



# RF TEST REPORT

**Applicant** ZTE Corporation

**FCC ID** SRQ-ZTEZ2312

**Product** LTE/WCDMA/CDMA/GSM(EDGE)  
Feature Phone

**Model** ZTE Z2312, ZTE Z2312B

**Marketing** ZTE Z2312, ZTE Z2312B

**Report No.** R1812A0563-R3

**Issue Date** December 29, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 15C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Peng Tao

Approved by: Kai Xu

## TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



## TABLE OF CONTENT

|                                                      |    |
|------------------------------------------------------|----|
| 1. Test Laboratory .....                             | 4  |
| 1.1. Notes of the test report.....                   | 4  |
| 1.2. Test facility .....                             | 4  |
| 1.3. Testing Location .....                          | 5  |
| 2. General Description of Equipment under Test.....  | 6  |
| 3. Applied Standards .....                           | 8  |
| 4. Test Configuration .....                          | 9  |
| 5. Test Case Results .....                           | 10 |
| 5.1. Maximum conducted output power .....            | 10 |
| 5.2. 6dB Bandwidth .....                             | 12 |
| 5.3. Band Edge .....                                 | 16 |
| 5.4. Power Spectral Density .....                    | 18 |
| 5.5. Spurious RF Conducted Emissions.....            | 22 |
| 5.6. Radiated Emissions in the Restricted Band ..... | 26 |
| 5.7. Radiates Emission .....                         | 31 |
| 5.8. Conducted Emission .....                        | 59 |
| 6. Main Test Instruments .....                       | 61 |

## Summary of measurement results

| Number                                              | Summary of measurements of results               | Clause in FCC rules     | Verdict |
|-----------------------------------------------------|--------------------------------------------------|-------------------------|---------|
| 1                                                   | Maximum conducted output power                   | 15.247(b)(3)            | PASS    |
| 2                                                   | 6 dB bandwidth                                   | 15.247(a)(2)            | PASS    |
| 3                                                   | Power spectral density                           | 15.247(e)               | PASS    |
| 4                                                   | Band Edge                                        | 15.247(d)               | PASS    |
| 5                                                   | Spurious RF Conducted Emissions                  | 15.247(d)               | PASS    |
| 6                                                   | Radiated Emissions in restricted frequency bands | 15.247(d),15.205,15.209 | PASS    |
| 7                                                   | Radiated Emissions                               | 15.247(d),15.205,15.209 | PASS    |
| 8                                                   | Conducted Emissions                              | 15.207                  | PASS    |
| Date of Testing: February 11, 2018 ~ March 14, 2018 |                                                  |                         |         |

## 1. Test Laboratory

### 1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

### 1.2. Test facility

#### **CNAS (accreditation number: L2264)**

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

#### **FCC (Designation number: CN1179, Test Firm Registration Number: 446626)**

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

#### **IC (recognition number is 8510A)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

#### **VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)**

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

#### **A2LA (Certificate Number: 3857.01)**

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



### 1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.  
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong  
City: Shanghai  
Post code: 201201  
Country: P. R. China  
Contact: Xu Kai  
Telephone: +86-021-50791141/2/3  
Fax: +86-021-50791141/2/3-8000  
Website: <http://www.ta-shanghai.com>  
E-mail: [xukai@ta-shanghai.com](mailto:xukai@ta-shanghai.com)

## 2. General Description of Equipment under Test

### Client Information

|                      |                                                                                                                   |
|----------------------|-------------------------------------------------------------------------------------------------------------------|
| Applicant            | ZTE Corporation                                                                                                   |
| Applicant address    | ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |
| Manufacturer         | ZTE Corporation                                                                                                   |
| Manufacturer address | ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park,<br>Nanshan District, Shenzhen, Guangdong, 518057, P.R.China |

### General information

| EUT Description                                                  |                                                                                     |
|------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Model                                                            | ZTE Z2312, ZTE Z2312B                                                               |
| IMEI                                                             | 868350030025522                                                                     |
| Hardware Version                                                 | A53A_V3.0G                                                                          |
| Software Version                                                 | H3G_ZTE-Z2312V1.0.1                                                                 |
| Power Supply                                                     | Battery/AC adapter                                                                  |
| Antenna Type                                                     | PIFA antenna                                                                        |
| Antenna Connector                                                | A permanently attached antenna (meet with the standard FCC Part 15.203 requirement) |
| Antenna Gain                                                     | 0.67dBi for Wi-Fi Antenna<br>0.56dBi for BLE Antenna                                |
| Test Mode                                                        | Bluetooth V4.0LE<br>802.11b<br>802.11g, 802.11n(HT20);                              |
| Modulation Type                                                  | BLE :GFSK<br>802.11b: DSSS;<br>802.11g/n(HT20): OFDM                                |
| Max. Conducted Power                                             | Wi-Fi 2.4G :13.29dBm<br>BLE : 0.62dBm                                               |
| Operating Frequency Range(s)                                     | 802.11b/g/n(HT20): 2412 ~ 2462 MHz<br>BLE: 2402 ~2480 MHz                           |
| EUT Accessory                                                    |                                                                                     |
| Battery                                                          | Manufacturer: ShenZhen Ruide Electronic Industrial Co.,Ltd<br>Model: BP-4L          |
| Earphone                                                         | Manufacturer: SHENZHEN JUDEXING TECHNOLOGY CO., LTD.<br>Model: JDX-A-RO-B2419-01    |
| Note: The information of the EUT is declared by the manufacturer |                                                                                     |

The difference between model ZTE Z2312 and ZTE Z2312B is show in the below table:

| Item                                                                                                                                                                                          |                 | ZTE Z2312   | ZTE Z2312B |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|-------------|------------|
| Software Modifications                                                                                                                                                                        | Camera function | Support     | Removed    |
| Hardware Modification                                                                                                                                                                         | Camera          | Support     | Removed    |
|                                                                                                                                                                                               | Flash Light     | Support     | Removed    |
| Mechanical shell                                                                                                                                                                              |                 | With camera | no camera  |
| Accessory                                                                                                                                                                                     |                 | Same        | Same       |
| Note: There are more than one Model, each one should be applied throughout the compliance test respectively, however, only the worst case (model: ZTE Z2312) will be recorded in this report. |                 |             |            |

### 3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

#### Test standards

- **FCC CFR47 Part 15C (2018) Radio Frequency Devices**
- **ANSI C63.10 (2013)**
- **KDB 558074 D01 DTS Meas Guidance v04**

## 4. Test Configuration

### Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate. Preliminary tests have been done on all the configuration for confirming worst case. Data rate below means worst-case rate of each test item.

Worst-case data rates are shown as following table.

| Band                  | Data Rate |
|-----------------------|-----------|
| Bluetooth(Low Energy) | 1Mbps     |
| 802.11b               | 1 Mbps    |
| 802.11g               | 6 Mbps    |
| 802.11n HT20          | MCS0      |

## 5. Test Case Results

### 5.1. Maximum conducted output power


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Methods of Measurement

During the process of the testing, The EUT was connected to Average Power meter with a known loss. The EUT is max power transmission with proper modulation. The signal transmission is continuous.

#### Test Setup



#### Limits

Rule Part 15.247 (b) (3) specifies that " For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz: 1 Watt."

|                   |                   |
|-------------------|-------------------|
| Peak Output Power | $\leq 1W$ (30dBm) |
|-------------------|-------------------|

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.44$  dB.

## Test Results

| Single Antenna Power Index |     |     |      |
|----------------------------|-----|-----|------|
| Packet Type                | CH1 | CH6 | CH11 |
| 802.11b                    | 17  | 17  | 17   |
| 802.11g                    | 15  | 15  | 15   |
| 802.11n HT20               | 15  | 15  | 15   |

| Band                                                                   | T <sub>on</sub> (ms) | T <sub>(on+off)</sub> (ms) | Duty cycle | Duty cycle correction Factor(dB) |
|------------------------------------------------------------------------|----------------------|----------------------------|------------|----------------------------------|
| 802.11b                                                                | 8.18                 | 8.22                       | 1.00       | NA                               |
| 802.11g                                                                | 1.36                 | 1.42                       | 0.96       | 0.19                             |
| 802.11n HT20                                                           | 0.30                 | 0.38                       | 0.79       | 1.04                             |
| BLE                                                                    | 0.40                 | 0.63                       | 0.631      | 2.00                             |
| Note: when Duty cycle>0.98, Duty cycle correction Factor not required. |                      |                            |            |                                  |

| Network Standards      | Carrier frequency (MHz) | Average Conducted Power Measured (dBm) | Average power with duty factor (dBm) | Limit (dBm) | Conclusion |
|------------------------|-------------------------|----------------------------------------|--------------------------------------|-------------|------------|
| 802.11b                | 2412                    | 13.10                                  | 13.10                                | 30          | PASS       |
|                        | 2437                    | 13.29                                  | 13.29                                | 30          | PASS       |
|                        | 2462                    | 12.15                                  | 12.15                                | 30          | PASS       |
| 802.11g                | 2412                    | 10.01                                  | 10.20                                | 30          | PASS       |
|                        | 2437                    | 11.51                                  | 11.70                                | 30          | PASS       |
|                        | 2462                    | 10.02                                  | 10.21                                | 30          | PASS       |
| 802.11n HT20           | 2412                    | 8.30                                   | 9.34                                 | 30          | PASS       |
|                        | 2437                    | 9.28                                   | 10.32                                | 30          | PASS       |
|                        | 2462                    | 7.83                                   | 8.87                                 | 30          | PASS       |
| Bluetooth (Low Energy) | 2402                    | -2.70                                  | -0.70                                | 30          | PASS       |
|                        | 2440                    | -1.51                                  | 0.49                                 | 30          | PASS       |
|                        | 2480                    | -1.38                                  | 0.62                                 | 30          | PASS       |

## 5.2. 6dB Bandwidth


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable. RBW is set to 100 kHz; VBW is set to 300 kHz on spectrum analyzer. Dector=Peak, Trace mode=max hold.

### Test Setup



### Limits

Rule Part 15.247 (a) (2) specifies that “Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.”

|                        |           |
|------------------------|-----------|
| minimum 6 dB bandwidth | ≥ 500 kHz |
|------------------------|-----------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 936$  Hz.

**Test Results:**

| Network Standards      | Carrier frequency (MHz) | 99% bandwidth (MHz) | Minimum 6 dB bandwidth (MHz) | Limit (kHz) | Conclusion |
|------------------------|-------------------------|---------------------|------------------------------|-------------|------------|
| 802.11b                | 2412                    | 11.487              | 9.130                        | 500         | PASS       |
|                        | 2437                    | 11.139              | 9.120                        | 500         | PASS       |
|                        | 2462                    | 11.668              | 9.573                        | 500         | PASS       |
| 802.11g                | 2412                    | 16.403              | 15.47                        | 500         | PASS       |
|                        | 2437                    | 16.359              | 15.13                        | 500         | PASS       |
|                        | 2462                    | 16.487              | 16.30                        | 500         | PASS       |
| 802.11n HT20           | 2412                    | 17.525              | 16.89                        | 500         | PASS       |
|                        | 2437                    | 17.493              | 15.98                        | 500         | PASS       |
|                        | 2462                    | 17.598              | 17.02                        | 500         | PASS       |
| Bluetooth (Low Energy) | 2402                    | 1.0676              | 0.6727                       | 500         | PASS       |
|                        | 2440                    | 1.0667              | 0.6662                       | 500         | PASS       |
|                        | 2480                    | 1.0661              | 0.6657                       | 500         | PASS       |

802.11b, Carrier frequency (MHz): 2412



802.11g, Carrier frequency (MHz): 2412



802.11b, Carrier frequency (MHz): 2437




802.11g, Carrier frequency (MHz): 2437



802.11b, Carrier frequency (MHz): 2462



802.11g, Carrier frequency (MHz): 2462

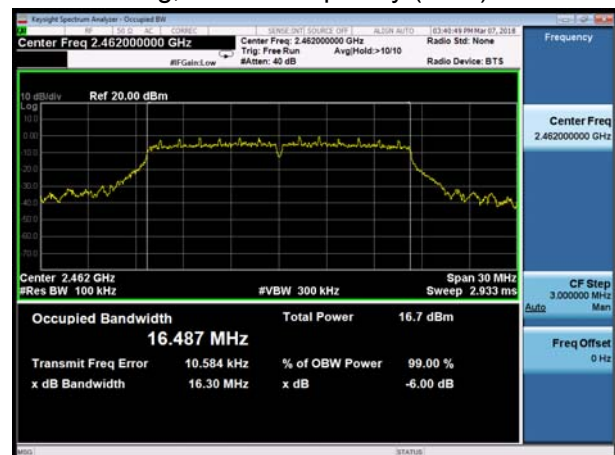

## 802.11n(HT20), Carrier frequency (MHz): 2412



## BLE Carrier frequency (MHz): 2402




## 802.11n(HT20), Carrier frequency (MHz): 2437



## BLE Carrier frequency (MHz): 2440



## 802.11n(HT20), Carrier frequency (MHz): 2462

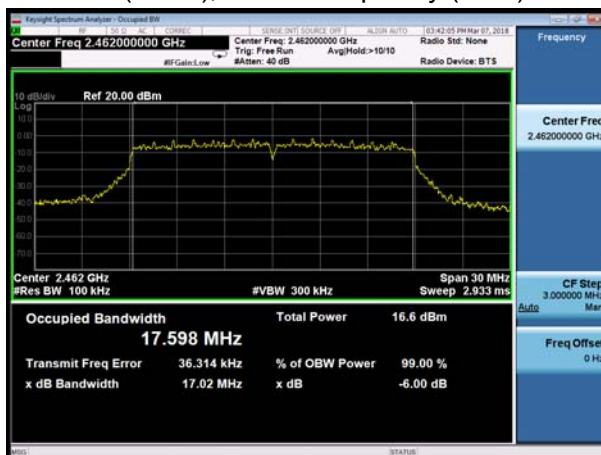

## BLE Carrier frequency (MHz): 2480



### 5.3. Band Edge


#### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

#### Method of Measurement

The EUT was connected to the spectrum analyzer through an external attenuator (20dB) and a known loss cable the band edge of the lowest and highest channels were measured. The peak detector is used and RBW is set to 100 kHz and VBW is set to 300 kHz on spectrum analyzer. Spectrum analyzer plots are included on the following pages.

#### Test Setup



#### Limits

Rule Part 15.247(d) specifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

#### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency | Uncertainty |
|-----------|-------------|
| 2GHz-3GHz | 1.407 dB    |




## Test Results: PASS


802.11b, Channel No.: 1

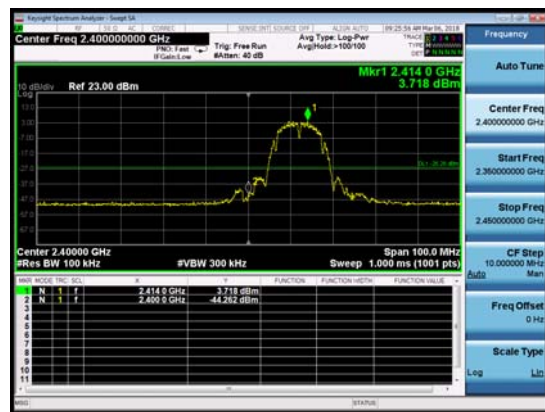


802.11b, Channel No.: 11

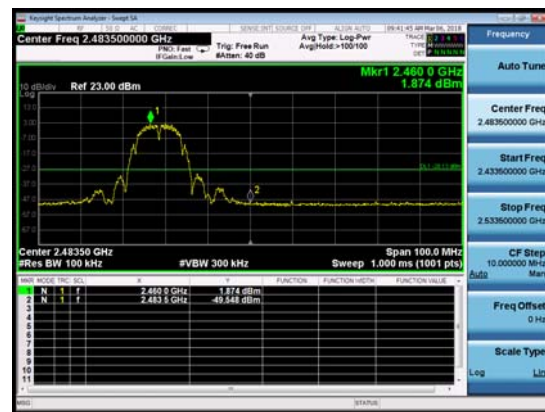


802.11g, Channel No.: 1

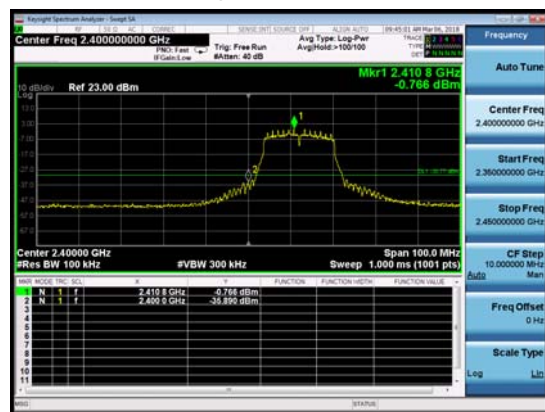


802.11g, Channel No.: 11

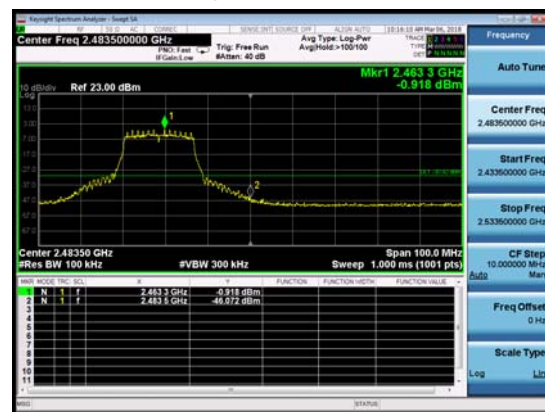


802.11n(HT20), Channel No.: 1

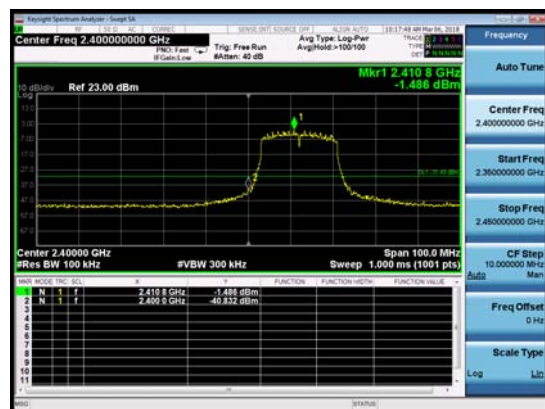


802.11n(HT20), Channel No.: 11

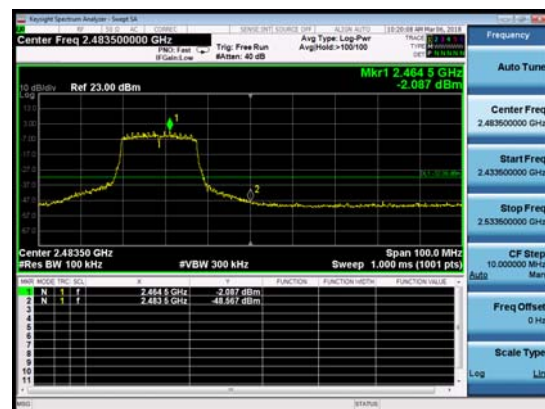

BLE, Channel No.: 0

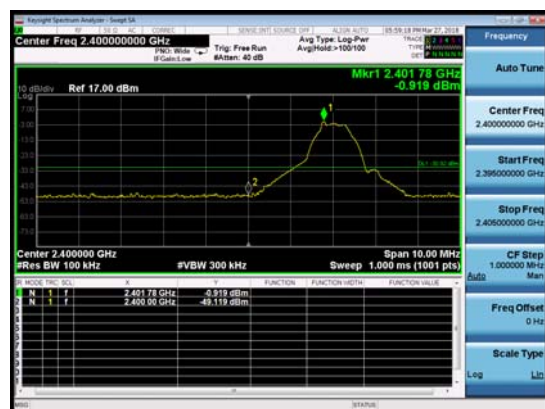

BLE, Channel No.: 39

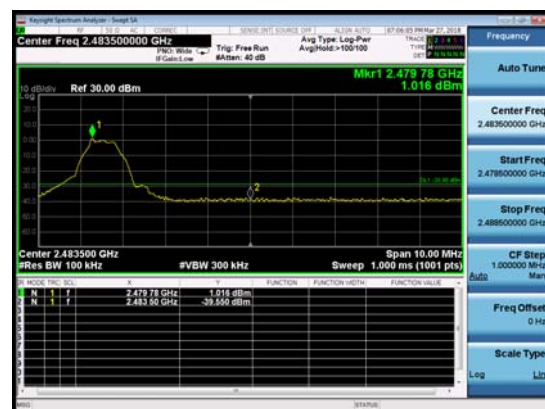

## 5.4. Power Spectral Density


### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

During the process of the testing, The EUT was connected to Spectrum Analyzer with a known loss. The EUT is max power transmission with proper modulation. Method AVGPS-2 in KDB558074 D01 was used for this test..

### Test setup



### Limits

Rule Part 15.247(e) specifies that” For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. ”

| Limits | $\leq 8 \text{ dBm} / 3\text{kHz}$ |
|--------|------------------------------------|
|--------|------------------------------------|

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 2$ ,  $U = 0.75\text{dB}$ .

**Test Results:**


| Network Standards      | Channel Number | Read Value (dBm / 3kHz) | Power Spectral Density (dBm / 3kHz) | Limit (dBm / 3kHz) | Conclusion |
|------------------------|----------------|-------------------------|-------------------------------------|--------------------|------------|
| 802.11b                | 1              | -19.75                  | -19.75                              | 8                  | PASS       |
|                        | 6              | -18.27                  | -18.27                              | 8                  | PASS       |
|                        | 11             | -20.68                  | -20.68                              | 8                  | PASS       |
| 802.11g                | 1              | -24.09                  | -23.90                              | 8                  | PASS       |
|                        | 6              | -22.52                  | -22.33                              | 8                  | PASS       |
|                        | 11             | -24.37                  | -24.18                              | 8                  | PASS       |
| 802.11n HT20           | 1              | -22.95                  | -21.91                              | 8                  | PASS       |
|                        | 6              | -21.82                  | -20.78                              | 8                  | PASS       |
|                        | 11             | -23.50                  | -22.46                              | 8                  | PASS       |
| Bluetooth (Low Energy) | 0              | -21.16                  | -19.15                              | 8                  | PASS       |
|                        | 19             | -19.38                  | -17.37                              | 8                  | PASS       |
|                        | 39             | -18.73                  | -16.73                              | 8                  | PASS       |

Note: Power Spectral Density =Read Value+Duty cycle correction factor

802.11b, Channel No.: 1




802.11g, Channel No.: 1

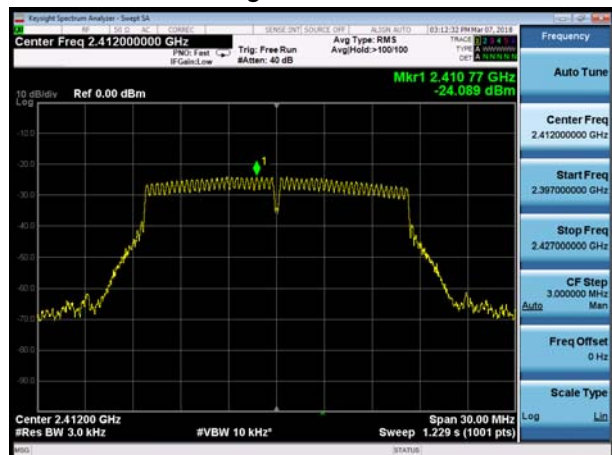

802.11b, Channel No.: 6



802.11g, Channel No.: 6

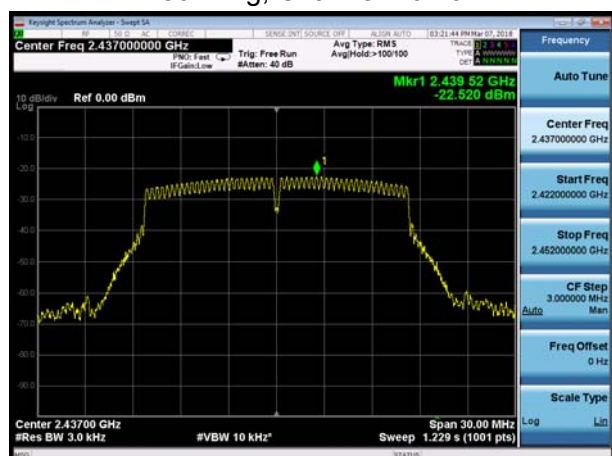


802.11b, Channel No.: 11



802.11g, Channel No.: 11




802.11n(HT20), Channel No. 1

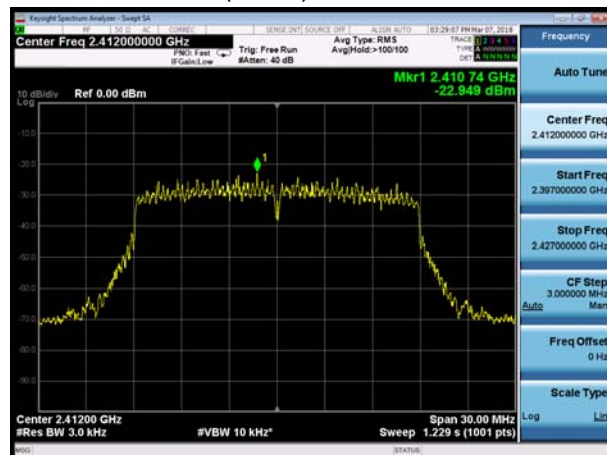

BLE, Channel No.: 0




802.11n(HT20), Channel No. 6

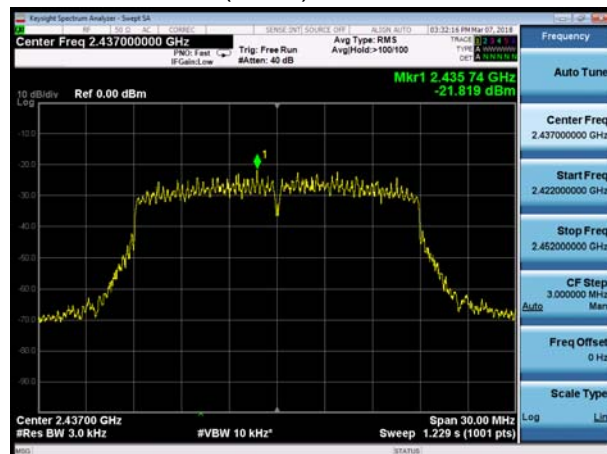

BLE, Channel No.: 19



802.11n(HT20), Channel No. 11

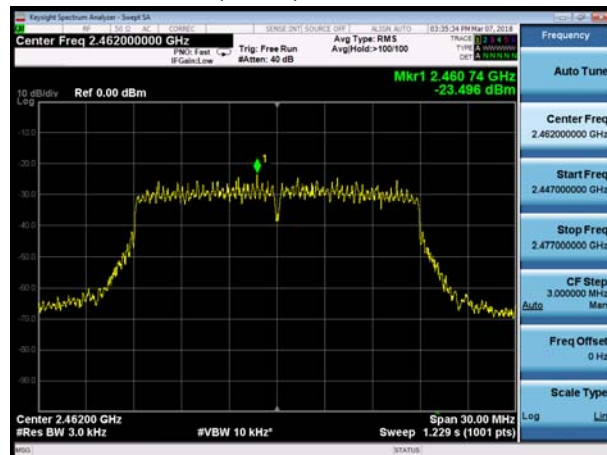

BLE, Channel No.: 39



## 5.5. Spurious RF Conducted Emissions

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The EUT was connected to the spectrum analyzer with a known loss. The spectrum analyzer scans from 30MHz to the 10th harmonic of the carrier. The peak detector is used. Set RBW to 100kHz and VBW to 300 kHz, Sweep is set to ATUO.

The test is in transmitting mode.

### Test setup



### Limits

Rule Part 15.247(d) pacifies that “In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.” If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.”

| Network Standards         | Carrier frequency (MHz) | Reference value (dBm) | Limit  |
|---------------------------|-------------------------|-----------------------|--------|
| 802.11b                   | 2412                    | 2.807                 | -27.19 |
|                           | 2437                    | 4.318                 | -25.68 |
|                           | 2462                    | 2.516                 | -27.48 |
| 802.11g                   | 2412                    | -1.535                | -31.54 |
|                           | 2437                    | 1.035                 | -28.97 |
|                           | 2462                    | -2.241                | -32.24 |
| 802.11n<br>HT20           | 2412                    | -1.222                | -31.22 |
|                           | 2437                    | 0.038                 | -29.96 |
|                           | 2462                    | -3.050                | -33.05 |
| Bluetooth<br>(Low Energy) | 2402                    | -0.74                 | -30.74 |
|                           | 2440                    | 0.33                  | -29.67 |
|                           | 2480                    | 0.94                  | -29.06 |

**Measurement Uncertainty**

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency   | Uncertainty |
|-------------|-------------|
| 100kHz-2GHz | 0.684 dB    |
| 2GHz-26GHz  | 1.407 dB    |



## Test Results:


802.11b, Channel No.: 1




802.11g, Channel No.: 1




802.11b, Channel No.: 6

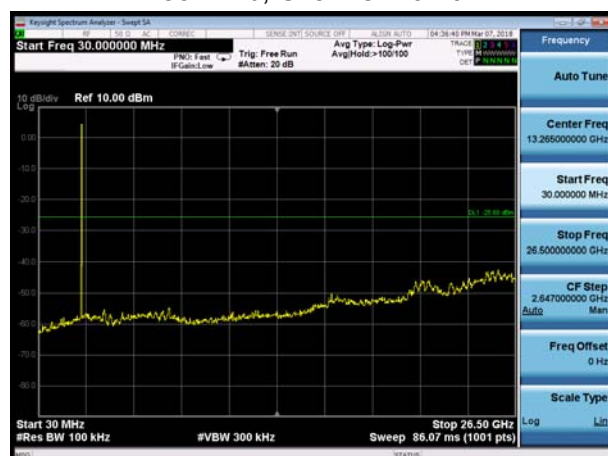

802.11g, Channel No.: 6

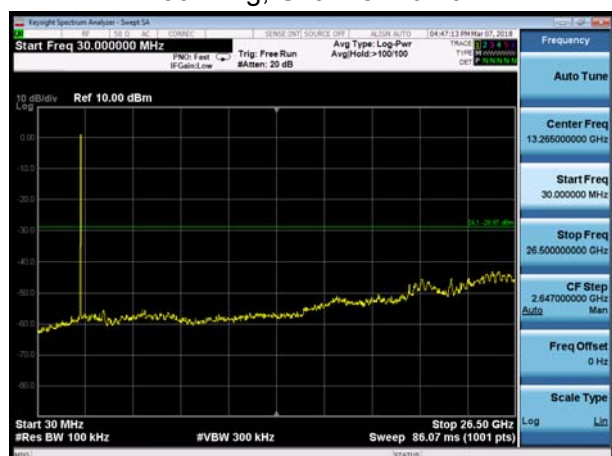

802.11b, Channel No.: 11

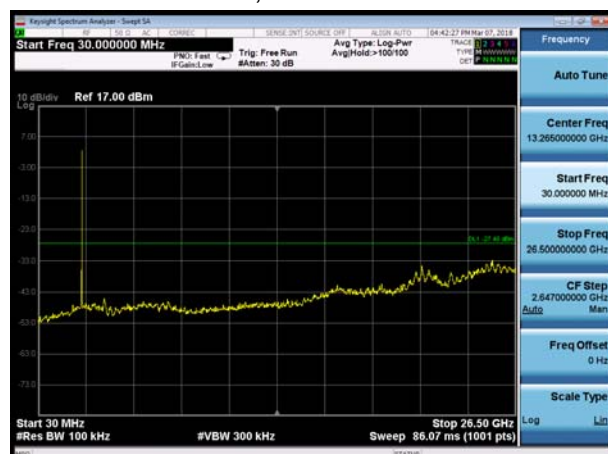

802.11g, Channel No.: 11






802.11n(HT20), Channel No. 1




BLE, Channel No. 0

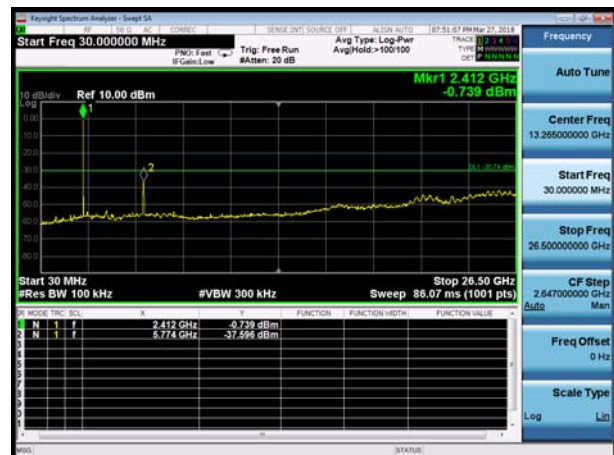


802.11n(HT20), Channel No. 6




BLE, Channel No. 19

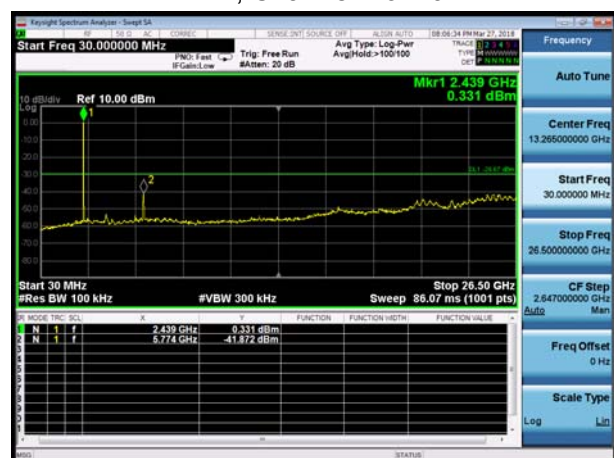

802.11n(HT20), Channel No. 11

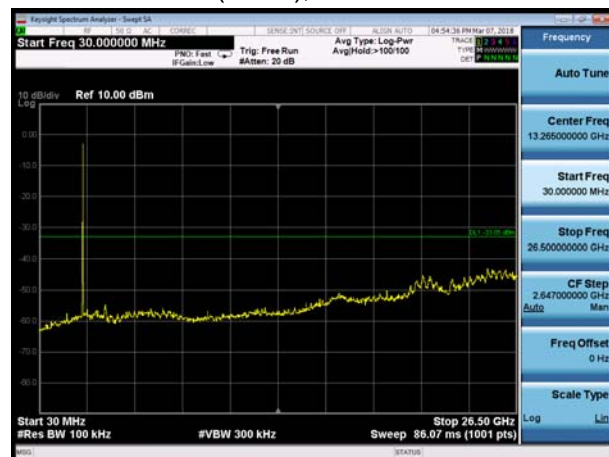

BLE, Channel No. 39

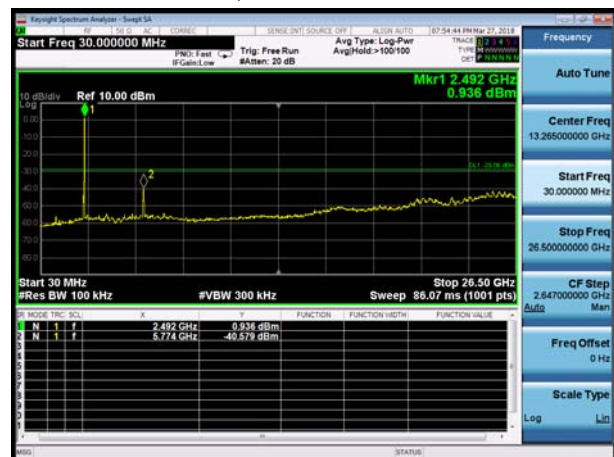

## 5.6. Radiated Emissions in the Restricted Band

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Method of Measurement

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

This method refer to KDB 558074.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

I) Peak emission levels are measured by setting the instrument as follows:

- 1) RBW = 1 MHz.
- 2) VBW  $\geq [3 \times \text{RBW}]$
- 3) Detector = peak.
- 4) Sweep time = auto.
- 5) Trace mode = max hold.
- 6) Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, then the time required for the trace to stabilize will increase by a factor of approximately  $1 / D$ , where D is the duty cycle.

II) Average emission levels are measured by setting the instrument as follows:

- a) RBW = 1 MHz.
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = RMS (power averaging), if  $[\text{span} / (\# \text{ of points in sweep})] \leq \text{RBW} / 2$ . Satisfying this condition can require increasing the number of points in the sweep or reducing the span. If the condition is not satisfied, then the detector mode shall be set to peak.
- d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage averaging. Log or dB averaging shall not be used.)
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of  $1 / D$ , where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)
- g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction


factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

- 1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is  $[10 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.
- 2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is  $[20 \log (1 / D)]$ , where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.
- 3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the antenna is vertical.

The test is in transmitting mode.

### Test setup

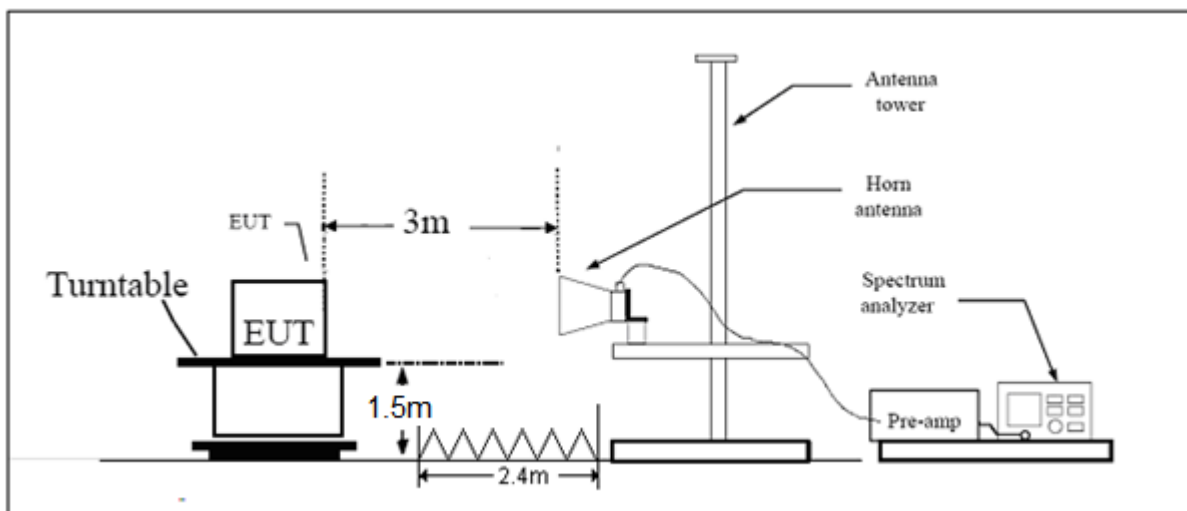

Note: Area side: 2.4mX3.6m

### Limits

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

| MHz                        | MHz                   | MHz             | GHz              |
|----------------------------|-----------------------|-----------------|------------------|
| 0.090 - 0.110              | 16.42 - 16.423        | 399.9 - 410     | 4.5 - 5.15       |
| <sup>1</sup> 0.495 - 0.505 | 16.69475 - 16.69525   | 608 - 614       | 5.35 - 5.46      |
| 2.1735 - 2.1905            | 16.80425 - 16.80475   | 960 - 1240      | 7.25 - 7.75      |
| 4.125 - 4.128              | 25.5 - 25.67          | 1300 - 1427     | 8.025 - 8.5      |
| 4.17725 - 4.17775          | 37.5 - 38.25          | 1435 - 1626.5   | 9.0 - 9.2        |
| 4.20725 - 4.20775          | 73 - 74.6             | 1645.5 - 1646.5 | 9.3 - 9.5        |
| 6.215 - 6.218              | 74.8 - 75.2           | 1660 - 1710     | 10.6 - 12.7      |
| 6.26775 - 6.26825          | 108 - 121.94          | 1718.8 - 1722.2 | 13.25 - 13.4     |
| 6.31175 - 6.31225          | 123 - 138             | 2200 - 2300     | 14.47 - 14.5     |
| 8.291 - 8.294              | 149.9 - 150.05        | 2310 - 2390     | 15.35 - 16.2     |
| 8.362 - 8.366              | 156.52475 - 156.52525 | 2483.5 - 2500   | 17.7 - 21.4      |
| 8.37625 - 8.38675          | 156.7 - 156.9         | 2690 - 2900     | 22.01 - 23.12    |
| 8.41425 - 8.41475          | 162.0125 - 167.17     | 3260 - 3267     | 23.6 - 24.0      |
| 12.29 - 12.293             | 167.72 - 173.2        | 3332 - 3339     | 31.2 - 31.8      |
| 12.51975 - 12.52025        | 240 - 285             | 3345.8 - 3358   | 36.43 - 36.5     |
| 12.57675 - 12.57725        | 322 - 335.4           | 3600 - 4400     | ( <sup>2</sup> ) |
| 13.36 - 13.41              |                       |                 |                  |

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 30-88                       | 100                  | 40                     |
| 88-216                      | 150                  | 43.5                   |
| 216-960                     | 200                  | 46                     |
| Above960                    | 500                  | 54                     |

#### §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dBuV/m

Average Limit=54 dBuV/m

#### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 3.55$  dB.

**Test Results:**

| Band                                                                   | T <sub>on</sub> (ms) | T <sub>(on+off)</sub> (ms) | Duty cycle | Duty cycle correction Factor(dB) |
|------------------------------------------------------------------------|----------------------|----------------------------|------------|----------------------------------|
| 802.11b                                                                | 8.18                 | 8.22                       | 1.00       | NA                               |
| 802.11g                                                                | 1.36                 | 1.42                       | 0.96       | 0.19                             |
| 802.11n HT20                                                           | 0.30                 | 0.38                       | 0.79       | 1.04                             |
| BLE                                                                    | 0.40                 | 0.63                       | 0.631      | 2.00                             |
| Note: when Duty cycle>0.98, Duty cycle correction Factor not required. |                      |                            |            |                                  |

**802.11b-Channel 1**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2390            | 55.078        | --               | 200.0       | V            | 135           | 0                                | 55.078                    | 18.922      | 74             |
| 2390            | --            | 43.777           | 200.0       | V            | 135           | 0                                | 43.777                    | 10.223      | 54             |

**802.11b-Channel 11**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2483.5          | 56.468        | --               | 200.0       | V            | 135           | 0                                | 56.468                    | 17.532      | 74             |
| 2483.5          | --            | 44.665           | 200.0       | V            | 135           | 0                                | 44.665                    | 9.335       | 54             |

**802.11g-Channel 1**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2390            | 63.614        | --               | 150         | V            | 65            | 0.19                             | 63.804                    | 10.196      | 74             |
| 2390            | --            | 45.588           | 150         | V            | 65            | 0.19                             | 45.778                    | 8.222       | 54             |

**802.11g-Channel 11**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2483.5          | 64.164        | --               | 150         | V            | 78            | 0.19                             | 64.354                    | 9.646       | 74             |
| 2483.5          | --            | 48.705           | 150         | V            | 78            | 0.19                             | 48.895                    | 5.105       | 54             |

**802.11n HT20 -Channel 1**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2390            | 58.900        | --               | 200         | V            | 90            | 1.04                             | 59.94                     | 14.06       | 74             |
| 2390            | --            | 44.560           | 200         | V            | 90            | 1.04                             | 45.6                      | 8.4         | 54             |

**802.11n HT20-Channel 11**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2483.5          | 63.605        | --               | 200         | V            | 90            | 1.04                             | 64.645                    | 9.355       | 74             |
| 2483.5          | --            | 48.553           | 200         | V            | 90            | 1.04                             | 49.593                    | 4.407       | 54             |

**BLE Channel 0**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2390            | 40.808        | --               | 200.0       | V            | 135           | 2.00                             | 42.808                    | 31.192      | 74             |
| 2390            | --            | 29.771           | 200.0       | V            | 135           | 2.00                             | 31.771                    | 22.229      | 54             |

**BLE Channel 39**

| Frequency (MHz) | Peak (dBuV/m) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Duty cycle correction Factor(dB) | conclusion value (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|------------------|-------------|--------------|---------------|----------------------------------|---------------------------|-------------|----------------|
| 2483.5          | 39.940        | --               | 200.0       | V            | 135           | 2.00                             | 41.940                    | 32.060      | 74             |
| 2483.5          | --            | 30.159           | 200.0       | V            | 135           | 2.00                             | 32.159                    | 21.841      | 54             |

## 5.7. Radiates Emission

### Ambient condition

| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 102.5kPa |

### Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10-2013. The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna. The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

During the test, below 30MHz, the center of the loop shall be 1 meters; above 30MHz, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing.

Set the spectrum analyzer in the following:

Below 1GHz (detector: Peak and Quasi-Peak)

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz (detector: Peak):

(a) PEAK: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz, when duty cycle is no less than 98%

VBW $\geq$ 1/T when duty cycle is less than 98%, where T is transmit on time


Sweep=AUTO

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.


The test is in transmitting mode.

## Test setup


### 9KHz ~ 30MHz

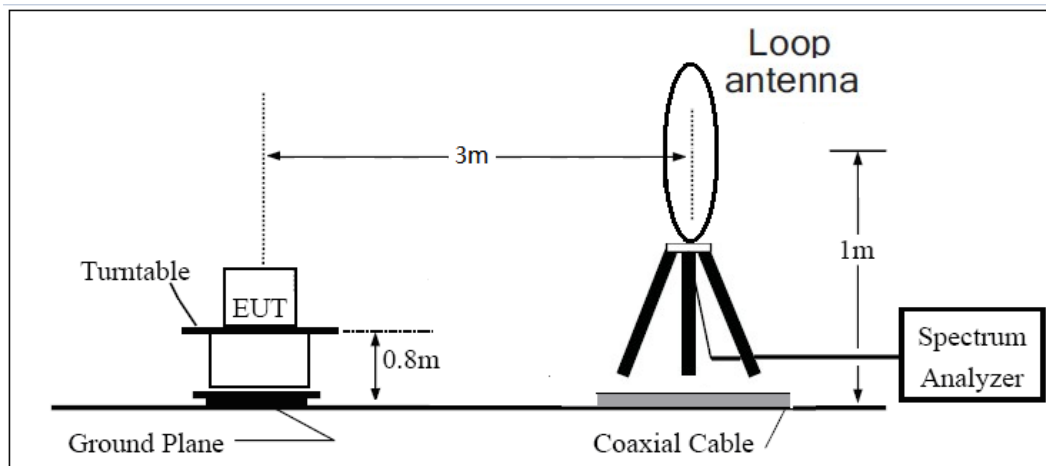

### 30MHz ~ 1GHz

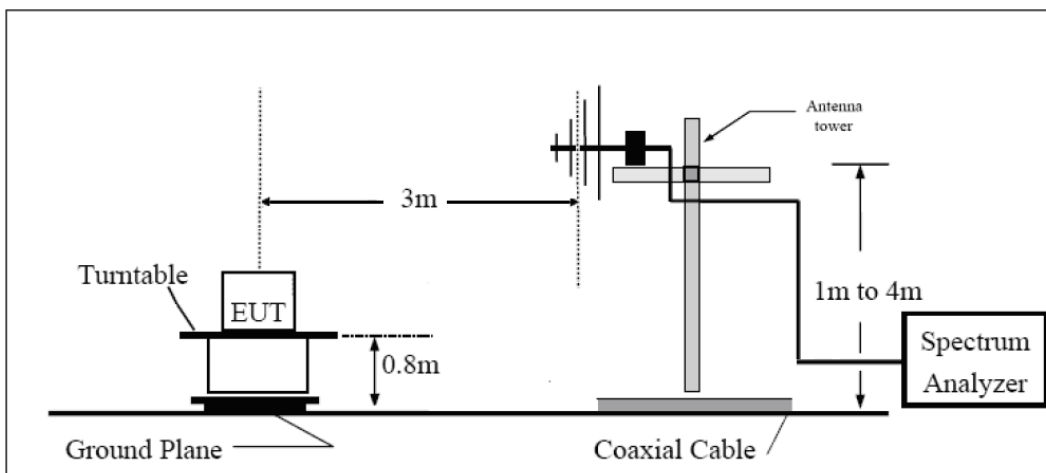

### Above 1GHz

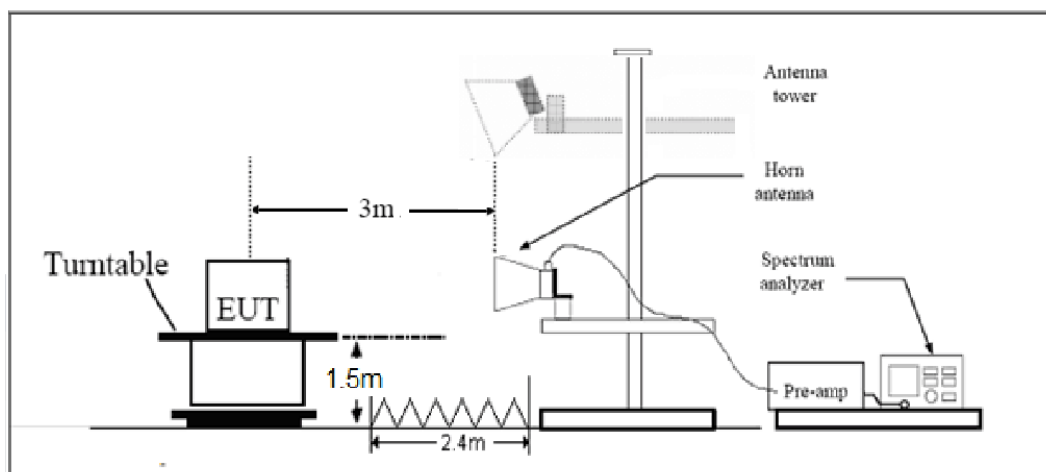

Note: Area side:2.4mX3.6m

### Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

| Frequency of emission (MHz) | Field strength(uV/m) | Field strength(dBuV/m) |
|-----------------------------|----------------------|------------------------|
| 0.009–0.490                 | 2400/F(kHz)          | /                      |
| 0.490–1.705                 | 24000/F(kHz)         | /                      |
| 1.705–30.0                  | 30                   | /                      |
| 30-88                       | 100                  | 40                     |
| 88-216                      | 150                  | 43.5                   |
| 216-960                     | 200                  | 46                     |
| Above960                    | 500                  | 54                     |

### §15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

### Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ .

| Frequency    | Uncertainty |
|--------------|-------------|
| 9KHz-30MHz   | 3.55 dB     |
| 30MHz-200MHz | 4.19 dB     |
| 200MHz-1GHz  | 3.63 dB     |
| Above 1GHz   | 3.68 dB     |

### Test result

Sweep from 9 kHz to 30MHz, and the emissions more than 20 dB below the permissible value are not reported.


The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

During the test, the Radiates Emission from 30MHz to 1GHz was performed in all modes with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

### Continuous TX mode:

FCC RE 0.03-1GHz QP Class B

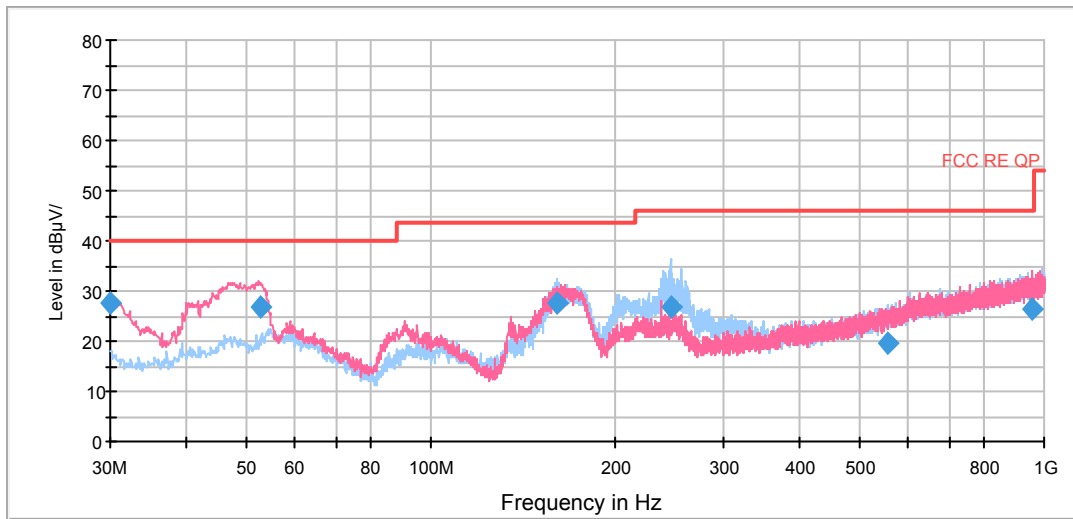

Radiates Emission from 30MHz to 1GHz

| Frequency (MHz) | Quasi-Peak (dBuV/m) | Reading value (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------|------------------------|-------------|--------------|---------------|---------------------|-------------|----------------|
| 30.000000       | 27.7                | 15.6                   | 100.0       | V            | 256.0         | 12.1                | 12.3        | 40.0           |
| 52.831250       | 26.6                | 13.6                   | 100.0       | V            | 80.0          | 13.0                | 13.4        | 40.0           |
| 160.590000      | 27.7                | 17.9                   | 125.0       | H            | 311.0         | 9.8                 | 15.8        | 43.5           |
| 246.065000      | 26.6                | 12.6                   | 100.0       | H            | 106.0         | 14.0                | 19.4        | 46.0           |
| 555.985000      | 19.4                | -2.4                   | 100.0       | H            | 336.0         | 21.8                | 26.6        | 46.0           |
| 955.737500      | 26.5                | -0.8                   | 125.0       | V            | 16.0          | 27.3                | 19.5        | 46.0           |


Remark: 1. Quasi-Peak = Reading value + Correction factor

2. Correction Factor = Antenna factor+ Insertion loss(cable loss+amplifier gain)

3. Margin = Limit – Quasi-Peak


802.11b CH1

RE 1G-3GHz PK+AV

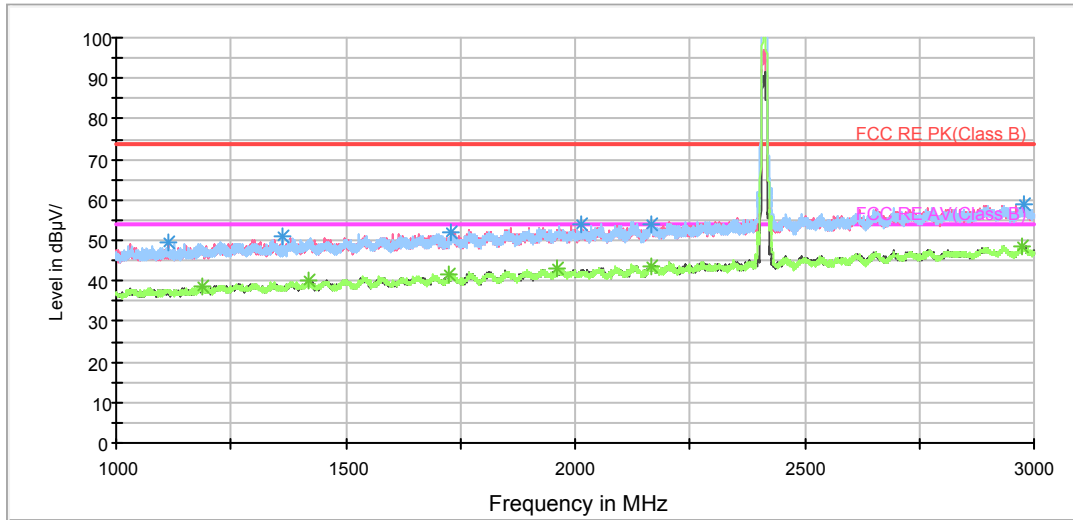


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

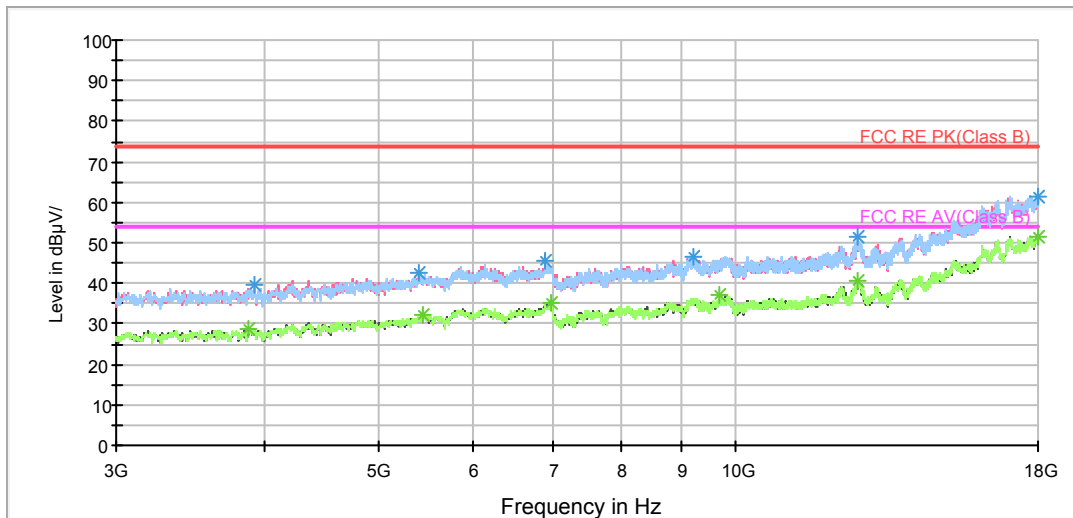

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

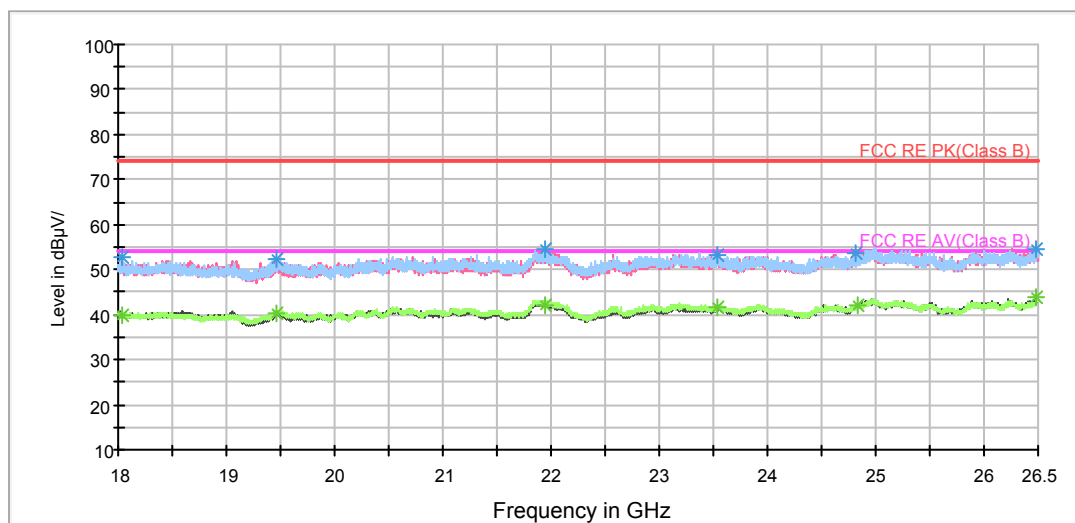

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1111.750000     | 49.3          | 200.0       | V            | 296.0         | 48.0                   | 1.3                 | 24.7        | 74             |
| 1360.750000     | 51.0          | 200.0       | H            | 19.0          | 48.4                   | 2.6                 | 23.0        | 74             |
| 1728.250000     | 51.7          | 200.0       | V            | 284.0         | 46.7                   | 5.0                 | 22.3        | 74             |
| 2014.750000     | 53.8          | 200.0       | V            | 132.0         | 47.3                   | 6.5                 | 20.2        | 74             |
| 2168.000000     | 54.1          | 200.0       | H            | 52.0          | 46.3                   | 7.8                 | 19.9        | 74             |
| 2978.750000     | 58.9          | 200.0       | V            | 5.0           | 46.7                   | 12.2                | 15.1        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1187.000000     | 38.4             | 200.0       | H            | 0.0           | 36.5                   | 1.9                 | 15.6        | 54             |
| 1418.750000     | 40.0             | 200.0       | H            | 64.0          | 36.9                   | 3.1                 | 14.0        | 54             |
| 1726.750000     | 41.6             | 200.0       | V            | 349.0         | 36.7                   | 4.9                 | 12.4        | 54             |
| 1960.750000     | 42.9             | 200.0       | H            | 52.0          | 36.1                   | 6.8                 | 11.1        | 54             |
| 2168.000000     | 43.4             | 200.0       | H            | 52.0          | 35.6                   | 7.8                 | 10.6        | 54             |
| 2972.000000     | 48.4             | 200.0       | V            | 5.0           | 36.2                   | 12.2                | 5.6         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH6

RE 1G-3GHz PK+AV

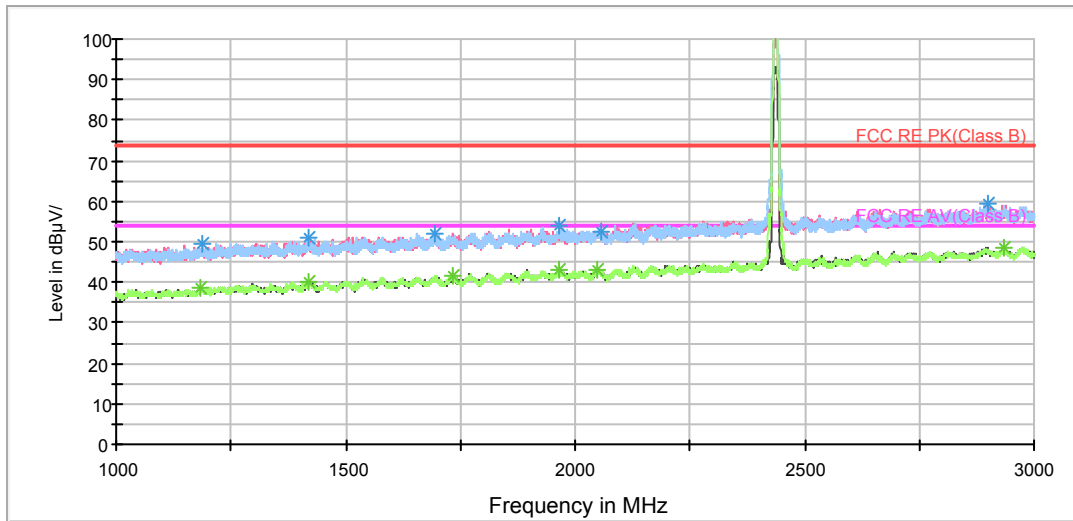


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

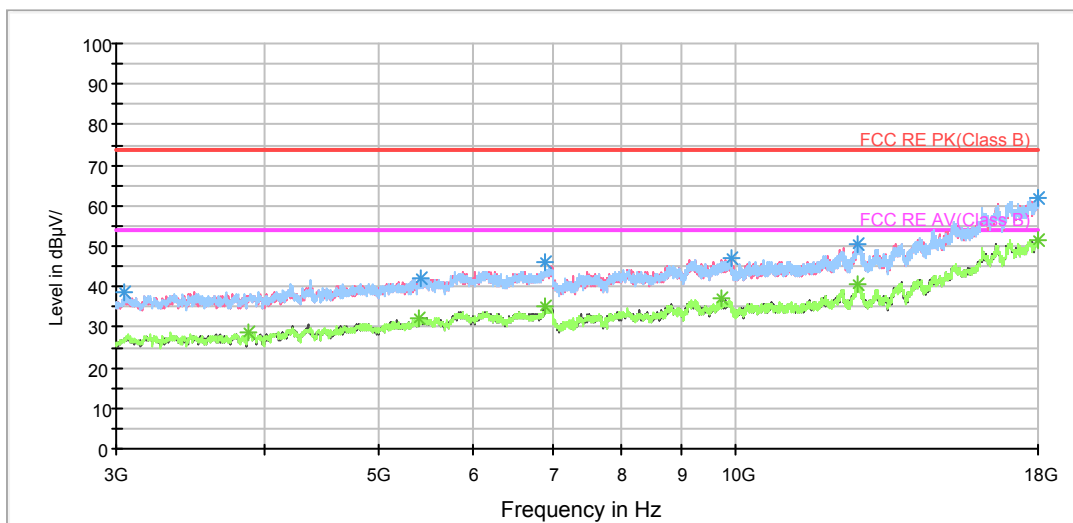

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

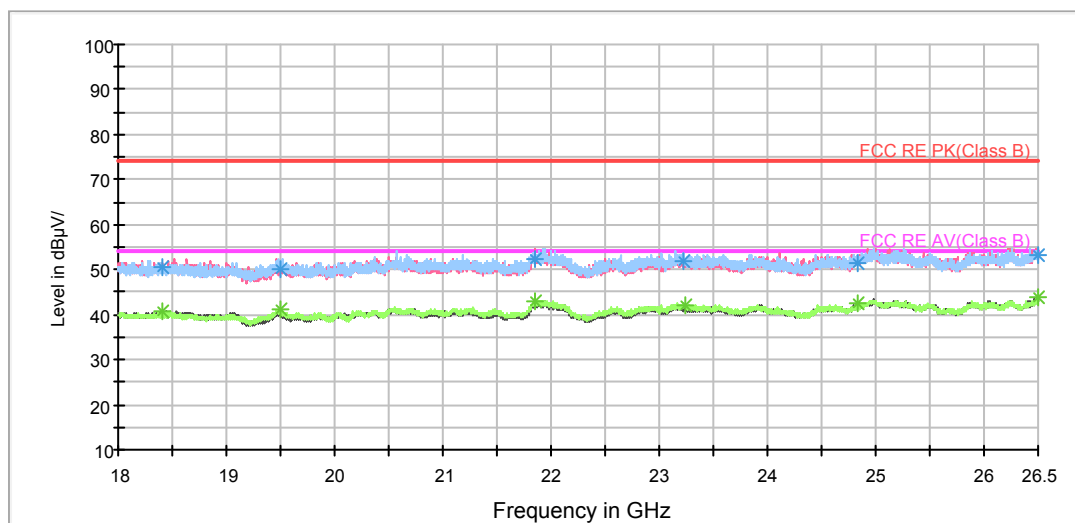

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1188.500000     | 49.3          | 200.0       | H            | 174.0         | 47.5                   | 1.8                 | 24.7        | 74             |
| 1420.500000     | 50.9          | 200.0       | H            | 333.0         | 47.8                   | 3.1                 | 23.1        | 74             |
| 1694.250000     | 52.2          | 200.0       | H            | 1.0           | 47.2                   | 5.0                 | 21.8        | 74             |
| 1966.500000     | 53.8          | 200.0       | V            | 130.0         | 47.2                   | 6.6                 | 20.2        | 74             |
| 2056.750000     | 52.6          | 200.0       | H            | 54.0          | 45.8                   | 6.8                 | 21.4        | 74             |
| 2898.250000     | 59.5          | 200.0       | V            | 0.0           | 47.4                   | 12.1                | 14.5        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1182.750000     | 38.7             | 200.0       | V            | 27.0          | 36.7                   | 2.0                 | 15.3        | 54             |
| 1417.750000     | 40.3             | 200.0       | H            | 239.0         | 37.2                   | 3.1                 | 13.7        | 54             |
| 1732.000000     | 41.8             | 200.0       | H            | 0.0           | 36.6                   | 5.2                 | 12.2        | 54             |
| 1966.750000     | 42.9             | 200.0       | H            | 11.0          | 36.3                   | 6.6                 | 11.1        | 54             |
| 2049.250000     | 43.3             | 200.0       | V            | 348.0         | 36.5                   | 6.8                 | 10.7        | 54             |
| 2933.750000     | 48.5             | 200.0       | V            | 0.0           | 36.7                   | 11.8                | 5.5         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11b CH11

RE 1G-3GHz PK+AV

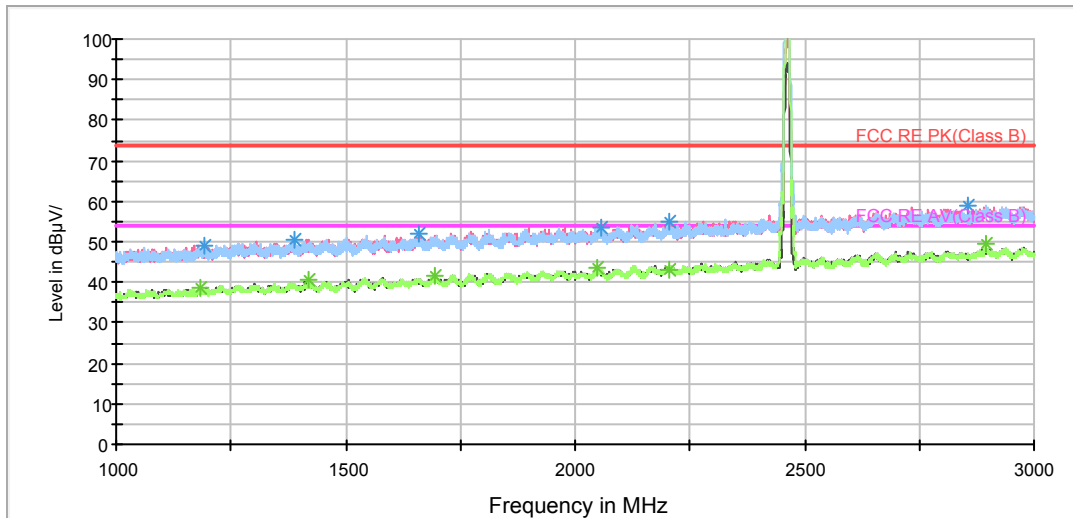


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

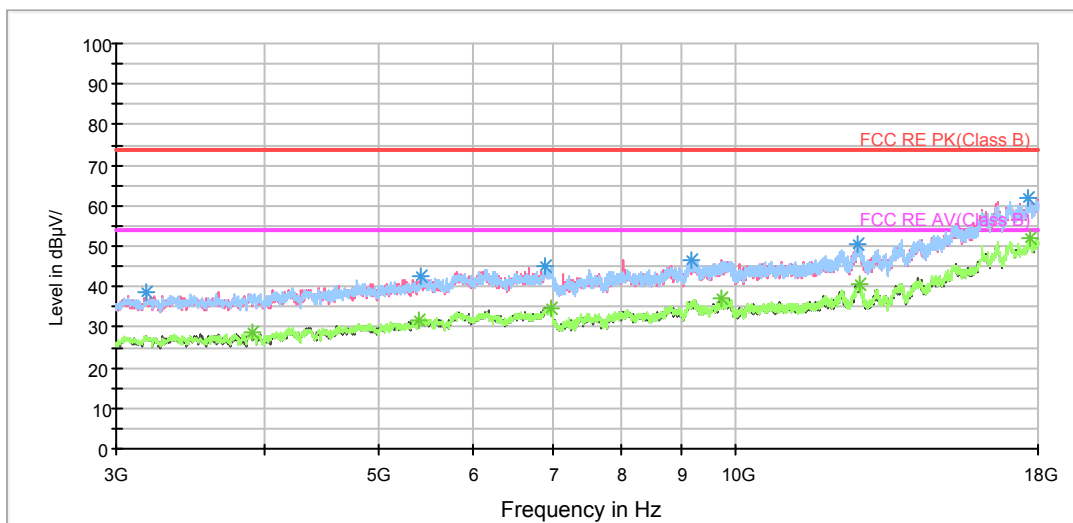

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

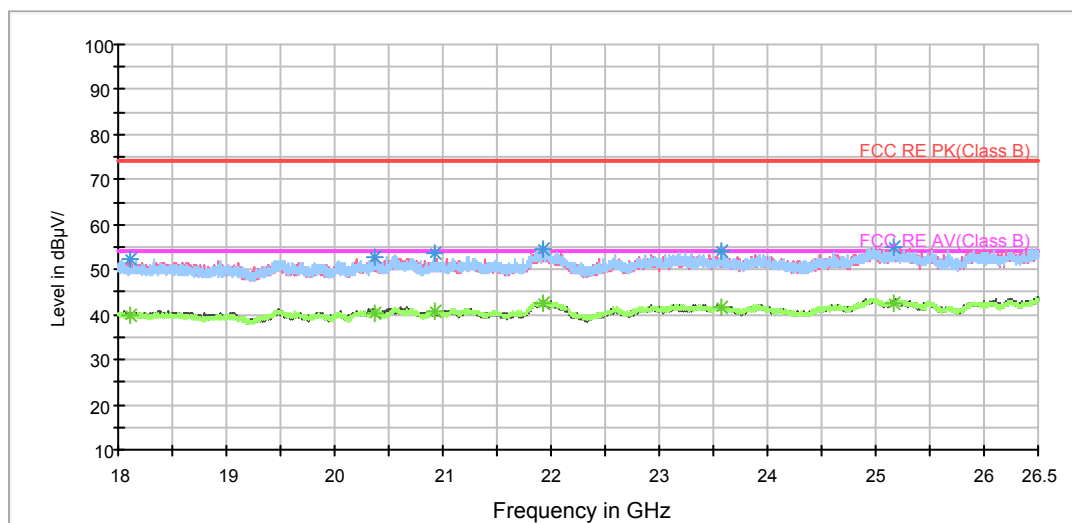

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1193.250000     | 49.2          | 200.0       | H            | 239.0         | 47.4                   | 1.8                 | 24.8        | 74             |
| 1387.250000     | 50.6          | 200.0       | V            | 277.0         | 47.6                   | 3.0                 | 23.4        | 74             |
| 1660.500000     | 52.0          | 200.0       | V            | 0.0           | 47.2                   | 4.8                 | 22.0        | 74             |
| 2055.500000     | 53.4          | 200.0       | H            | 0.0           | 46.6                   | 6.8                 | 20.6        | 74             |
| 2206.250000     | 55.0          | 200.0       | H            | 162.0         | 47.1                   | 7.9                 | 19.0        | 74             |
| 2854.500000     | 59.1          | 200.0       | H            | 36.0          | 47.7                   | 11.4                | 14.9        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1181.250000     | 38.6             | 200.0       | V            | 341.0         | 36.6                   | 2.0                 | 15.4        | 54             |
| 1418.250000     | 40.4             | 200.0       | H            | 140.0         | 37.3                   | 3.1                 | 13.6        | 54             |
| 1693.500000     | 41.6             | 200.0       | V            | 352.0         | 36.6                   | 5.0                 | 12.4        | 54             |
| 2047.750000     | 43.5             | 200.0       | H            | 217.0         | 36.7                   | 6.8                 | 10.5        | 54             |
| 2206.250000     | 43.1             | 200.0       | H            | 162.0         | 35.2                   | 7.9                 | 10.9        | 54             |
| 2896.000000     | 49.4             | 200.0       | H            | 347.0         | 37.3                   | 12.1                | 4.6         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH1

RE 1G-3GHz PK+AV

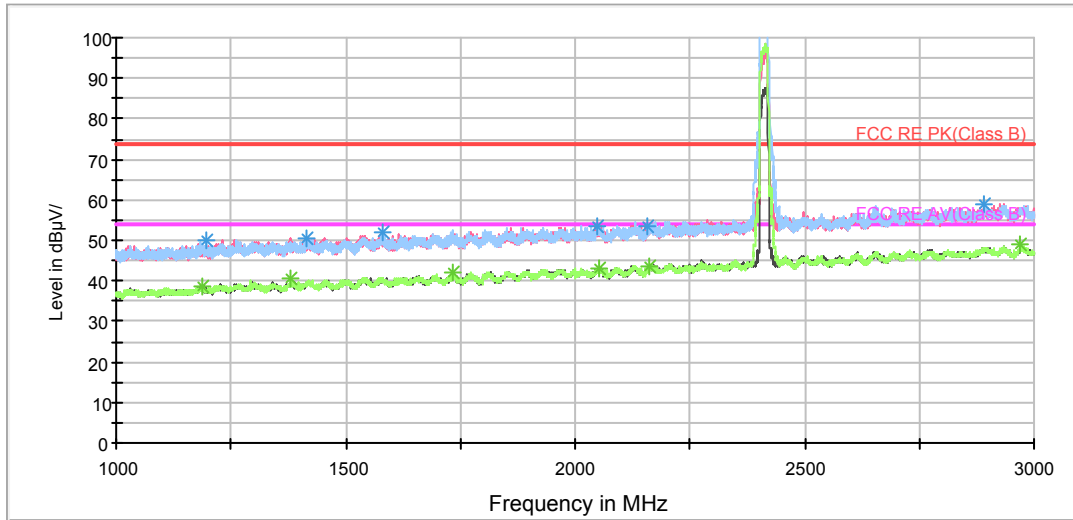


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

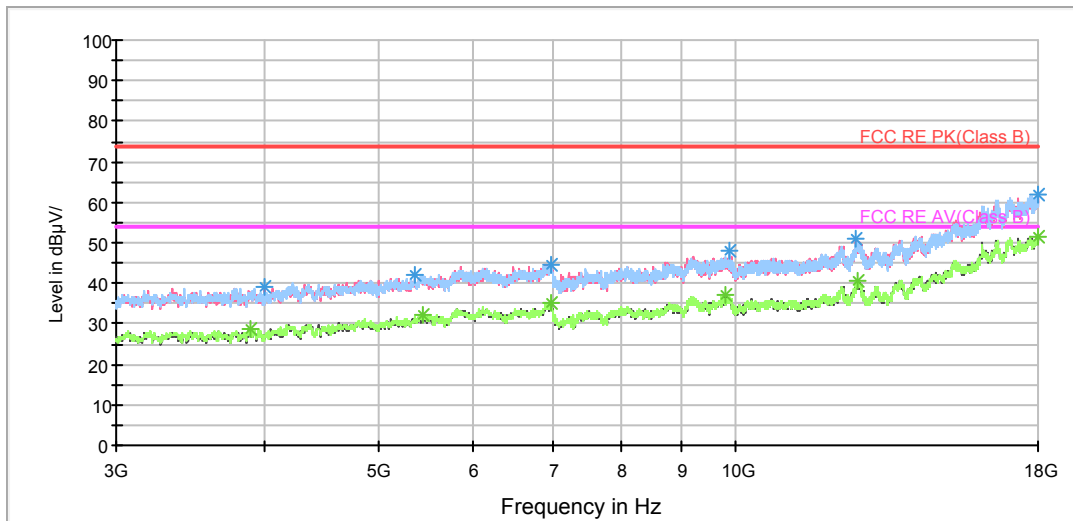

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

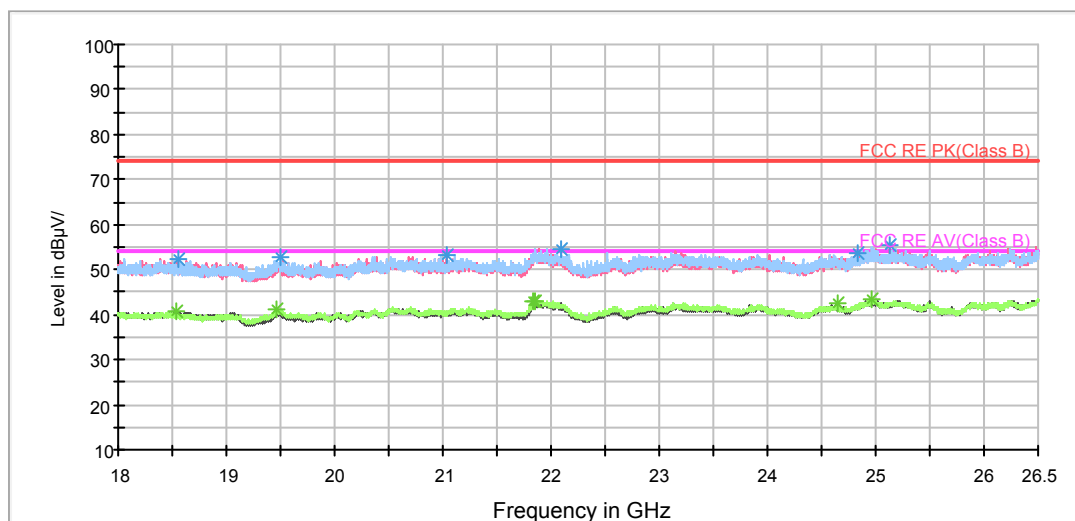

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1197.500000     | 49.8          | 200.0       | H            | 0.0           | 48.0                   | 1.8                 | 24.2        | 74             |
| 1414.000000     | 50.6          | 200.0       | H            | 35.0          | 47.6                   | 3.0                 | 23.4        | 74             |
| 1581.000000     | 51.8          | 200.0       | H            | 0.0           | 48.1                   | 3.7                 | 22.2        | 74             |
| 2050.000000     | 53.6          | 200.0       | H            | 46.0          | 46.8                   | 6.8                 | 20.4        | 74             |
| 2157.000000     | 53.7          | 200.0       | V            | 231.0         | 46.0                   | 7.7                 | 20.3        | 74             |
| 2889.750000     | 59.1          | 200.0       | V            | 351.0         | 46.9                   | 12.2                | 14.9        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1186.250000     | 38.8             | 200.0       | V            | 329.0         | 36.9                   | 1.9                 | 15.2        | 54             |
| 1381.750000     | 40.4             | 200.0       | H            | 121.0         | 37.4                   | 3.0                 | 13.6        | 54             |
| 1731.500000     | 42.1             | 200.0       | H            | 68.0          | 36.9                   | 5.2                 | 11.9        | 54             |
| 2051.750000     | 43.1             | 200.0       | H            | 111.0         | 36.3                   | 6.8                 | 10.9        | 54             |
| 2163.250000     | 43.4             | 200.0       | V            | 285.0         | 35.6                   | 7.8                 | 10.6        | 54             |
| 2970.500000     | 48.8             | 200.0       | H            | 197.0         | 36.6                   | 12.2                | 5.2         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH6

RE 1G-3GHz PK+AV

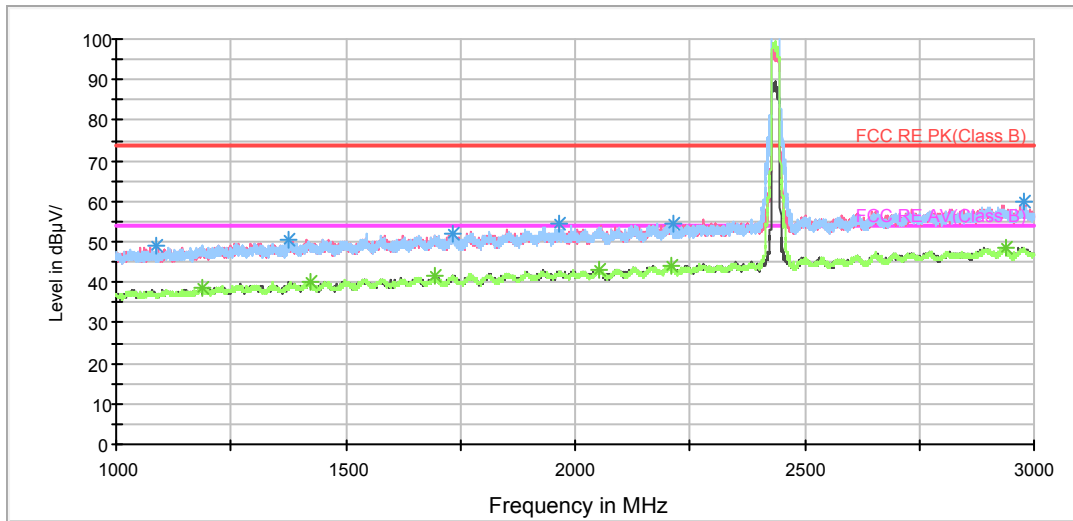


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

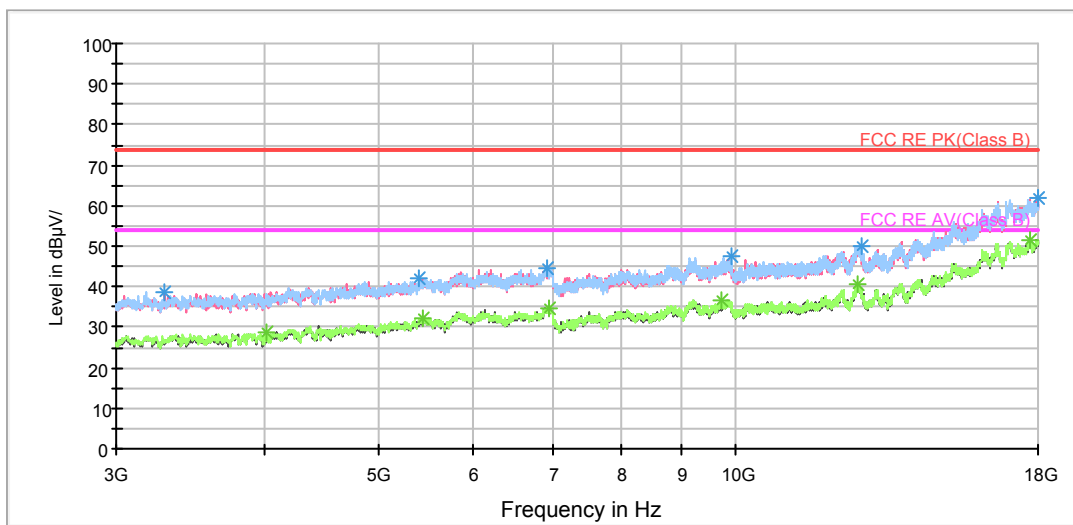

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

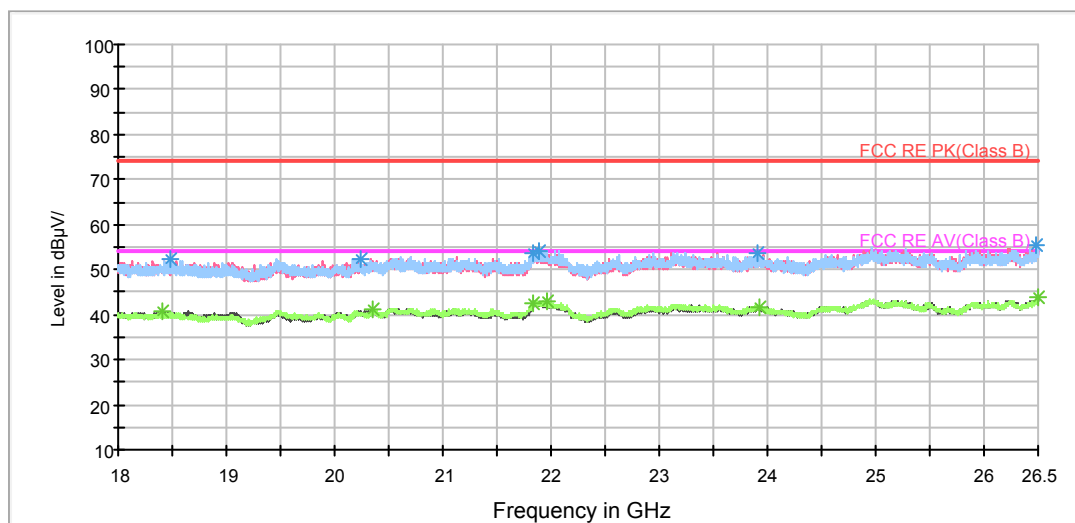

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1089.250000     | 49.0          | 200.0       | H            | 11.0          | 47.9                   | 1.1                 | 25.0        | 74             |
| 1377.000000     | 50.6          | 200.0       | H            | 309.0         | 47.7                   | 2.9                 | 23.4        | 74             |
| 1731.750000     | 52.0          | 200.0       | H            | 55.0          | 46.8                   | 5.2                 | 22.0        | 74             |
| 1966.250000     | 54.5          | 200.0       | V            | 197.0         | 47.9                   | 6.6                 | 19.5        | 74             |
| 2213.500000     | 54.3          | 200.0       | H            | 206.0         | 46.6                   | 7.7                 | 19.7        | 74             |
| 2979.750000     | 59.8          | 200.0       | H            | 108.0         | 47.6                   | 12.2                | 14.2        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1187.250000     | 38.8             | 200.0       | H            | 206.0         | 36.9                   | 1.9                 | 15.2        | 54             |
| 1423.000000     | 40.0             | 200.0       | H            | 11.0          | 36.9                   | 3.1                 | 14.0        | 54             |
| 1695.750000     | 41.6             | 200.0       | H            | 1.0           | 36.6                   | 5.0                 | 12.4        | 54             |
| 2054.000000     | 43.2             | 200.0       | V            | 0.0           | 36.4                   | 6.8                 | 10.8        | 54             |
| 2208.750000     | 44.1             | 200.0       | V            | 351.0         | 36.3                   | 7.8                 | 9.9         | 54             |
| 2938.000000     | 48.6             | 200.0       | H            | 174.0         | 36.7                   | 11.9                | 5.4         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11g CH11

RE 1G-3GHz PK+AV

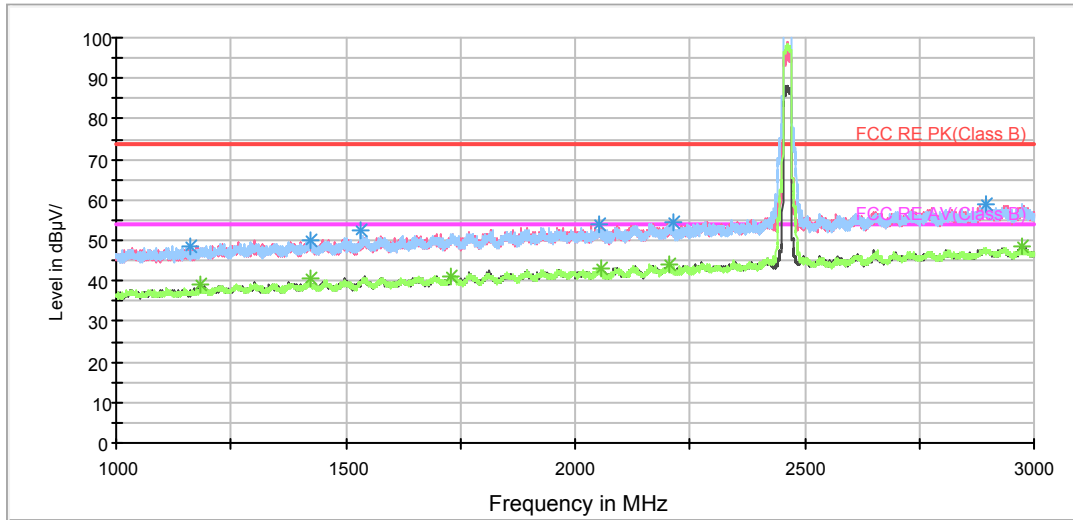


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

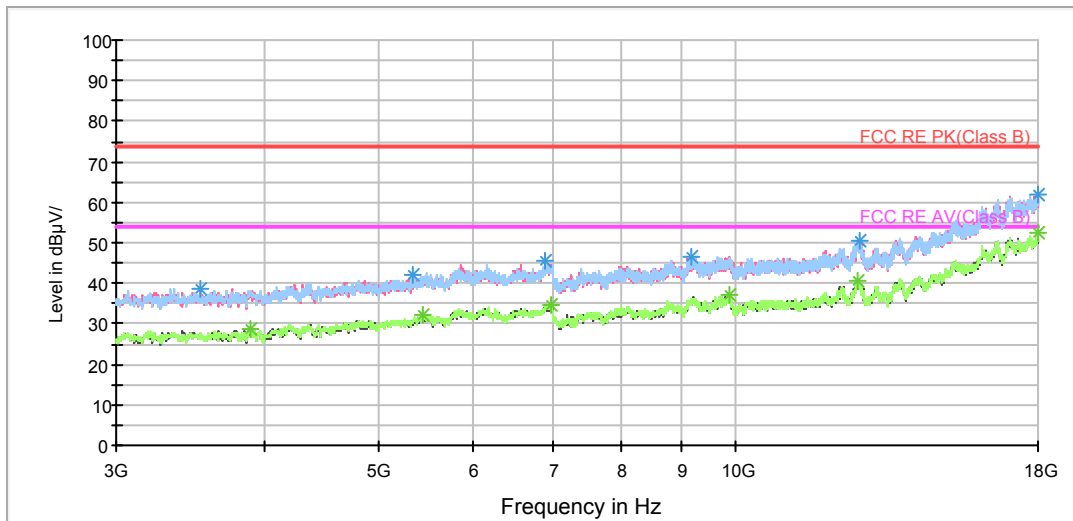

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

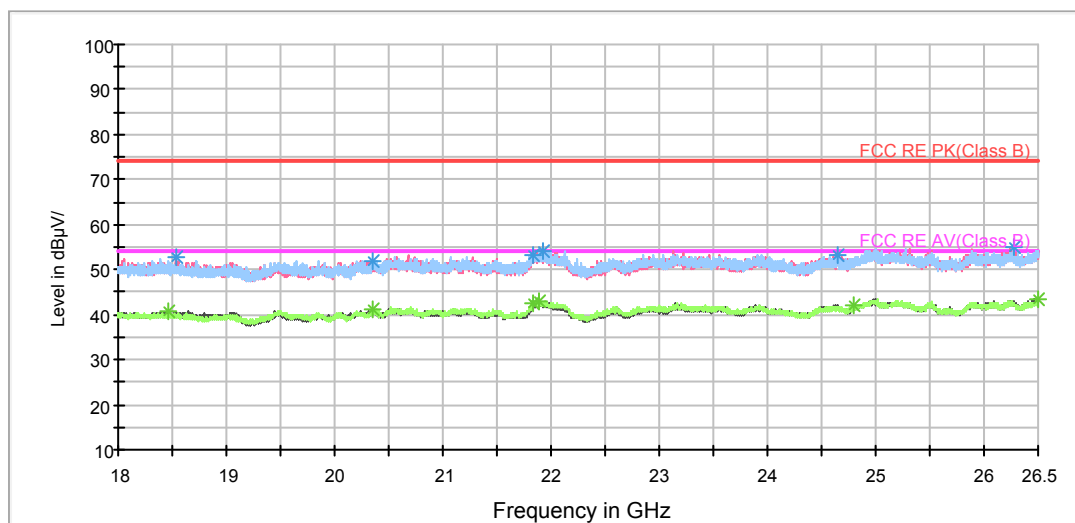

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1162.250000     | 48.7          | 200.0       | V            | 296.0         | 47.0                   | 1.7                 | 25.3        | 74             |
| 1422.250000     | 50.0          | 200.0       | V            | 129.0         | 46.9                   | 3.1                 | 24.0        | 74             |
| 1534.000000     | 52.4          | 200.0       | H            | 0.0           | 48.8                   | 3.6                 | 21.6        | 74             |
| 2054.000000     | 53.8          | 200.0       | H            | 17.0          | 47.0                   | 6.8                 | 20.2        | 74             |
| 2212.500000     | 54.4          | 200.0       | V            | 329.0         | 46.6                   | 7.8                 | 19.6        | 74             |
| 2893.500000     | 58.9          | 200.0       | H            | 71.0          | 46.8                   | 12.1                | 15.1        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1184.000000     | 39.0             | 200.0       | H            | 40.0          | 37.1                   | 1.9                 | 15.0        | 54             |
| 1423.250000     | 40.4             | 200.0       | H            | 217.0         | 37.3                   | 3.1                 | 13.6        | 54             |
| 1729.750000     | 41.2             | 200.0       | H            | 7.0           | 36.2                   | 5.0                 | 12.8        | 54             |
| 2055.250000     | 43.1             | 200.0       | H            | 173.0         | 36.3                   | 6.8                 | 10.9        | 54             |
| 2206.750000     | 44.0             | 200.0       | H            | 129.0         | 36.1                   | 7.9                 | 10.0        | 54             |
| 2972.000000     | 48.3             | 200.0       | V            | 0.0           | 36.1                   | 12.2                | 5.7         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH1

RE 1G-3GHz PK+AV

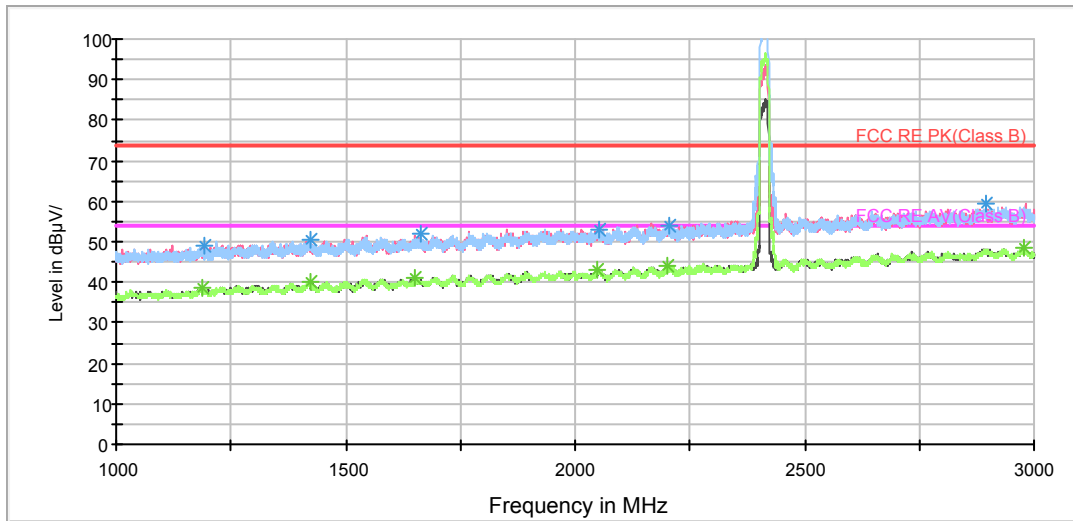


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

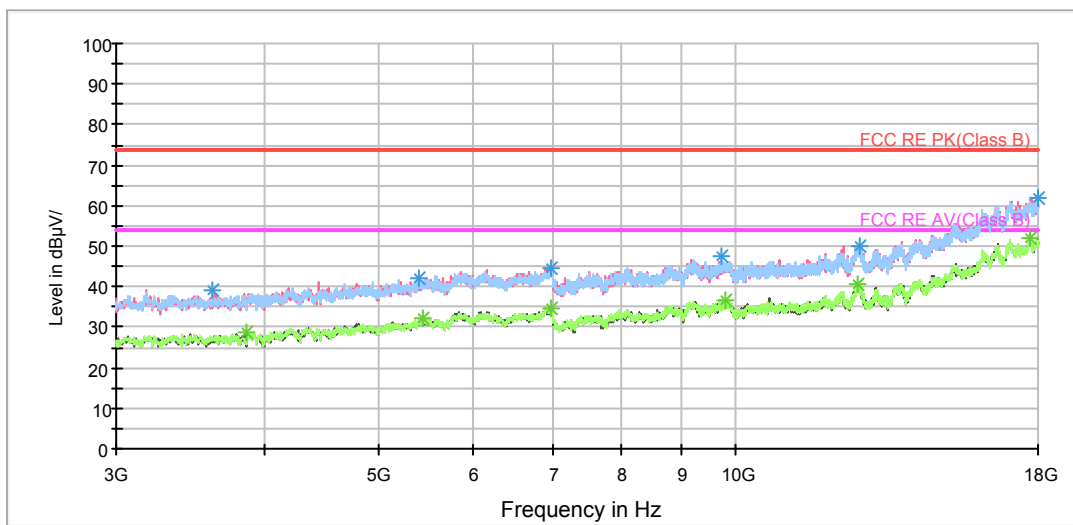

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

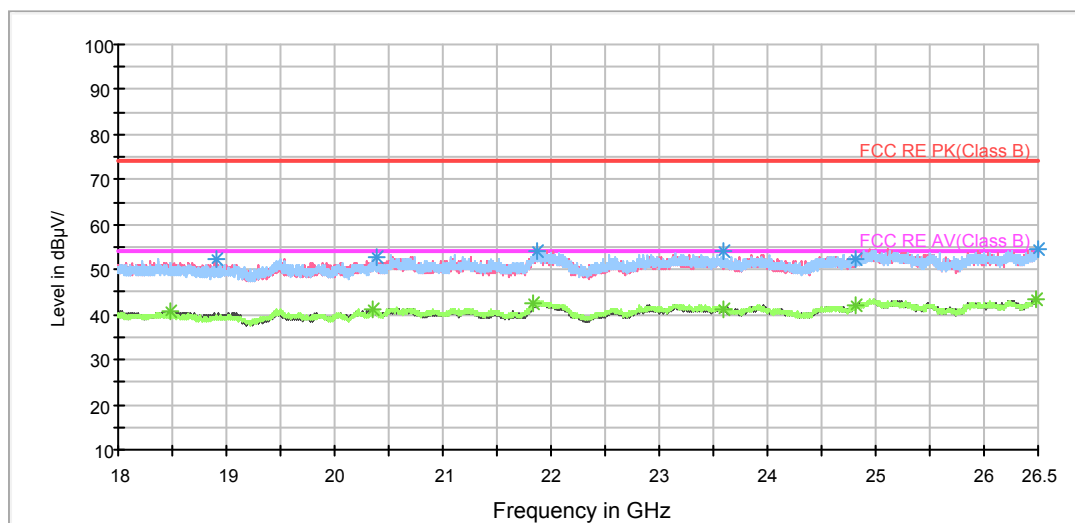

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1193.000000     | 49.1          | 200.0       | V            | 0.0           | 47.3                   | 1.8                 | 24.9        | 74             |
| 1421.750000     | 50.5          | 200.0       | H            | 97.0          | 47.4                   | 3.1                 | 23.5        | 74             |
| 1664.500000     | 52.1          | 200.0       | H            | 207.0         | 47.3                   | 4.8                 | 21.9        | 74             |
| 2053.750000     | 53.2          | 200.0       | H            | 20.0          | 46.4                   | 6.8                 | 20.8        | 74             |
| 2203.750000     | 54.1          | 200.0       | V            | 212.0         | 46.2                   | 7.9                 | 19.9        | 74             |
| 2895.000000     | 59.6          | 200.0       | H            | 0.0           | 47.5                   | 12.1                | 14.4        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1189.000000     | 38.5             | 200.0       | H            | 229.0         | 36.7                   | 1.8                 | 15.5        | 54             |
| 1424.750000     | 40.0             | 200.0       | H            | 217.0         | 36.9                   | 3.1                 | 14.0        | 54             |
| 1650.000000     | 41.3             | 200.0       | H            | 273.0         | 36.4                   | 4.9                 | 12.7        | 54             |
| 2049.500000     | 43.1             | 200.0       | V            | 191.0         | 36.3                   | 6.8                 | 10.9        | 54             |
| 2200.500000     | 44.0             | 200.0       | H            | 52.0          | 36.1                   | 7.9                 | 10.0        | 54             |
| 2976.750000     | 48.4             | 200.0       | V            | 322.0         | 36.2                   | 12.2                | 5.6         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH6

RE 1G-3GHz PK+AV

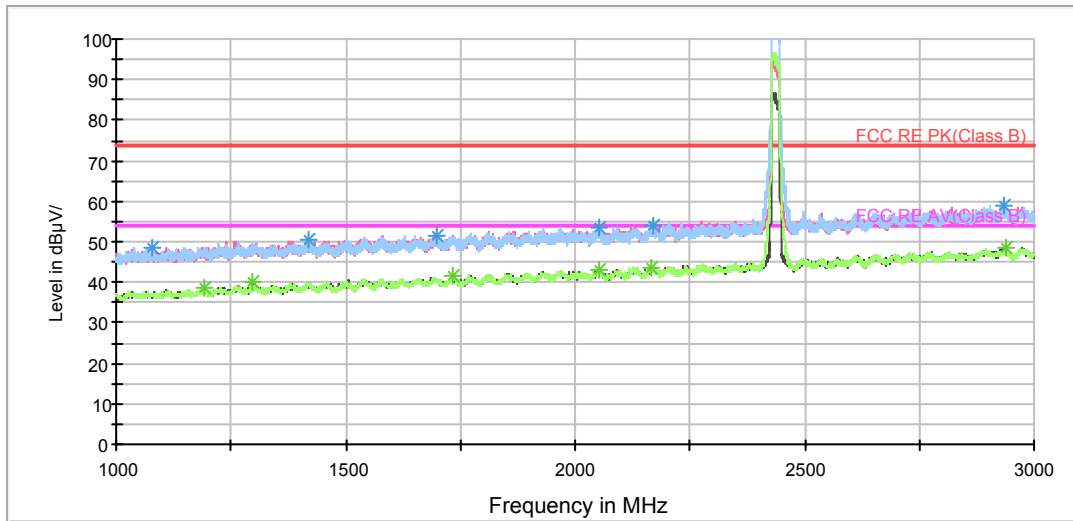


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

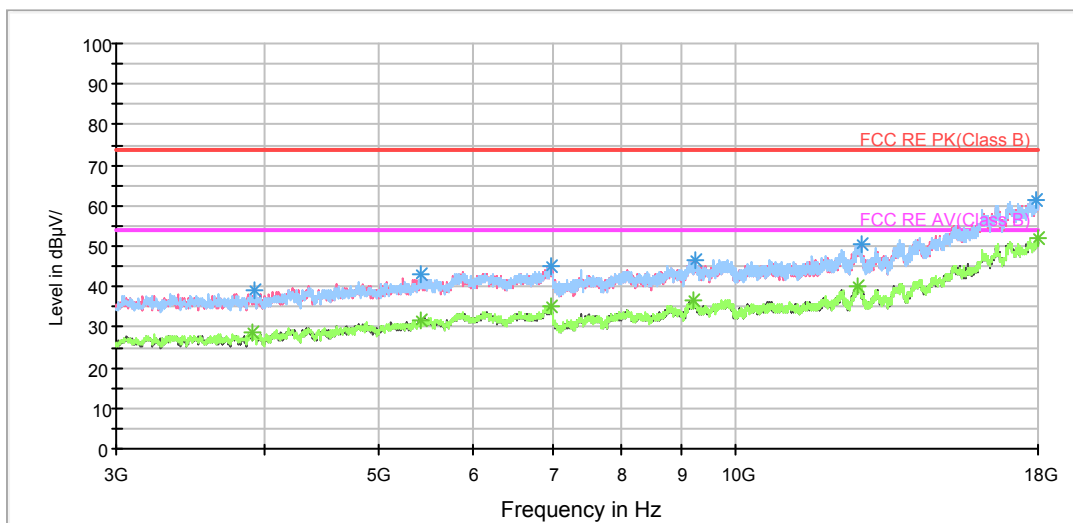

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

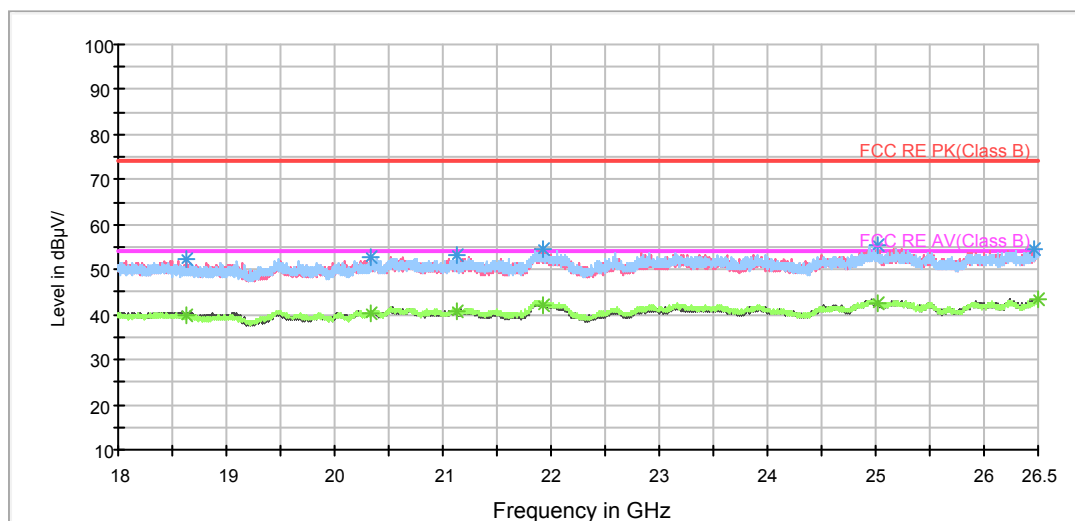

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1077.000000     | 48.8          | 200.0       | V            | 0.0           | 47.6                   | 1.2                 | 25.2        | 74             |
| 1420.750000     | 50.5          | 200.0       | H            | 152.0         | 47.4                   | 3.1                 | 23.5        | 74             |
| 1697.250000     | 51.7          | 200.0       | H            | 173.0         | 46.7                   | 5.0                 | 22.3        | 74             |
| 2053.750000     | 53.5          | 200.0       | V            | 129.0         | 46.7                   | 6.8                 | 20.5        | 74             |
| 2168.750000     | 54.0          | 200.0       | H            | 97.0          | 46.2                   | 7.8                 | 20.0        | 74             |
| 2933.250000     | 58.8          | 200.0       | H            | 284.0         | 47.0                   | 11.8                | 15.2        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1191.500000     | 38.4             | 200.0       | V            | 349.0         | 36.6                   | 1.8                 | 15.6        | 54             |
| 1298.000000     | 39.9             | 200.0       | V            | 0.0           | 37.7                   | 2.2                 | 14.1        | 54             |
| 1731.750000     | 41.7             | 200.0       | V            | 338.0         | 36.5                   | 5.2                 | 12.3        | 54             |
| 2053.250000     | 43.0             | 200.0       | H            | 119.0         | 36.2                   | 6.8                 | 11.0        | 54             |
| 2167.500000     | 43.6             | 200.0       | H            | 141.0         | 35.8                   | 7.8                 | 10.4        | 54             |
| 2940.750000     | 48.4             | 200.0       | V            | 317.0         | 36.5                   | 11.9                | 5.6         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


802.11n (HT20) CH11

RE 1G-3GHz PK+AV

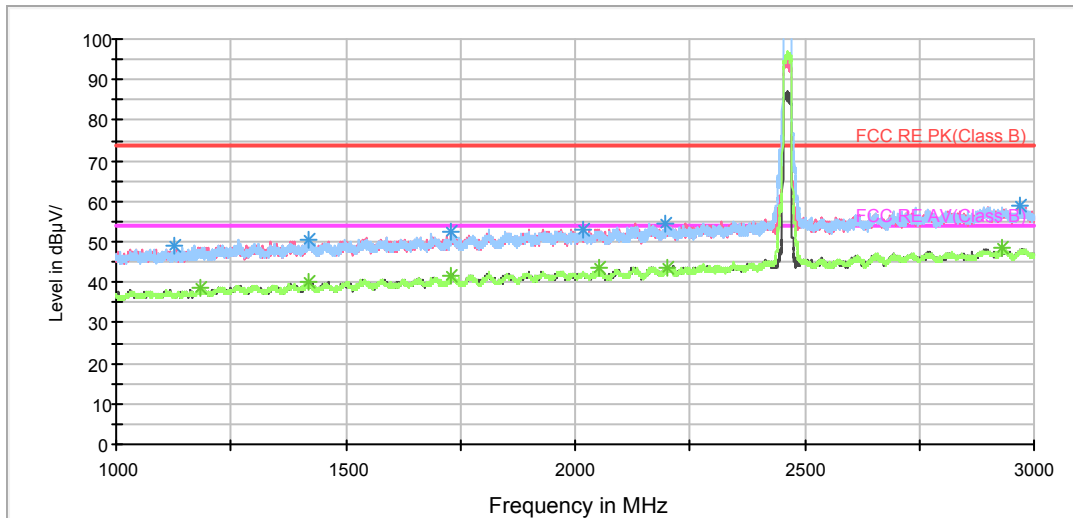


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

RE 3-18GHz PK+AV

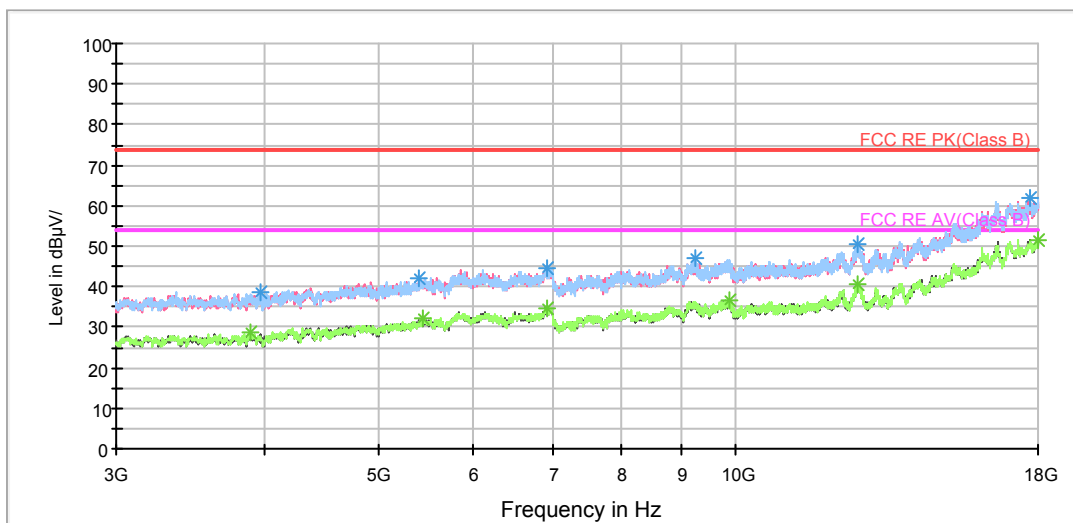

Radiates Emission from 3GHz to 18GHz

## BELL\_RE 18-26.5GHz PK+AV

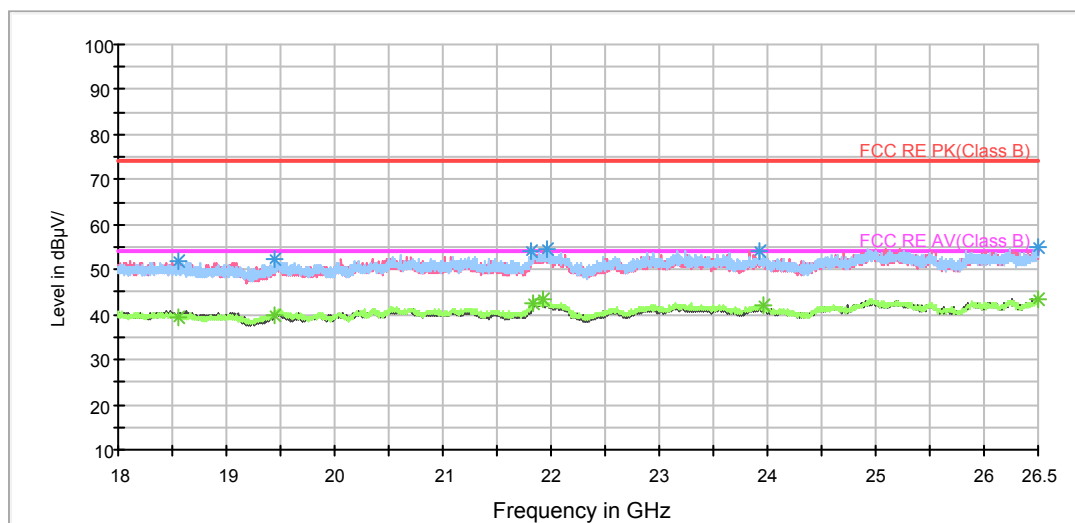

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1128.250000     | 49.1          | 200.0       | H            | 19.0          | 47.5                   | 1.6                 | 24.9        | 74             |
| 1420.000000     | 50.6          | 200.0       | V            | 201.0         | 47.5                   | 3.1                 | 23.4        | 74             |
| 1727.750000     | 52.7          | 200.0       | V            | 212.0         | 47.8                   | 4.9                 | 21.3        | 74             |
| 2015.500000     | 53.1          | 200.0       | V            | 266.0         | 46.6                   | 6.5                 | 20.9        | 74             |
| 2196.500000     | 54.3          | 200.0       | H            | 104.0         | 46.4                   | 7.9                 | 19.7        | 74             |
| 2971.250000     | 59.0          | 200.0       | V            | 169.0         | 46.8                   | 12.2                | 15.0        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1183.750000     | 38.8             | 200.0       | V            | 125.0         | 36.9                   | 1.9                 | 15.2        | 54             |
| 1419.250000     | 40.2             | 200.0       | V            | 147.0         | 37.1                   | 3.1                 | 13.8        | 54             |
| 1731.000000     | 41.6             | 200.0       | V            | 278.0         | 36.5                   | 5.1                 | 12.4        | 54             |
| 2054.000000     | 43.3             | 200.0       | H            | 160.0         | 36.5                   | 6.8                 | 10.7        | 54             |
| 2200.750000     | 43.8             | 200.0       | H            | 248.0         | 35.9                   | 7.9                 | 10.2        | 54             |
| 2931.250000     | 48.5             | 200.0       | H            | 160.0         | 36.7                   | 11.8                | 5.5         | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


## BLE-Channel 0

FCC RE 1G-3GHz PK+AV Class B

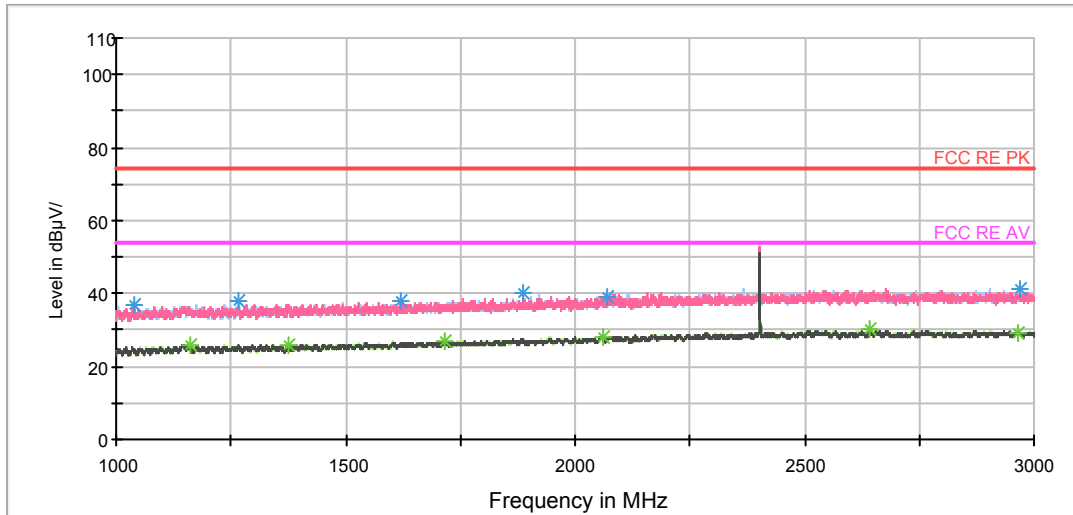


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

FCC RE 1G-18GHz PK+AV Class B

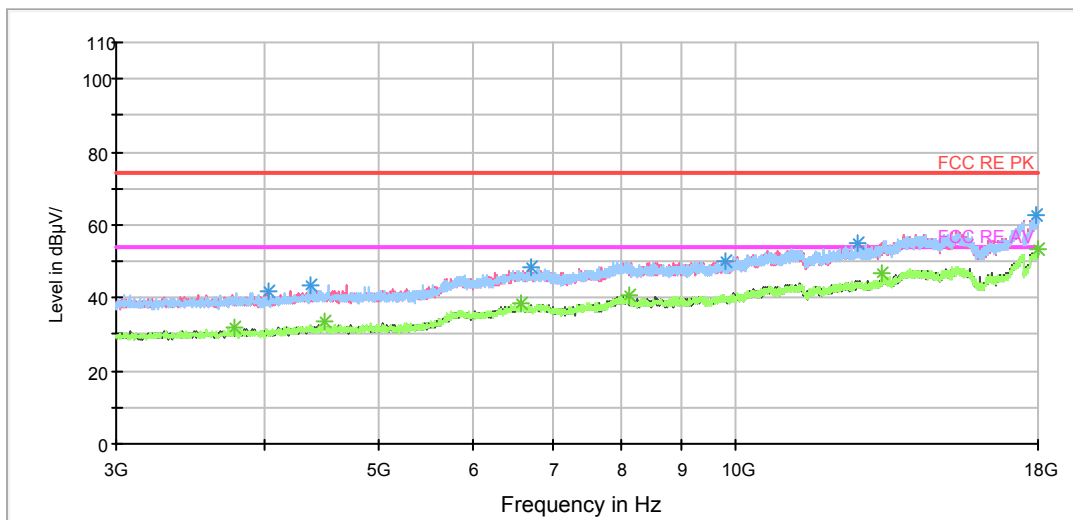

Radiates Emission from 3GHz to 18GHz

## RE 18-26.5GHz PK+AV

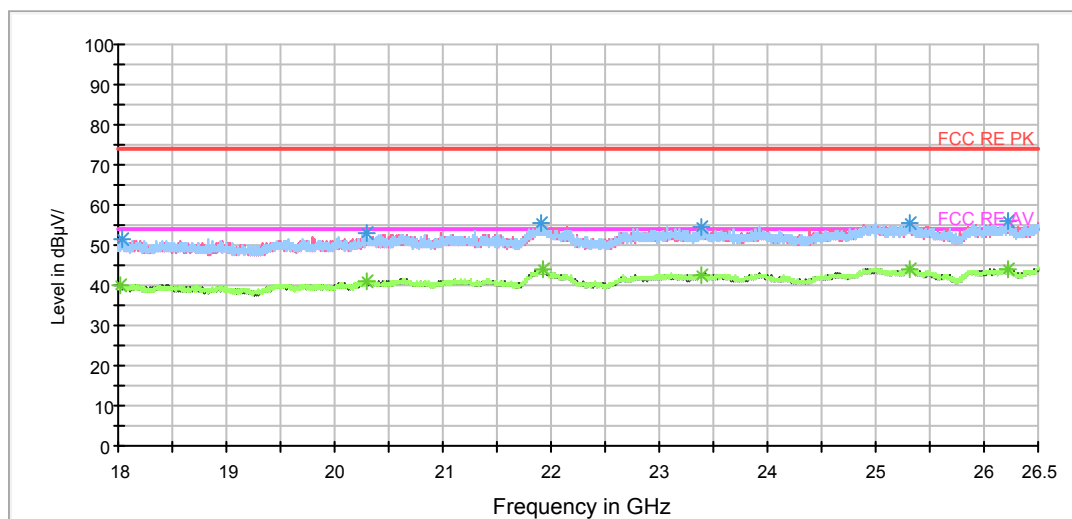

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1037.750000     | 36.8          | 100.0       | V            | 23.0          | 44.9                   | -8.1                | 37.2        | 74             |
| 1268.500000     | 37.9          | 100.0       | H            | 240.0         | 45.2                   | -7.3                | 36.1        | 74             |
| 1620.500000     | 37.8          | 100.0       | V            | 8.0           | 44.0                   | -6.2                | 36.2        | 74             |
| 1886.500000     | 40.2          | 100.0       | V            | 286.0         | 45.4                   | -5.2                | 33.8        | 74             |
| 2068.500000     | 39.0          | 100.0       | H            | 314.0         | 43.5                   | -4.5                | 35.0        | 74             |
| 2968.750000     | 41.5          | 100.0       | H            | 324.0         | 44.0                   | -2.5                | 32.5        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1160.750000     | 26.0             | 100.0       | H            | 355.0         | 33.7                   | -7.7                | 28.0        | 54             |
| 1377.500000     | 26.1             | 100.0       | V            | 67.0          | 33.1                   | -7.0                | 27.9        | 54             |
| 1717.750000     | 26.8             | 100.0       | H            | 125.0         | 32.6                   | -5.8                | 27.2        | 54             |
| 2060.250000     | 28.2             | 100.0       | V            | 203.0         | 32.8                   | -4.6                | 25.8        | 54             |
| 2642.250000     | 30.0             | 100.0       | V            | 110.0         | 32.7                   | -2.7                | 24.0        | 54             |
| 2965.250000     | 29.2             | 100.0       | H            | 212.0         | 31.7                   | -2.5                | 24.8        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


## BLE-Channel 19

FCC RE 1G-3GHz PK+AV Class B

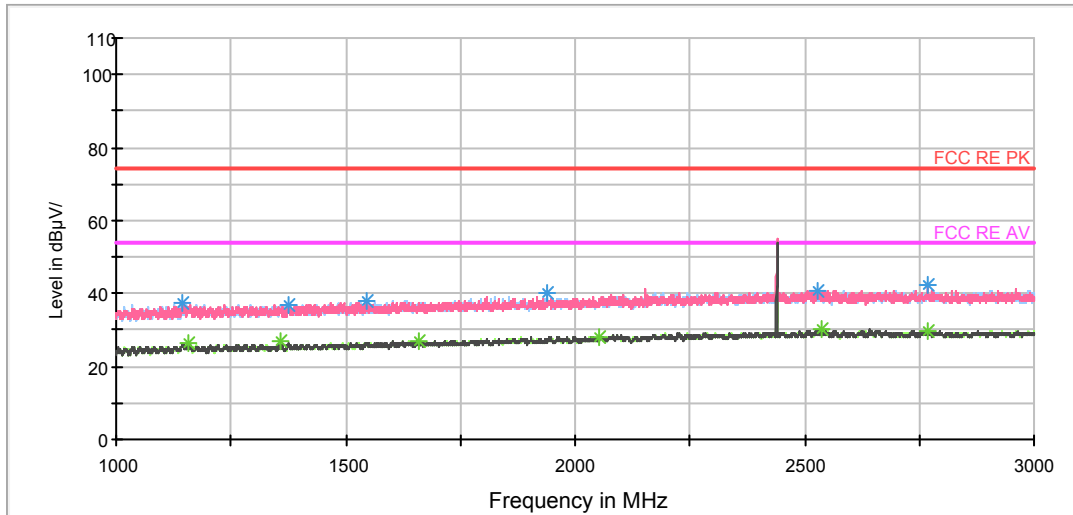


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

FCC RE 1G-18GHz PK+AV Class B

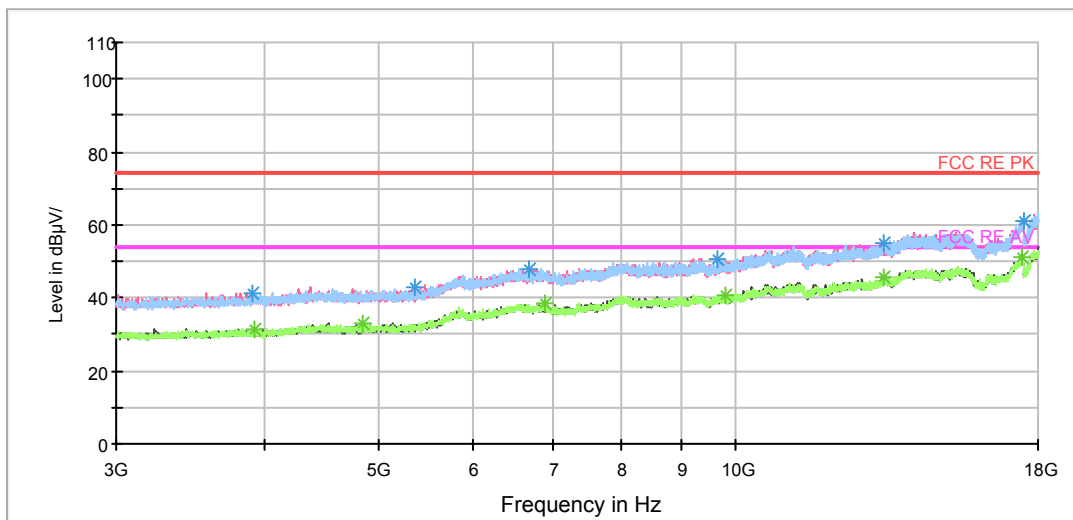

Radiates Emission from 3GHz to 18GHz

## RE 18-26.5GHz PK+AV

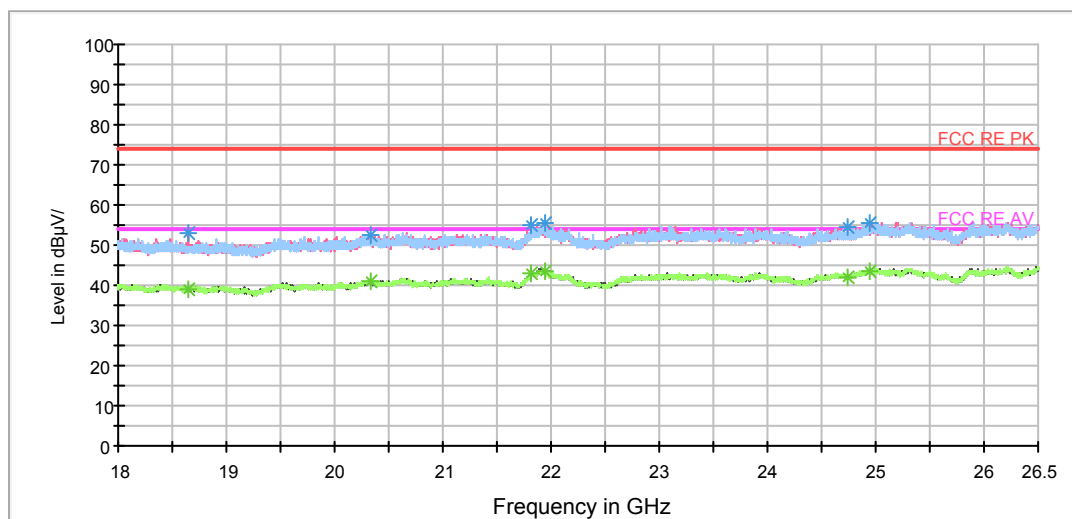

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1145.250000     | 37.1          | 100.0       | H            | 348.0         | 44.8                   | -7.7                | 36.9        | 74             |
| 1376.000000     | 37.1          | 100.0       | H            | 0.0           | 44.1                   | -7.0                | 36.9        | 74             |
| 1548.000000     | 38.1          | 100.0       | V            | 69.0          | 44.6                   | -6.5                | 35.9        | 74             |
| 1940.500000     | 40.3          | 100.0       | H            | 0.0           | 45.3                   | -5.0                | 33.7        | 74             |
| 2527.000000     | 40.7          | 100.0       | H            | 0.0           | 43.5                   | -2.8                | 33.3        | 74             |
| 2768.750000     | 42.3          | 100.0       | V            | 106.0         | 44.9                   | -2.6                | 31.7        | 74             |


Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1156.500000     | 26.2             | 100.0       | H            | 225.0         | 33.9                   | -7.7                | 27.8        | 54             |
| 1358.250000     | 26.7             | 100.0       | H            | 282.0         | 33.8                   | -7.1                | 27.3        | 54             |
| 1658.250000     | 27.1             | 100.0       | H            | 318.0         | 33.1                   | -6.0                | 26.9        | 54             |
| 2054.500000     | 28.3             | 100.0       | V            | 0.0           | 32.9                   | -4.6                | 25.7        | 54             |
| 2535.500000     | 30.0             | 100.0       | H            | 0.0           | 32.8                   | -2.8                | 24.0        | 54             |
| 2770.000000     | 29.5             | 100.0       | V            | 41.0          | 32.1                   | -2.6                | 24.5        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)


## BLE-Channel 39

FCC RE 1G-3GHz PK+AV Class B

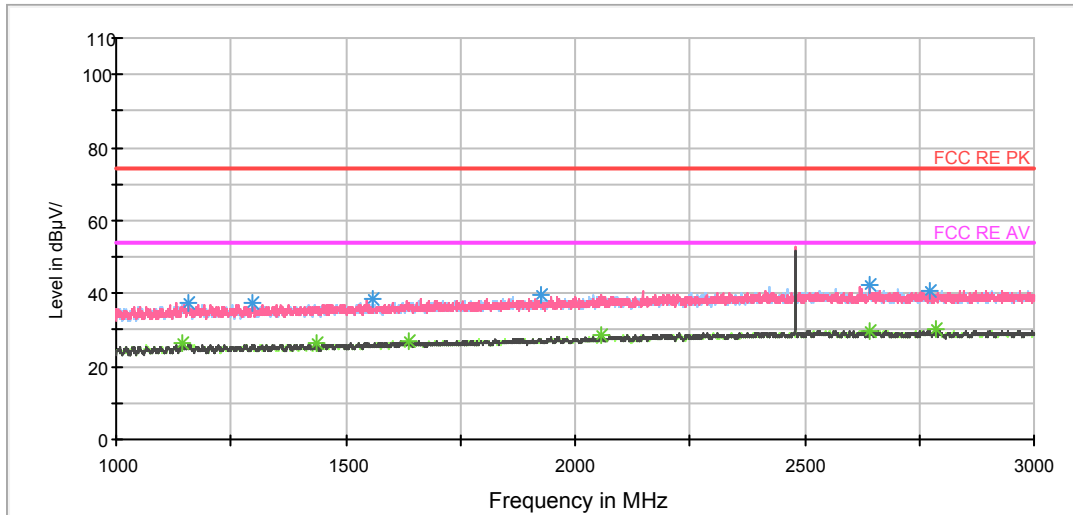


Note: The signal beyond the limit is carrier.  
Radiates Emission from 1GHz to 3GHz

FCC RE 1G-18GHz PK+AV Class B

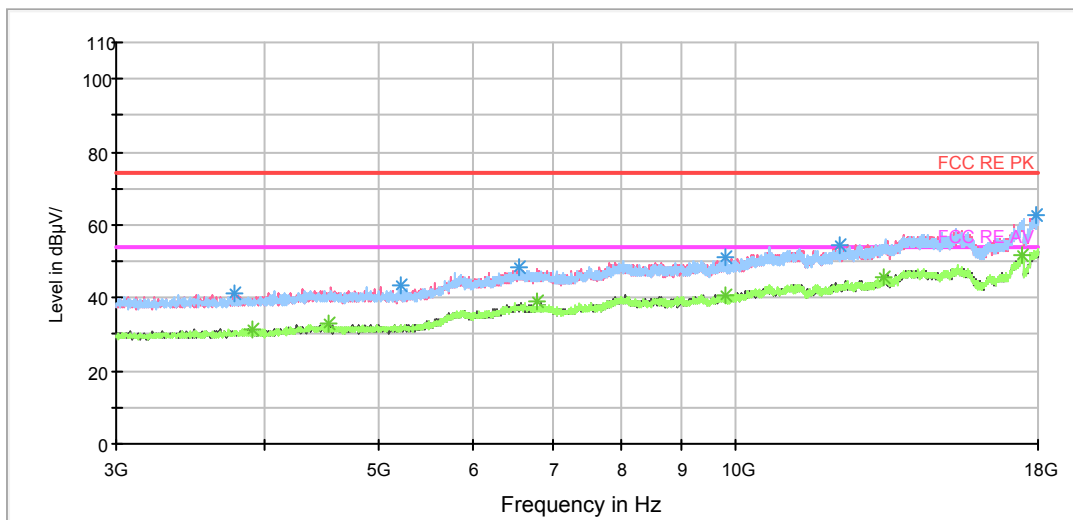

Radiates Emission from 3GHz to 18GHz

## RE 18-26.5GHz PK+AV

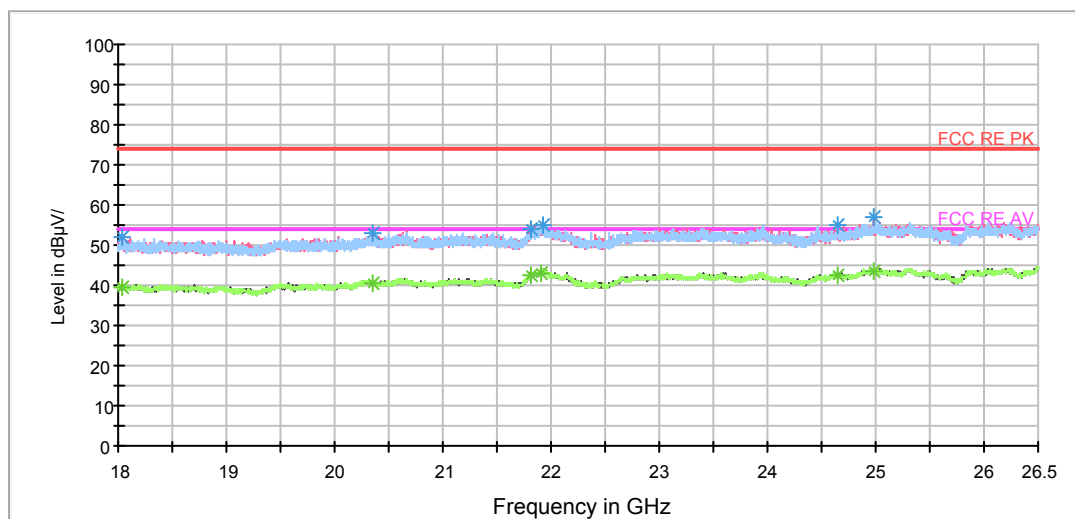

## Radiates Emission from 18GHz to 26.5GHz

| Frequency (MHz) | Peak (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1159.000000     | 37.5          | 100.0       | V            | 41.0          | 45.2                   | -7.7                | 36.5        | 74             |
| 1297.000000     | 37.5          | 100.0       | H            | 0.0           | 44.8                   | -7.3                | 36.5        | 74             |
| 1560.750000     | 38.5          | 100.0       | H            | 350.0         | 44.9                   | -6.4                | 35.5        | 74             |
| 1927.750000     | 39.4          | 100.0       | H            | 242.0         | 44.5                   | -5.1                | 34.6        | 74             |
| 2641.000000     | 42.2          | 100.0       | V            | 13.0          | 44.9                   | -2.7                | 31.8        | 74             |
| 2773.500000     | 40.5          | 100.0       | H            | 359.0         | 43.1                   | -2.6                | 33.5        | 74             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

| Frequency (MHz) | Average (dBuV/m) | Height (cm) | Polarization | Azimuth (deg) | Reading value (dBuV/m) | Correct Factor (dB) | Margin (dB) | Limit (dBuV/m) |
|-----------------|------------------|-------------|--------------|---------------|------------------------|---------------------|-------------|----------------|
| 1145.000000     | 26.2             | 100.0       | H            | 359.0         | 33.9                   | -7.7                | 27.8        | 54             |
| 1436.250000     | 26.3             | 100.0       | H            | 357.0         | 33.1                   | -6.8                | 27.7        | 54             |
| 1638.250000     | 27.2             | 100.0       | V            | 153.0         | 33.3                   | -6.1                | 26.8        | 54             |
| 2056.750000     | 28.5             | 100.0       | V            | 189.0         | 33.1                   | -4.6                | 25.5        | 54             |
| 2640.000000     | 29.5             | 100.0       | V            | 41.0          | 32.2                   | -2.7                | 24.5        | 54             |
| 2784.250000     | 30.1             | 100.0       | V            | 208.0         | 32.7                   | -2.6                | 23.9        | 54             |

Remark: 1. Correction Factor = Antenna factor+ Insertion loss (cable loss + amplifier gain)

## 5.8. Conducted Emission

### Ambient condition


| Temperature | Relative humidity | Pressure |
|-------------|-------------------|----------|
| 23°C ~25°C  | 45%~50%           | 101.5kPa |

### Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10-2013. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

The test is in transmitting mode.

### Test Setup

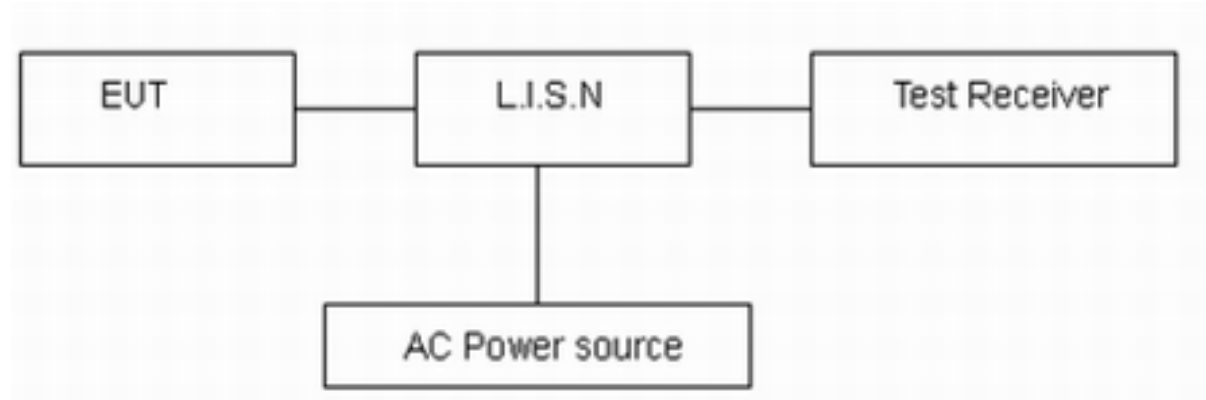

Note: AC Power source is used to change the voltage 110V/60Hz.

### Limits

| Frequency<br>(MHz) | Conducted Limits(dBμV) |            |
|--------------------|------------------------|------------|
|                    | Quasi-peak             | Average    |
| 0.15 - 0.5         | 66 to 56 *             | 56 to 46 * |
| 0.5 - 5            | 56                     | 46         |
| 5 - 30             | 60                     | 50         |

\*: Decreases with the logarithm of the frequency.

### Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor  $k = 1.96$ ,  $U = 2.69$  dB.

**Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes (WIFI 2.4G /BLE) with all channels, 802.11b, Channel 11 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.


## 802.11b, Channel No.: 1

## L Line

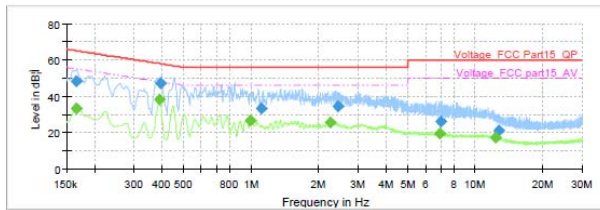

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.165750        | ---                    | 33.41                | 55.17              | 21.77       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 0.165750        | 48.17                  | ---                  | 65.17              | 17.00       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 0.388500        | ---                    | 38.24                | 48.10              | 9.85        | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 0.388500        | 47.05                  | ---                  | 57.95              | 10.90       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 0.998250        | ---                    | 26.61                | 46.00              | 19.39       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 1.115250        | 33.21                  | ---                  | 56.00              | 22.79       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 2.244750        | ---                    | 25.60                | 46.00              | 20.40       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 2.438250        | 34.59                  | ---                  | 56.00              | 21.41       | 1000.0          | 9.000           | L1   | ON     | 19.6       |
| 6.976500        | ---                    | 19.45                | 50.00              | 30.55       | 1000.0          | 9.000           | L1   | ON     | 19.7       |
| 7.048500        | 26.35                  | ---                  | 60.00              | 33.65       | 1000.0          | 9.000           | L1   | ON     | 19.7       |
| 12.309000       | ---                    | 17.44                | 50.00              | 32.56       | 1000.0          | 9.000           | L1   | ON     | 19.9       |
| 12.813000       | 21.04                  | ---                  | 60.00              | 38.96       | 1000.0          | 9.000           | L1   | ON     | 19.9       |

## N Line

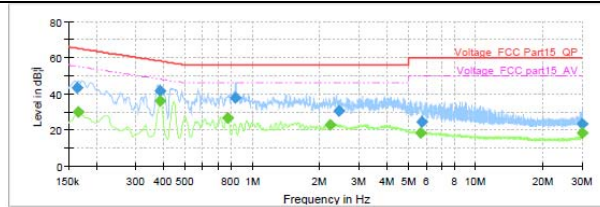

| Frequency (MHz) | QuasiPeak (dB $\mu$ V) | Average (dB $\mu$ V) | Limit (dB $\mu$ V) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Line | Filter | Corr. (dB) |
|-----------------|------------------------|----------------------|--------------------|-------------|-----------------|-----------------|------|--------|------------|
| 0.163500        | 43.24                  | ---                  | 65.28              | 22.05       | 1000.0          | 9.000           | N    | ON     | 19.7       |
| 0.165750        | ---                    | 30.09                | 55.17              | 25.08       | 1000.0          | 9.000           | N    | ON     | 19.7       |
| 0.384000        | 41.57                  | ---                  | 58.19              | 16.62       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 0.386250        | ---                    | 36.31                | 48.14              | 11.83       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 0.773250        | ---                    | 26.84                | 46.00              | 19.16       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 0.840750        | 37.98                  | ---                  | 56.00              | 18.02       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 2.233500        | ---                    | 23.02                | 46.00              | 22.98       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 2.429250        | 30.79                  | ---                  | 56.00              | 25.21       | 1000.0          | 9.000           | N    | ON     | 19.6       |
| 5.687250        | ---                    | 18.45                | 50.00              | 31.55       | 1000.0          | 9.000           | N    | ON     | 19.7       |
| 5.743500        | 24.59                  | ---                  | 60.00              | 35.41       | 1000.0          | 9.000           | N    | ON     | 19.7       |
| 29.897250       | 23.10                  | ---                  | 60.00              | 36.90       | 1000.0          | 9.000           | N    | ON     | 19.9       |
| 29.942250       | ---                    | 18.46                | 50.00              | 31.54       | 1000.0          | 9.000           | N    | ON     | 19.9       |

## 6. Main Test Instruments

| Name                                 | Manufacturer      | Type      | Serial Number              | Calibration Date | Expiration Date |
|--------------------------------------|-------------------|-----------|----------------------------|------------------|-----------------|
| Spectrum Analyzer                    | R&S               | FSV30     | 100815                     | 2017-12-17       | 2018-12-16      |
| EMI Test Receiver                    | R&S               | ESCI      | 100948                     | 2017-05-20       | 2018-05-19      |
| TRILOG Broadband Antenna             | Schwarzbeck       | VULB 9163 | 9163-201                   | 2017-11-18       | 2020-11-17      |
| Double Ridged Waveguide Horn Antenna | R&S               | HF907     | 100126                     | 2014-12-06       | 2019-12-05      |
| Loop Antenna                         | SCHWARZBECK       | FMZB1519  | 1519-047                   | 2017-11-18       | 2020-11-17      |
| Standard Gain Horn                   | ETS-Lindgren      | 3160-09   | 00102644                   | 2015-01-30       | 2020-01-29      |
| EMI Test Receiver                    | R&S               | ESR       | 101667                     | 2017-09-06       | 2018-09-05      |
| LISN                                 | R&S               | ENV216    | 101171                     | 2016-12-16       | 2019-12-15      |
| Spectrum Analyzer                    | Agilent           | N9010A    | MY47191109                 | 2017-05-20       | 2018-05-19      |
| Power Meter                          | R&S               | NRP2      | 1144.1374K02<br>-104306-EX | 2017-05-24       | 2018-05-23      |
| Power Sensor                         | R&S               | NRP-Z21   | 104799                     | 2017-05-24       | 2018-05-23      |
| RF Cable                             | Agilent           | SMA 15cm  | 0001                       | /                | /               |
| Software (CE)                        | ROHDE&SCHW<br>ARZ | EMC32     | 9.26.0                     | /                | /               |
| Software (RE/RSE)                    | ROHDE&SCHW<br>ARZ | EMC32     | 8.52.0                     | /                | /               |

\*\*\*\*\*END OF REPORT \*\*\*\*\*