



# FCC RF Test Report

APPLICANT : ZTE CORPORATION  
EQUIPMENT : smart watch  
BRAND NAME : ZTE  
MODEL NAME : ZW10  
FCC ID : SRQ-ZW10  
STANDARD : FCC Part 15 Subpart C §15.247  
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 10, 2016 and testing was completed on Jan. 17, 2017. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (KUNSHAN) INC.**  
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 5

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Applicable Standards..... 6

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 7**

    2.1 Carrier Frequency and Channel ..... 7

    2.2 Test Mode ..... 8

    2.3 Connection Diagram of Test System..... 9

    2.4 Support Unit used in test configuration and system ..... 11

    2.5 EUT Operation Test Setup ..... 11

    2.6 Measurement Results Explanation Example..... 11

**3 TEST RESULT ..... 12**

    3.1 6dB Bandwidth Measurement ..... 12

    3.2 Output Power Measurement..... 14

    3.3 Power Spectral Density Measurement ..... 15

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 17

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 27

    3.6 AC Conducted Emission Measurement..... 31

    3.7 Antenna Requirements ..... 35

**4 LIST OF MEASURING EQUIPMENT ..... 36**

**5 UNCERTAINTY OF EVALUATION ..... 37**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. RADIATED TEST RESULTS**

**APPENDIX C. DUTY CYCLE PLOTS**

**APPENDIX D. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.00 dB at 2483.500 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 5.69 dB at 0.546 MHz
0	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



# 1 General Description

## 1.1 Applicant

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 1.2 Manufacturer

**ZTE CORPORATION**

ZTE Plaza, Keji Road South, Hi-Tech, Industrial Park, Nanshan District, Shenzhen, Guangdong, 518057, P. R. China

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	smart watch
Brand Name	ZTE
Model Name	ZW10
FCC ID	SRQ-ZW10
EUT supports Radios application	GSM/GPRS/EGPRS/WCDMA/HSPA/ WLAN 2.4GHz 802.11b/g/n HT20 Bluetooth v3.0 + EDR/Bluetooth v4.0 LE
IMEI Code	Conducted: N/A Radiation: N/A
HW Version	ZW10HW1.0
SW Version	NFG08
EUT Stage	Identical Prototype

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 22.23 dBm (0.1671 W) 802.11g : 23.37 dBm (0.2173 W) 802.11n HT20 : 23.01 dBm (0.2000 W)
Antenna Type / Gain	PIFA Antenna with gain -10.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

<b>Test Site</b>	SPORTON INTERNATIONAL (KUNSHAN) INC.			
<b>Test Site Location</b>	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958			
<b>Test Site No.</b>	<b>Sporton Site No.</b>			<b>FCC Registration No.</b>
	TH01-KS	CO01-KS	03CH02-KS	418269

**Note:** The test site complies with ANSI C63.4 2014 requirement.

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



## 2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-



## 2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.


Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter)
<b>Remark:</b> For radiated test cases, the tests were performed with Adapter and USB cable.	


## 2.3 Connection Diagram of Test System

<WLAN Tx Mode>


For 802.11b/g

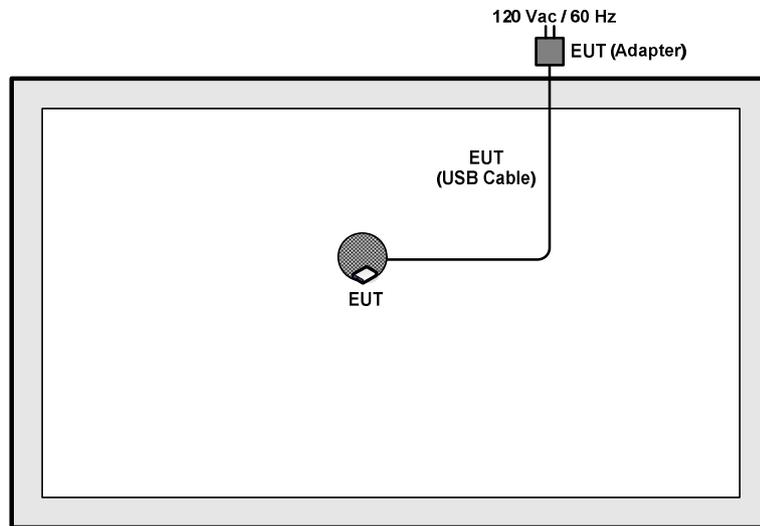

For 802.11n HT20

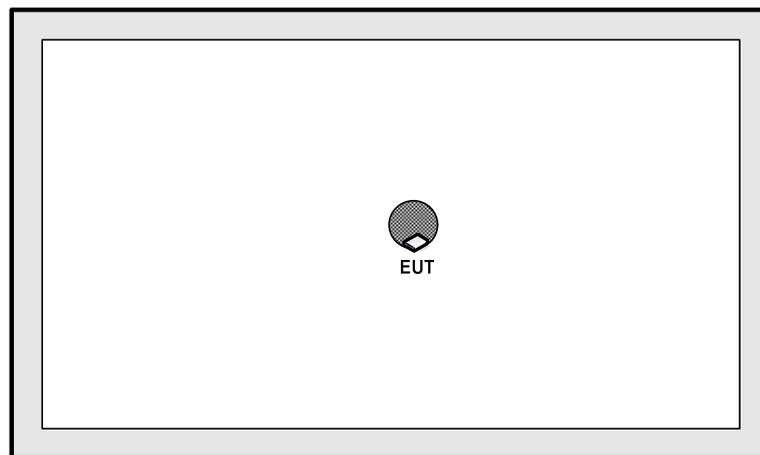

<AC Conducted Emission Mode>

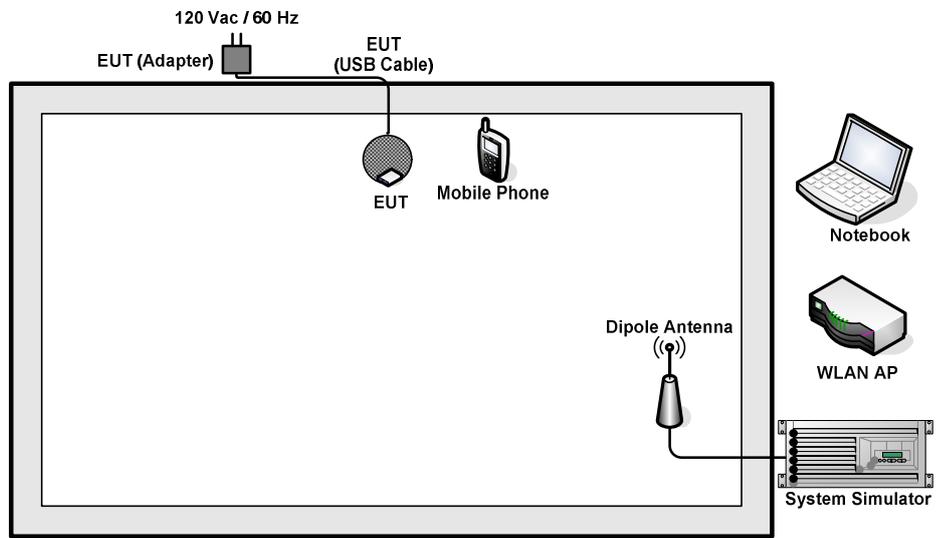

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	WLAN AP	D-Link	DIR-855	KA2DIR855A2	N/A	Unshielded, 1.8 m
3.	WLAN AP	LINKSYS	WRT600N	Q87-WRT600NV11	N/A	Unshielded, 1.2 m
4.	Notebook	Lenovo	G480	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m
5.	Bluetooth Earphone	Nokia	BH-102	PYAHS-107W	N/A	N/A
6.	Mobile Phone	ZTE	A1	N/A	N/A	N/A

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

*Offset = RF cable loss.*

Following shows an offset computation example with cable loss 5.8 dB.

*Offset(dB) = RF cable loss(dB).*

*= 5.8 (dB)*

### 3 Test Result

#### 3.1 6dB Bandwidth Measurement

##### 3.1.1 Limit of 6dB Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. Measure and record the results in the test report.


##### 3.1.4 Test Setup





### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

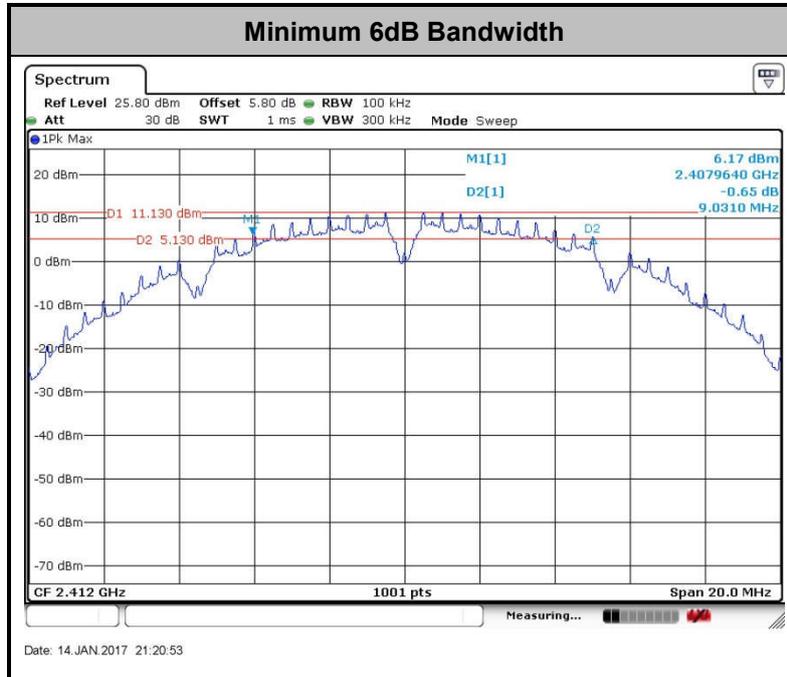

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

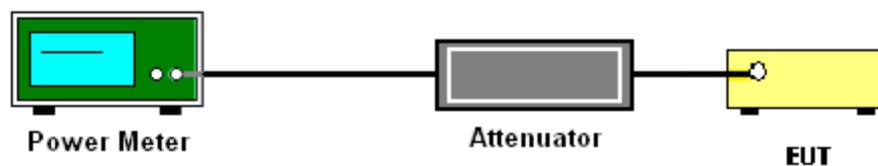

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


#### 3.3.4 Test Setup

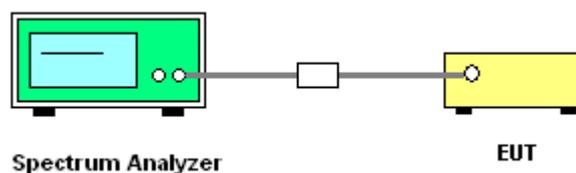



### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

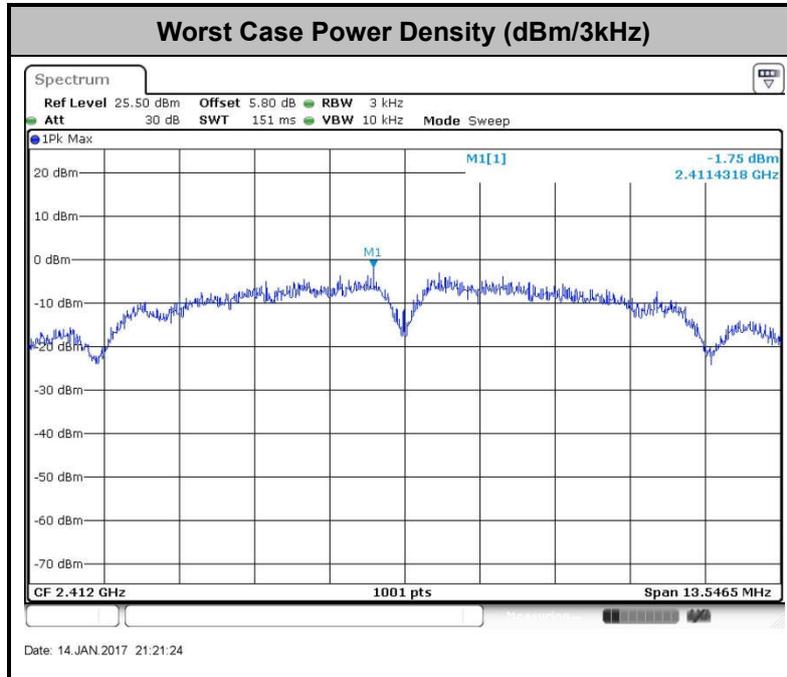

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


### 3.4.4 Test Setup

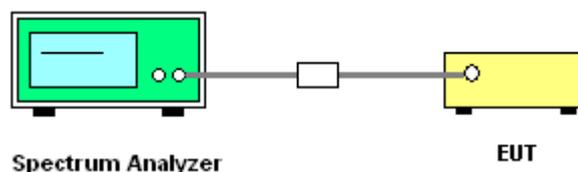



### 3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

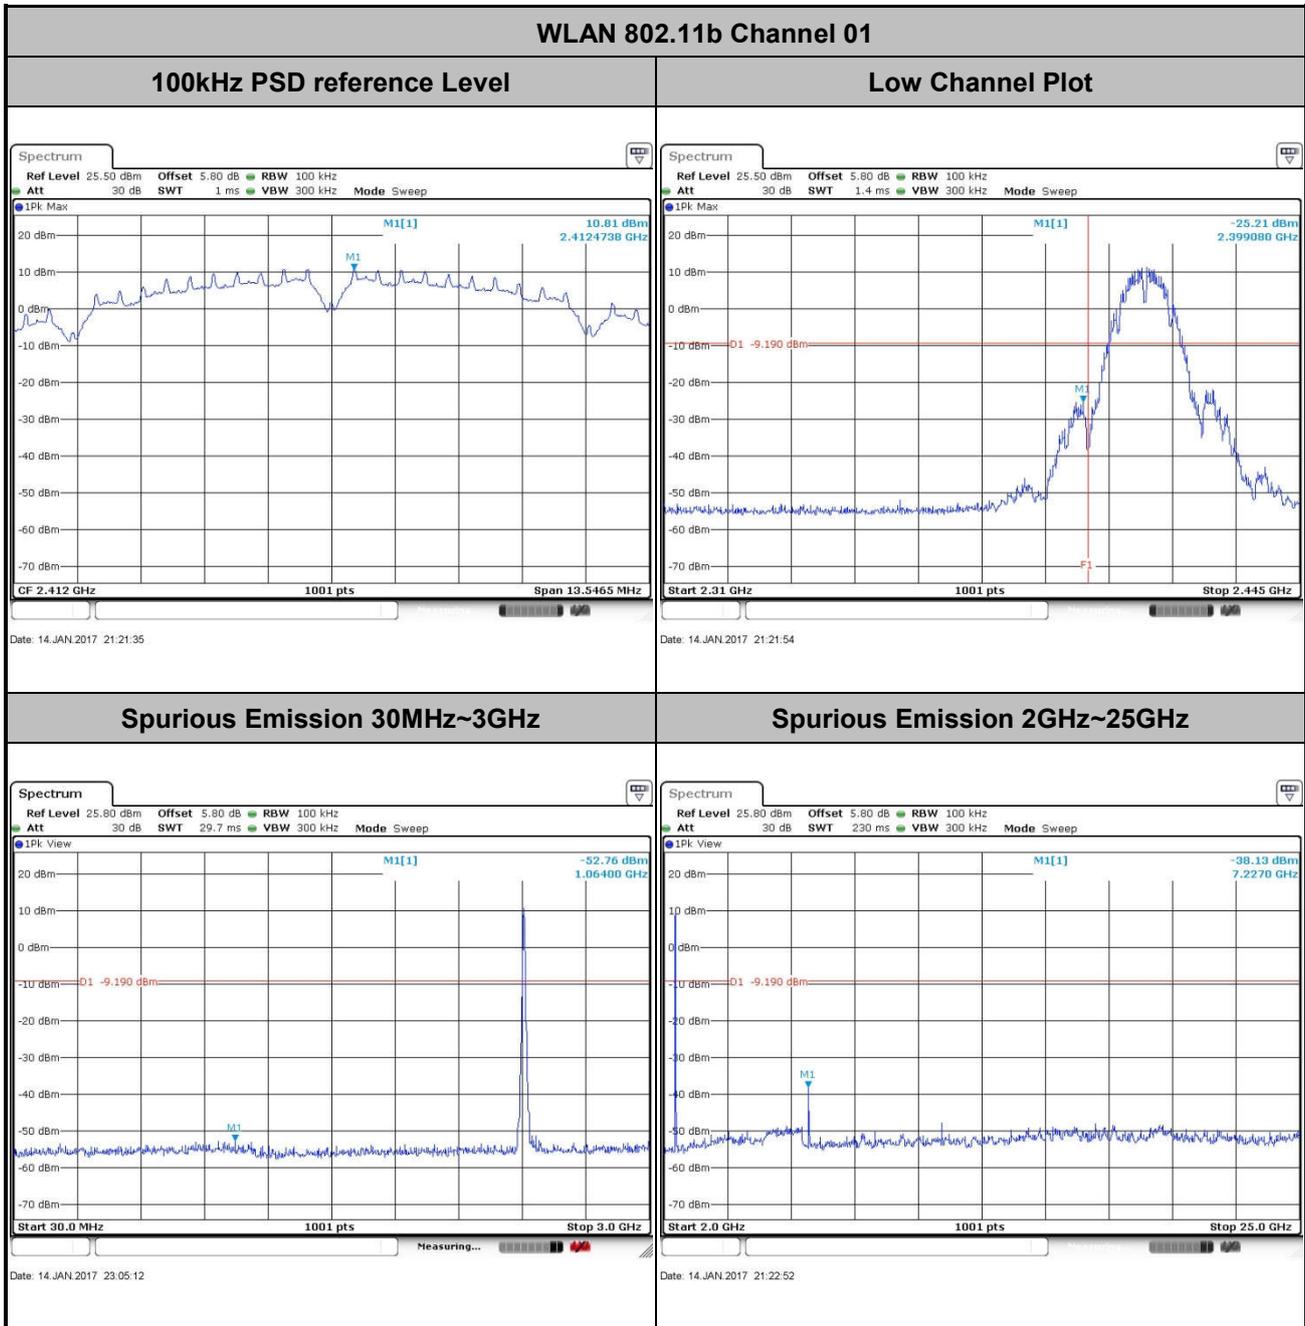





Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11b Channel 06


100kHz PSD reference Level

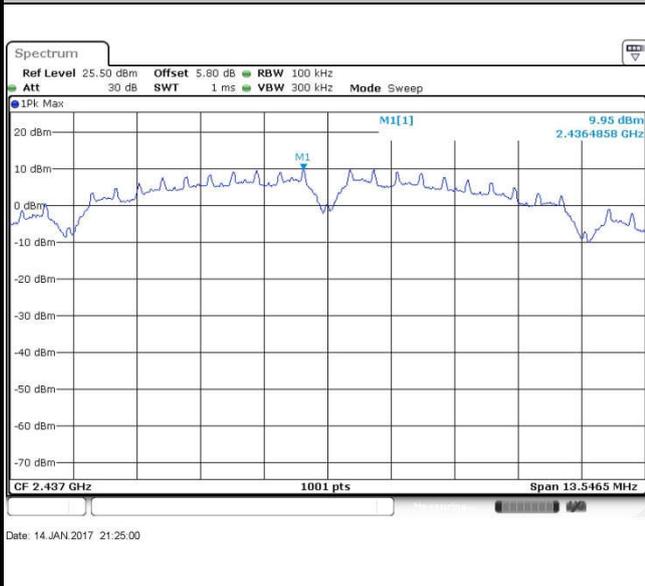

Spurious Emission 30MHz~3GHz

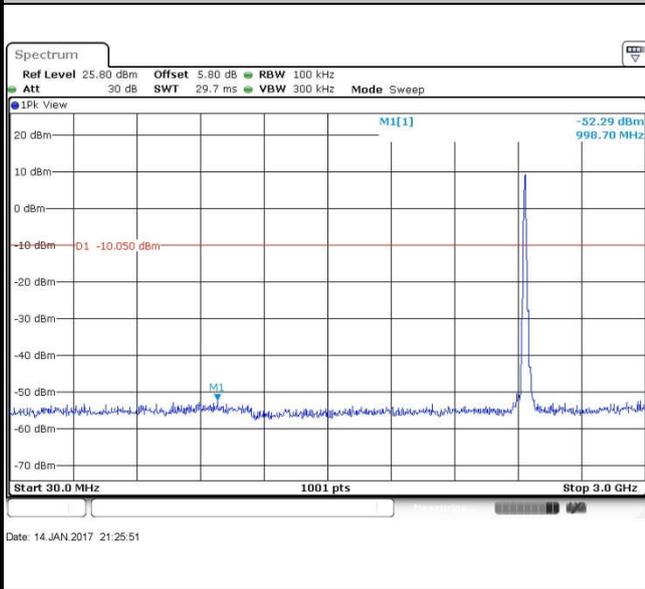

Spurious Emission 2GHz~25GHz

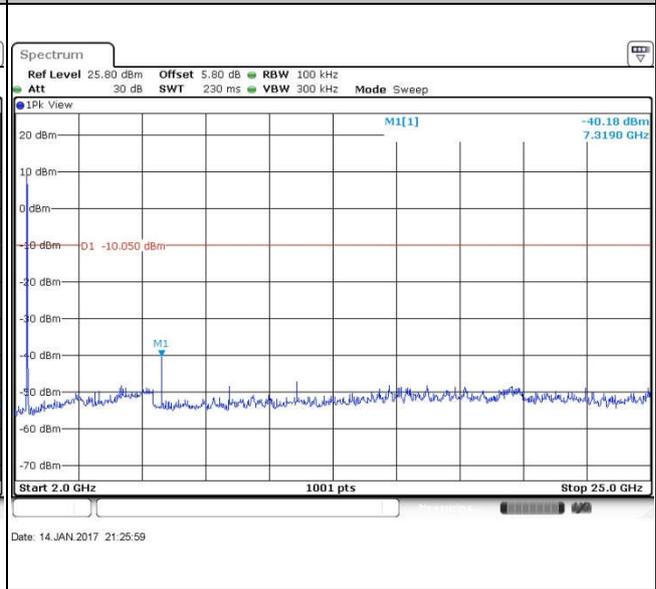




Test Mode :	802.11b	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11b Channel 11

100kHz PSD reference Level

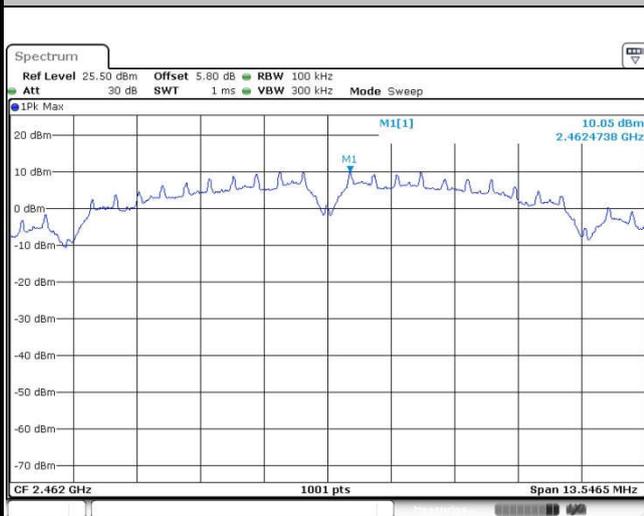


Date: 14.JAN.2017 21:37:45

High Channel Plot

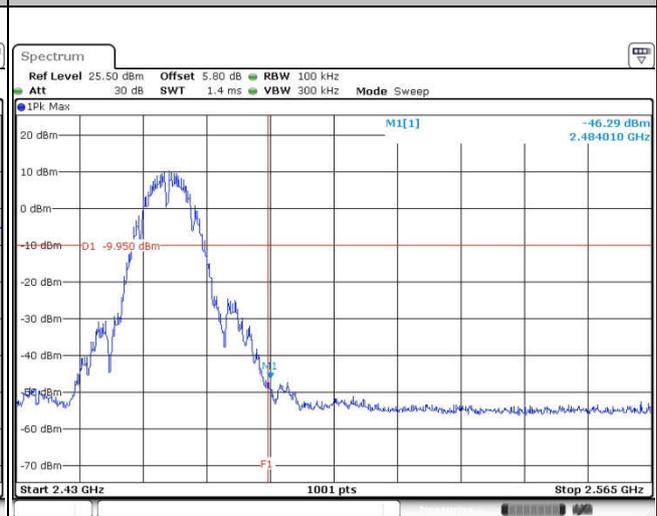


Date: 14.JAN.2017 21:39:17

Spurious Emission 30MHz~3GHz

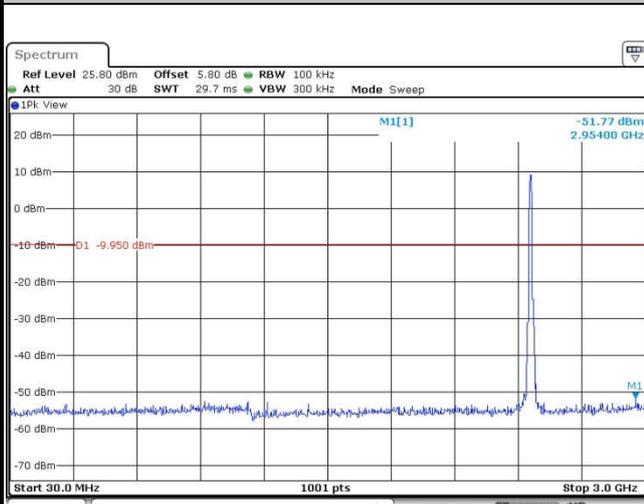

Date: 14.JAN.2017 21:40:35

Spurious Emission 2GHz~25GHz

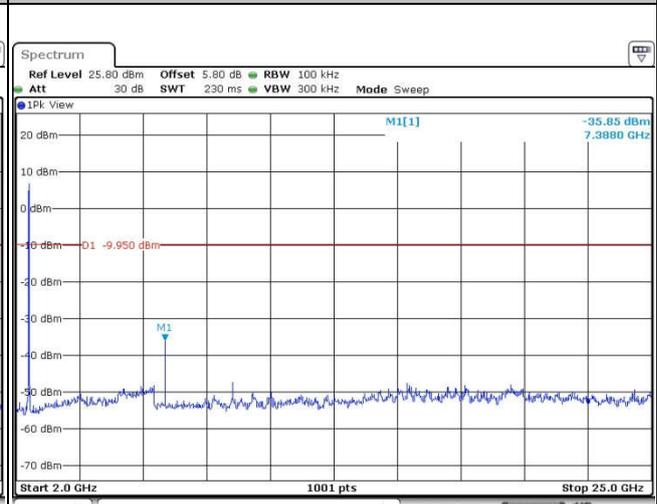


Date: 14.JAN.2017 21:40:44



Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai


WLAN 802.11g Channel 01

100kHz PSD reference Level

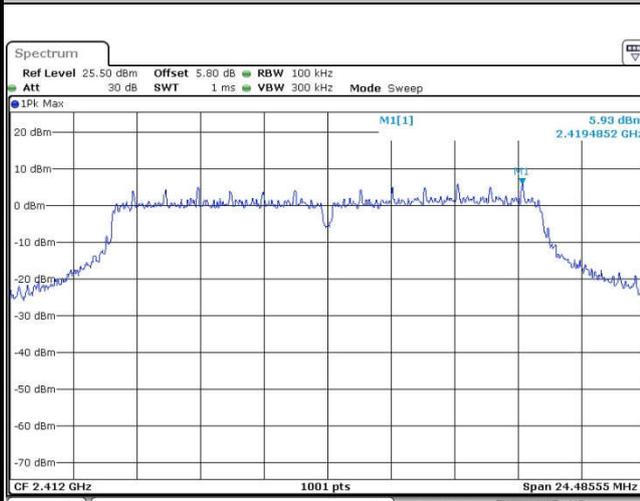


Date: 17.JAN.2017 01:37:27

Low Channel Plot

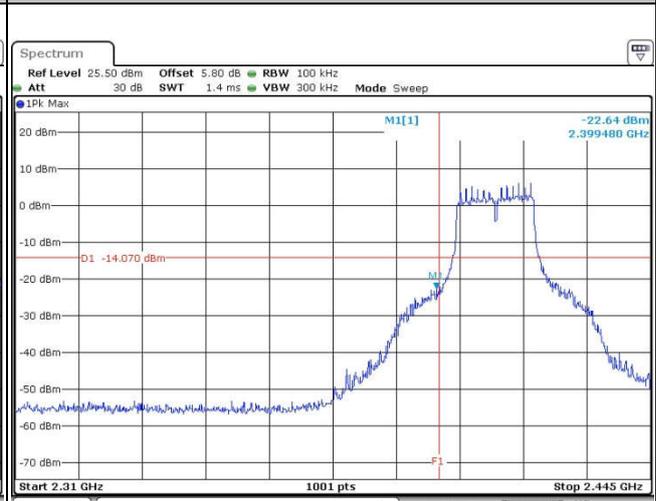


Date: 17.JAN.2017 01:37:51

Spurious Emission 30MHz~3GHz

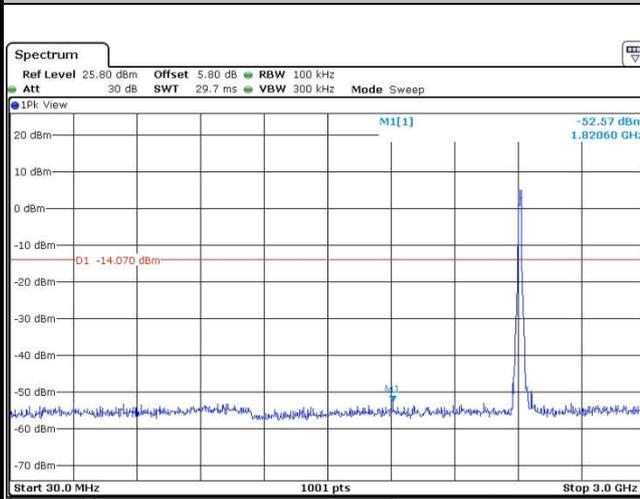

Date: 17.JAN.2017 01:39:41

Spurious Emission 2GHz~25GHz

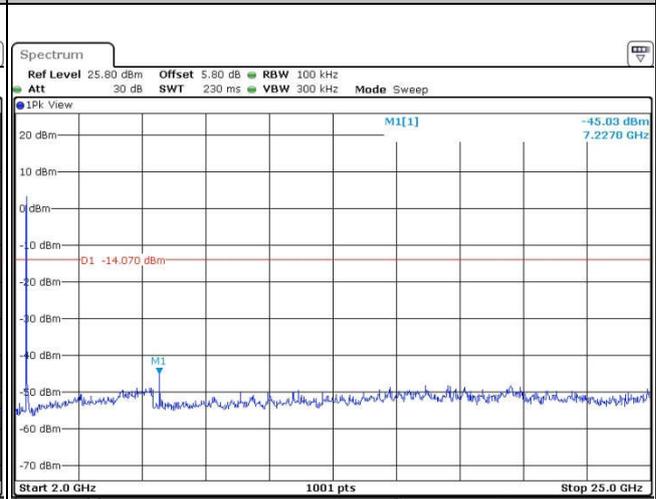


Date: 17.JAN.2017 01:38:36




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11g Channel 06


100kHz PSD reference Level

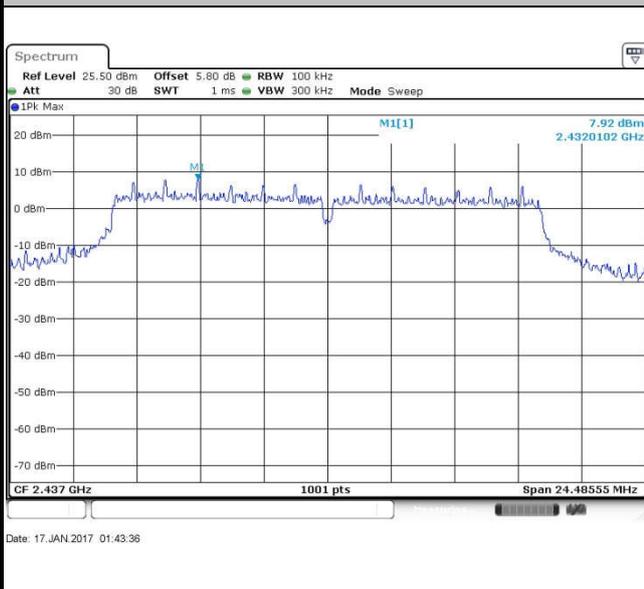

Spurious Emission 30MHz~3GHz

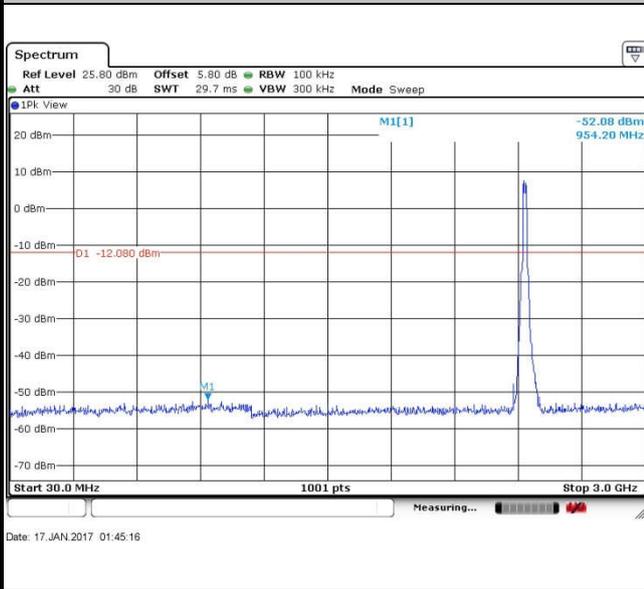

Spurious Emission 2GHz~25GHz

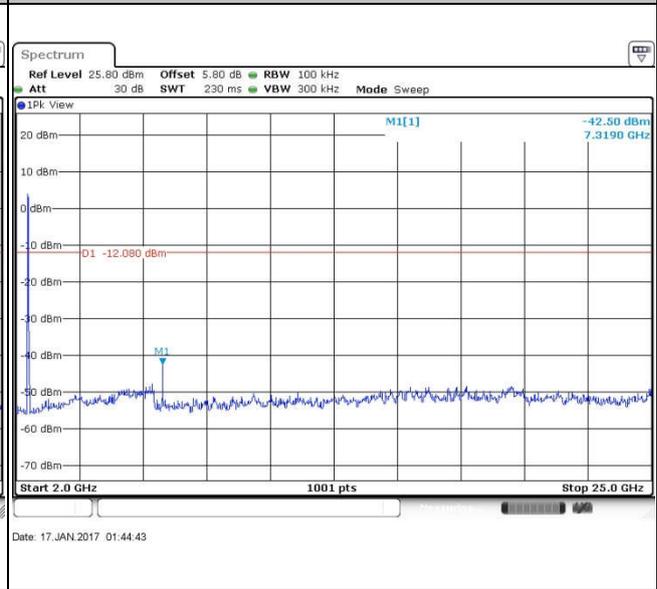




Test Mode :	802.11g	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai


WLAN 802.11g Channel 11

100kHz PSD reference Level

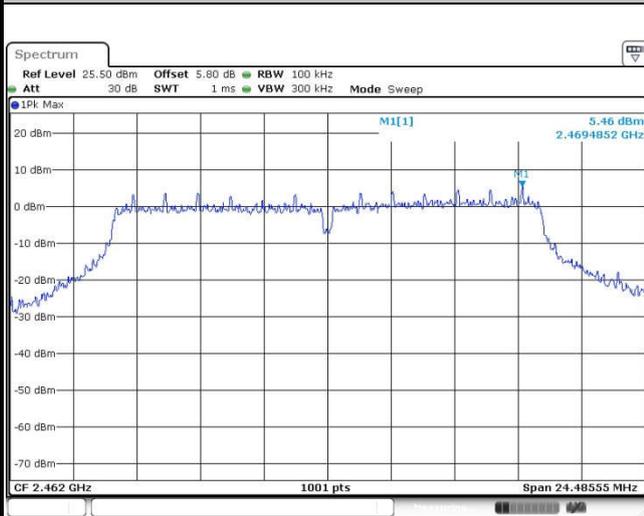


Date: 17.JAN.2017 01:49:29

High Channel Plot

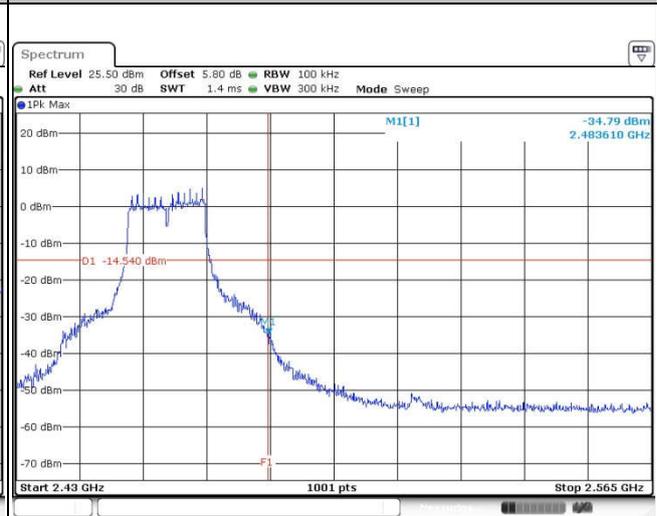


Date: 17.JAN.2017 14:01:39

Spurious Emission 30MHz~3GHz

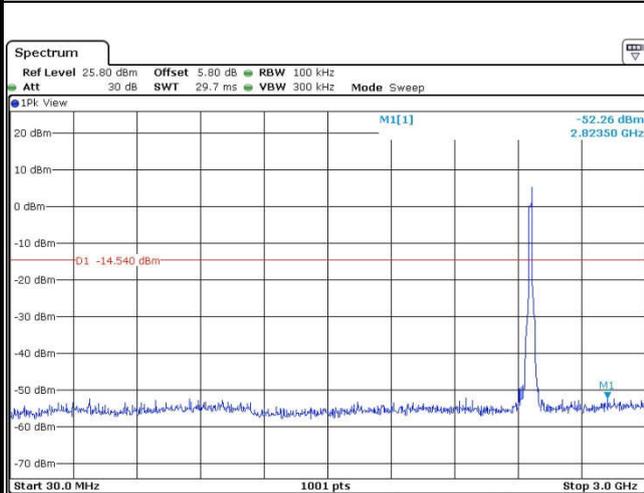

Date: 17.JAN.2017 13:57:53


Spurious Emission 2GHz~25GHz

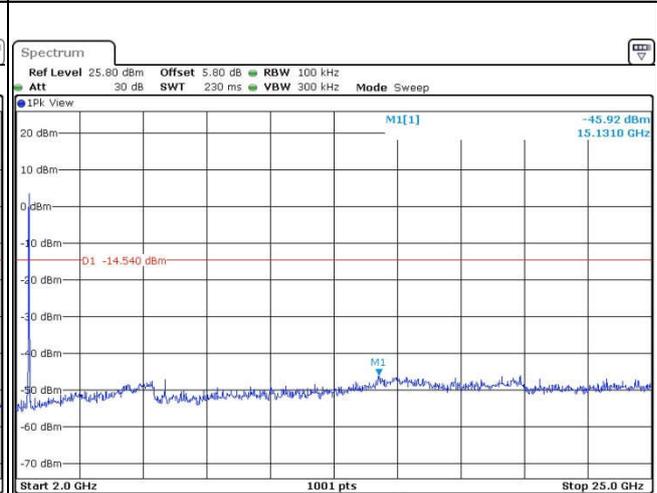

Date: 17.JAN.2017 13:57:12



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Low	Relative Humidity :	51~55%
Test Channel :	01	Test Engineer :	Silent Hai

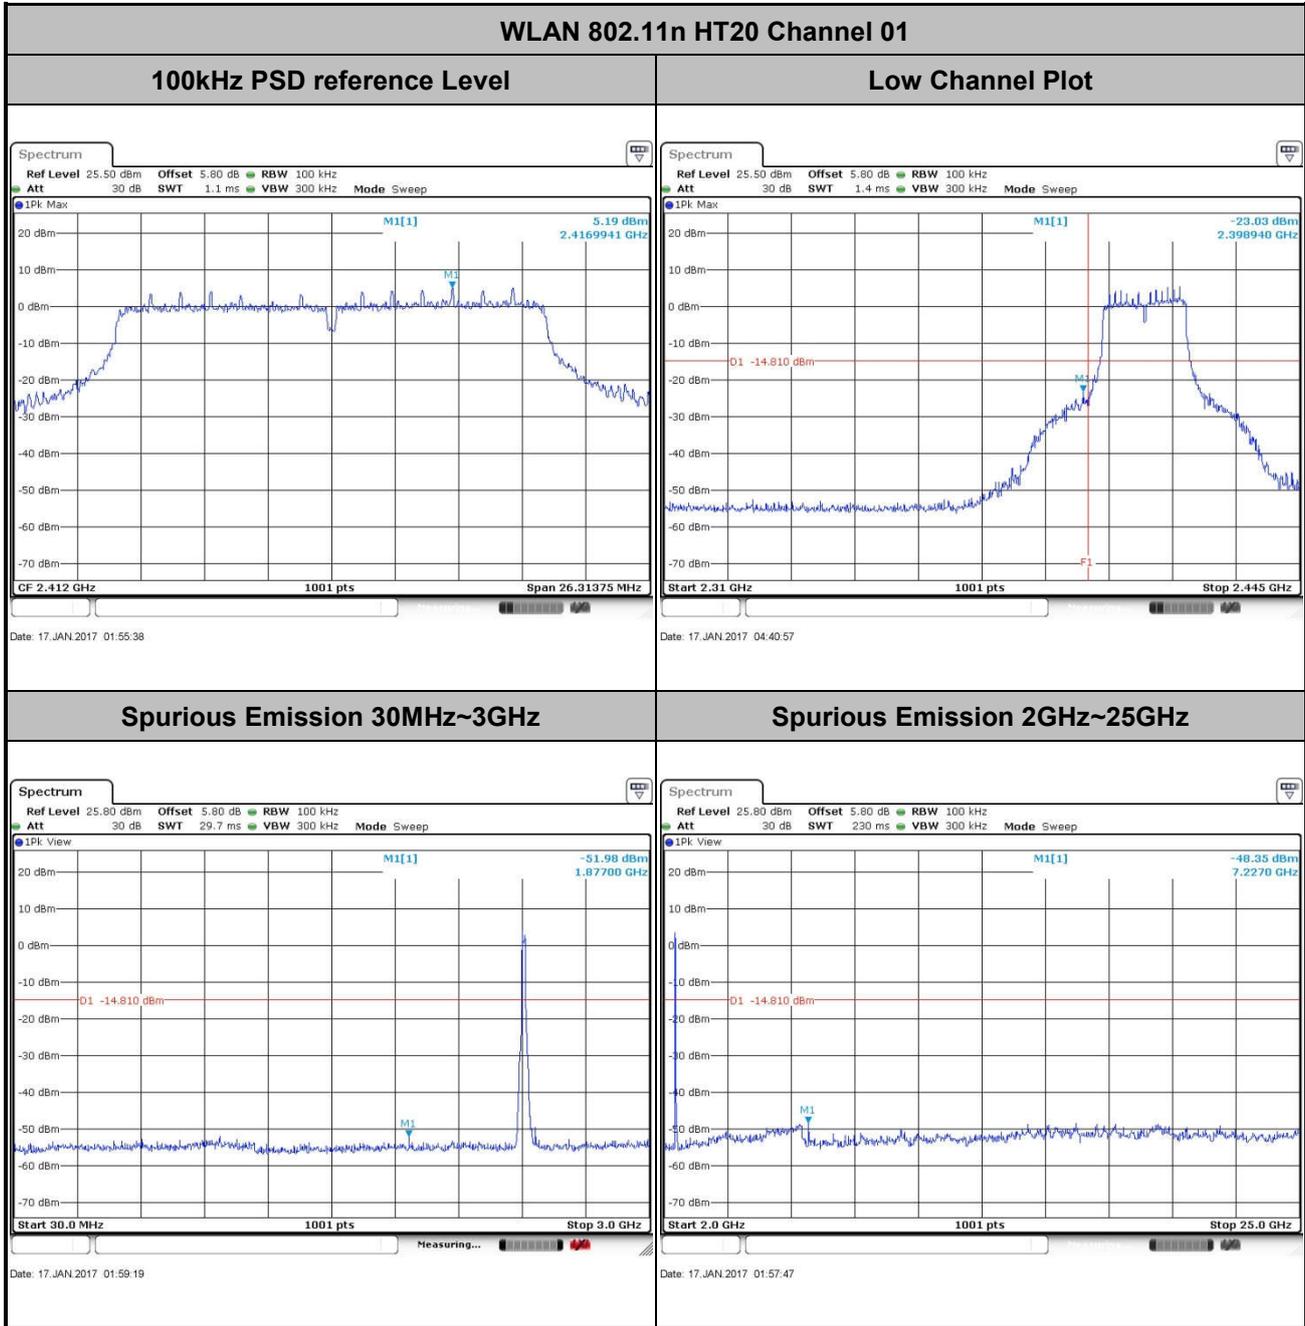





Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz Mid	Relative Humidity :	51~55%
Test Channel :	06	Test Engineer :	Silent Hai

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

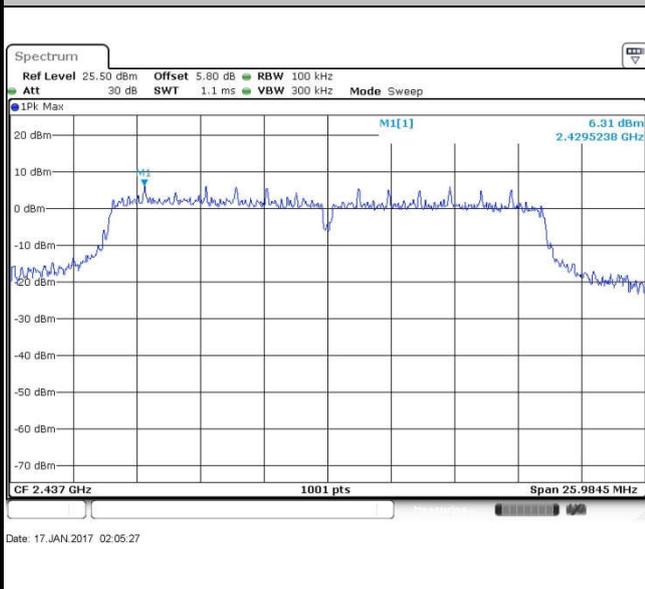

Spurious Emission 30MHz~3GHz

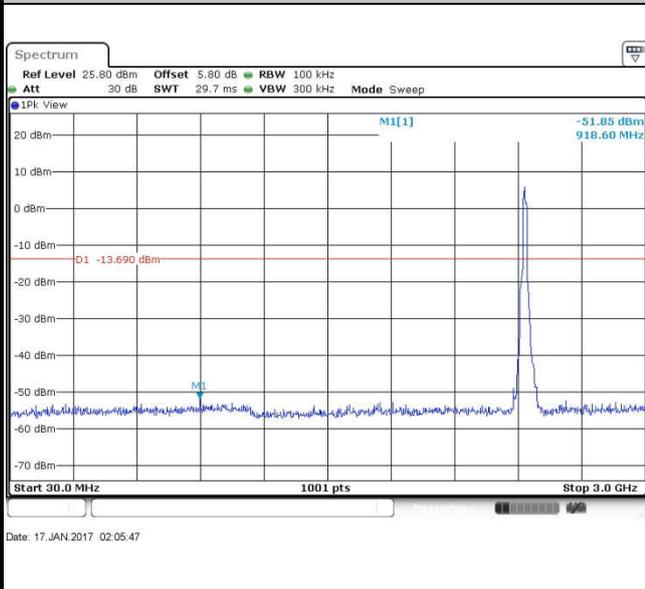


Spurious Emission 2GHz~25GHz

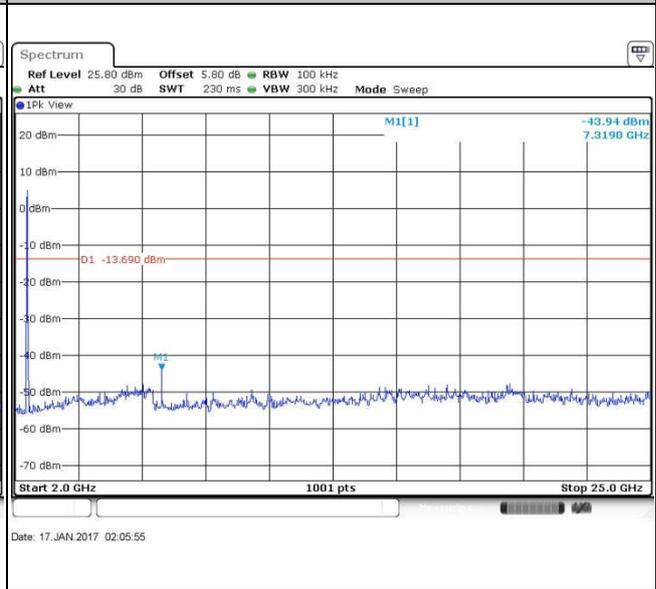



Test Mode :	802.11n HT20	Temperature :	21~25°C
Test Band :	2.4GHz High	Relative Humidity :	51~55%
Test Channel :	11	Test Engineer :	Silent Hai

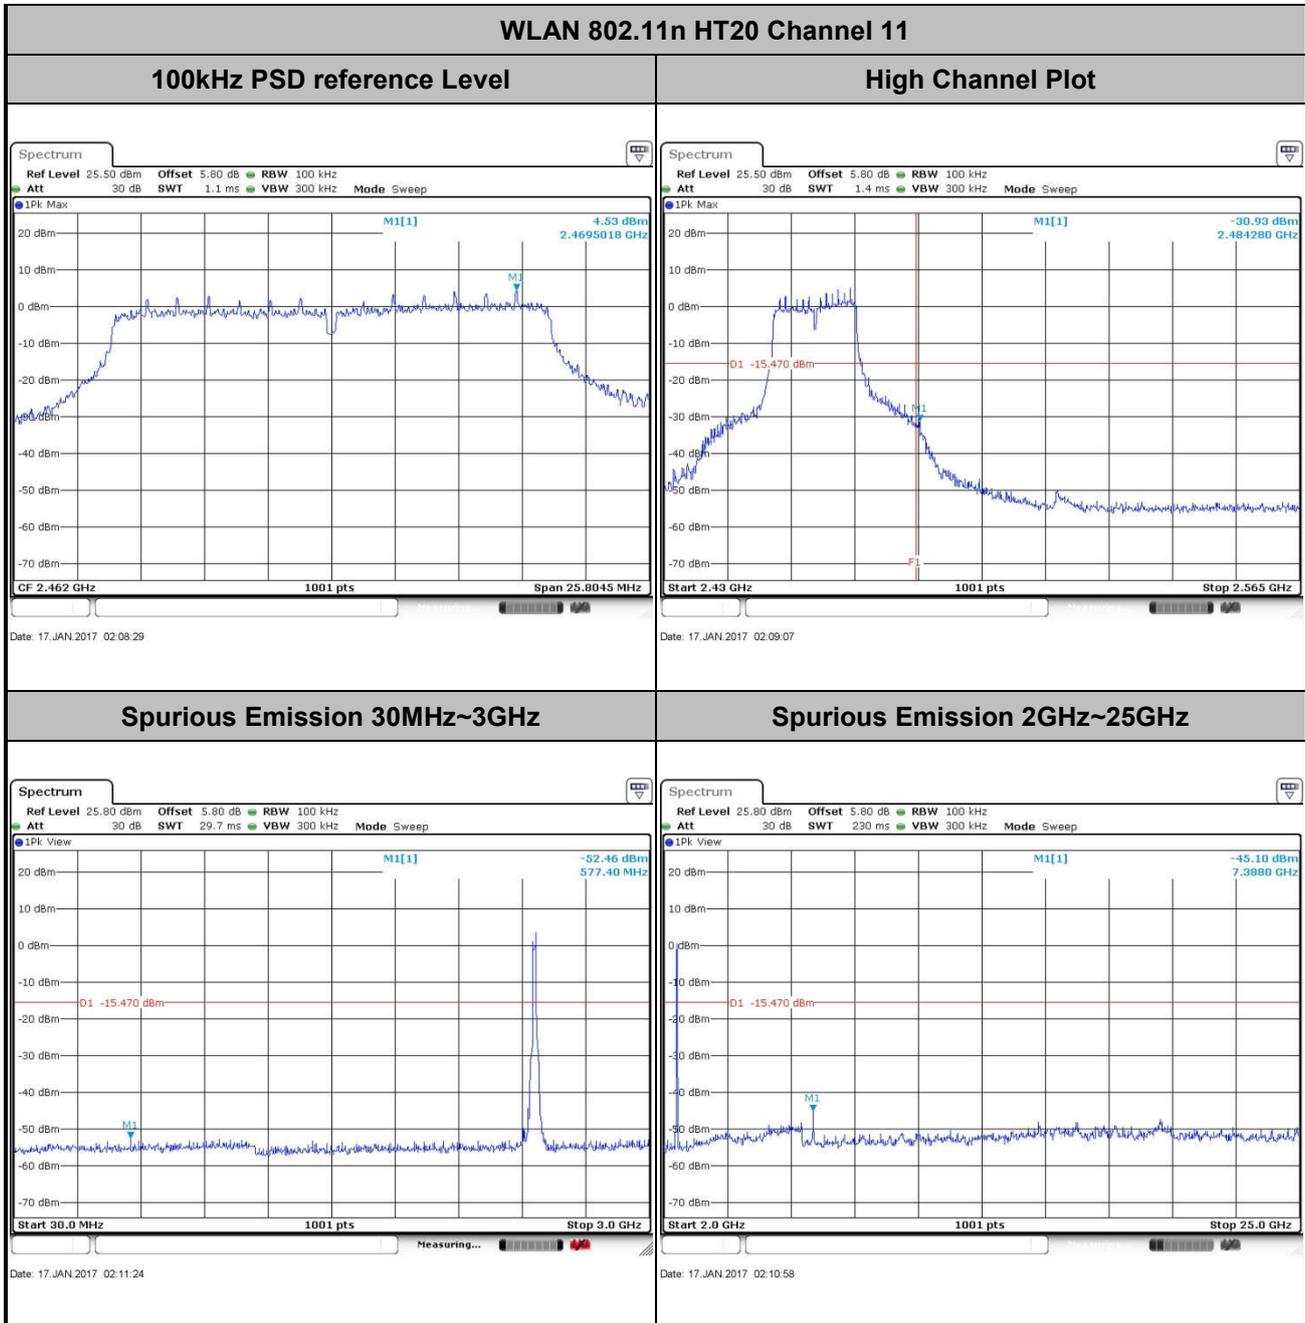



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




### 3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

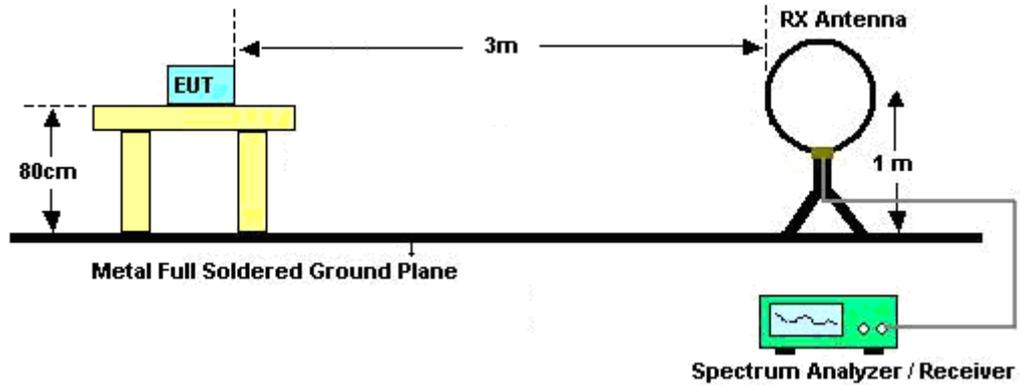

For radiated emissions from 30MHz to 1GHz

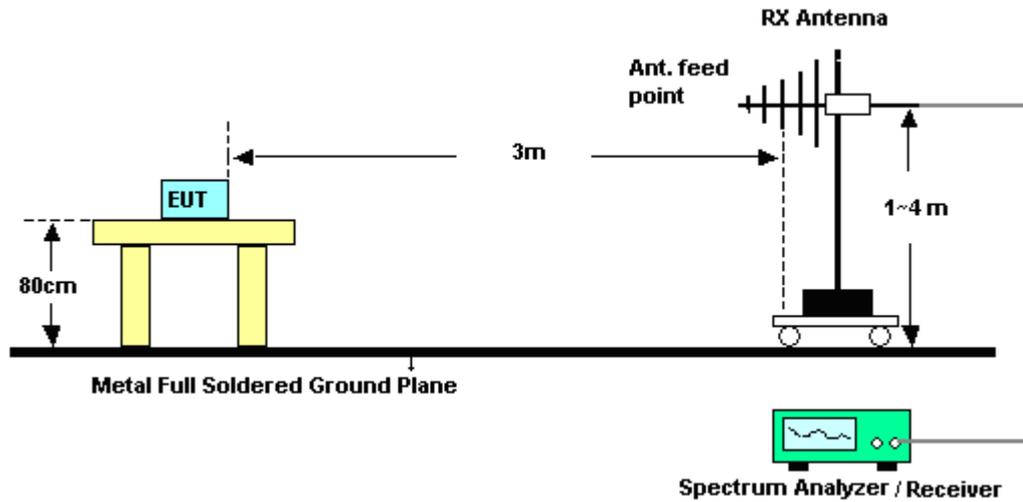

For radiated emissions above 1GHz

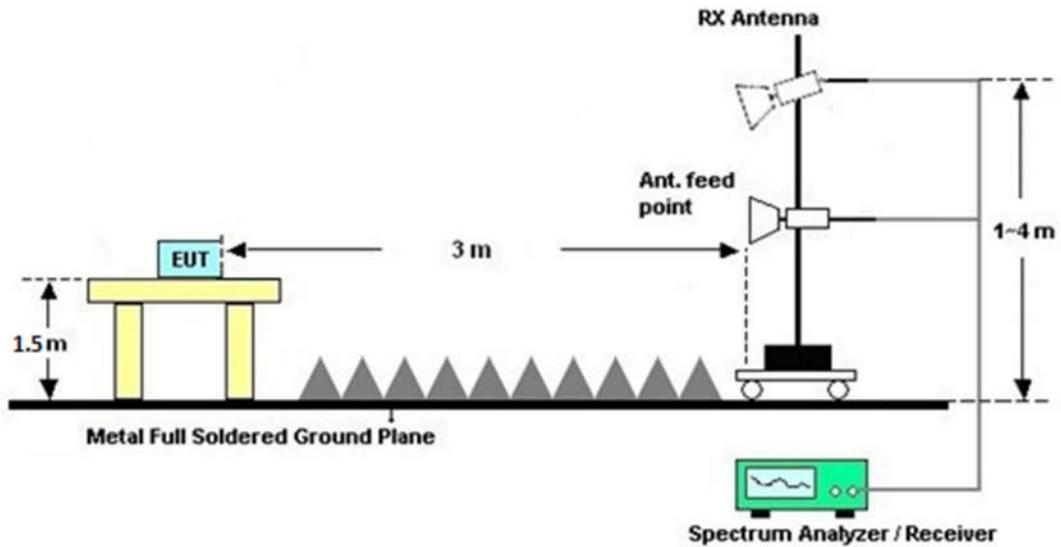

### 3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

### 3.5.7 Duty Cycle

Please refer to Appendix C.

### 3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

Please refer to Appendix B.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.


### 3.6.4 Test Setup

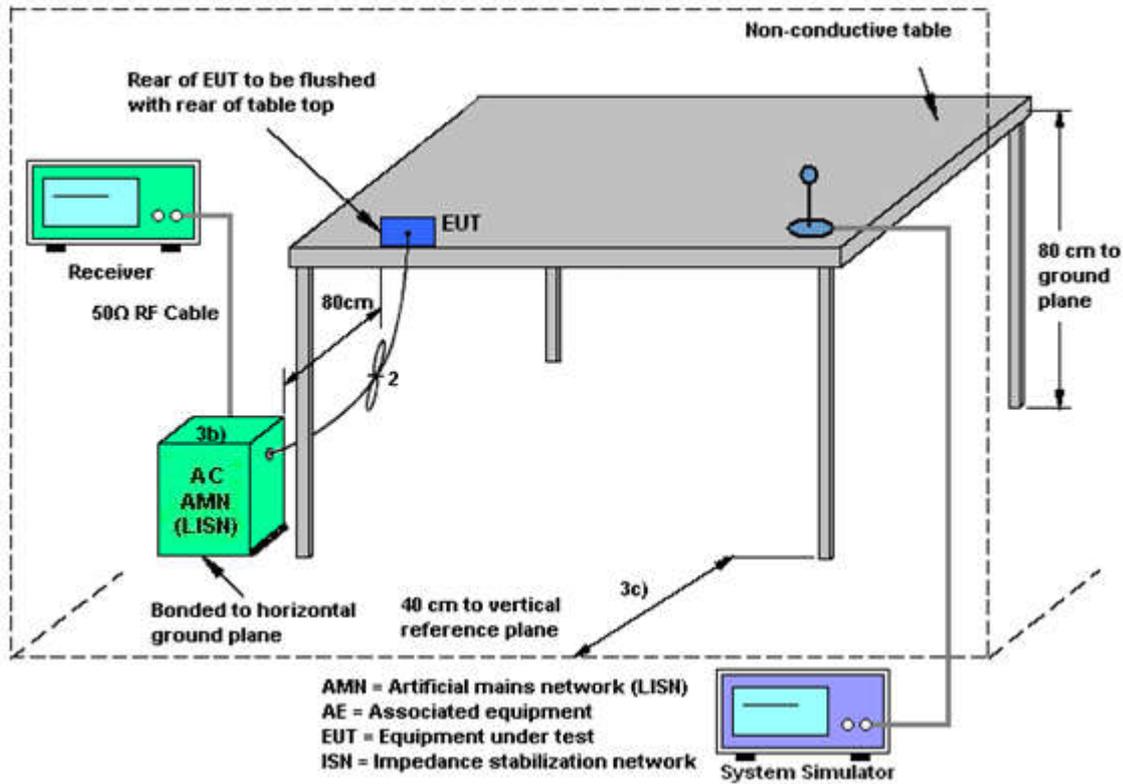



3.6.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter)		

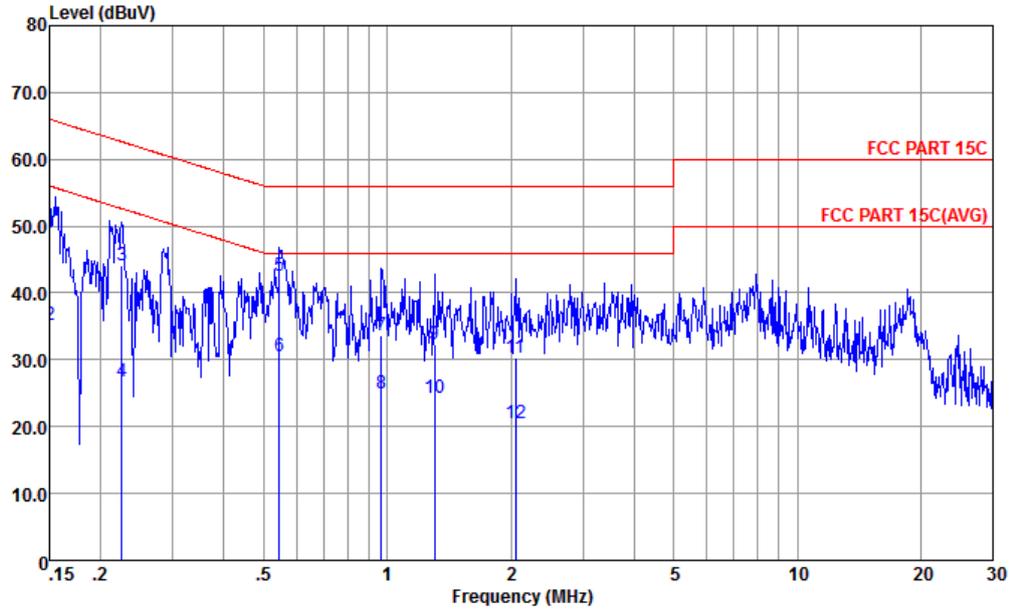


Site : CO01-KS  
 Condition : FCC PART 15C LISN-L-20151024 LINE

mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.150	49.72	-16.28	66.00	38.80	0.53	10.39	QP
2	0.150	35.12	-20.88	56.00	24.20	0.53	10.39	Average
3	0.226	44.03	-18.58	62.61	33.50	0.22	10.31	QP
4	0.226	26.73	-25.88	52.61	16.20	0.22	10.31	Average
5 *	0.546	42.52	-13.48	56.00	32.10	0.23	10.19	QP
6	0.546	30.62	-15.38	46.00	20.20	0.23	10.19	Average
7	0.968	33.74	-22.26	56.00	23.30	0.25	10.19	QP
8	0.968	25.04	-20.96	46.00	14.60	0.25	10.19	Average
9	1.303	32.31	-23.69	56.00	21.90	0.22	10.19	QP
10	1.303	24.21	-21.79	46.00	13.80	0.22	10.19	Average
11	2.055	30.27	-25.73	56.00	19.90	0.18	10.19	QP
12	2.055	20.57	-25.43	46.00	10.20	0.18	10.19	Average



Test Mode :	Mode 1	Temperature :	20~22°C
Test Engineer :	Peter Wei	Relative Humidity :	40~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	GSM850 Idle + Bluetooth Link + WLAN Link + USB Cable (Charging from Adapter)		

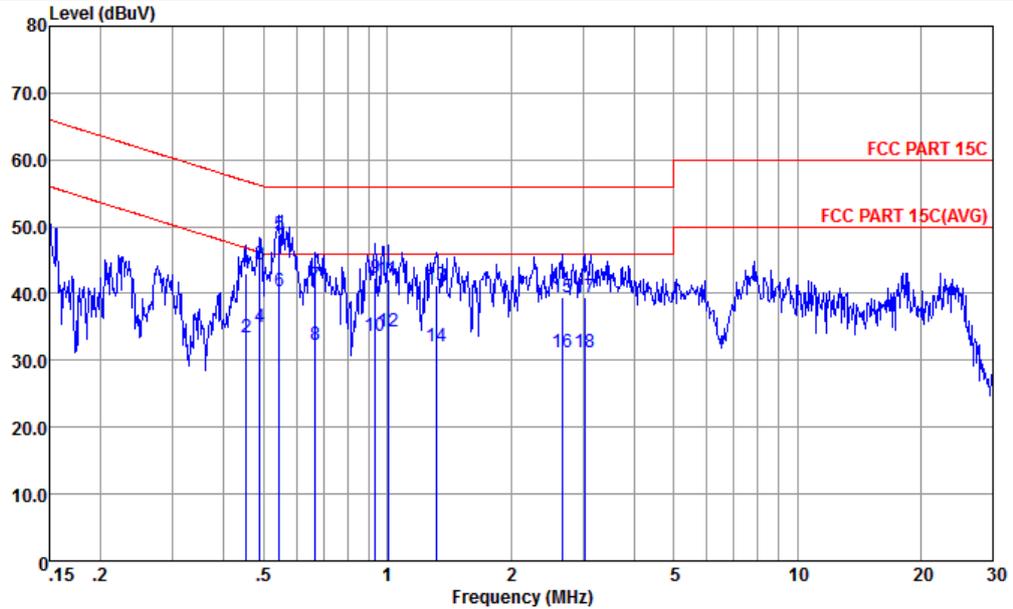

Site : CO01-KS  
 Condition : FCC PART 15C LISN-N-20151024 NEUTRAL  
 mode : Mode 1

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.454	43.11	-13.69	56.80	32.60	0.32	10.19	QP
2	0.454	33.41	-13.39	46.80	22.90	0.32	10.19	Average
3	0.489	44.41	-11.78	56.19	33.90	0.32	10.19	QP
4	0.489	35.01	-11.18	46.19	24.50	0.32	10.19	Average
5	0.546	48.81	-7.19	56.00	38.29	0.33	10.19	QP
6 *	0.546	40.31	-5.69	46.00	29.79	0.33	10.19	Average
7	0.668	41.12	-14.88	56.00	30.60	0.34	10.18	QP
8	0.668	32.42	-13.58	46.00	21.90	0.34	10.18	Average
9	0.933	42.45	-13.55	56.00	31.91	0.36	10.18	QP
10	0.933	33.65	-12.35	46.00	23.11	0.36	10.18	Average
11	1.005	42.16	-13.84	56.00	31.60	0.37	10.19	QP
12	1.005	34.36	-11.64	46.00	23.80	0.37	10.19	Average
13	1.317	41.26	-14.74	56.00	30.70	0.37	10.19	QP
14	1.317	32.16	-13.84	46.00	21.60	0.37	10.19	Average
15	2.678	39.48	-16.52	56.00	28.90	0.37	10.21	QP
16	2.678	31.28	-14.72	46.00	20.70	0.37	10.21	Average
17	3.025	39.39	-16.61	56.00	28.80	0.37	10.22	QP
18	3.025	31.19	-14.81	46.00	20.60	0.37	10.22	Average



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSP40	100319	9kHz~40GHz	Oct. 13, 2016	Dec. 13, 2016~ Jan. 17, 2017	Oct. 12, 2017	Conducted (TH01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Dec. 13, 2016~ Jan. 17, 2017	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Dec. 13, 2016~ Jan. 17, 2017	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Dec. 13, 2016~ Jan. 17, 2017	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Dec. 13, 2016~ Jan. 17, 2017	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150208	10Hz~44GHz, MAX 30dB	Apr. 22, 2016	Dec. 13, 2016~ Jan. 17, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Dec. 13, 2016~ Jan. 17, 2017	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Dec. 13, 2016~ Jan. 17, 2017	Oct. 21, 2017	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1943529	1GHz~18GHz	Jan. 20, 2016	Dec. 13, 2016~ Jan. 17, 2017	Jan. 19, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Dec. 13, 2016~ Jan. 17, 2017	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A02384	1GHz~26.5GHz	Oct. 13, 2016	Dec. 13, 2016~ Jan. 17, 2017	Oct. 12, 2017	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35-HG	1887435	18GHz~40GHz	Jan. 20, 2016	Dec. 13, 2016~ Jan. 17, 2017	Jan. 19, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Dec. 13, 2016~ Jan. 17, 2017	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Dec. 13, 2016~ Jan. 17, 2017	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Dec. 13, 2016~ Jan. 17, 2017	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz	Apr. 29, 2016	Jan. 05, 2017	Apr. 28, 2017	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060103	9kHz~30MHz	Oct. 13, 2016	Jan. 05, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060105	9kHz~30MHz	Oct. 13, 2016	Jan. 05, 2017	Oct. 12, 2017	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000811	AC 0V~300V, 45Hz~1000Hz	Oct. 13, 2016	Jan. 05, 2017	Oct. 12, 2017	Conduction (CO01-KS)
RF Cable	WOKEN	Y5T	00100N1Q3N1	150kHz~30MHz	Aug. 26, 2016	Jan. 05, 2017	Aug. 25, 2017	Conduction (CO01-KS)



## 5 Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.5dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.1dB
---	-------



## **Appendix A. Conducted Test Results**

**A1 - DTS Part**

Test Engineer:	Silent Hai	Temperature:	21~25	°C
Test Date:	2016/12/13~2017/1/17	Relative Humidity:	51~55	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	14.14	9.03	0.50	Pass
11b	1Mbps	1	6	2437	14.24	9.03	0.50	Pass
11b	1Mbps	1	11	2462	13.89	9.03	0.50	Pass
11g	6Mbps	1	1	2412	19.03	16.32	0.50	Pass
11g	6Mbps	1	6	2437	23.28	16.32	0.50	Pass
11g	6Mbps	1	11	2462	19.28	16.32	0.50	Pass
HT20	MCS0	1	1	2412	19.53	17.54	0.50	Pass
HT20	MCS0	1	6	2437	23.13	17.32	0.50	Pass
HT20	MCS0	1	11	2462	19.58	17.20	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	22.23	30.00	-10.00	12.23	36.00	Pass
11b	1Mbps	1	6	2437	21.51	30.00	-10.00	11.51	36.00	Pass
11b	1Mbps	1	11	2462	21.56	30.00	-10.00	11.56	36.00	Pass
11g	6Mbps	1	1	2412	23.37	30.00	-10.00	13.37	36.00	Pass
11g	6Mbps	1	6	2437	23.16	30.00	-10.00	13.16	36.00	Pass
11g	6Mbps	1	11	2462	22.67	30.00	-10.00	12.67	36.00	Pass
HT20	MCS0	1	1	2412	22.49	30.00	-10.00	12.49	36.00	Pass
HT20	MCS0	1	6	2437	23.01	30.00	-10.00	13.01	36.00	Pass
HT20	MCS0	1	11	2462	22.32	30.00	-10.00	12.32	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**  
**(Reporting Only)**

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.12	19.97
11b	1Mbps	1	6	2437	0.12	19.33
11b	1Mbps	1	11	2462	0.12	19.44
11g	6Mbps	1	1	2412	0.58	16.24
11g	6Mbps	1	6	2437	0.58	18.01
11g	6Mbps	1	11	2462	0.58	15.49
HT20	MCS0	1	1	2412	0.64	15.33
HT20	MCS0	1	6	2437	0.64	17.15
HT20	MCS0	1	11	2462	0.64	14.65

**TEST RESULTS DATA**  
**Peak Power Density**

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-1.75	-10.00	8.00	Pass
11b	1Mbps	1	6	2437	-4.36	-10.00	8.00	Pass
11b	1Mbps	1	11	2462	-3.81	-10.00	8.00	Pass
11g	6Mbps	1	1	2412	-8.40	-10.00	8.00	Pass
11g	6Mbps	1	6	2437	-5.75	-10.00	8.00	Pass
11g	6Mbps	1	11	2462	-9.13	-10.00	8.00	Pass
HT20	MCS0	1	1	2412	-9.74	-10.00	8.00	Pass
HT20	MCS0	1	6	2437	-8.32	-10.00	8.00	Pass
HT20	MCS0	1	11	2462	-10.83	-10.00	8.00	Pass



## Appendix B. Radiated Spurious Emission

### 2.4GHz 2400~2483.5MHz

#### WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b CH 01 2412MHz		2388	48.25	-25.75	74	43.61	31.4	4.76	31.52	158	309	P	H
		2387.61	39.75	-14.25	54	35.11	31.4	4.76	31.52	158	309	A	H
	*	2412	95.5	-	-	90.81	31.41	4.78	31.5	158	309	P	H
	*	2410	92.29	-	-	87.6	31.41	4.78	31.5	158	309	A	H
		2386.57	48.34	-25.66	74	43.7	31.4	4.76	31.52	120	176	P	V
		2387.35	40.16	-13.84	54	35.52	31.4	4.76	31.52	120	176	A	V
	*	2412	97.14	-	-	92.45	31.41	4.78	31.5	120	176	P	V
	*	2414	93.94	-	-	89.25	31.41	4.78	31.5	120	176	A	V
802.11b CH 06 2437MHz		2374.09	48.5	-25.5	74	43.9	31.38	4.75	31.53	102	194	P	H
		2385.14	35.54	-18.46	54	30.94	31.38	4.75	31.53	102	194	A	H
	*	2436	93.35	-	-	88.61	31.43	4.8	31.49	102	194	P	H
	*	2438	90.13	-	-	85.35	31.44	4.82	31.48	102	194	A	H
		2498.62	47.7	-26.30	74	42.78	31.49	4.88	31.45	102	194	P	H
		2499.04	35.86	-18.14	54	30.94	31.49	4.88	31.45	102	194	A	H
		2370.19	46.57	-27.43	74	41.97	31.38	4.75	31.53	119	187	P	V
		2383.71	35.95	-18.05	54	31.35	31.38	4.75	31.53	119	187	A	V
	*	2438	98.41	-	-	93.63	31.44	4.82	31.48	119	187	P	V
	*	2438	95.36	-	-	90.58	31.44	4.82	31.48	119	187	A	V
		2499.04	48.47	-25.53	74	43.55	31.49	4.88	31.45	119	187	P	V
	2493.22	36.67	-17.33	54	31.75	31.49	4.88	31.45	119	187	A	V	



802.11b CH 11 2462MHz		2499.22	53.09	-20.91	74	48.17	31.49	4.88	31.45	103	209	P	H
		2487.46	41.23	-12.77	54	36.36	31.47	4.86	31.46	103	209	A	H
	*	2462	94.15	-	-	89.32	31.46	4.84	31.47	103	209	P	H
	*	2464	90.72	-	-	85.89	31.46	4.84	31.47	103	209	A	H
		2486.44	51.42	-22.58	74	46.55	31.47	4.86	31.46	116	190	P	V
		2487.4	44.89	-9.11	54	40.02	31.47	4.86	31.46	116	190	A	V
	*	2462	98.64	-	-	93.81	31.46	4.84	31.47	116	190	P	V
	*	2460	95.26	-	-	90.43	31.46	4.84	31.47	116	190	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11b (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01 2412MHz		4824	39.87	-34.13	74	57.4	34.98	6.87	59.38	100	360	P	H
		4824	41.1	-32.90	74	58.63	34.98	6.87	59.38	100	360	P	V
802.11b CH 06 2437MHz		4872	40.88	-33.12	74	58.23	34.93	6.86	59.14	100	360	P	H
		7308	43.33	-30.67	74	57.59	35.82	8.47	58.55	100	360	P	H
		4872	40.61	-33.39	74	57.96	34.93	6.86	59.14	100	360	P	V
		7308	42.29	-31.71	74	56.55	35.82	8.47	58.55	100	360	P	V
802.11b CH 11 2462MHz		4926	39.82	-34.18	74	57	34.88	6.84	58.9	100	360	P	H
		7386	41.91	-32.09	74	56.54	35.86	8.49	58.98	100	360	P	H
		4926	40.4	-33.60	74	57.58	34.88	6.84	58.9	100	360	P	V
		7386	40.67	-33.33	74	55.3	35.86	8.49	58.98	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz**  
**WIFI 802.11g (Band Edge @ 3m)**

WIFI Ant. 2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		2389.56	65.54	-8.46	74	60.9	31.4	4.76	31.52	161	345	P	H
		2389.95	51.47	-2.53	54	46.83	31.4	4.76	31.52	161	345	A	H
	*	2408	95.79	-	-	91.1	31.41	4.78	31.5	161	345	P	H
	*	2406	87.8	-	-	83.11	31.41	4.78	31.5	161	345	A	H
		2389.95	61.76	-12.24	74	57.12	31.4	4.76	31.52	200	244	P	V
		2389.82	46.2	-7.80	54	41.56	31.4	4.76	31.52	200	244	A	V
	*	2406	91.9	-	-	87.21	31.41	4.78	31.5	200	244	P	V
	*	2406	83.84	-	-	79.15	31.41	4.78	31.5	200	244	A	V
802.11g CH 06 2437MHz		2389.17	51.86	-22.14	74	47.22	31.4	4.76	31.52	112	151	P	H
		2384.62	34.96	-19.04	54	30.36	31.38	4.75	31.53	112	151	A	H
	*	2444	99.52	-	-	94.74	31.44	4.82	31.48	112	151	P	H
	*	2444	91.38	-	-	86.6	31.44	4.82	31.48	112	151	A	H
		2485.84	54.03	-19.97	74	49.16	31.47	4.86	31.46	112	151	P	H
		2489.38	39.08	-14.92	54	34.16	31.49	4.88	31.45	112	151	A	H
		2383.58	48.24	-25.76	74	43.64	31.38	4.75	31.53	101	68	P	V
		2384.62	32.42	-21.58	54	27.82	31.38	4.75	31.53	101	68	A	V
	*	2444	94.58	-	-	89.8	31.44	4.82	31.48	101	68	P	V
	*	2444	86.4	-	-	81.62	31.44	4.82	31.48	101	68	A	V
		2484.52	48.07	-25.93	74	43.2	31.47	4.86	31.46	101	68	P	V
		2489.44	34.45	-19.55	54	29.53	31.49	4.88	31.45	101	68	A	V



802.11g CH 11 2462MHz		2483.8	67.92	-6.08	74	63.05	31.47	4.86	31.46	273	160	P	H
		2483.51	51.74	-2.26	54	46.87	31.47	4.86	31.46	273	160	A	H
	*	2468	95.15	-	-	90.32	31.46	4.84	31.47	273	160	P	H
	*	2466	87.2	-	-	82.37	31.46	4.84	31.47	273	160	A	H
		2483.74	61.32	-12.68	74	56.45	31.47	4.86	31.46	267	22	P	V
		2483.51	44.89	-9.11	54	40.02	31.47	4.86	31.46	267	22	A	V
	*	2468	90.89	-	-	86.06	31.46	4.84	31.47	267	22	P	V
	*	2466	82.72	-	-	77.89	31.46	4.84	31.47	267	22	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11g CH 01 2412MHz		4824	39.33	-34.67	74	56.86	34.98	6.87	59.38	100	360	P	H
		4824	40.37	-33.63	74	57.9	34.98	6.87	59.38	100	360	P	V
802.11g CH 06 2437MHz		4872	40.99	-33.01	74	58.34	34.93	6.86	59.14	100	360	P	H
		7308	42.65	-31.35	74	56.91	35.82	8.47	58.55	100	360	P	H
		4872	40.23	-33.77	74	57.58	34.93	6.86	59.14	100	360	P	V
		7308	43.19	-30.81	74	57.45	35.82	8.47	58.55	100	360	P	V
802.11g CH 11 2462MHz		4926	41.57	-32.43	74	58.75	34.88	6.84	58.9	100	360	P	H
		7386	41.47	-32.53	74	56.1	35.86	8.49	58.98	100	360	P	H
		4926	41.2	-32.80	74	58.38	34.88	6.84	58.9	100	360	P	V
		7386	41.02	-32.98	74	55.65	35.86	8.49	58.98	100	360	P	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Band Edge @ 3m)**

WIFI Ant. 2	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.11n HT20 CH 01 2412MHz		2389.69	69.23	-4.77	74	64.59	31.4	4.76	31.52	100	186	P	H
		2389.95	51.85	-2.15	54	47.21	31.4	4.76	31.52	100	186	A	H
	*	2404	94.96	-	-	90.27	31.41	4.78	31.5	100	186	P	H
	*	2404	86.98	-	-	82.29	31.41	4.78	31.5	100	186	A	H
		2389.69	63.5	-10.50	74	58.86	31.4	4.76	31.52	100	198	P	V
		2389.95	47.68	-6.32	54	43.04	31.4	4.76	31.52	100	198	A	V
	*	2406	90.27	-	-	85.58	31.41	4.78	31.5	100	198	P	V
	*	2408	82.2	-	-	77.51	31.41	4.78	31.5	100	198	A	V
802.11n HT20 CH 06 2437MHz		2389.3	48.74	-25.26	74	44.1	31.4	4.76	31.52	143	149	P	H
		2385.53	34.24	-19.76	54	29.6	31.4	4.76	31.52	143	149	A	H
	*	2444	97.85	-	-	93.07	31.44	4.82	31.48	143	149	P	H
	*	2444	90.03	-	-	85.25	31.44	4.82	31.48	143	149	A	H
		2485.42	50.86	-23.14	74	45.99	31.47	4.86	31.46	143	149	P	H
		2488.9	38.56	-15.44	54	33.64	31.49	4.88	31.45	143	149	A	H
		2388.39	45.02	-28.98	74	40.38	31.4	4.76	31.52	100	67	P	V
		2385.27	32.22	-21.78	54	27.62	31.38	4.75	31.53	100	67	A	V
	*	2444	92.52	-	-	87.74	31.44	4.82	31.48	100	67	P	V
	*	2444	84.42	-	-	79.64	31.44	4.82	31.48	100	67	A	V
		2484.4	47.1	-26.90	74	42.23	31.47	4.86	31.46	100	67	P	V
	2489.02	34.03	-19.97	54	29.11	31.49	4.88	31.45	100	67	A	V	



802.11n HT20 CH 11 2462MHz		2484.1	69.77	-4.23	74	64.9	31.47	4.86	31.46	100	178	P	H
		2483.5	52	-2.00	54	47.13	31.47	4.86	31.46	100	178	A	H
	*	2466	96.59	-	-	91.76	31.46	4.84	31.47	100	178	P	H
	*	2468	87.81	-	-	82.98	31.46	4.84	31.47	100	178	A	H
		2484.52	60.01	-13.99	74	55.14	31.47	4.86	31.46	203	90	P	V
		2483.5	43.83	-10.17	54	38.96	31.47	4.86	31.46	203	90	A	V
	*	2456	91.5	-	-	86.67	31.46	4.84	31.47	203	90	P	V
	*	2456	83.69	-	-	78.86	31.46	4.84	31.47	203	90	A	V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



**2.4GHz 2400~2483.5MHz  
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI Ant. 1	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	39.36	-34.64	74	56.89	34.98	6.87	59.38	100	360	P	H
		4824	40.11	-33.89	74	57.64	34.98	6.87	59.38	100	360	P	V
802.11n HT20 CH 06 2437MHz		4872	39.64	-34.36	74	56.99	34.93	6.86	59.14	100	360	P	H
		7308	41.81	-32.19	74	56.07	35.82	8.47	58.55	100	360	P	H
		4872	39.39	-34.61	74	56.74	34.93	6.86	59.14	100	360	P	V
		7308	42.33	-31.67	74	56.59	35.82	8.47	58.55	100	360	P	V
802.11n HT20 CH 11 2462MHz		4926	40.17	-33.83	74	57.35	34.88	6.84	58.9	100	360	P	H
		7386	41.05	-32.95	74	55.68	35.86	8.49	58.98	100	360	P	H
		4926	40.8	-33.20	74	57.98	34.88	6.84	58.9	100	360	P	V
		7386	41	-33.00	74	55.63	35.86	8.49	58.98	100	360	P	V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11n HT20 (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz 802.11n HT20 LF		30	23.92	-16.08	40	27.07	26.7	0.65	30.5	155	60	P	H
		120.21	17.26	-26.24	43.5	25.89	19.43	1.17	29.23	-	-	P	H
		443.22	23.1	-22.90	46	22.82	25.15	2.2	27.07	-	-	P	H
		585.81	23.03	-22.97	46	21.87	25.04	2.55	26.43	-	-	P	H
		697.36	25.32	-20.68	46	21.38	27.11	2.79	25.96	-	-	P	H
		957.32	27.94	-18.06	46	19.96	29.88	3.23	25.13	-	-	P	H
		31.94	36.43	-3.57	40	39.89	26.38	0.65	30.49	100	0	QP	V
		40.67	30.21	-9.79	40	37.83	22.1	0.69	30.41	-	-	P	V
		91.11	22.58	-20.92	43.5	33.33	17.86	1.02	29.63	-	-	P	V
		396.66	20.92	-25.08	46	22.01	24.01	2.1	27.2	-	-	P	V
		588.72	23.65	-22.35	46	22.45	25.05	2.56	26.41	-	-	P	V
	993.21	29.25	-24.75	54	20.75	30.23	3.32	25.05	-	-	P	V	
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =  
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

- Level(dBμV/m)  
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
- Over Limit(dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)


Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	97.34	8.22	0.12	300Hz
802.11g	87.50	1.37	0.73	1kHz
2.4GHz 802.11n HT20	86.27	1.28	0.78	1kHz


### 802.11b

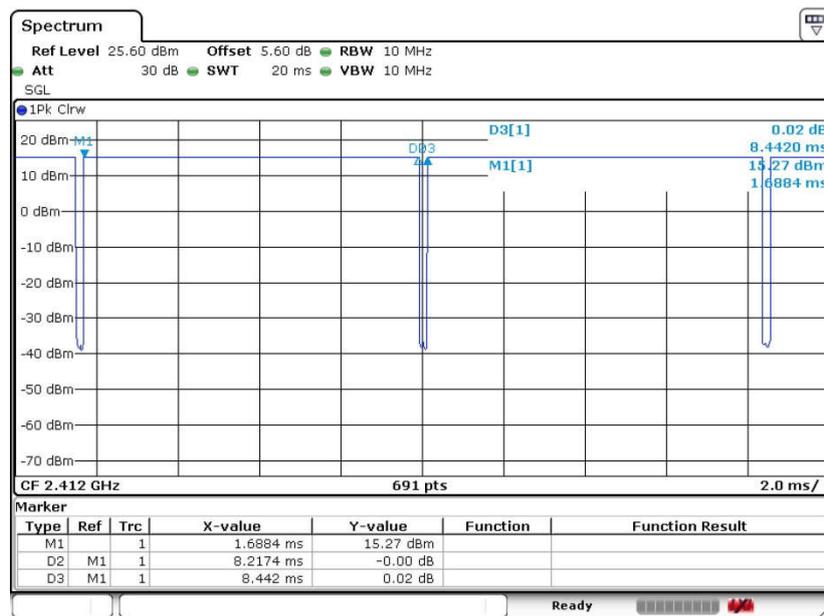

Date: 13.DEC.2016 15:26:57




802.11g

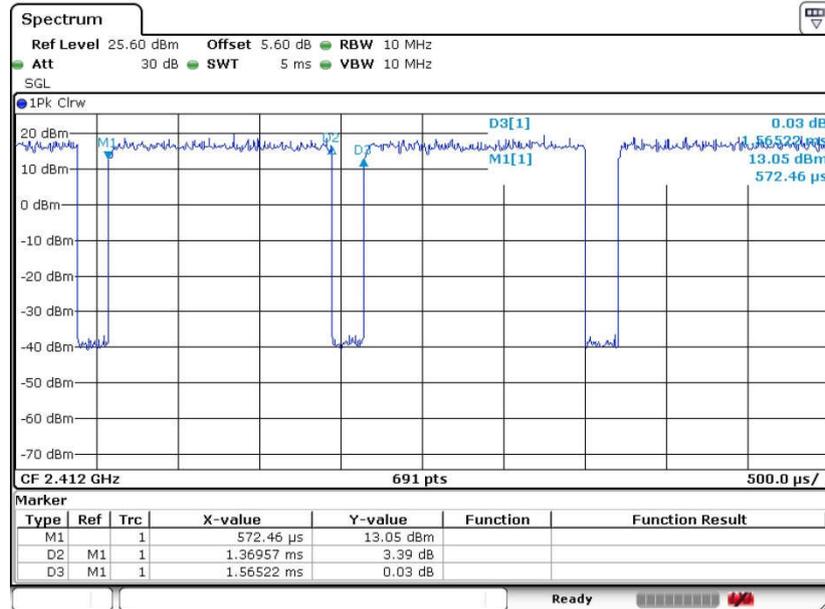

Date: 13.DEC.2016 15:28:21

802.11n HT20

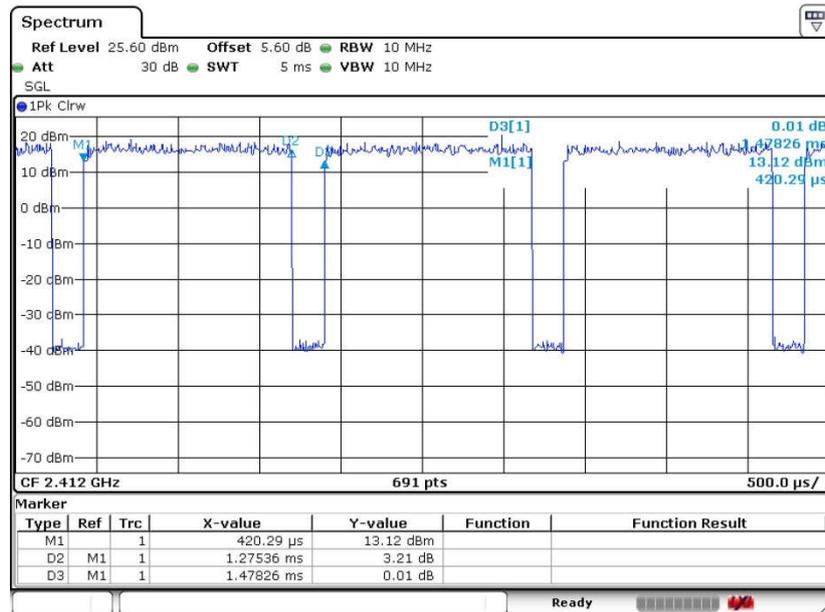

Date: 13.DEC.2016 15:29:55