

Advanced
Compliance Laboratory

6 Randolph Way
Hillsborough, NJ 08844
Tel: (908) 927 9288
Fax: (908) 927 0728

ELECTROMAGNETIC EMISSION COMPLIANCE REPORT
of
i-DIM-GO

MODEL: IT-373GJ
FCC ID: ST2-IT373GJ IC: 6012A-IT373GJ

October 25, 2013

This report concerns (check one): Original grant Class II change
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes no
If yes, defer until: _____ (date)
Company agrees to notify the Commission by _____ (date)
of the intended date of announcement of the product so that the grant can be
issued on that date.

Transition Rules Request per 15.37? yes no
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR
[10-1-90 Edition] provision.

Report prepared for: CENTRAK, INC.
Report prepared by: Advanced Compliance Lab
Report number: 0048-131007-02-FCC-IC



Lab Code: 200101 The test result in this report IS supported and covered by the NVLAP accreditation

Table of Contents

Report Cover Page	1
Table of Contents	2
Figures	3
1. GENERAL INFORMATION	4
1.1 Verification of Compliance	4
1.2 Equipment Modifications	5
1.4 Test Methodology	6
1.5 Test Facility	6
1.6 Test Equipment	6
1.7 Statement for the Document Use	7
2. PRODUCT LABELING	8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	9
3.2 Special Accessories	9
3.3 Configuration of Tested System	9
4. SYSTEM SCHEMATICS	13
5. RADIATED EMISSION DATA	14
5.1 Field Strength Calculation	14
5.2 Test Methods and Conditions	14
5.3 Test Data	14
5.4 125KHz Transmission Radiated Test Data	18
6. EUT RECEIVING MODE VERIFICATION	20
7. PHOTOS OF TESTED EUT	21

Figures

Figure 2.1 ID Label.....	8
Figure 2.2 Location of Label on Back of the EUT.....	8
Figure 3.1 Radiated Test Setup.....	10-12
Figure 4.1 EUT Schematics.....	13
Figure 7.1-7.10 EUT Details.....	22-31

1. GENERAL INFORMATION

1.1 Verification of Compliance

EUT: i-DIM-GO

Model: IT-373GJ

Applicant: CENTRAK, INC.

Test Type: FCC Part 15 Sub Part 15.249 & 15.209
IC RSS-210 (Issue 8) A2.9 & RSS-Gen (Issue 3)
CERTIFICATION

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY

Test Date: October 25, 2013

Report Number: 0048-131007-02-FCC-IC

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC/IC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty u_c	norm.	± 2.36	± 2.99	± 1.83



Wei Li
Lab Manager
Advanced Compliance Lab

Date October 25, 2013

1.2 Equipment Modifications

N/A

1.3 Product Information

System Configuration

ITEM	DESCRIPTION	ID	CABLE
Product	LF DIM IT-373GJ ⁽¹⁾	FCC ID: ST2-IT373GJ IC: 6012A-IT373GJ	
Housing	PLASTICS		
Power Supply	4.5V DC Battery		
Operation Freq.	904MHz ~ 926MHz		
Receiver	IT-373GJ(RX)	Verification	

(1) EUT submitted for grant.

1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2003 at an antenna to EUT distance of 3 meters.

1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Somerset, New Jersey, which is designated by IC as “site IC 3130”. This site is also accepted by FCC to perform measurements under Part 15 or 18 (Registration # 90601). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Cal Due dd/mm/yy
Hewlett-Packard	HP8546A	3448A00290	EMI Receiver	15/10/14
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	15/01/14
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	15/01/14
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	18/03/14
Electro-Meterics	ALR-25M/30	289	10KHz-30MHz Active Loop Antenna	28/05/14
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	24/03/14
EMCO	3115	4945	Double Ridge Guide Horn Antenna	22/01/14

All Test Equipment Used are Calibrated Traceable to NIST Standards. Calibration Interval: two year.

1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

2. PRODUCT LABELING

Centrak i-DIM-GO

Model No.: IT-373GJ

FCC ID: ST2-IT373GJ IC: 6012A-IT373GJ

This device complies with part 15 of the FCC & IC RSS-210 & RSS-Gen Rules. Operating is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Figure 2.1 ID Label

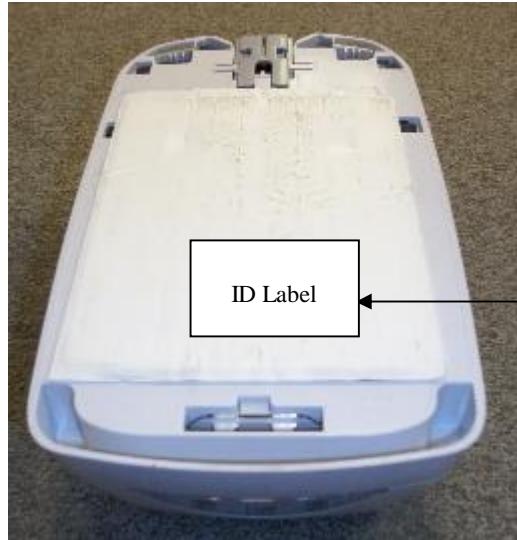


Figure 2.2 Location of the Label

3. SYSTEM TEST CONFIGURATION

3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was permanently attached to the EUT with max length, 3”.

Testing was performed as EUT was continuously operated at the following frequency channels: Low=904MHz, Middle= 915MHz, High=926MHz for 900MHz Band and 125KHz for LF band.

Fresh external battery was used for extended operating time.

3.2 Special Accessories

N/A

3.3 Configuration of Tested System

Figure 3.1 to Figure 3.3 illustrate this system, which is tested standing along.







Figure 3.1 Radiated Test Setup

4. SYSTEM SCHEMATICS

See Attachment.

Figure 4.1 System Schematics

5. RADIATED EMISSION DATA

5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dB μ V/m

RA: Amplitude of EMI Receiver before correction in dB μ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

THE "DUTY CYCLE CORRECTION FACTOR" FOR SPURIOUS RADIATED EMISSIONS IS;
 $20 \log * (4 \text{ ms} / 100 \text{ ms}) = -28 \text{ dB}$, WHICH WAS USED TO CORRECT THE AVERAGE RADIATED EMISSION READINGS.

5.2 Test Methods and Conditions

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 100KHz IF bandwidth / 100KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10th harmonics were investigated.

5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Test Personnel:



Typed/Printed Name: Edward Lee

Date: October 25, 2013

Radiated Test Data (CH-904MHz/915MHz/926MHz)

Worst case: Vertical Orientation

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Peak Reading After Correction (dBuV/m)	FCC/IC 3m Limit (1) (dBuV/m)	Difference (dBuV/m)
904	V/Z	1.2	180	87.5	87.5	94	-6.5
1808	V/Z	1.1	170	67.8	39.8	54	-14.2
2712	V/Z	1.1	235	67.2	39.2	54	-14.8
904	H/Z	1.2	090	84.3	84.3	94	-9.7
1808	H/Z	1.0	090	64.8	36.8	54	-17.2
2712	H/Z	1.0	180	58.7	30.7	54	-23.3
915	V/Z	1.2	180	86.3	86.3	94	-7.7
1830	V/Z	1.1	170	67.9	39.9	54	-14.1
2745	V/Z	1.1	235	66.7	38.7	54	-15.3
915	H/Z	1.2	090	84.5	84.5	94	-9.5
1830	H/Z	1.1	090	65.1	37.1	54	-16.9
2745	H/Z	1.0	180	58.3	30.3	54	-23.7
926	V/Z	1.2	180	84.5	84.5	94	-9.5
1852	V/Z	1.0	170	67.8	39.8	54	-14.2
2778	V/Z	1.0	235	66.6	38.6	54	-15.4
926	H/Z	1.2	090	84.9	84.9	94	-9.1
1852	H/Z	1.0	090	65.6	37.6	54	-16.4
2778	H/Z	1.0	180	58.1	30.1	54	-23.9


(1) The limit for emissions within the 902-928MHz band is 50mV(94dB) per Sec. 15.249 & RSS-210, Annex 2.9. The limit for its harmonics is 500uV (54dB). Other spurious emissions shall be lower than either its fundamental by 50dB or the limit defined in Sec. 15.209, whichever is higher.


(2) If each peak reading is less than the FCC average limit, it'll be not necessary to show the measured/ calculated average reading.

Other Spurious outside of the band 902-928MHz

Frequency (MHz)	Polarity (V,H) Position (X,Y,Z)	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Peak Reading After Correction (dBuV/m)	FCC 3m Limit (1) (dBuV/m)	Difference (dBuV/m)
894.2	V/Z	1.1	000	37.6		46.5	-8.9
895.3	V/Z	1.1	000	38.5		46.5	-8.0
899.8	V/Z	1.1	330	37.5		46.5	-9.0
935.0	V/Z	1.1	330	40.8		46.5	-5.7
936.1	V/Z	1.1	330	40.5		46.5	-6.0
894.2	V/Z	1.1	330	36.6		46.5	-9.9
895.3	H/Z	1.0	235	37.2		46.5	-9.3
899.8	H/Z	1.0	235	36.3		46.5	-10.2
935.0	H/Z	1.0	125	39.0		46.5	-7.5
936.1	H/Z	1.0	125	39.1		46.5	-7.4

Comparing to the limit defined in Sec. 15.209 & RSS-210, emissions below the limit by 20dB were not recorded.

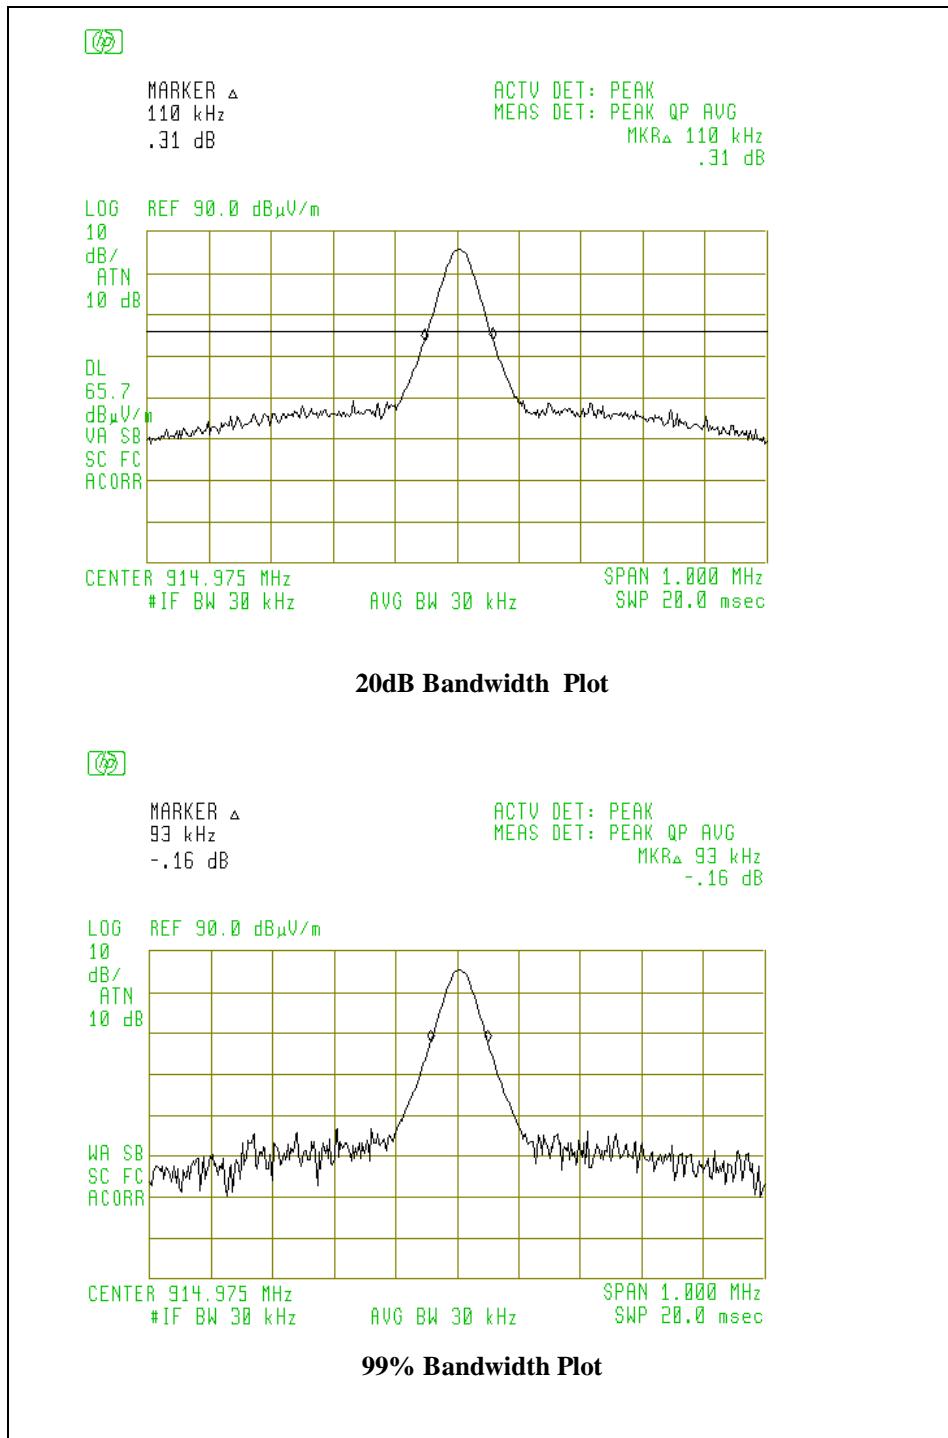

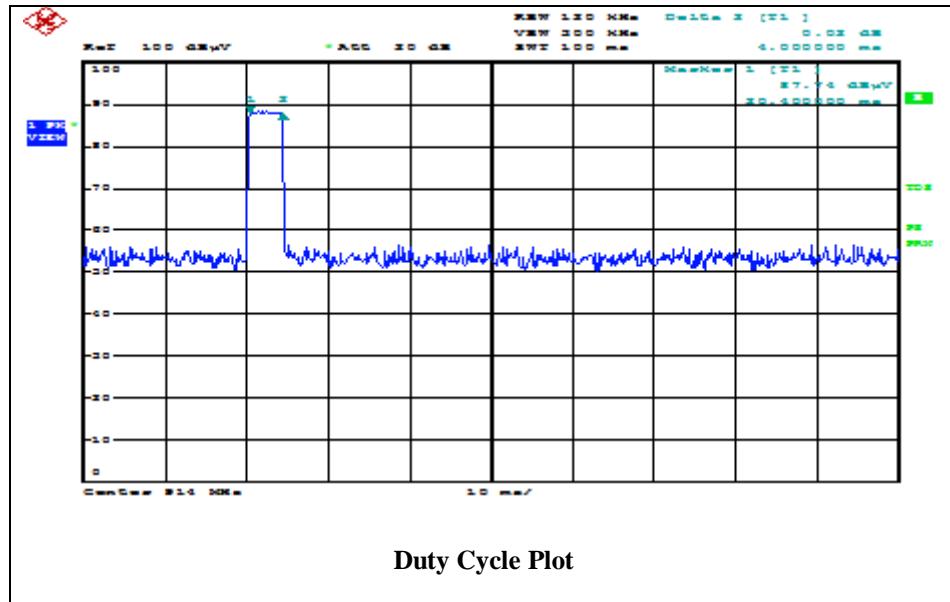

5.4 125KHz Transmission Radiated Test Data


EUT is powered by battery and represents the worst case at Vertical Orientation

Frequency (MHz)	Polarity (V,H) Position	Antenna Height X	Azimuth (Degree)	Peak Reading at 3m (2) (dBuV/m)	Reading After Correction	FCC Limit@ 3m (1)	Difference
0.124	Loop	1.0	000	96.2		105.6	-9.4
0.251	Loop	1.0	010	79.9		99.6	-19.7
0.370	Loop	1.0	030	71.0		96.1	-25.1
0.504	Loop	1.0	010	55.6		73.7	-18.1
0.641	Loop	1.0	020	49.1		71.0	-21.9

(1) The limit for emissions per Sec. 15.209 with distance correction factor (40dB/decade at f<30MHz).

(2) If each peak reading is less than the FCC QP or average limit, it'll be not necessary to show the measured/calculated QP or average reading (QP detector shall be used except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, in which an average detector shall be employed).

20 dB Bandwidth at 125KHz

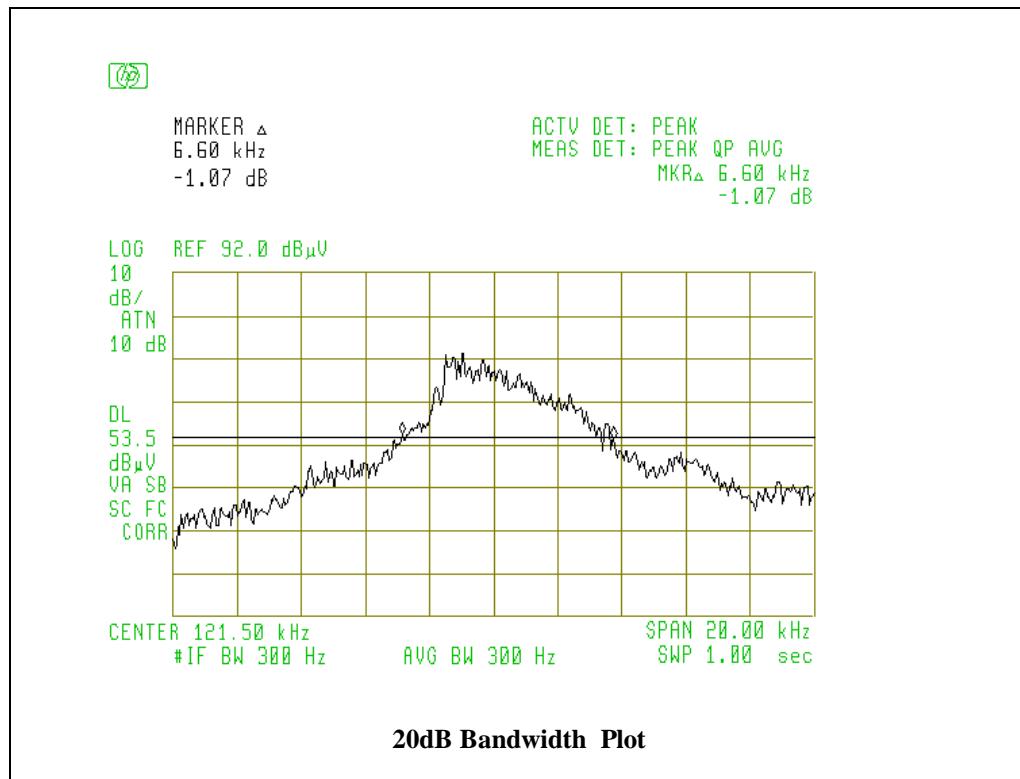

6. EUT RECEIVING MODE VERIFICATION

Radiated Test Data for Receiving Mode (worst case: Vertical Orientation)

Frequency (MHz)	Polarity (H or V)	Antenna Height (m)	Azimuth (Degree)	Peak Reading at 3m(2) (dBuV/m)	FCC 3m Limit(1) (dBuV/m)	Difference (dBuV/m)
41.7	H	1.4	235	32.3	40.0	-7.7
150.3	H	1.3	180	33.7	43.5	-9.8
575	H	1.1	045	35.0	46.5	-11.5
618	H	1.0	045	35.7	46.5	-10.8
700	H	1.0	000	38.6	46.5	-7.9
41.7	V	1.2	135	32.5	40.0	-7.5
145.1	V	1.2	132	32.8	43.5	-10.7
400	V	1.1	090	35.5	46.5	-11
537	V	1.1	270	37.6	46.5	-8.9

(1) Receiving mode spurious emissions shall be lower than the limit defined in Sec. 15.209 & RSS-Gen

(2) If each peak reading is less than the FCC average limit, it'll be not necessary to show the measured/ calculated average reading.