

TEST REPORT

Applicant: Shanghai Huace Navigation Technology Ltd.

Address of Applicant: Building D, 599 Gaojing Road, Qingpu District, Shanghai, China

Manufacturer/ Factory: Shanghai Huace Navigation Technology Ltd.

Address of Manufacturer/ Factory: Building D, 599 Gaojing Road, Qingpu District, Shanghai, China

Equipment Under Test (EUT)

Product Name: H12 remote control

Model No.: H12

Trade Mark: CHCNAV

FCC ID: SY4-A02037

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: July 14, 2022

Date of Test: July 14-20, 2022

Date of report issued: July 21, 2022

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:




Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	July 21, 2022	Original

Prepared By:




Date:

July 21, 2022

Project Engineer

Check By:



Date:

July 21, 2022

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 TEST FACILITY	7
5.4 TEST LOCATION	7
5.5 DESCRIPTION OF SUPPORT UNITS	7
5.6 DEVIATION FROM STANDARDS	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
5.8 ADDITIONAL INSTRUCTIONS	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	10
7.1 ANTENNA REQUIREMENT	10
7.2 CONDUCTED EMISSIONS	11
7.3 CONDUCTED PEAK OUTPUT POWER	14
7.4 20dB EMISSION BANDWIDTH	15
7.5 CARRIER FREQUENCIES SEPARATION	16
7.6 HOPPING CHANNEL NUMBER	17
7.7 DWELL TIME	18
7.8 SPURIOUS EMISSION IN NON-RESTRICTED & RESTRICTED BANDS	19
7.8.1 Conducted Emission Method	19
7.8.2 Radiated Emission Method	20
8 TEST SETUP PHOTO	39
9 EUT CONSTRUCTIONAL DETAILS	39

4 Test Summary

Test Item	Section	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.10:2013.

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30MHz-200MHz	3.8039dB	(1)
Radiated Emission	200MHz-1GHz	3.9679dB	(1)
Radiated Emission	1GHz-18GHz	4.29dB	(1)
Radiated Emission	18GHz-40GHz	3.30dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	3.44dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	H12 remote control
Model No.:	H12
S/N.:	00000000000000
Test sample(s) ID:	GTSL202207000126-1
Sample(s) Status	Engineer sample
Operation Frequency:	2420MHz~2480MHz
Channel numbers:	31
Modulation technology:	QPSK
Antenna Type:	Integral Antenna
Antenna gain:	ANT 1&ANT 2:1.0dBi
Power supply:	Adater Model:KXS-012 Input:AC 220V~50/60Hz 0.5A Max Output:DC 3.6V-6V 3A or 6V-9V 2A or 9V-12V 1.5A or DC 3.7V, 10000mAh, 37Wh Battery

Note: SISO mode only.

Operation Frequency each of channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	9	2436	17	2452	25	2468
2	2422	10	2438	18	2454	26	2470
3	2424	11	2440	19	2456	27	2472
4	2426	12	2442	20	2458	28	2474
5	2428	13	2444	21	2460	29	2476
6	2430	14	2446	22	2462	30	2478
7	2432	15	2448	23	2464	31	2480
8	2434	16	2450	24	2466		

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2420MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in transmitting mode.
-------------------	------------------------------------

5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations: ● FCC —Registration No.: 381383 Designation Number: CN5029 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. ● IC —Registration No.: 9079A CAB identifier: CN0091 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. ● NVLAP (LAB CODE:600179-0) Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP).
--

5.4 Test Location

All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 123-128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

5.5 Description of Support Units

None.

5.6 Deviation from Standards

None.

5.7 Abnormalities from Standard Conditions

None.

5.8 Additional Instructions

Software (Used for test) from client
Built-in by manufacturer, power set default.

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 02 2020	July. 01 2025
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	April. 22 2022	April. 21 2023
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB918	GTS640	March. 21 2022	March. 20 2023
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 12 2022	June. 11 2023
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 23 2022	June. 22 2023
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	April. 22 2022	April. 21 2023
9	Coaxial Cable	GTS	N/A	GTS211	April. 22 2022	April. 21 2023
10	Coaxial cable	GTS	N/A	GTS210	April. 22 2022	April. 21 2023
11	Coaxial Cable	GTS	N/A	GTS212	April. 22 2022	April. 21 2023
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	April. 22 2022	April. 21 2023
13	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 23 2022	June. 22 2023
14	Band filter	Amindeon	82346	GTS219	June. 23 2022	June. 22 2023
15	Power Meter	Anritsu	ML2495A	GTS540	June. 23 2022	June. 22 2023
16	Power Sensor	Anritsu	MA2411B	GTS541	June. 23 2022	June. 22 2023
17	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	April. 22 2022	April. 21 2023
18	Splitter	Agilent	11636B	GTS237	June. 23 2022	June. 22 2023
19	Loop Antenna	ZHINAN	ZN30900A	GTS534	Nov. 30 2021	Nov. 29 2022
20	Broadband Preamplifier	SCHWARZBECK	BBV9718	GTS535	April. 22 2022	April. 21 2023
21	Breitband hornantenna	SCHWARZBECK	BBHA 9170	GTS579	Oct. 17 2021	Oct. 16 2022
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 17 2021	Oct. 16 2022
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 17 2021	Oct. 16 2022
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 23 2022	June. 22 2023
25	Amplifier(1GHz-26.5GHz)	HP	8449B	GTS601	April. 22 2022	April. 21 2023

Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.14 2022	May.13 2025
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April. 24 2022	April. 23 2023
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 23 2022	June. 22 2023
4	ENV216 2-L-V-NETZNACHB.DE	ROHDE&SCHWARZ	ENV216	GTS226	April. 22 2022	April. 21 2023
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	JINCHUANG	GSP-8A	GTS639	April. 28 2022	April. 27 2023
8	Absorbing clamp	Elektronik-Feinmechanik	MDS21	GTS229	April.15 2022	April.14 2023
9	ISN	SCHWARZBECK	NTFM 8158	GTS565	April. 22 2022	April. 21 2023
10	High voltage probe	SCHWARZBECK	TK9420	GTS537	April. 22 2022	April. 21 2023

RF Conducted Test:						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	MXA Signal Analyzer	Agilent	N9020A	GTS566	April. 22 2022	April. 21 2023
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April. 24 2022	April. 23 2023
3	Spectrum Analyzer	Agilent	E4440A	GTS536	April. 22 2022	April. 21 2023
4	MXG vector Signal Generator	Agilent	N5182A	GTS567	April. 22 2022	April. 21 2023
5	ESG Analog Signal Generator	Agilent	E4428C	GTS568	April. 22 2022	April. 21 2023
6	USB RF Power Sensor	DARE	RPR3006W	GTS569	April. 22 2022	April. 21 2023
7	RF Switch Box	Shongyi	RFSW3003328	GTS571	April. 22 2022	April. 21 2023
8	Programmable Constant Temp & Humi Test Chamber	WEWON	WHTH-150L-40-880	GTS572	April. 22 2022	April. 21 2023


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	April. 25 2022	April. 24 2023
2	Barometer	ChangChun	DYM3	GTS255	June. 23 2022	June. 22 2023

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna:	
<i>The antenna is integral antenna, the best case gain of the antenna is 1.0dBi, reference to the appendix II for details.</i>	


7.2 Conducted Emissions

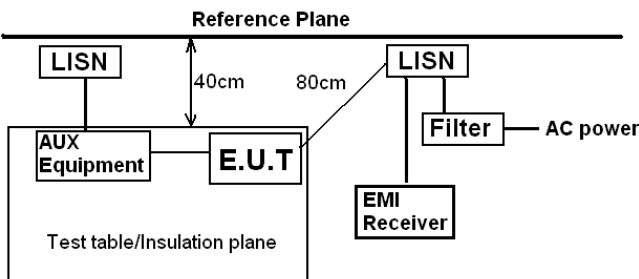Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
	5-30		60		50	
* Decreases with the logarithm of the frequency.						
Test setup:	Reference Plane  Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m					
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.


Measurement data:

Line:

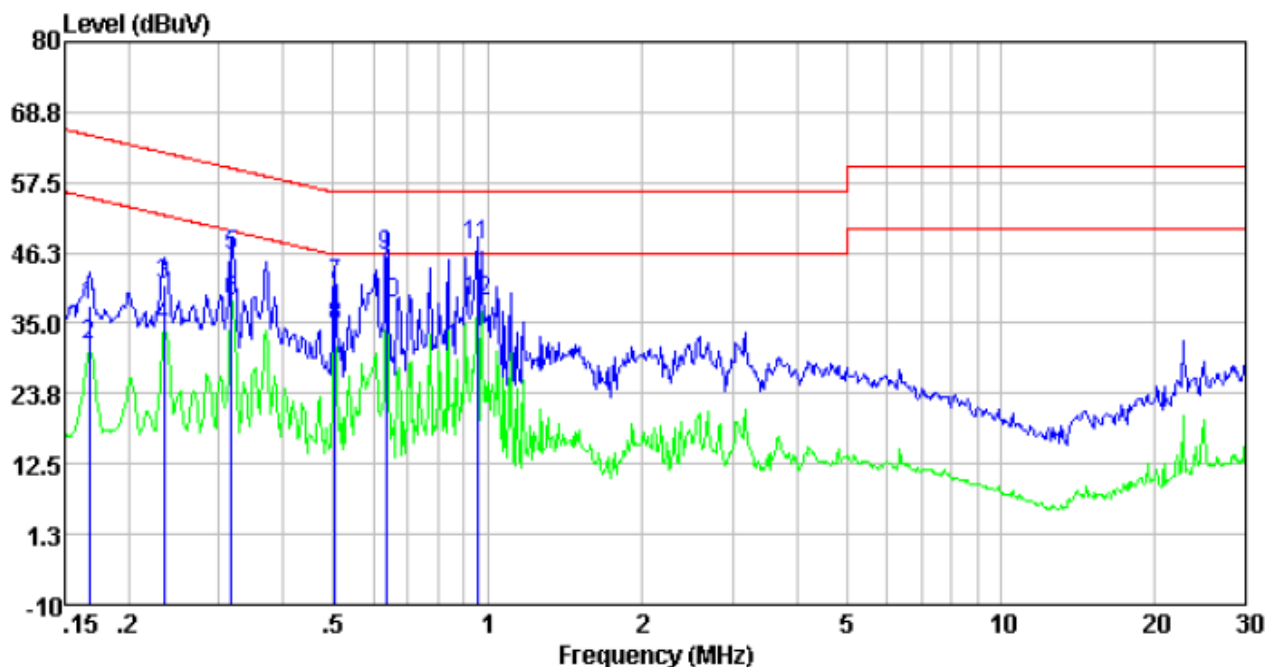

Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.17	17.54	20.40	0.01	37.95	65.08	-27.13	QP
0.17	11.02	20.40	0.01	31.43	55.08	-23.65	Average
0.23	20.86	20.40	0.01	41.27	62.30	-21.03	QP
0.23	14.14	20.40	0.01	34.55	52.30	-17.75	Average
0.32	25.26	20.39	0.01	45.66	59.80	-14.14	QP
0.32	18.25	20.39	0.01	38.65	49.80	-11.15	Average
0.50	20.90	20.31	0.01	41.22	56.00	-14.78	QP
0.50	14.24	20.31	0.01	34.56	46.00	-11.44	Average
0.63	25.49	20.28	0.02	45.79	56.00	-10.21	QP
0.63	17.97	20.28	0.02	38.27	46.00	-7.73	Average
0.95	27.25	20.21	0.03	47.49	56.00	-8.51	QP
0.95	18.10	20.21	0.03	38.34	46.00	-7.66	Average

Neutral:

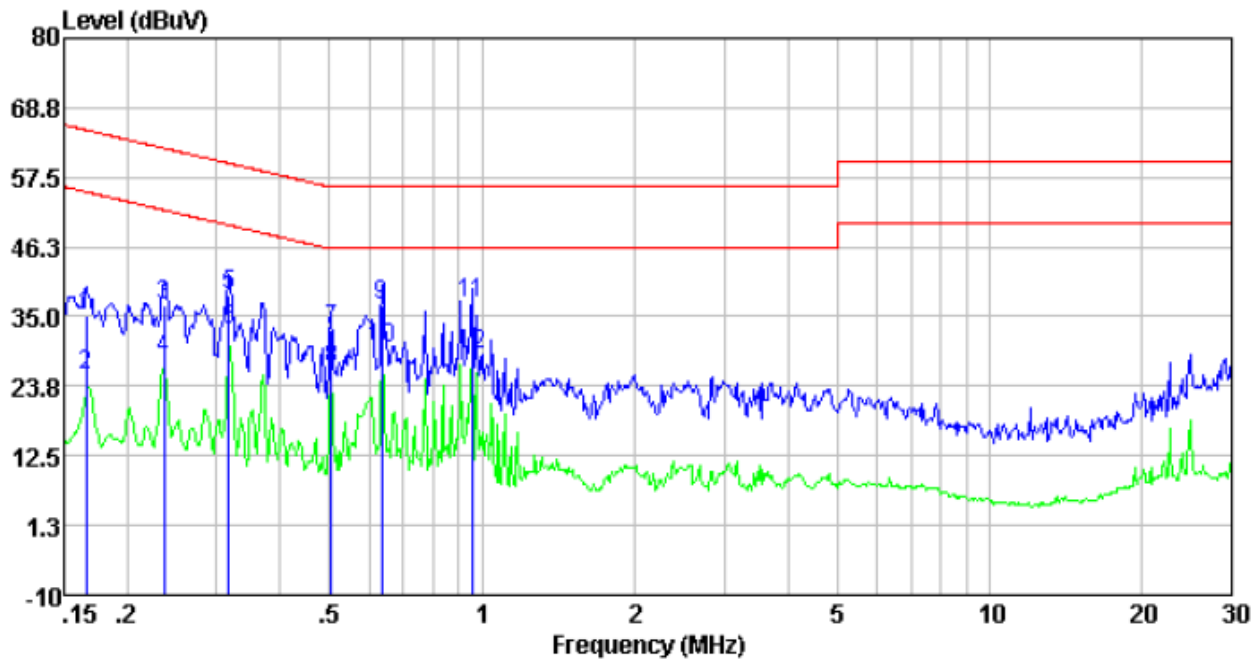


Freq MHz	Reading level dBuV	LISN/ISN factor dB/m	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.17	14.81	20.40	0.01	35.22	65.16	-29.94	QP
0.17	5.29	20.40	0.01	25.70	55.16	-29.46	Average
0.24	16.32	20.40	0.01	36.73	62.22	-25.49	QP
0.24	7.77	20.40	0.01	28.18	52.22	-24.04	Average
0.32	18.12	20.39	0.01	38.52	59.80	-21.28	QP
0.32	12.47	20.39	0.01	32.87	49.80	-16.93	Average
0.50	12.50	20.31	0.01	32.82	56.00	-23.18	QP
0.50	6.10	20.31	0.01	26.42	46.00	-19.58	Average
0.63	16.45	20.28	0.02	36.75	56.00	-19.25	QP
0.63	9.41	20.28	0.02	29.71	46.00	-16.29	Average
0.95	17.04	20.21	0.03	37.28	56.00	-18.72	QP
0.95	8.52	20.21	0.03	28.76	46.00	-17.24	Average

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss

7.3 Conducted Peak Output Power

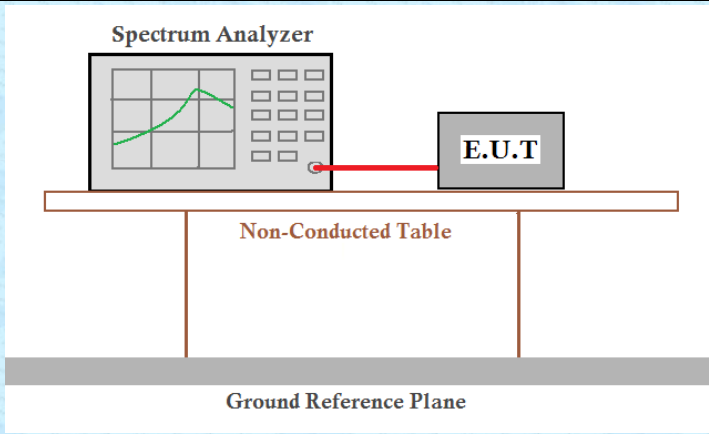Test Requirement:	FCC Part15 C Section 15.247 (b)(1)
Test Method:	ANSI C63.10:2013
Limit:	20.97dBm
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, shown with a green trace on its screen, is connected to an E.U.T. (Equipment Under Test) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.4 20dB Emission Bandwidth

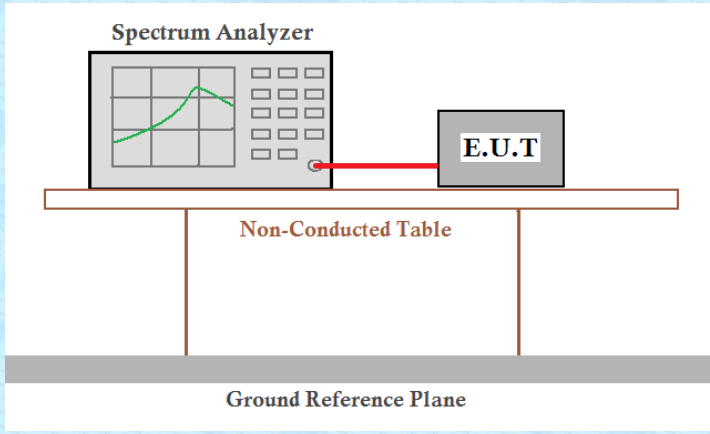Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Limit:	N/A
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.5 Carrier Frequencies Separation

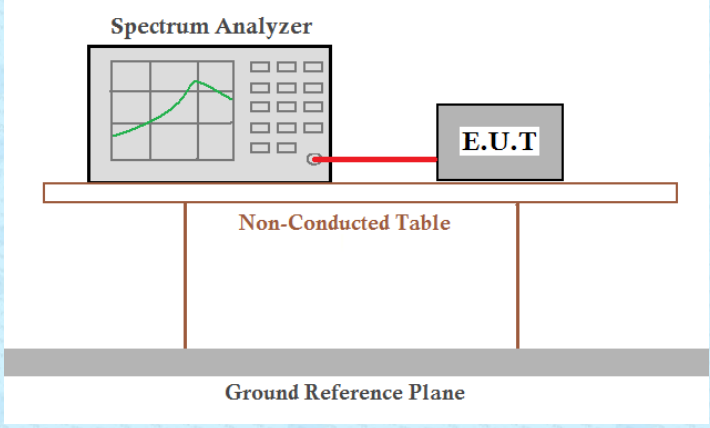Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer, showing a frequency spectrum on its screen, is connected to an Equipment Under Test (E.U.T.) by a red cable. Both the Spectrum Analyzer and the E.U.T. are positioned on a table labeled 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data: The detailed test data see Appendix for 2.4G.

7.6 Hopping Channel Number

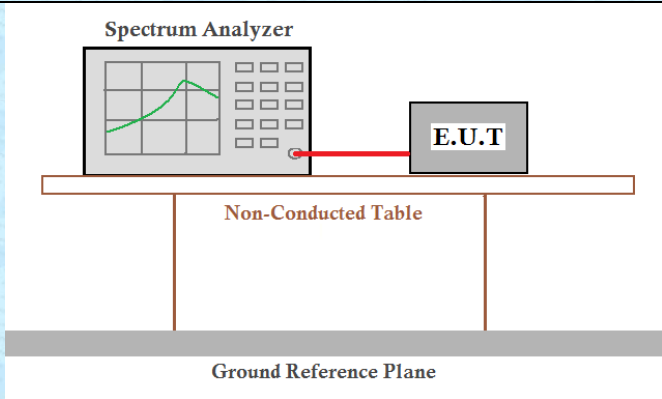Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15 channels
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.


7.7 Dwell Time

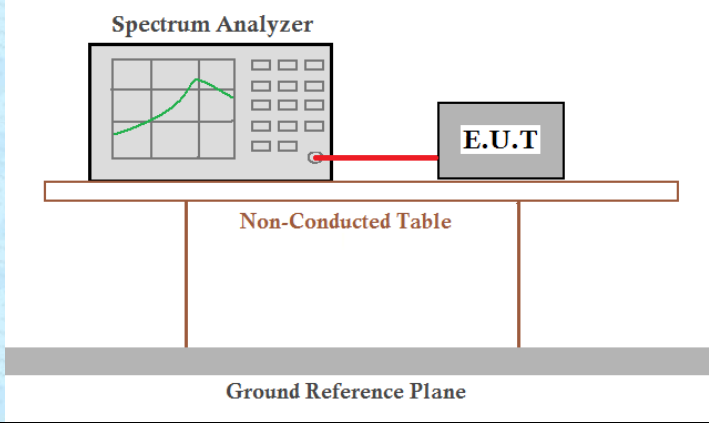Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.


7.8 Spurious Emission in Non-restricted & restricted Bands



7.8.1 Conducted Emission Method

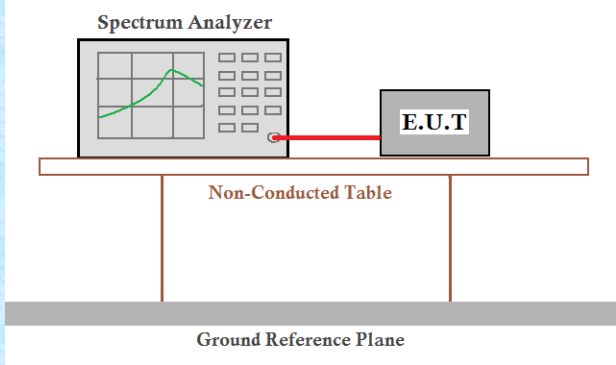Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a table labeled 'Non-Conducted Table'. This table is supported by a 'Ground Reference Plane'.
Test Instruments:	Refer to section6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data: The detailed test data see Appendix for 2.4G.

7.8.2 Radiated Emission Method

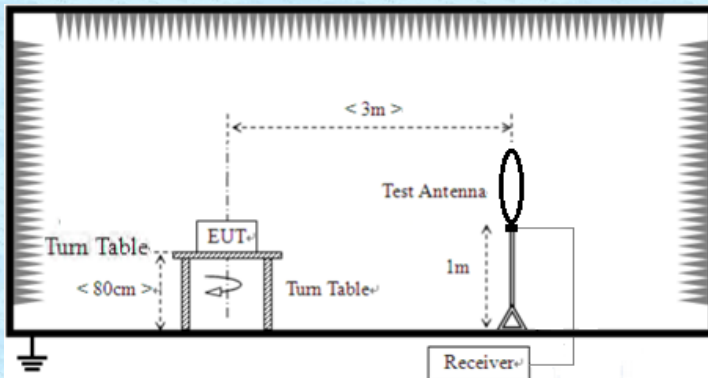Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit: (Spurious Emissions)	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	PK/AV/QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	Below 30MHz				
					
	Below 1GHz				

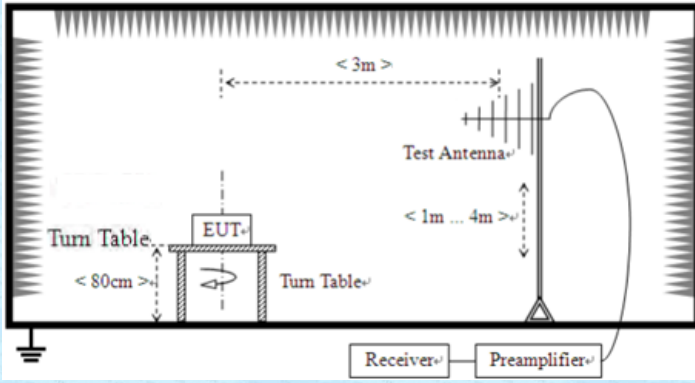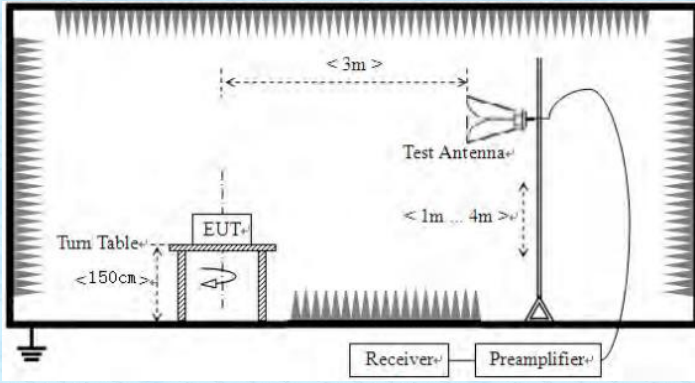	 Above 1GHz 						
Test Procedure:	1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.						
Test Instruments:	Refer to section 5.8 for details						
Test mode:	Refer to section 5.2 for details						
Temp. / Hum.	<table><tr><td>Temp.:</td><td>25 °C</td><td>Humid.:</td><td>52%</td><td>Press.:</td><td>1 012mbar</td></tr></table>	Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1 012mbar		

Test results:

Pass

Remark:

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.


Measurement data:**■ Below 30MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ 30MHz ~ 1GHz

ANT 1 and ANT 2 modes all have been tested,worse case ANT 1 mode is reported.


Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

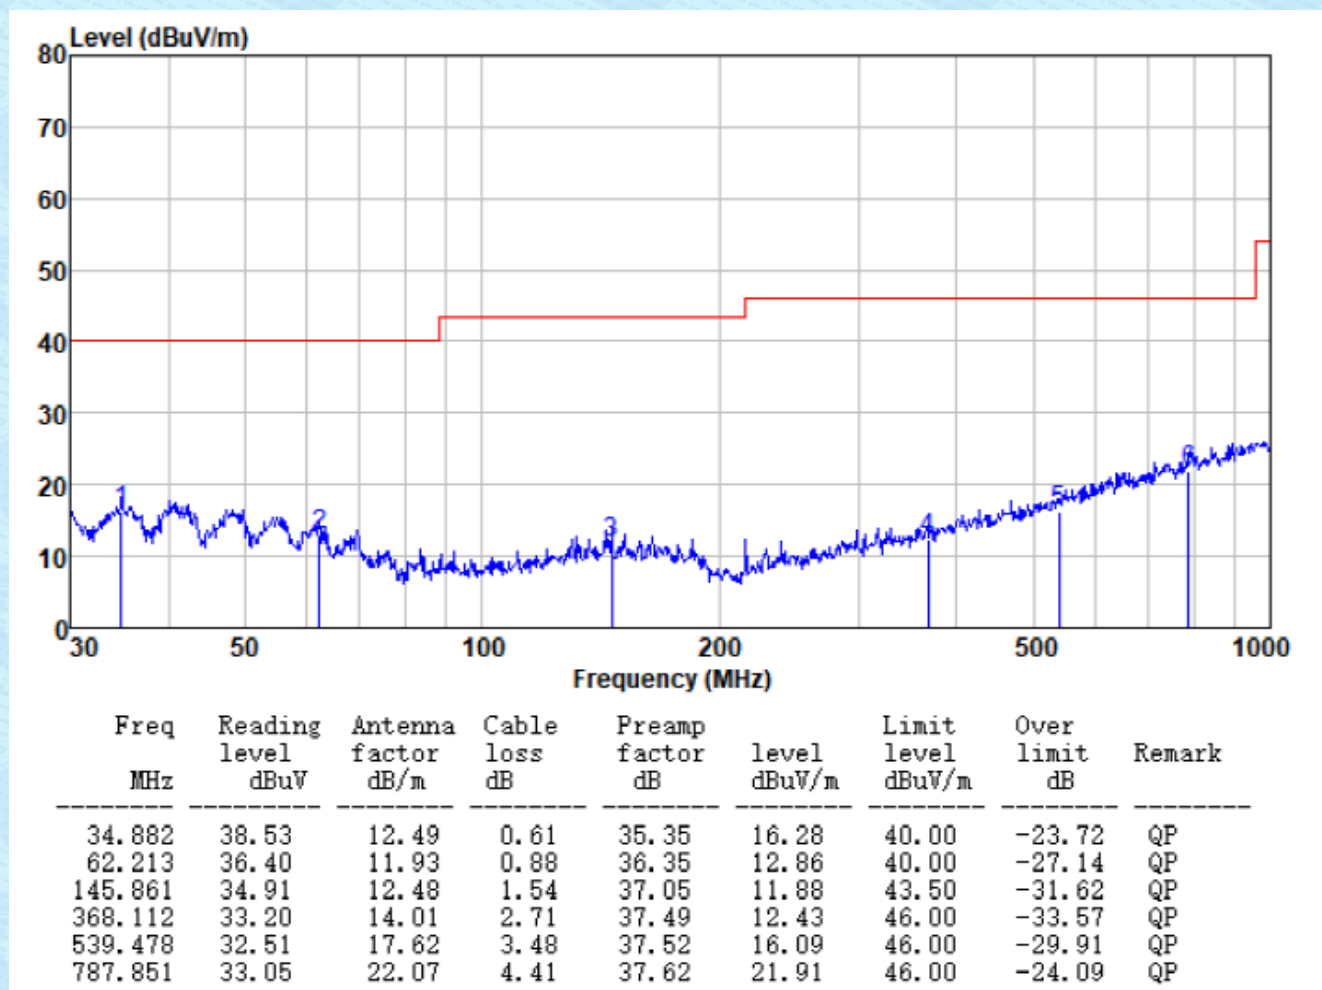

Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

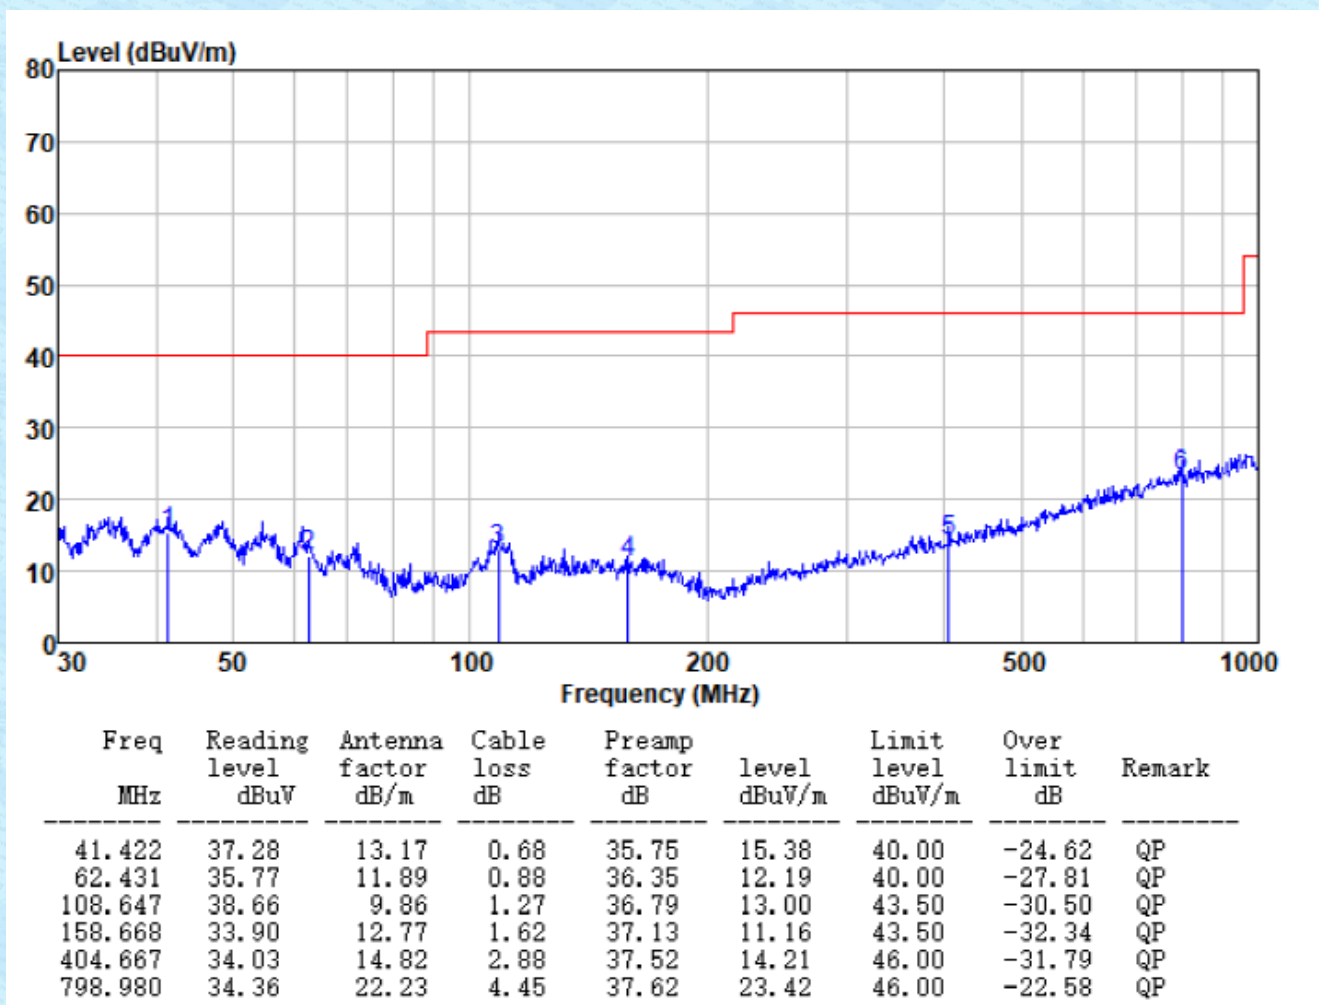


Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

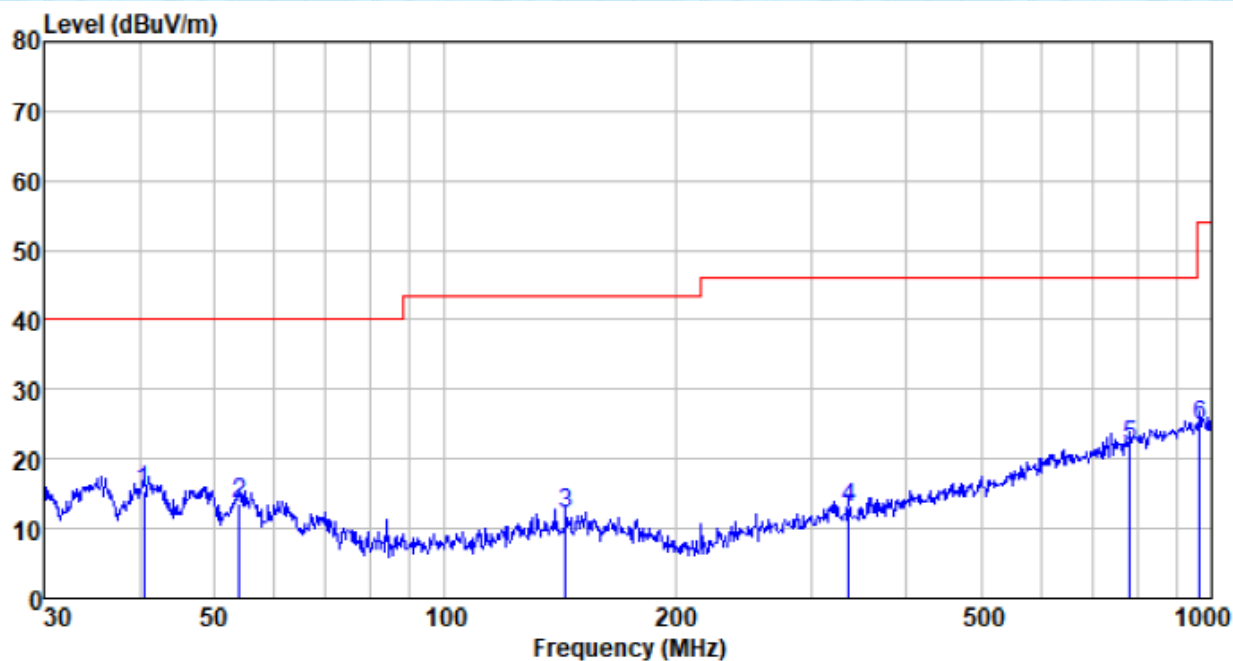


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.559	37.18	13.23	0.67	35.70	15.38	40.00	-24.62	QP
53.882	36.37	12.66	0.81	36.24	13.60	40.00	-26.40	QP
143.830	35.22	12.32	1.53	37.04	12.03	43.50	-31.47	QP
336.035	34.49	13.30	2.55	37.46	12.88	46.00	-33.12	QP
782.345	33.07	22.00	4.40	37.62	21.85	46.00	-24.15	QP
965.542	33.36	23.99	5.09	37.54	24.90	54.00	-29.10	QP

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

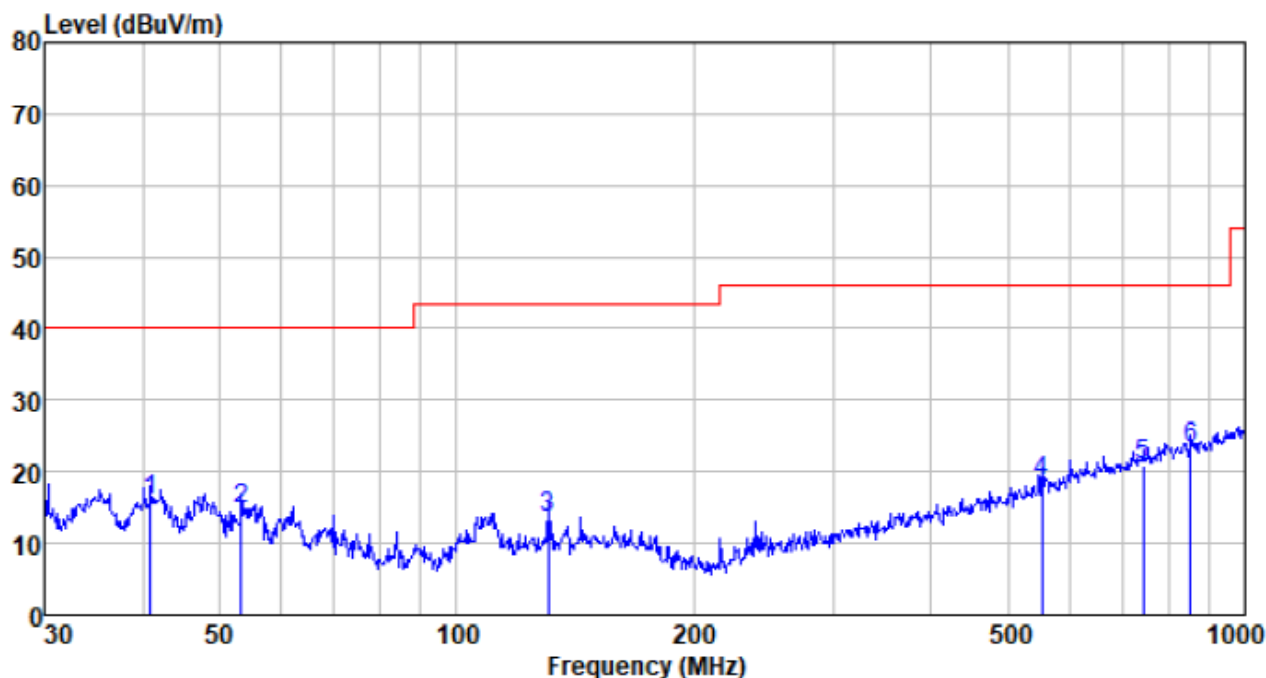


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
40.845	37.77	13.21	0.67	35.71	15.94	40.00	-24.06	QP
53.318	37.43	12.71	0.80	36.23	14.71	40.00	-25.29	QP
130.837	37.52	11.66	1.44	36.96	13.66	43.50	-29.84	QP
552.883	34.67	18.00	3.53	37.53	18.67	46.00	-27.33	QP
742.259	32.94	21.37	4.24	37.63	20.92	46.00	-25.08	QP
854.025	33.52	22.62	4.68	37.61	23.21	46.00	-22.79	QP

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

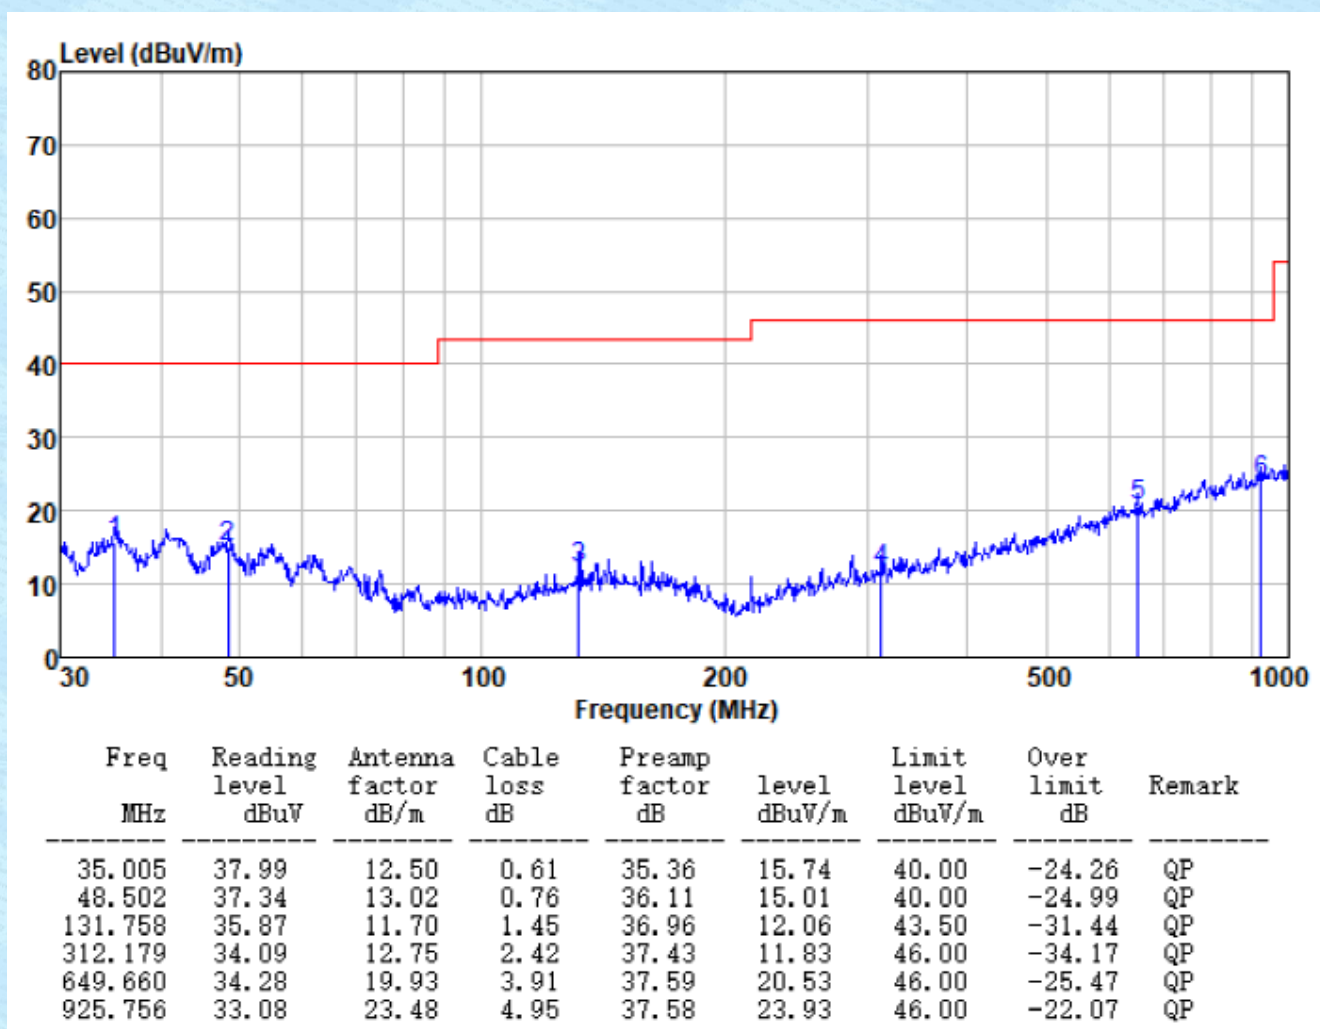

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

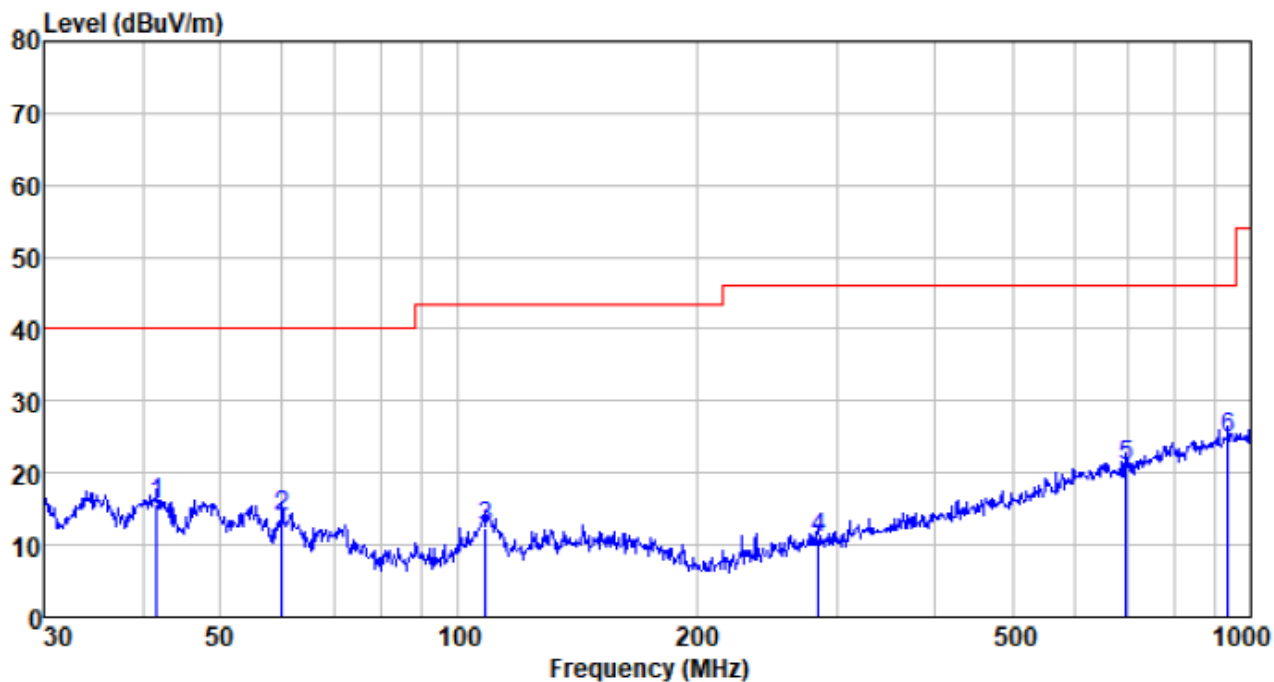


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
41.713	37.70	13.16	0.68	35.76	15.78	40.00	-24.22	QP
59.859	36.96	12.32	0.86	36.32	13.82	40.00	-26.18	QP
108.267	38.03	9.83	1.26	36.79	12.33	43.50	-31.17	QP
284.977	33.95	11.97	2.29	37.41	10.80	46.00	-35.20	QP
696.857	34.04	20.35	4.08	37.63	20.84	46.00	-25.16	QP
935.546	33.58	23.68	4.99	37.57	24.68	46.00	-21.32	QP


- Above 1GHz
- Unwanted Emissions in Restricted Frequency Bands

ANT 1 and ANT 2 modes all have been tested, worse case ANT 1 mode is reported.

Test channel:	Lowest	Polarization:	Horizontal
---------------	--------	---------------	------------

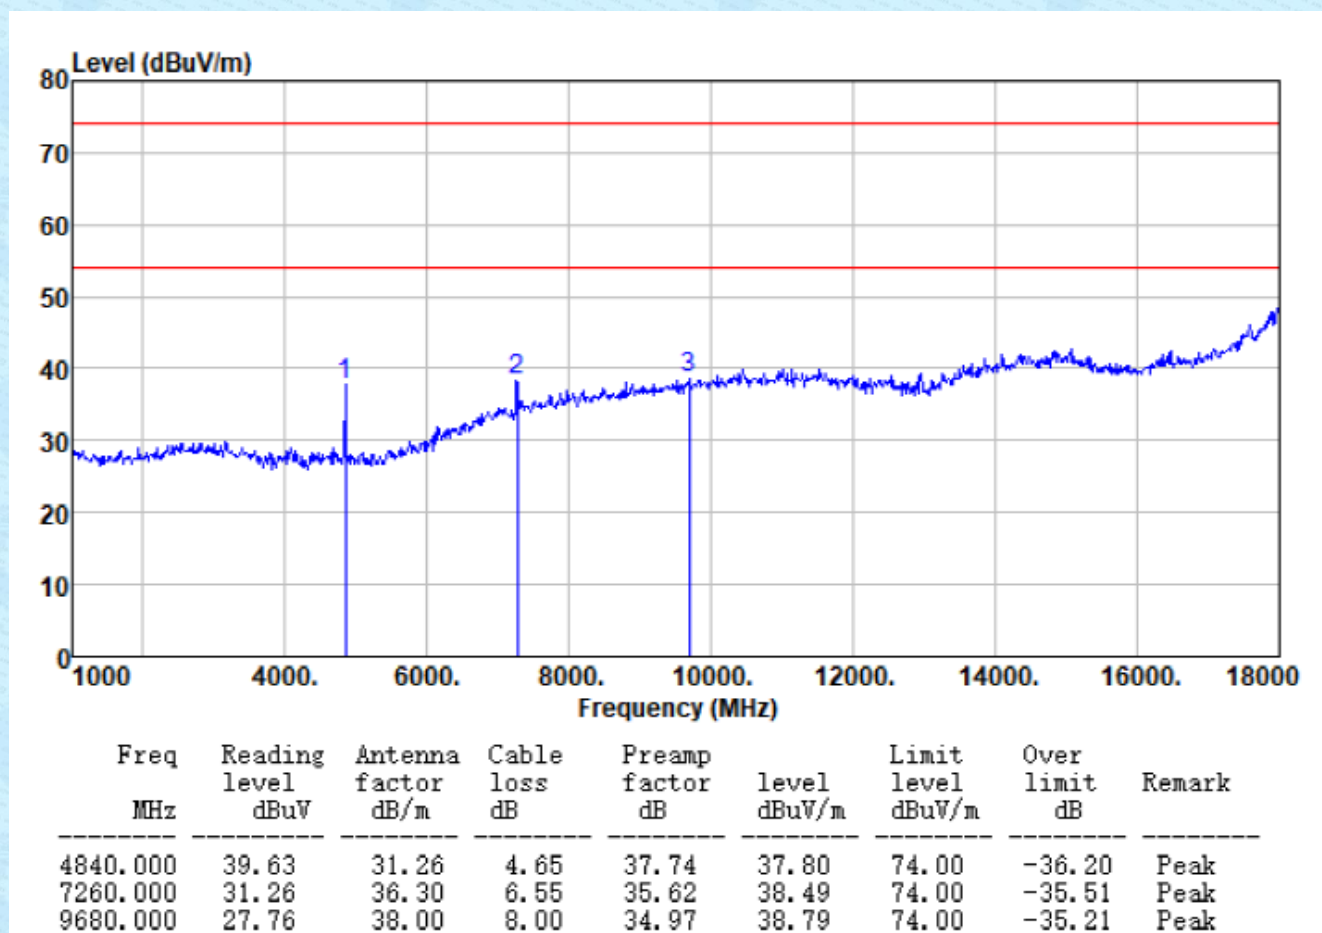


Test channel:	Lowest	Polarization:	Vertical
---------------	--------	---------------	----------

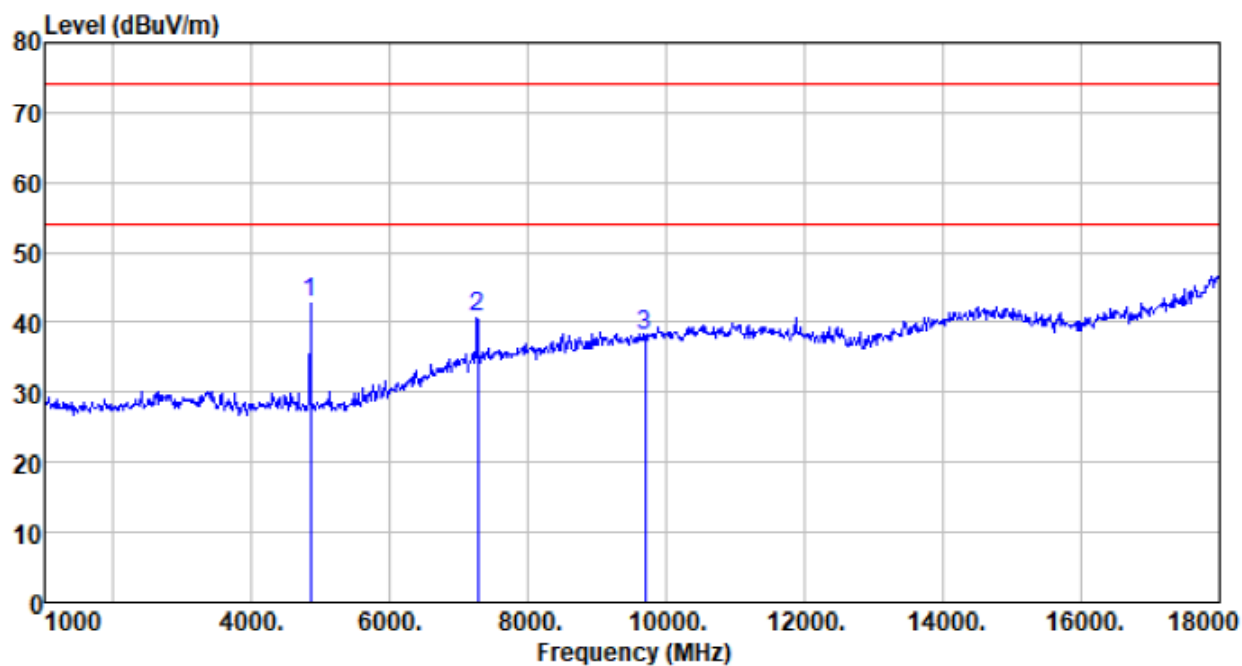


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4840.000	44.71	31.26	4.65	37.74	42.88	74.00	-31.12	Peak
7260.000	33.47	36.30	6.55	35.62	40.70	74.00	-33.30	Peak
9680.000	26.99	38.00	8.00	34.97	38.02	74.00	-35.98	Peak

Test channel:	Middle	Polarization:	Horizontal
---------------	--------	---------------	------------

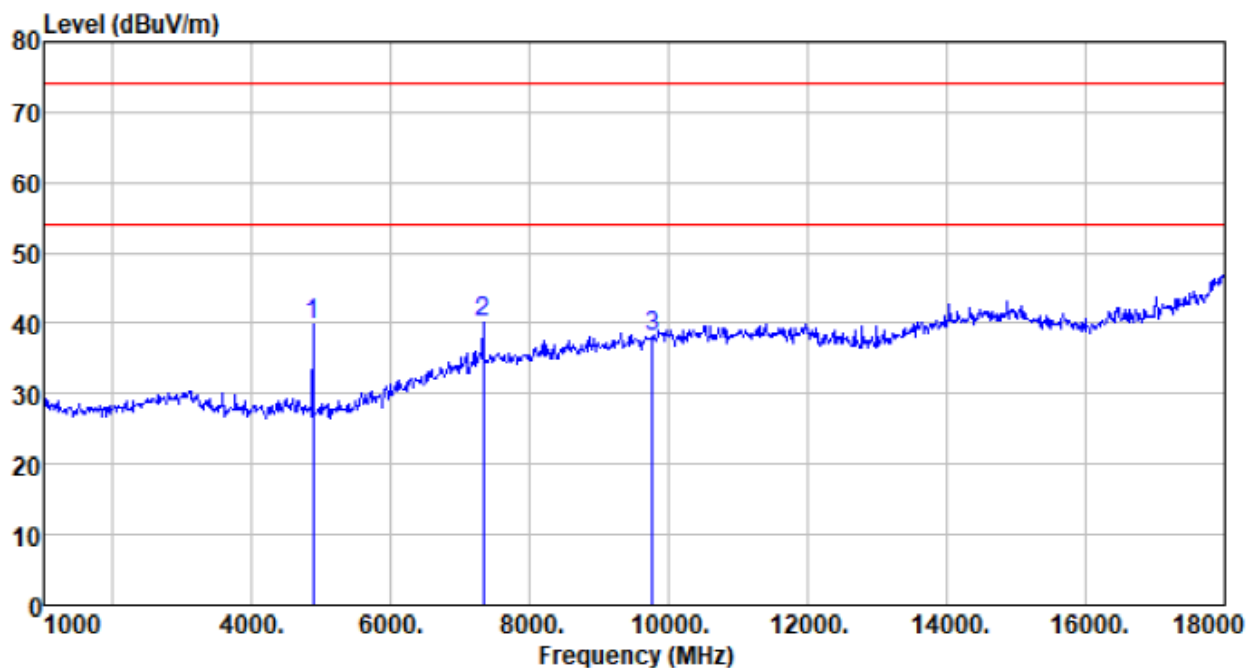


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	41.75	31.31	4.69	37.75	40.00	74.00	-34.00	Peak
7320.000	32.58	36.43	6.63	35.60	40.04	74.00	-33.96	Peak
9760.000	26.91	38.10	8.03	35.03	38.01	74.00	-35.99	Peak

Test channel:	Middle	Polarization:	Vertical
---------------	--------	---------------	----------

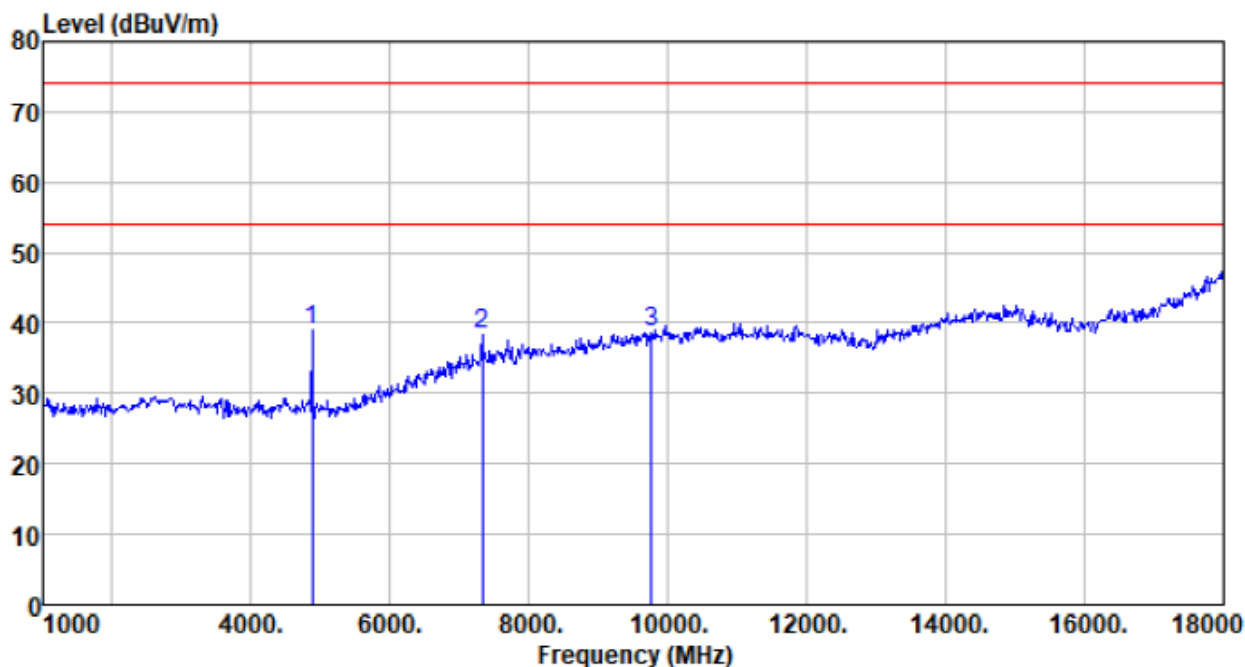


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4880.000	40.64	31.31	4.69	37.75	38.89	74.00	-35.11	Peak
7320.000	30.97	36.43	6.63	35.60	38.43	74.00	-35.57	Peak
9760.000	27.65	38.10	8.03	35.03	38.75	74.00	-35.25	Peak

Test channel:	Highest	Polarization:	Horizontal
---------------	---------	---------------	------------

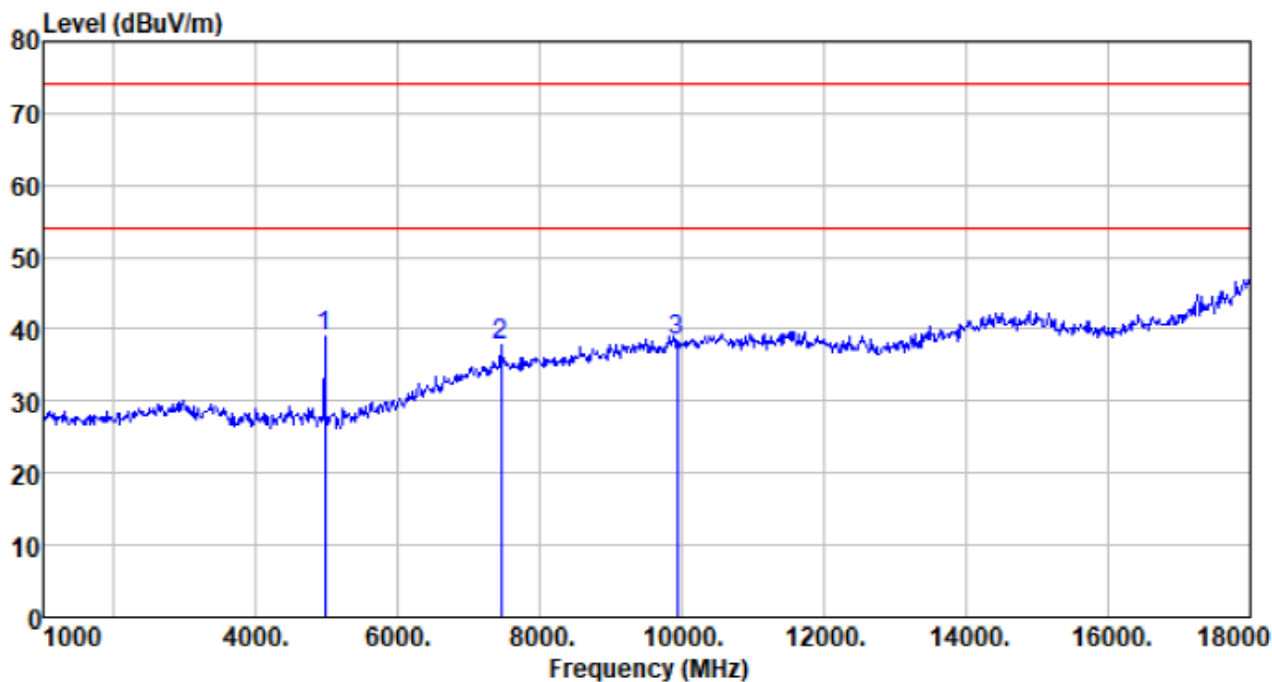

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
4960.000	40.57	31.44	4.79	37.78	39.02	74.00	-34.98	Peak
7440.000	30.03	36.66	6.77	35.56	37.90	74.00	-36.10	Peak
9920.000	27.23	38.30	8.09	35.14	38.48	74.00	-35.52	Peak

Test channel:	Highest	Polarization:	Vertical
---------------	---------	---------------	----------

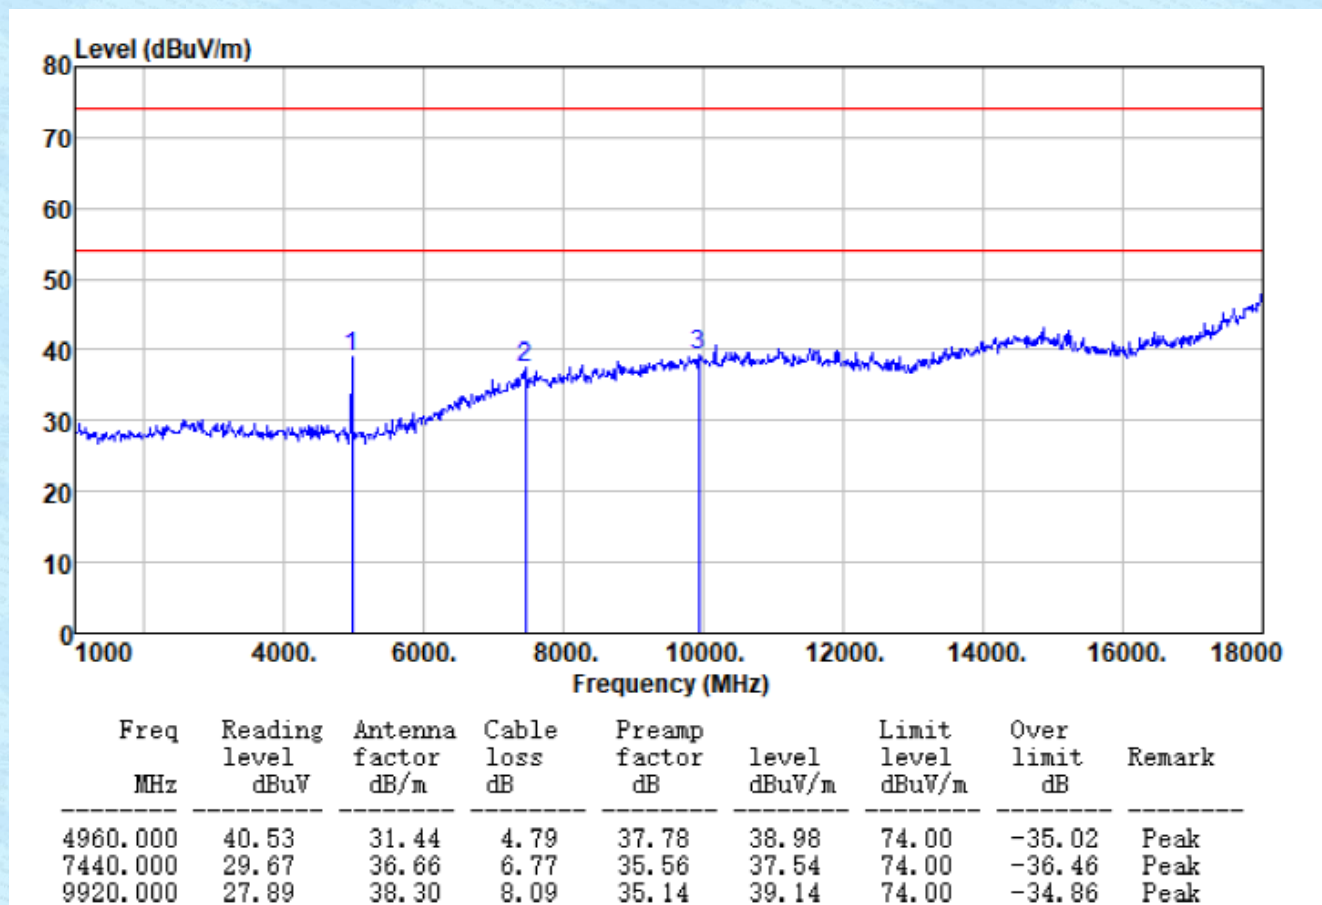

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. No emission found in frequency above 18GHz.

■ Unwanted Emissions in Non-restricted Frequency Bands

ANT 1

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	45.23	27.91	5.30	24.64	53.80	74.00	-20.20	Horizontal
2390.00	49.36	27.59	5.38	24.71	57.62	74.00	-16.38	Horizontal
2400.00	51.09	27.41	5.39	24.72	59.17	74.00	-14.83	Horizontal
2310.00	46.01	27.91	5.30	24.64	54.58	74.00	-19.42	Vertical
2390.00	50.65	27.59	5.38	24.71	58.91	74.00	-15.09	Vertical
2400.00	52.19	27.41	5.39	24.72	60.27	74.00	-13.73	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	35.25	27.91	5.30	24.64	43.82	54.00	-10.18	Horizontal
2390.00	36.63	27.59	5.38	24.71	44.89	54.00	-9.11	Horizontal
2400.00	37.90	27.41	5.39	24.72	45.98	54.00	-8.02	Horizontal
2310.00	35.36	27.91	5.30	24.64	43.93	54.00	-10.07	Vertical
2390.00	37.50	27.59	5.38	24.71	45.76	54.00	-8.24	Vertical
2400.00	38.55	27.41	5.39	24.72	46.63	54.00	-7.37	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	47.62	27.53	5.47	24.80	55.82	74.00	-18.18	Horizontal
2500.00	46.34	27.55	5.49	24.86	54.52	74.00	-19.48	Horizontal
2483.50	48.85	27.53	5.47	24.80	57.05	74.00	-16.95	Vertical
2500.00	47.56	27.55	5.49	24.86	55.74	74.00	-18.26	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.11	27.53	5.47	24.80	44.31	54.00	-9.69	Horizontal
2500.00	35.77	27.55	5.49	24.86	43.95	54.00	-10.05	Horizontal
2483.50	36.15	27.53	5.47	24.80	44.35	54.00	-9.65	Vertical
2500.00	35.89	27.55	5.49	24.86	44.07	54.00	-9.93	Vertical

ANT 2

Test channel:	Lowest channel
---------------	----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	45.59	27.91	5.30	24.64	54.16	74.00	-19.84	Horizontal
2390.00	49.76	27.59	5.38	24.71	58.02	74.00	-15.98	Horizontal
2400.00	51.50	27.41	5.39	24.72	59.58	74.00	-14.42	Horizontal
2310.00	46.39	27.91	5.30	24.64	54.96	74.00	-19.04	Vertical
2390.00	51.09	27.59	5.38	24.71	59.35	74.00	-14.65	Vertical
2400.00	52.66	27.41	5.39	24.72	60.74	74.00	-13.26	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	35.52	27.91	5.30	24.64	44.09	54.00	-9.91	Horizontal
2390.00	36.92	27.59	5.38	24.71	45.18	54.00	-8.82	Horizontal
2400.00	38.26	27.41	5.39	24.72	46.34	54.00	-7.66	Horizontal
2310.00	35.66	27.91	5.30	24.64	44.23	54.00	-9.77	Vertical
2390.00	37.83	27.59	5.38	24.71	46.09	54.00	-7.91	Vertical
2400.00	38.86	27.41	5.39	24.72	46.94	54.00	-7.06	Vertical

Test channel:	Highest channel
---------------	-----------------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	48.01	27.53	5.47	24.80	56.21	74.00	-17.79	Horizontal
2500.00	46.67	27.55	5.49	24.86	54.85	74.00	-19.15	Horizontal
2483.50	49.31	27.53	5.47	24.80	57.51	74.00	-16.49	Vertical
2500.00	47.93	27.55	5.49	24.86	56.11	74.00	-17.89	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	36.38	27.53	5.47	24.80	44.58	54.00	-9.42	Horizontal
2500.00	36.00	27.55	5.49	24.86	44.18	54.00	-9.82	Horizontal
2483.50	36.33	27.53	5.47	24.80	44.53	54.00	-9.47	Vertical
2500.00	36.15	27.55	5.49	24.86	44.33	54.00	-9.67	Vertical

Remarks:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

8 Test Setup Photo

Reference to the **appendix I** for details.

9 EUT Constructional Details

Reference to the **appendix II** for details.

---End---