



FCC TEST REPORT

FCC ID: SY4-A02063

On Behalf of

Shanghai Huace Navigation Technology Ltd.

Display

Model No.: CB-H10D

Prepared for : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China

Prepared By : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
Shenzhen, Guangdong, China

Report Number : A2503084-C01-R01
Date of Receipt : March 18, 2025
Date of Test : March 18, 2025 –April 25, 2025
Date of Report : May 7, 2025
Version Number : V0
Test Result : Pass

ALPHA's reports is using a digital certificate that is trusted on Adobe's official server. If there is no digital certificate or the digital certificate shows damaged in your report. Please do not accept the report.

E-mail: service@a-lab.cn Tel: 4008300895 Website: <http://www.a-lab.cn/certificate>

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
1. Summary of Standards And Results	6
1.1. Description of Standards and Results	6
2. General Information	7
2.1. Description of Device (EUT)	7
2.2. Accessories of Device (EUT)	8
2.3. Tested Supporting System Details	8
2.4. Block Diagram of connection between EUT and simulators	8
2.5. Test Mode Description	8
2.6. Test Conditions	9
2.7. Test Facility	9
2.8. Measurement Uncertainty	9
2.9. Test Equipment List	10
3. Maximum Peak Output power	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Setup	11
3.4. Test Result	11
4. Bandwidth	12
4.1. Limit	12
4.2. Test Procedure	12
4.3. Test setup	12
4.4. Test Result	12
5. Carrier Frequency Separation	23
5.1. Limit	23
5.2. Test Procedure	23
5.3. Test setup	23
5.4. Test Result	23
6. Number Of Hopping Channel	26
6.1. Limit	26
6.2. Test Procedure	26
6.3. Test setup	26
6.4. Test Result	26
7. Dwell Time	28
7.1. Limit	28
7.2. Test Procedure	28
7.3. Test setup	28
7.4. Test Result	28
8. Radiated SPURIOUS emissions	38
8.1. Limit	38
8.2. Test Procedure	40

8.3. Test setup	40
8.4. Test Result.....	41
9. Conducted RF Spurious Emission.....	47
9.1. Limit.....	47
9.2. Test Procedure	47
9.3. Test setup	47
9.4. Test Result.....	48
10. Band Edge Compliance.....	57
10.1. Limit.....	57
10.2. Test Procedure	57
10.3. Test setup	57
10.4. Test Result.....	57
11. Power Line Conducted Emissions	73
11.1. Limit.....	73
11.2. Test Procedure	73
11.3. Test setup	73
11.4. Test Result.....	73
12. Antenna Requirements.....	74
12.1. Limit.....	74
12.2. Result	74
13. Test setup photo	75
13.1. Photo of Radiated Emission test	75
14. EUT Photo.....	76

TEST REPORT DECLARATION

Applicant : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
Manufacturer : Shanghai Huace Navigation Technology Ltd.
Address : 577 Songying Road, Qingpu District, 201706 Shanghai, China
EUT Description : Display
(A) Model No. : CB-H10D
(B) Trademark : 

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247

ANSI C63.10:2013

The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Tested by (name + signature).....: Yannis Wen
Project Engineer



Approved by (name + signature).....: Jack Xu
Project Manager



Date of issue.....: May 7, 2025

Revision History

Revision	Issue Date	Revisions	Revised By
V0	May 7, 2025	Initial released Issue	Yannis Wen

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Test Item	Standards Paragraph	Result
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) ANSI C63.10 :2013	P
Bandwidth	FCC Part 15: 15.215 ANSI C63.10 :2013	P
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Dwell Time	FCC Part 15: 15.247(a)(1) ANSI C63.10 :2013	P
Radiated Spurious Emission	FCC Part 15: 15.209, FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Conducted RF Spurious Emission &Band Edge Compliance	FCC Part 15: 15.247(d) ANSI C63.10 :2013	P
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.10 :2013	P
Antenna requirement	FCC Part 15: 15.203	P
Note: 1. P is an abbreviation for Pass. 2. F is an abbreviation for Fail. 3. N/A is an abbreviation for Not Applicable.		

1. Pass: The EUT complies with the essential requirements in the standard.
2. Frequency Stability: The manufacturer stated in the user's manual.
3. The conclusion of this test report is judged by actual test data without considering measurement uncertainty.

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT Description	: Display
Model No.	: CB-H10D
DIFF.	: N/A
Power supply	: DC 9~36V from battery
Radio Technology	: Bluetooth(BR&EDR)
Operation frequency	: 2402-2480MHz
Channel No.	: 79 Channels
Channel spacing	: 1MHz
Modulation type	: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna Type	: Internal antenna, Maximum Gain is 1.5dBi (Antenna information is provided by applicant.)
Software version	: Android 6.0.1
Hardware version	: V1.2
Connector cable loss	: N/A
Intend use environment	: Residential, commercial and light industrial environment


2.2. Accessories of Device (EUT)

Accessories : /
 Manufacturer : /
 Model : /
 Ratings : /

2.3. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number	Certification or SDoC
1.	Notebook PC	Lenovo	ThinkPad E14	N/A	N/A

2.4. Block Diagram of connection between EUT and simulators



2.5. Test Mode Description

The test software “Ampak RFTTestTool, VER: 5.6” was used to control EUT work in Continuous TX mode, and select test channel, default power level, wireless mode:

Tested mode, channel information		
Mode	Channel	Frequency (MHz)
GFSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
$\pi/4$ DQPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
8DPSK	Low :CH1	2402
	Middle: CH40	2441
	High: CH79	2480
GFSK-Hopping	/	2402-2480
$\pi/4$ DQPSK-Hopping	/	2402-2480
8DPSK-Hopping	/	2402-2480

2.6. Test Conditions

Items	Required	Actual
Temperature range:	15-35°C	24°C
Humidity range:	25-75%	56%
Pressure range:	86-106kPa	980kPa

2.7. Test Facility

Shenzhen Alpha Product Testing Co., Ltd
 Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103,
 Shenzhen, Guangdong, China

June 21, 2018 File on Federal Communication Commission
 Registration Number: 293961

July 15, 2019 Certificated by IC
 Registration Number: 12135A
 CAB identifier: CN0085

2.8. Measurement Uncertainty

(95% confidence levels, k=2)

Item	Uncertainty
Uncertainty for Power point Conducted Emissions Test	1.63dB
Uncertainty for Radiation Emission test in 3m chamber (below 30MHz)	3.5dB
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.74dB(Polarize: V)
	3.76dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	3.77dB(Polarize: V)
	3.80dB(Polarize: H)
Uncertainty for Radiation Emission test in 3m chamber (18GHz to 40GHz)	4.31 dB(Polarize: V)
	4.30 dB(Polarize: H)
Uncertainty for radio frequency	5.06×10^{-8} GHz
Uncertainty for conducted RF Power	0.40dB
Uncertainty for temperature	0.2°C
Uncertainty for humidity	1%
Uncertainty for DC and low frequency voltages	0.06%

2.9. Test Equipment List

Equipment	Manufacture	Model No.	Firmware version	Serial No.	Last cal.	Cal Interval
9*6*6 anechoic chamber	CHENYU	9*6*6	/	N/A	2025.03.09	3Year
Spectrum analyzer	ROHDE&SCHWARZ	FSV40-N	2.3	102137	2024.08.08	1Year
Spectrum analyzer	Agilent	N9020A	A.14.16	MY499100060	2024.08.08	1Year
Receiver	ROHDE&SCHWARZ	ESR	2.28 SP1	1316.3003K03-102082-Wa	2024.08.08	1Year
Receiver	R&S	ESCI	4.42 SP1	101165	2024.08.08	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	/	VULB 9168#627	2023.08.28	2Year
Horn Antenna	SCHWARZBECK	BBHA 9120 D	/	2106	2023.08.19	2Year
Loop Antenna	SCHWARZBECK	FMZB 1519B	/	00128	2023.08.19	2Year
RF Cable	Resenberger	Cable 1	/	RE1	2024.08.08	1Year
RF Cable	Resenberger	Cable 2	/	RE2	2024.08.08	1Year
RF Cable	Resenberger	Cable 3	/	CE1	2024.08.08	1Year
Pre-amplifier	HP	HP8347A	/	2834A00455	2024.08.08	1Year
Pre-amplifier	Agilent	8449B	/	3008A02664	2024.08.08	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	/	8126-466	2024.08.08	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	/	101043	2024.08.08	1Year
Horn Antenna	SCHWARZBECK	BBHA 9170	/	00946	2023.08.19	2Year
Preamplifier	SKET	LNPA_1840-50	/	SK2018101801	2024.08.08	1 Year
Power Meter	Agilent	E9300A	/	MY41496628	2024.08.08	1 Year
Power Sensor	DARE	RPR3006W	/	15100041SNO91	2024.08.08	1 Year
Electronic Thermo-Hygrometer	S.H.Qixiang	HTC-1	/	N/A	2024.08.11	1 Year
Switching Mode Power Supply	JUNKE	JK12010S	/	20140927-6	2024.08.08	1 Year
Adjustable attenuator	MWRFTtest	N/A	/	N/A	N/A	N/A
10dB Attenuator	Mini-Circuits	DC-6G	/	N/A	N/A	N/A

Software Information

Test Item	Software Name	Manufacturer	Version
RE	EZ-EMC	EZ	Alpha-3A1
CE	EZ-EMC	EZ	Alpha-3A1
RF-CE	MTS 8310	MW	V2.0.0.0

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit


Please refer section 15.247

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.

3.3. Test Setup



3.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	-0.916	21	Pass
NVNT	1-DH5	2441	Ant1	-1.232	21	Pass
NVNT	1-DH5	2480	Ant1	-2.775	21	Pass
NVNT	2-DH5	2402	Ant1	-5.301	21	Pass
NVNT	2-DH5	2441	Ant1	-5.82	21	Pass
NVNT	2-DH5	2480	Ant1	-7.034	21	Pass
NVNT	3-DH5	2402	Ant1	-5.509	21	Pass
NVNT	3-DH5	2441	Ant1	-6.393	21	Pass
NVNT	3-DH5	2480	Ant1	-6.516	21	Pass

4. BANDWIDTH


4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in FCC Section 15.247(a)(1), must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated..

4.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.


4.3. Test setup




4.4. Test Result

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	1.034	Pass
NVNT	1-DH5	2441	Ant1	0.986	Pass
NVNT	1-DH5	2480	Ant1	1.026	Pass
NVNT	2-DH5	2402	Ant1	1.344	Pass
NVNT	2-DH5	2441	Ant1	1.366	Pass
NVNT	2-DH5	2480	Ant1	1.35	Pass
NVNT	3-DH5	2402	Ant1	1.342	Pass
NVNT	3-DH5	2441	Ant1	1.354	Pass
NVNT	3-DH5	2480	Ant1	1.368	Pass

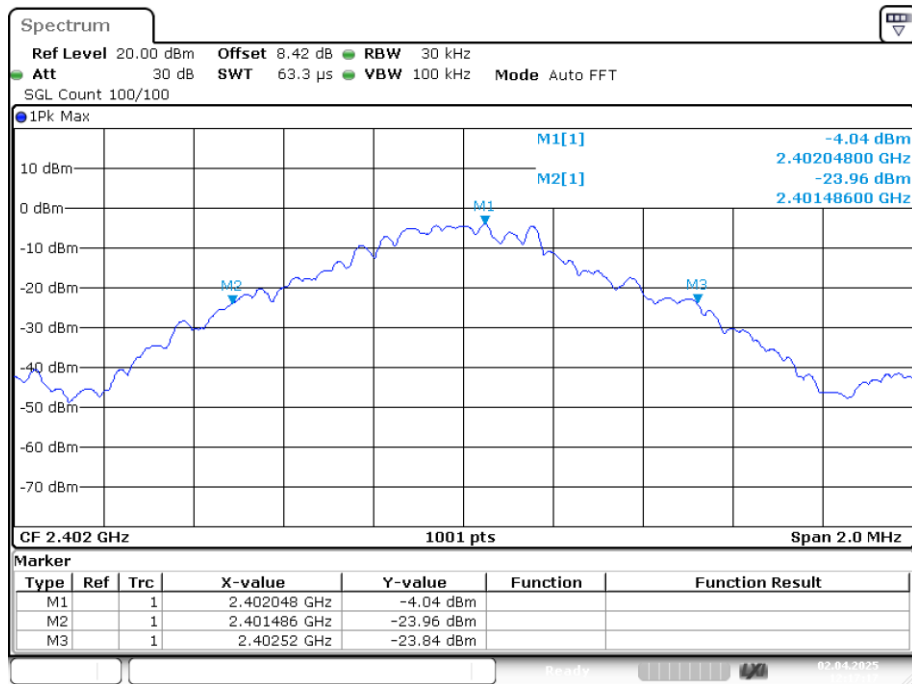
-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1

Date: 2.APR.2025 12:17:17

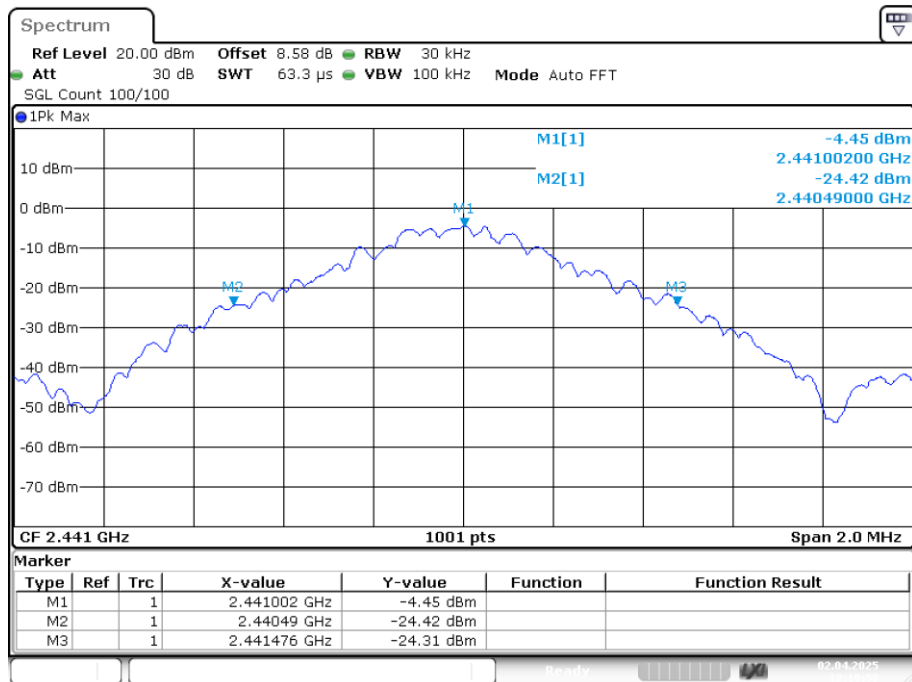-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1


Date: 2.APR.2025 12:19:58

-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1

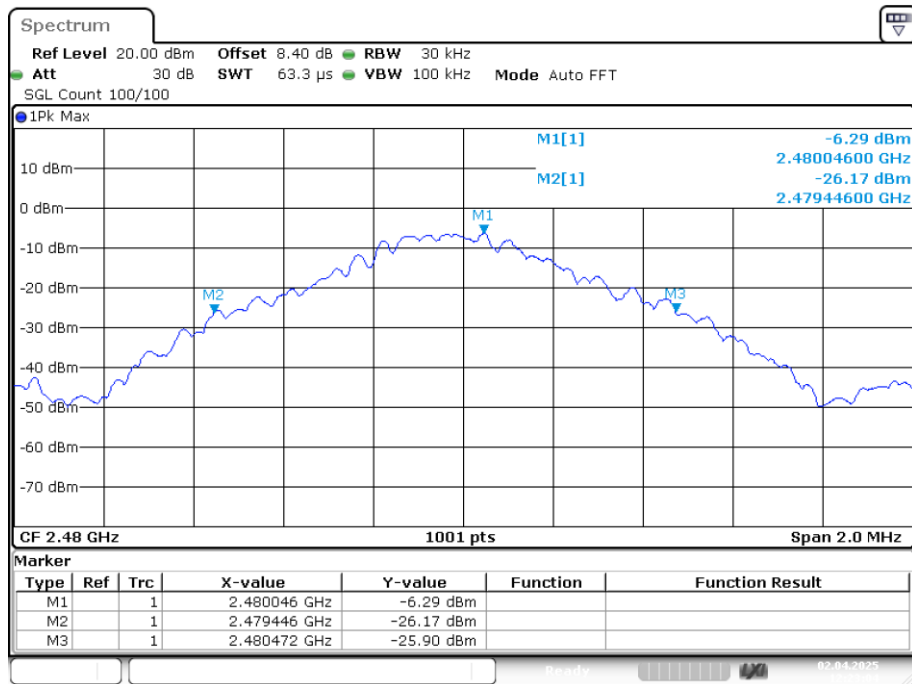


Date: 2.APR.2025 12:23:03


-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1

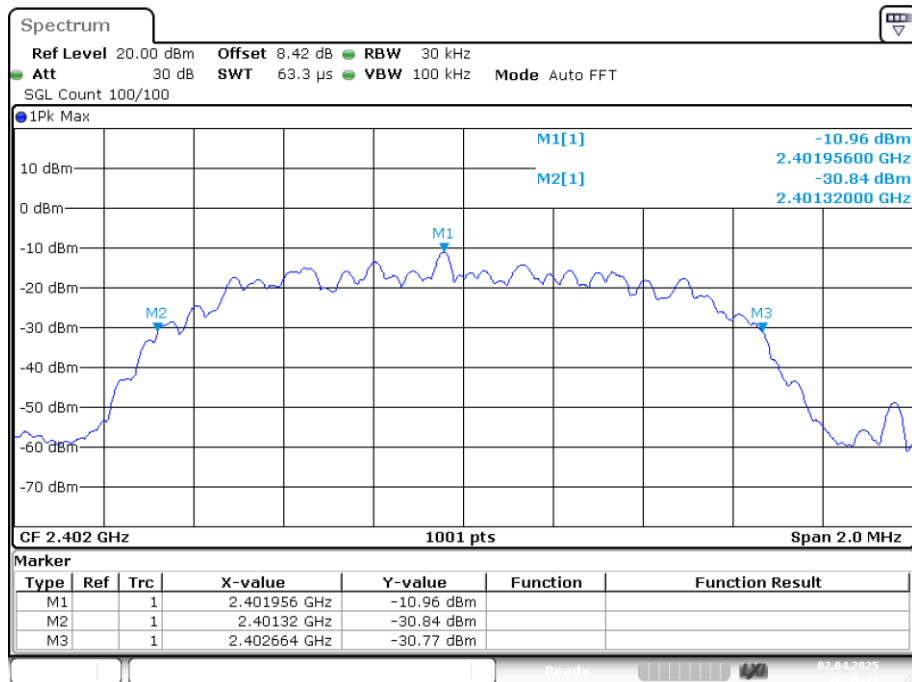

Date: 2.APR.2025 12:46:30

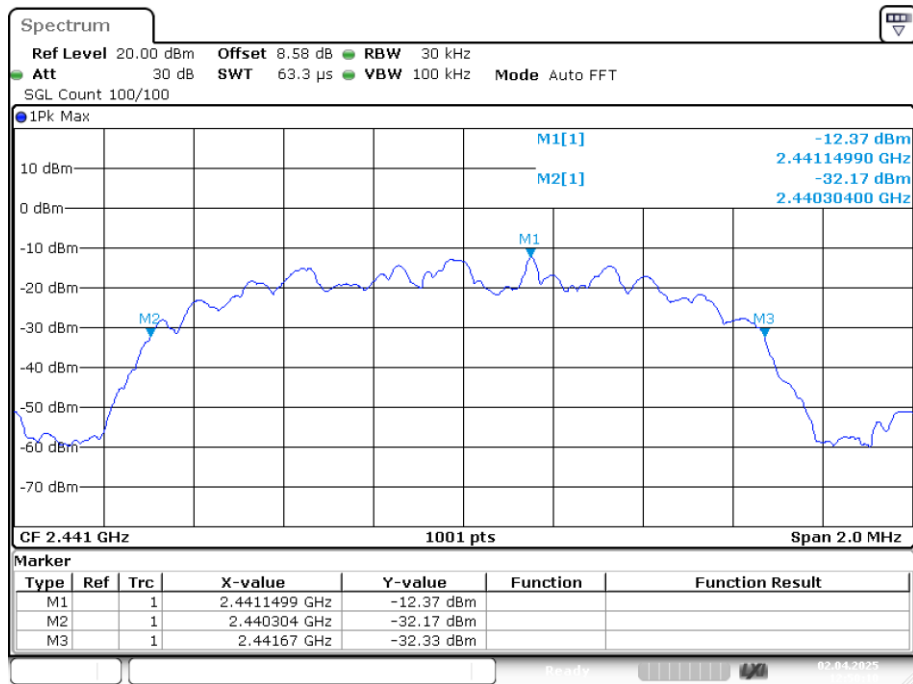
-20dB Bandwidth NVNT 2-DH5 2441MHz Ant1

Date: 2.APR.2025 12:50:10

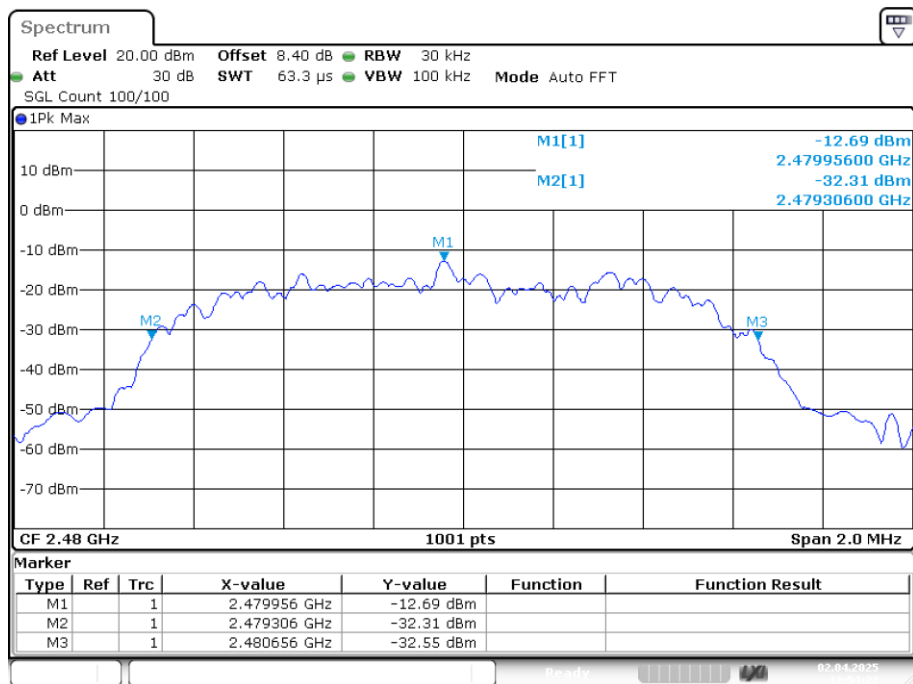-20dB Bandwidth NVNT 2-DH5 2480MHz Ant1


Date: 2.APR.2025 12:54:21

-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1

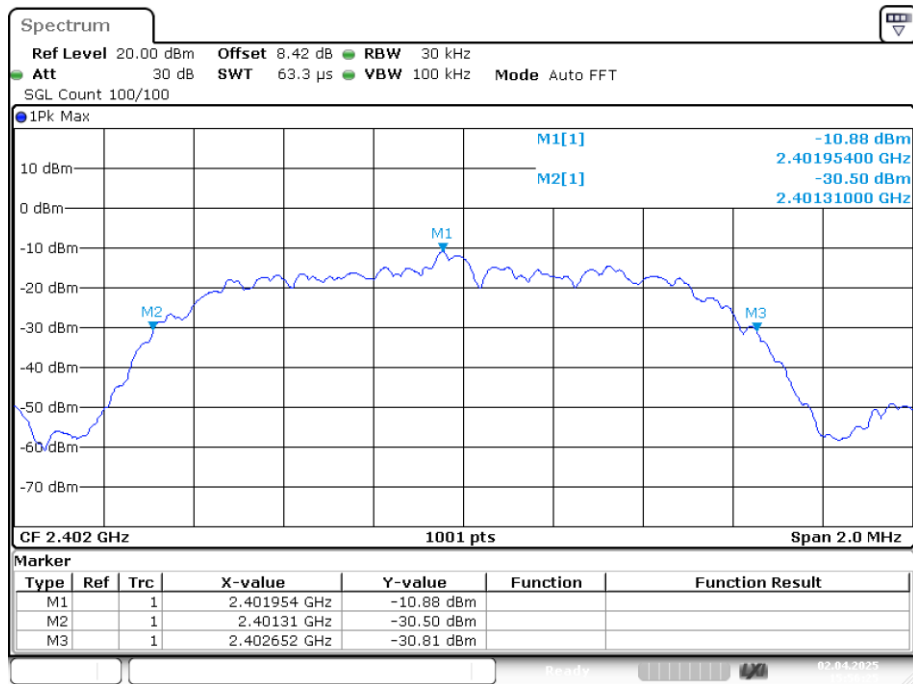


Date: 2.APR.2025 15:56:25

-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1

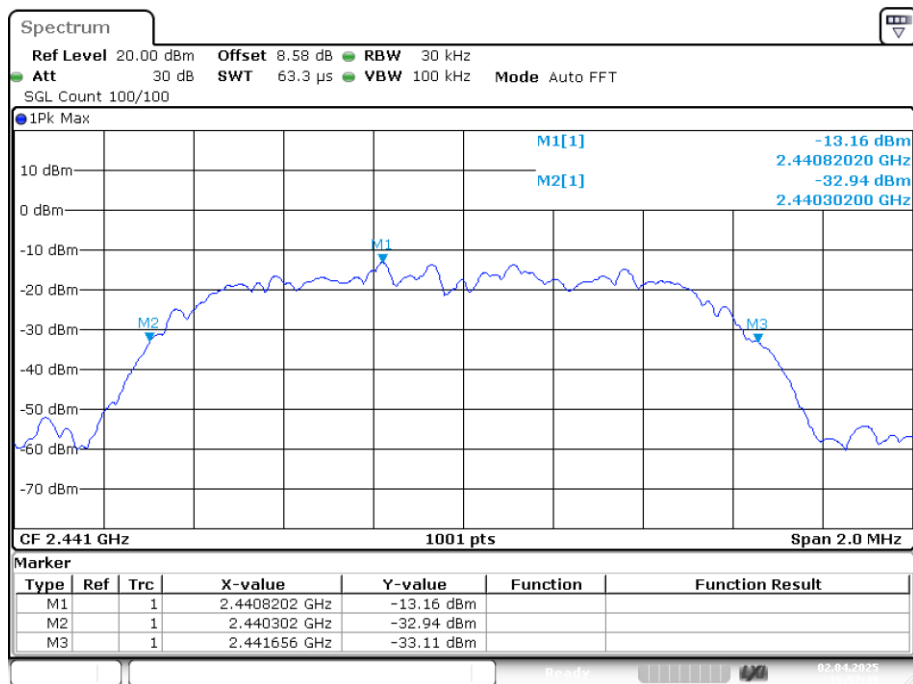

Date: 2.APR.2025 15:57:49

-20dB Bandwidth NVNT 3-DH5 2480MHz Ant1

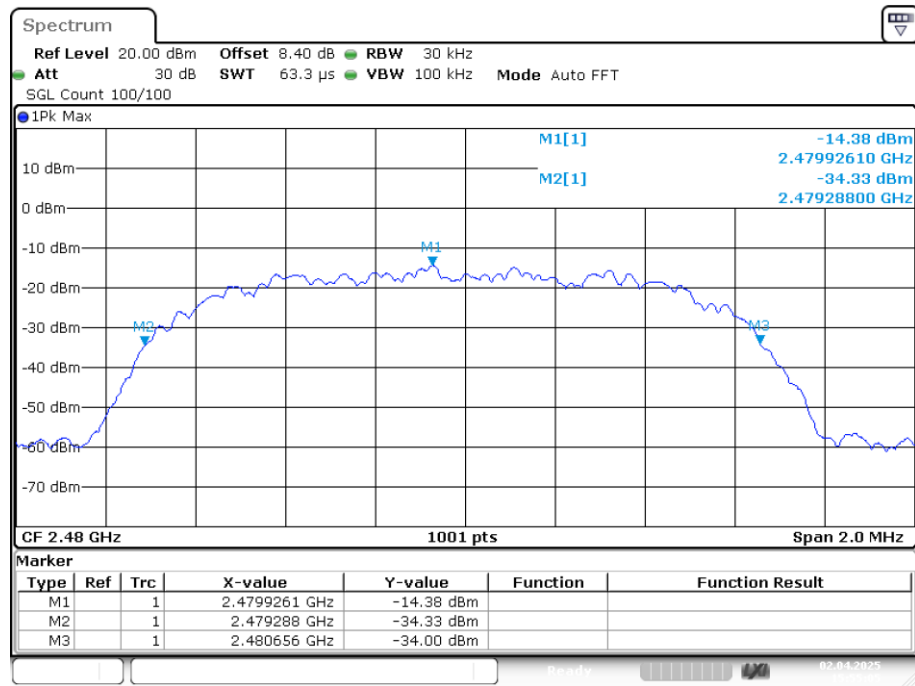


Date: 2.APR.2025 15:55:04

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.917
NVNT	1-DH5	2441	Ant1	0.889
NVNT	1-DH5	2480	Ant1	0.897
NVNT	2-DH5	2402	Ant1	1.235
NVNT	2-DH5	2441	Ant1	1.211
NVNT	2-DH5	2480	Ant1	1.207
NVNT	3-DH5	2402	Ant1	1.233
NVNT	3-DH5	2441	Ant1	1.231
NVNT	3-DH5	2480	Ant1	1.203

OBW NVNT 1-DH5 2402MHz Ant1

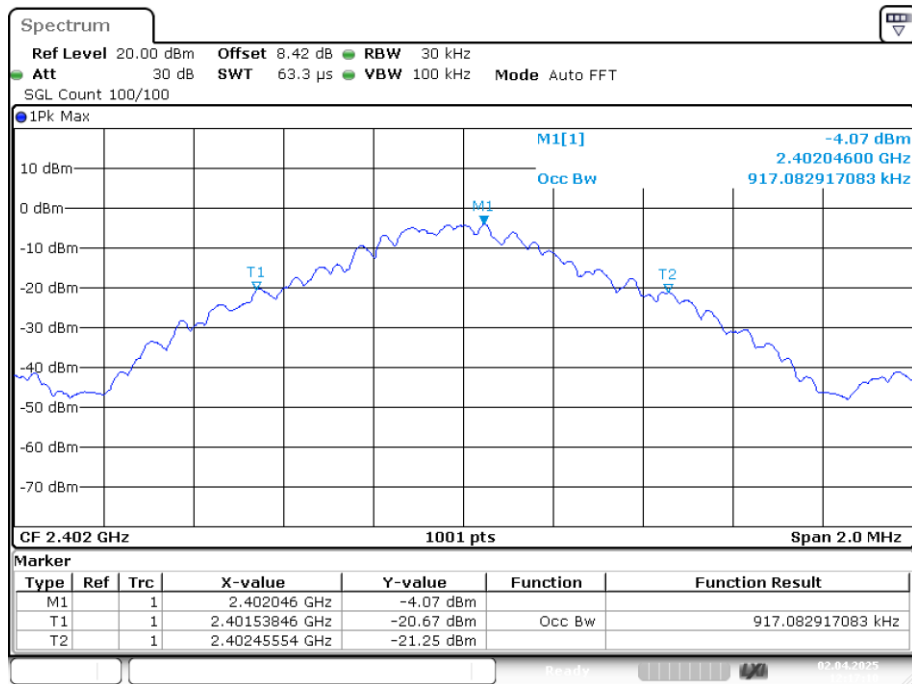


Date: 2.APR.2025 12:17:10

OBW NVNT 1-DH5 2441MHz Ant1

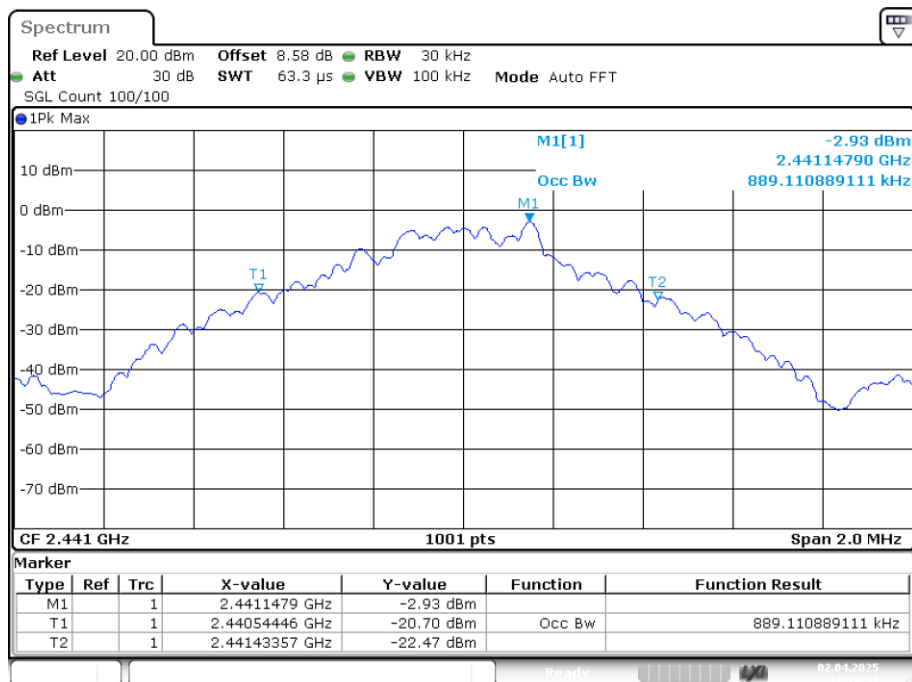


Date: 2.APR.2025 12:19:50

OBW NVNT 1-DH5 2480MHz Ant1

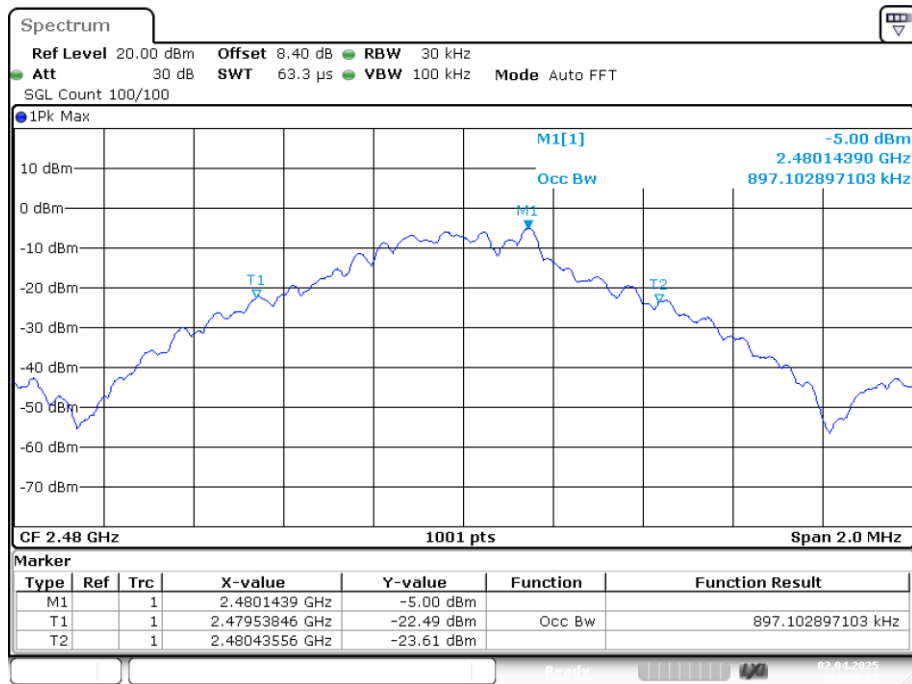


Date: 2.APR.2025 12:22:56

OBW NVNT 2-DH5 2402MHz Ant1

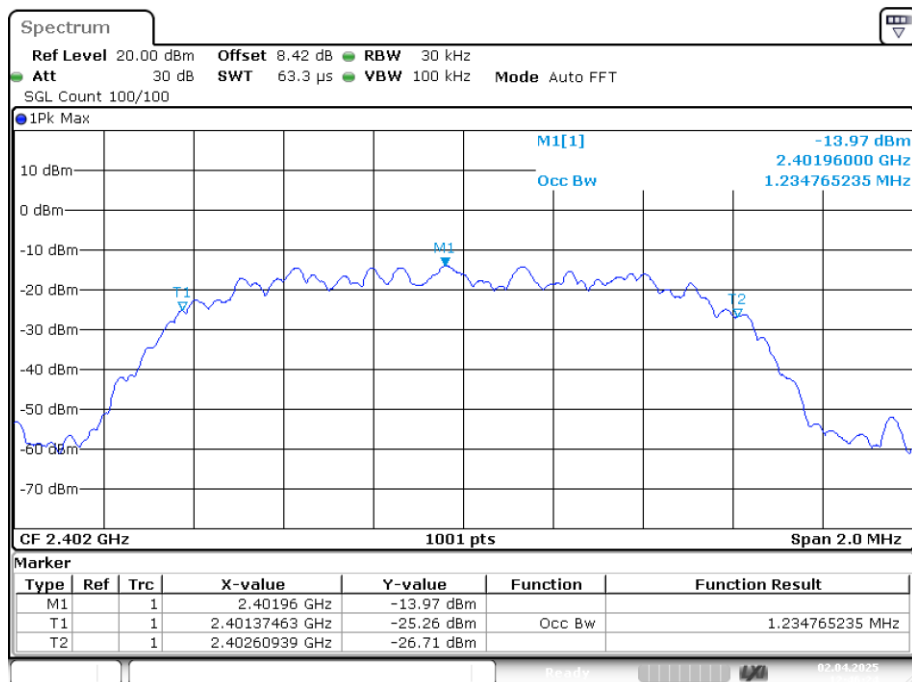


Date: 2.APR.2025 12:46:23

OBW NVNT 2-DH5 2441MHz Ant1

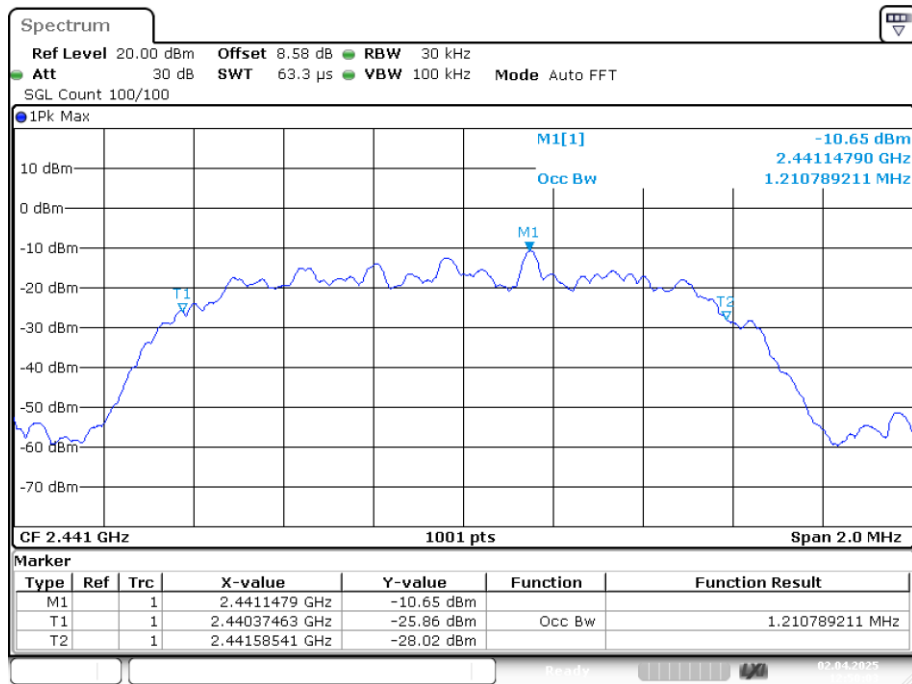


Date: 2.APR.2025 12:50:03

OBW NVNT 2-DH5 2480MHz Ant1

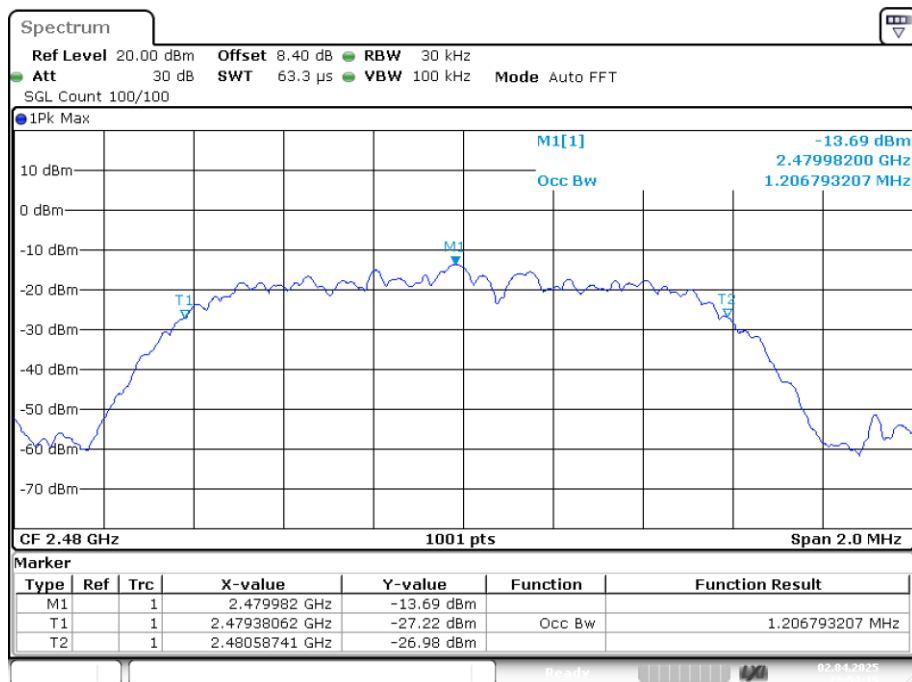


Date: 2.APR.2025 12:54:14

OBW NVNT 3-DH5 2402MHz Ant1

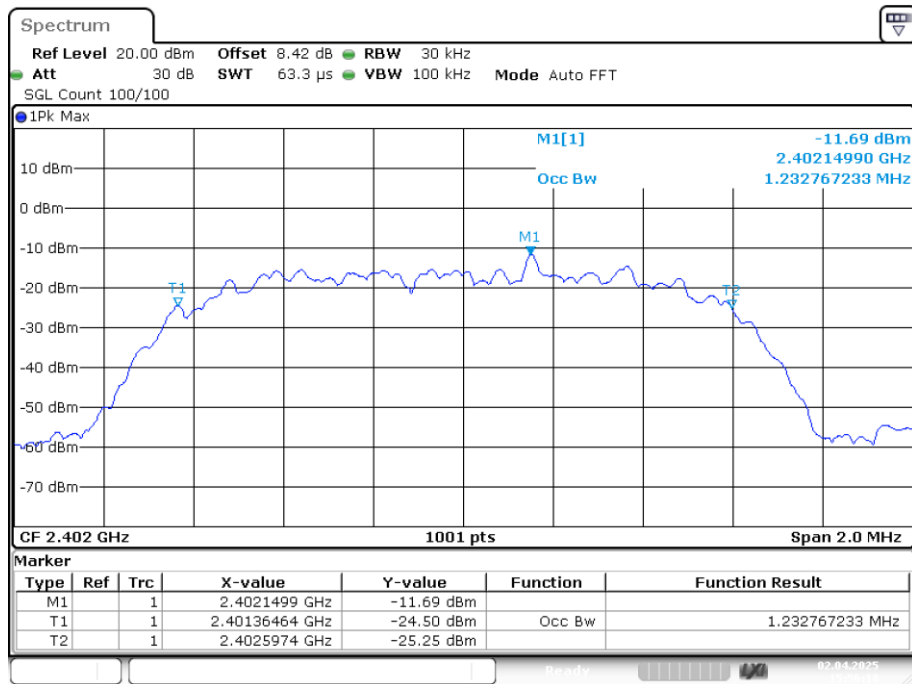


Date: 2.APR.2025 15:56:18

OBW NVNT 3-DH5 2441MHz Ant1

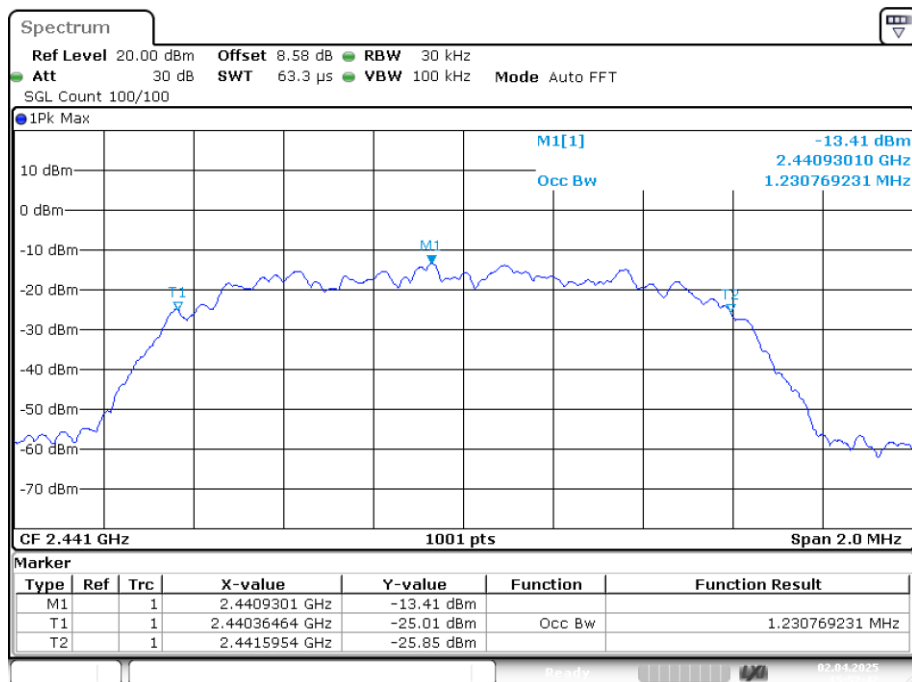

Date: 2.APR.2025 15:57:41

OBW NVNT 3-DH5 2480MHz Ant1

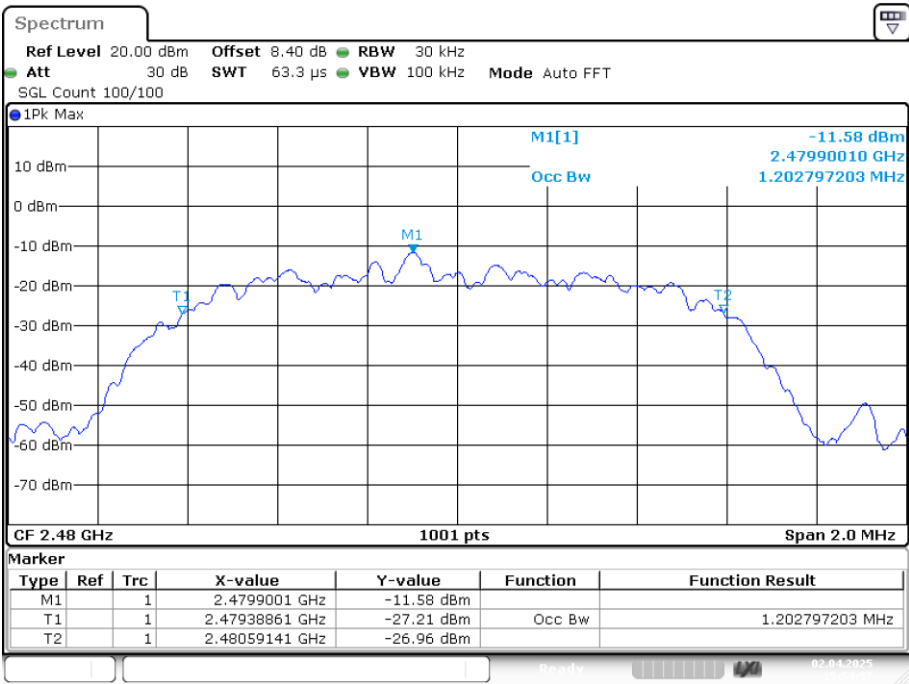

Date: 2.APR.2025 15:54:57

5. CARRIER FREQUENCY SEPARATION


5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW

5.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The carrier frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW.


5.3. Test setup



5.4. Test Result


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2440.979	2442.009	1.03	0.986	Pass
NVNT	2-DH5	Ant1	2440.889	2441.976	1.087	0.911	Pass
NVNT	3-DH5	Ant1	2440.93	2441.904	0.974	0.903	Pass

CFS NVNT 1-DH5 2441MHz Ant1

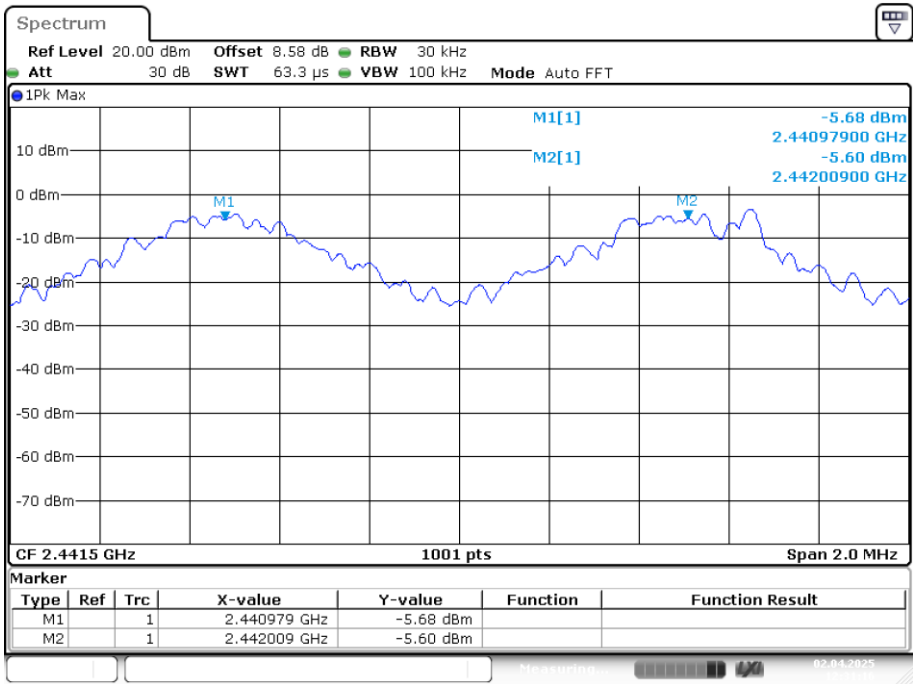


Date: 2.APR.2025 12:31:16

CFS NVNT 2-DH5 2441MHz Ant1

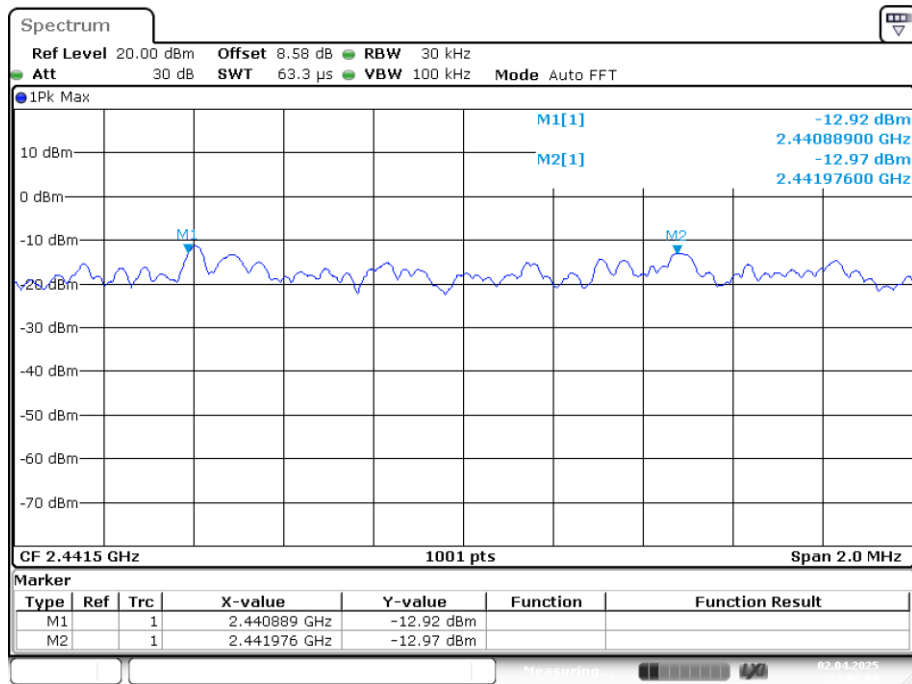

Date: 2.APR.2025 13:02:59

CFS NVNT 3-DH5 2441MHz Ant1

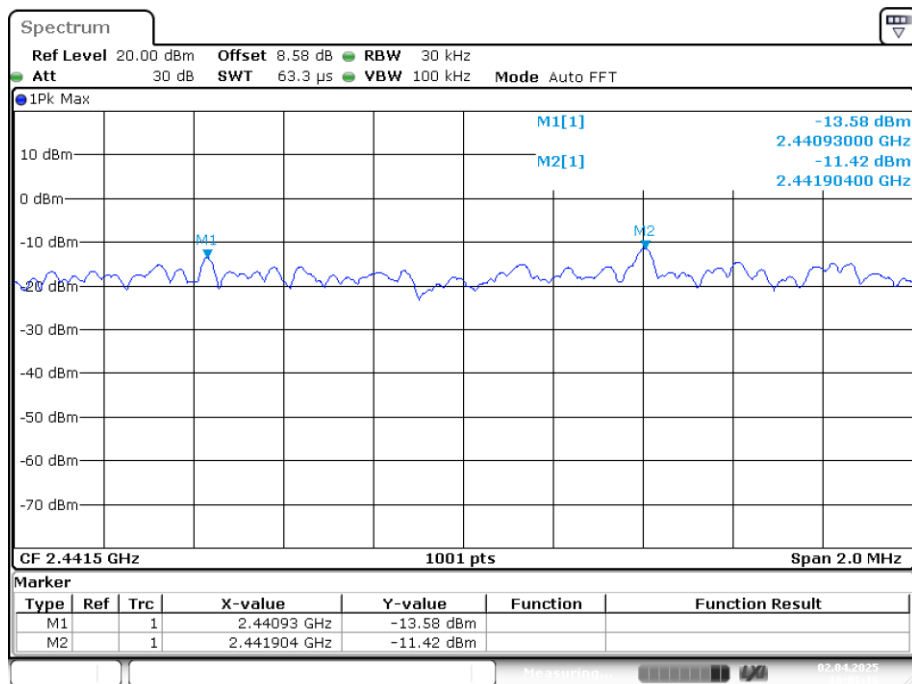

Date: 2.APR.2025 16:01:15

6. NUMBER OF HOPPING CHANNEL


6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The number of hopping channel was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW.


6.3. Test setup




6.4. Test Result

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass

Hopping No. NVNT 1-DH5 2441MHz Ant1

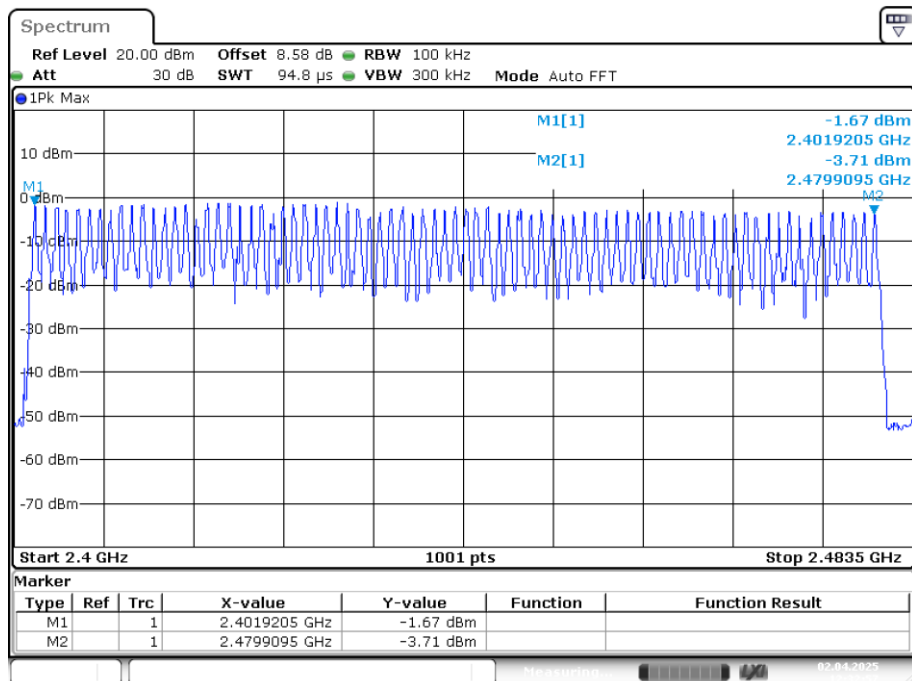


Hopping No. NVNT 2-DH5 2441MHz Ant1

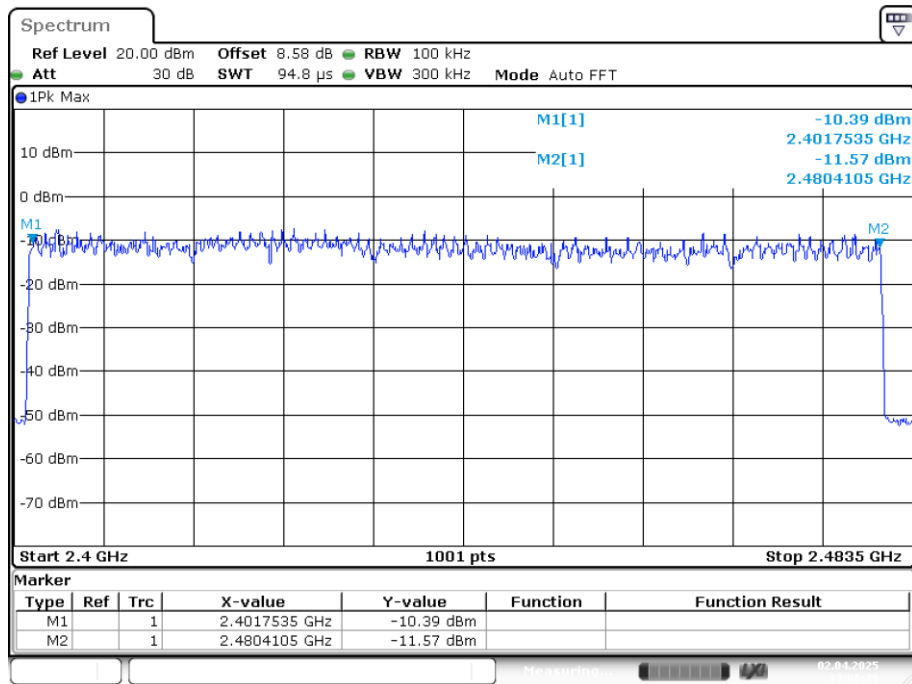

Date: 2.APR.2025 13:06:29

Hopping No. NVNT 3-DH5 2441MHz Ant1

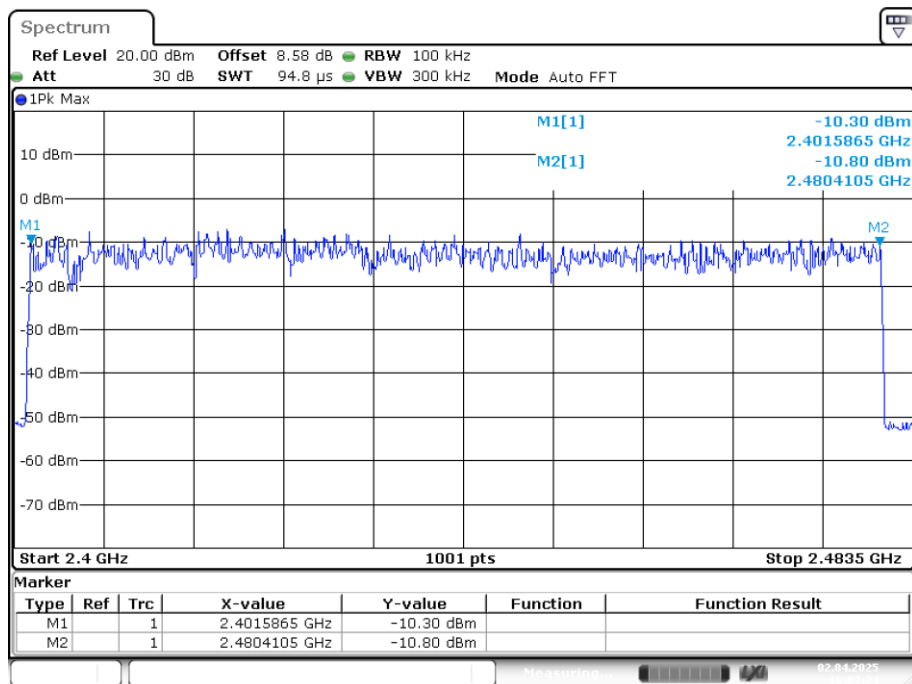

Date: 2.APR.2025 16:02:23

7. DWELL TIME

7.1. Limit

Please refer section 15.247.

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 sec- onds multiplied by the number of hopping channel employed.

7.2. Test Procedure

7.2.1. Place the EUT on the table and set it in transmitting mode.


7.2.2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

7.2.3. Set center frequency of spectrum analyzer = operating frequency.

7.2.4. Set the spectrum analyzer as RBW=1MHz, VBW=3MHz, Span = 0Hz, Sweep = auto.

7.2.5. Repeat above procedures until all frequency measured were complete.

7.3. Test setup




7.4. Test Result

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.383	2.681	7	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.639	11.473	7	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.882	89.342	31	31600	400	Pass
NVNT	2-DH1	2441	Ant1	0.385	29.26	76	31600	400	Pass
NVNT	2-DH3	2441	Ant1	1.634	57.19	35	31600	400	Pass
NVNT	2-DH5	2441	Ant1	2.883	77.841	27	31600	400	Pass
NVNT	3-DH1	2441	Ant1	0.383	34.47	90	31600	400	Pass
NVNT	3-DH3	2441	Ant1	1.634	76.798	47	31600	400	Pass
NVNT	3-DH5	2441	Ant1	2.885	77.895	27	31600	400	Pass


Note: Total Dwell Time= Pulse Time* Burst Count

Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

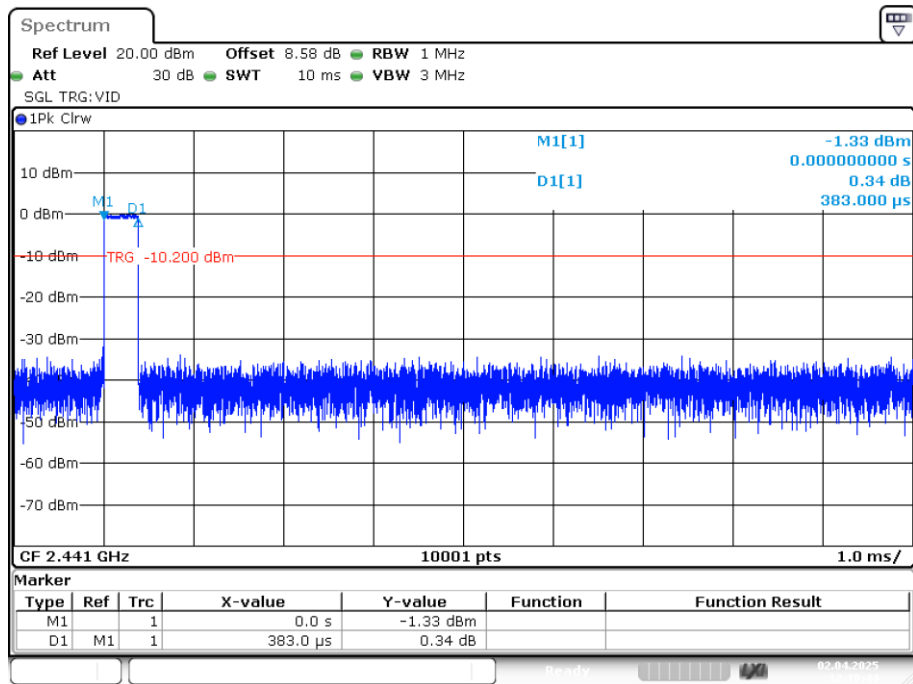


Date: 2.APR.2025 12:10:44

Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

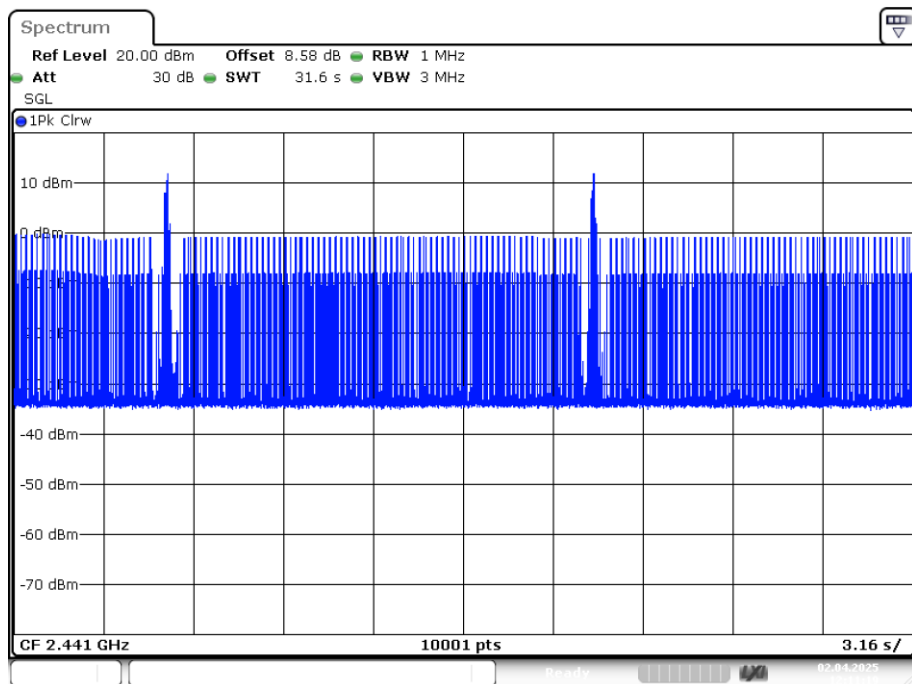


Date: 2.APR.2025 12:11:19

Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

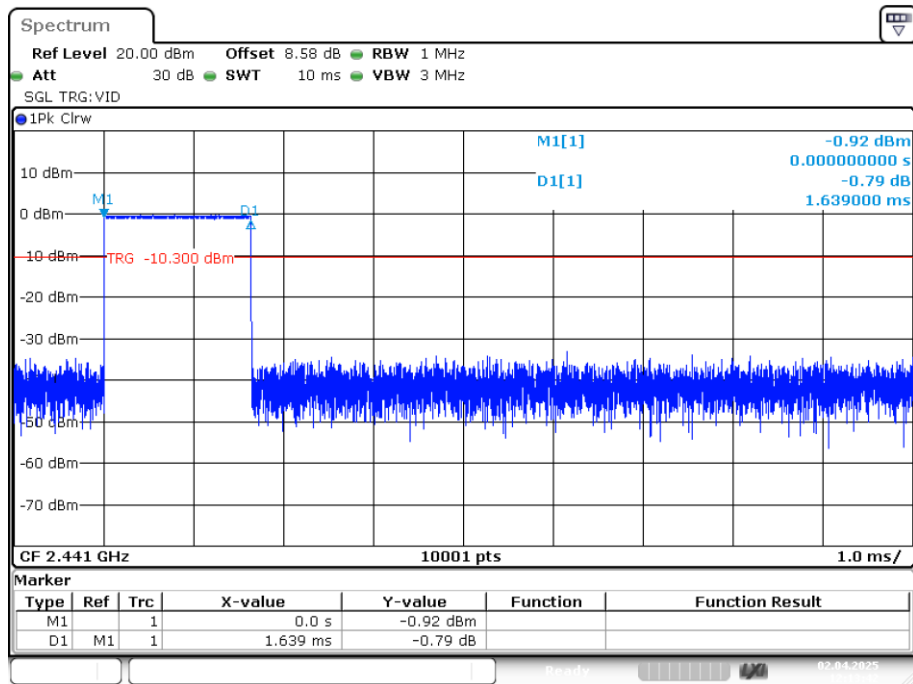


Date: 2.APR.2025 12:13:42

Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

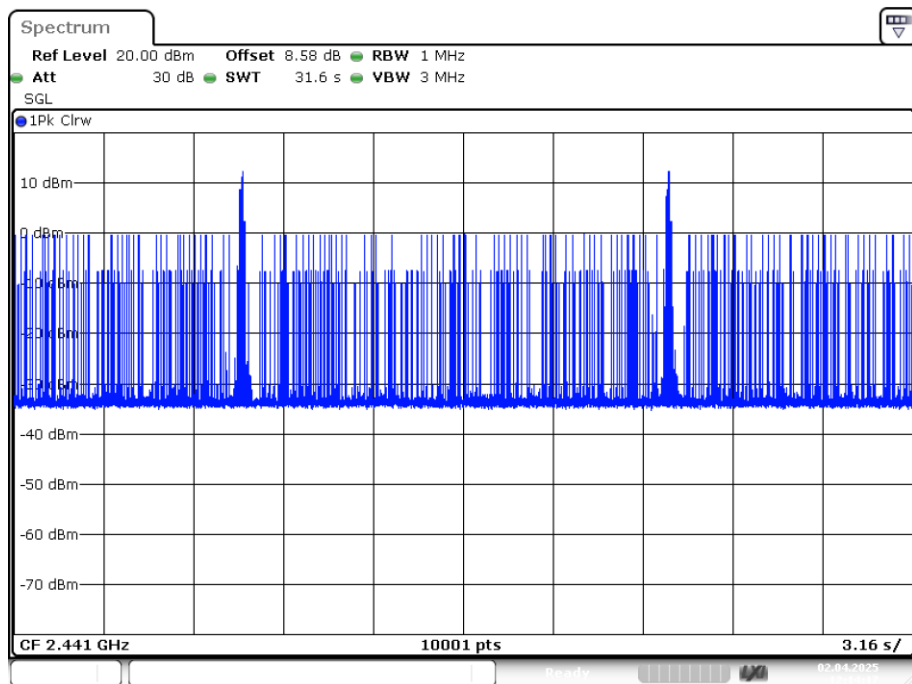


Date: 2.APR.2025 12:14:17

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

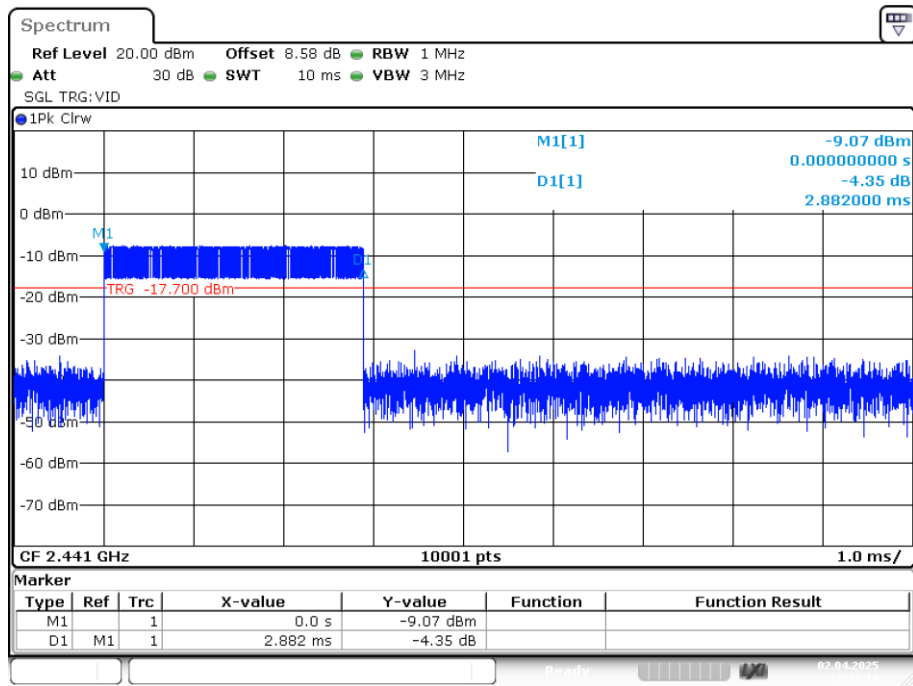


Date: 2.APR.2025 12:33:14

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

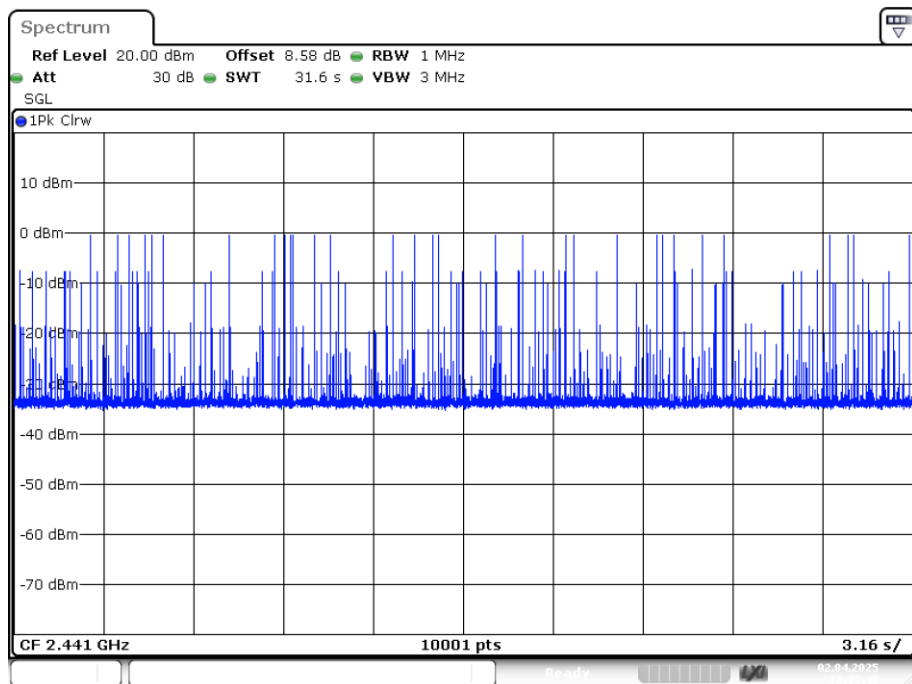


Date: 2.APR.2025 12:33:48

Dwell NVNT 2-DH1 2441MHz Ant1 One Burst

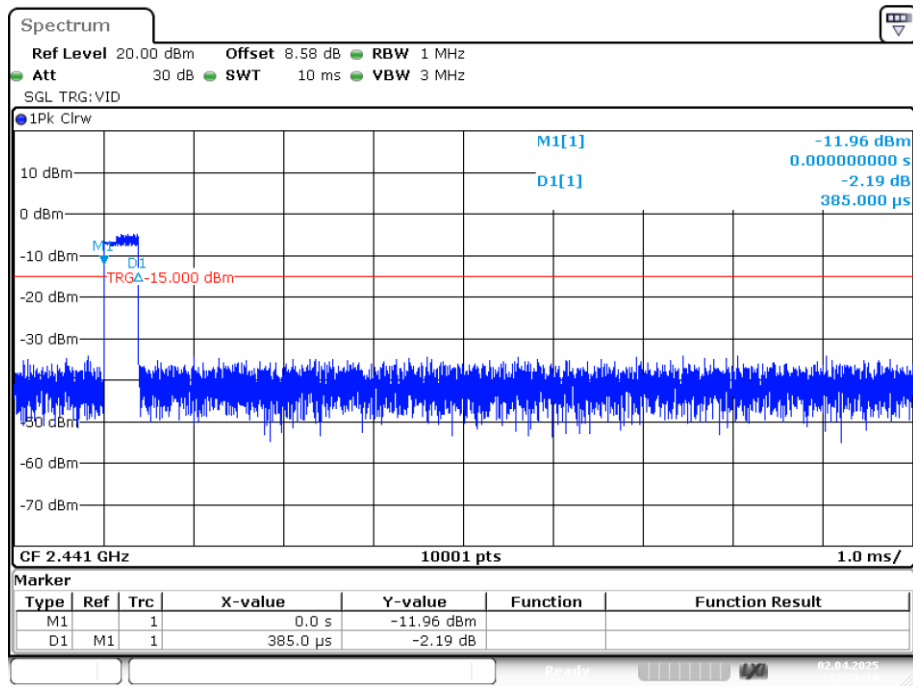


Date: 2.APR.2025 12:38:18

Dwell NVNT 2-DH1 2441MHz Ant1 Accumulated

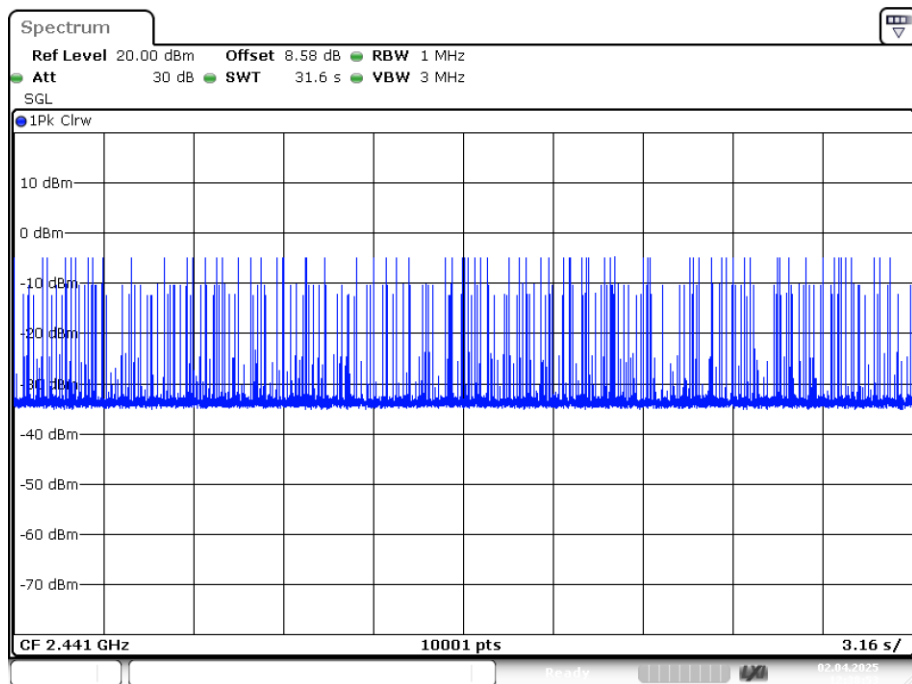


Date: 2.APR.2025 12:38:53

Dwell NVNT 2-DH3 2441MHz Ant1 One Burst

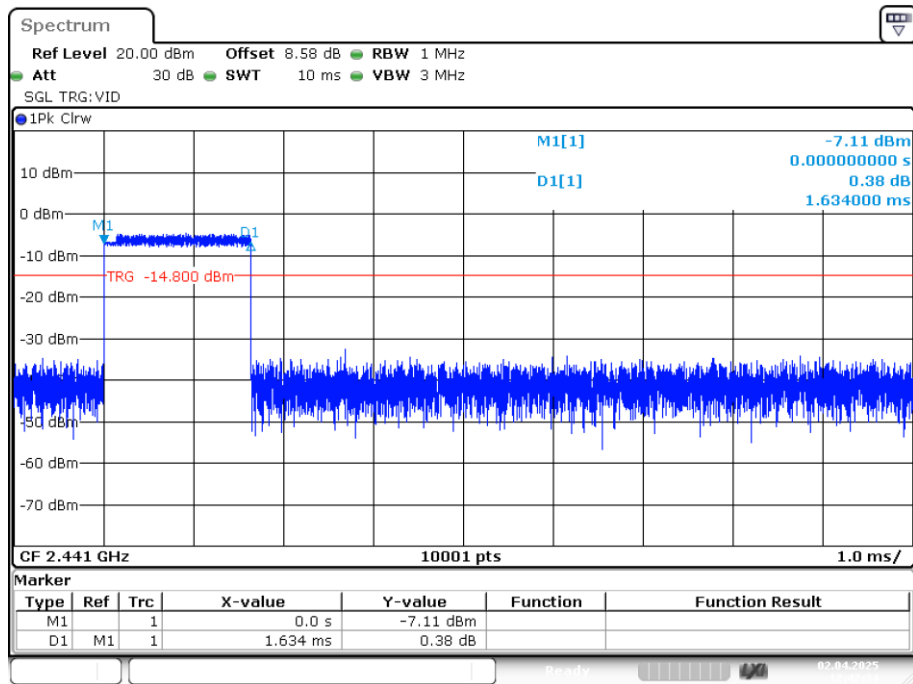


Date: 2.APR.2025 12:42:33

Dwell NVNT 2-DH3 2441MHz Ant1 Accumulated

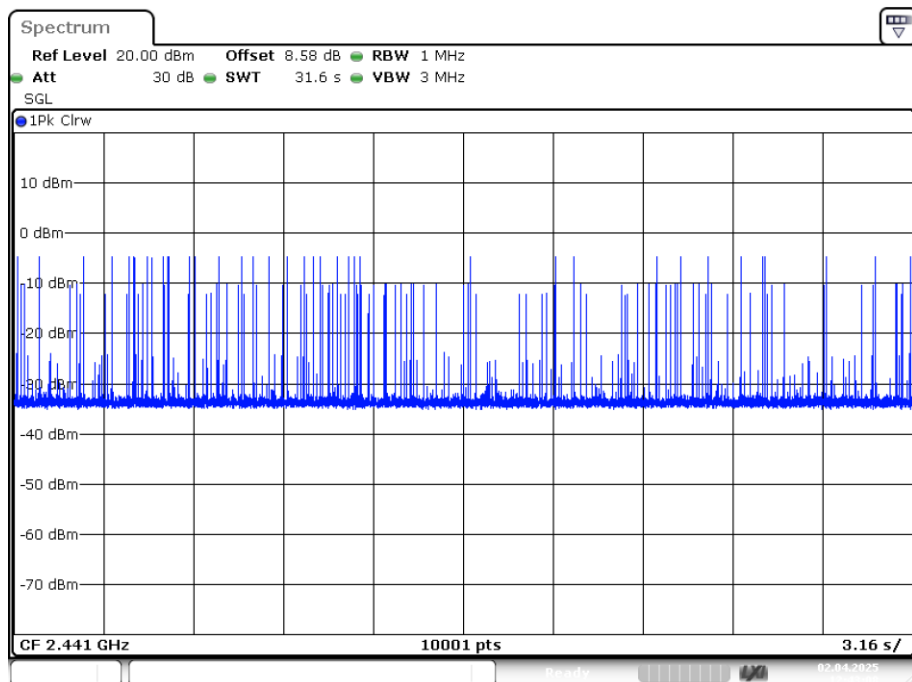


Date: 2.APR.2025 12:43:08

Dwell NVNT 2-DH5 2441MHz Ant1 One Burst

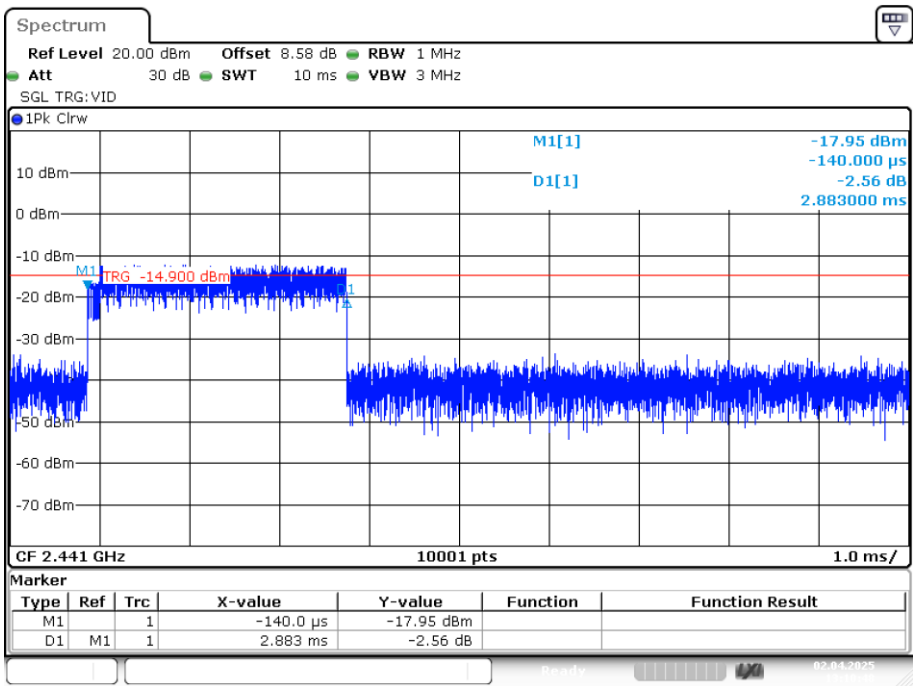


Date: 2.APR.2025 13:10:48

Dwell NVNT 2-DH5 2441MHz Ant1 Accumulated

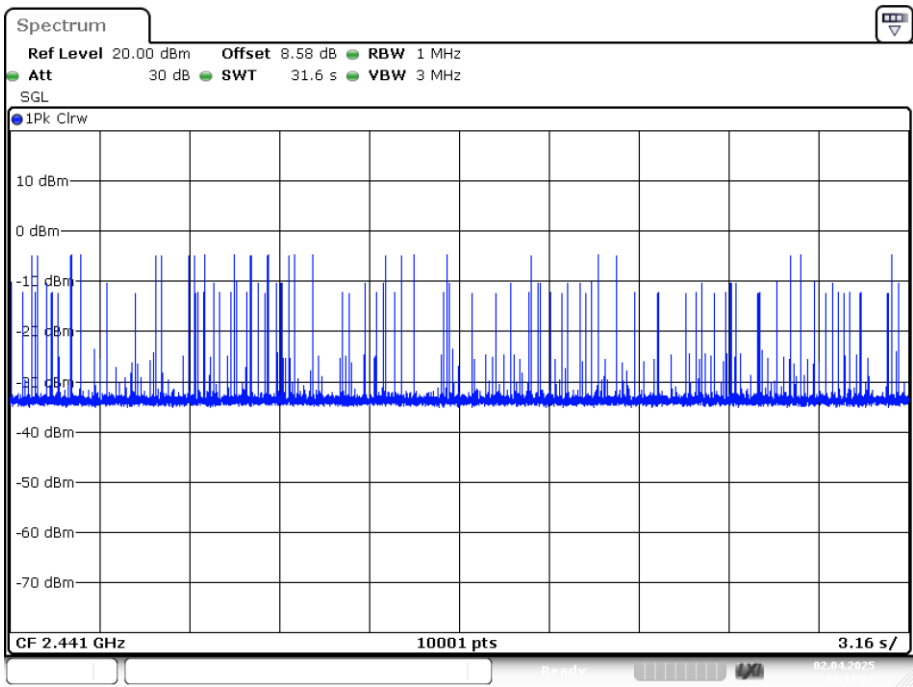


Date: 2.APR.2025 13:11:22

Dwell NVNT 3-DH1 2441MHz Ant1 One Burst

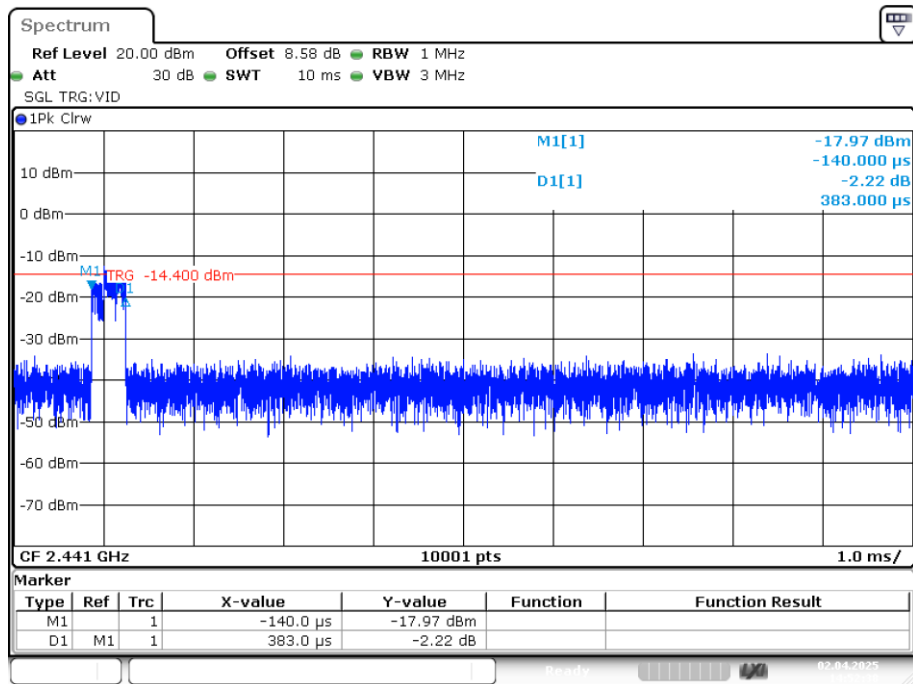


Date: 2.APR.2025 14:52:38

Dwell NVNT 3-DH1 2441MHz Ant1 Accumulated

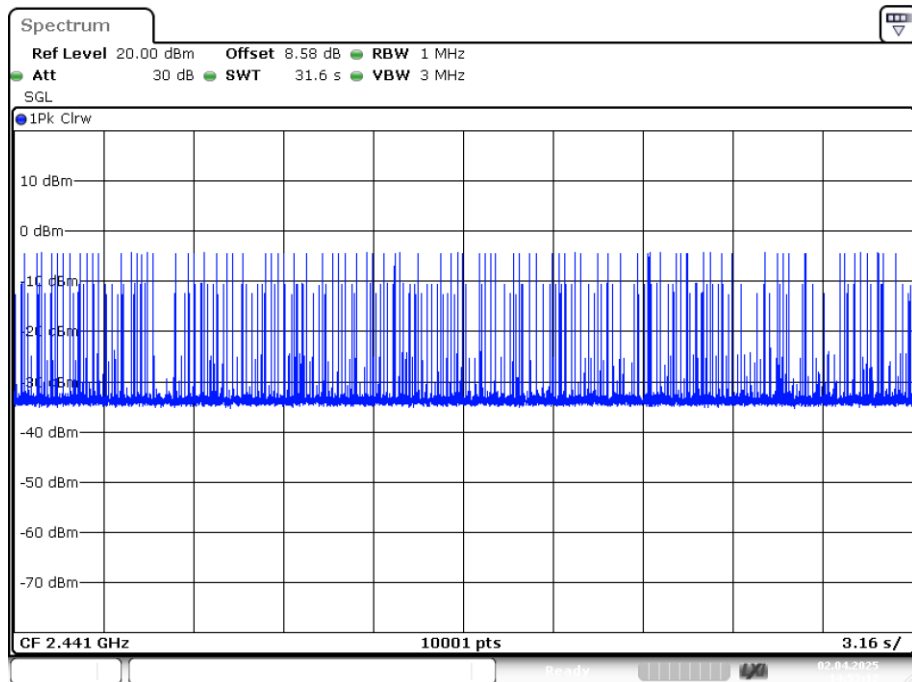


Date: 2.APR.2025 14:53:12

Dwell NVNT 3-DH3 2441MHz Ant1 One Burst

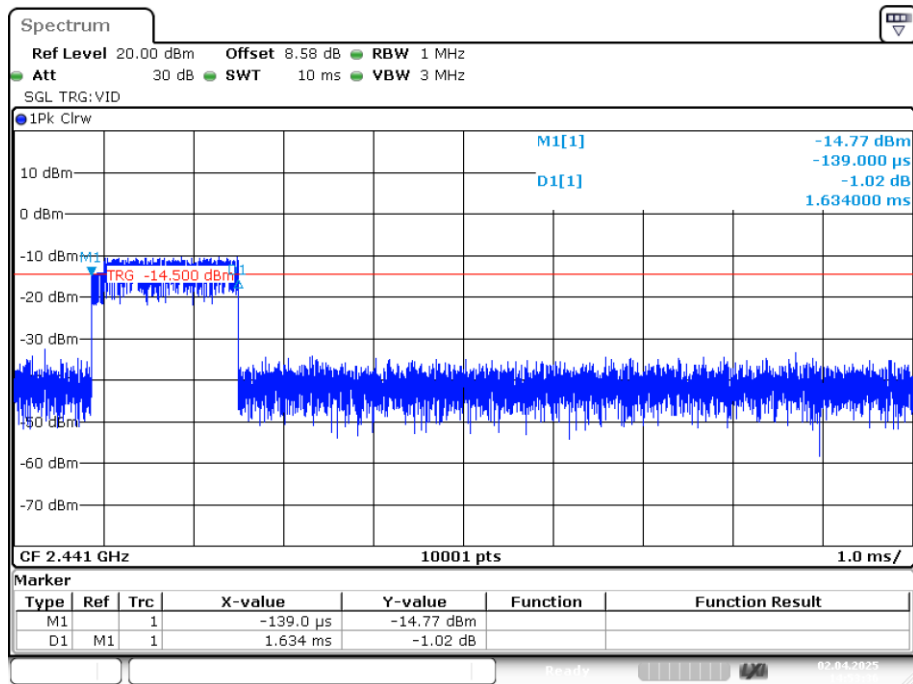


Date: 2.APR.2025 14:53:37

Dwell NVNT 3-DH3 2441MHz Ant1 Accumulated

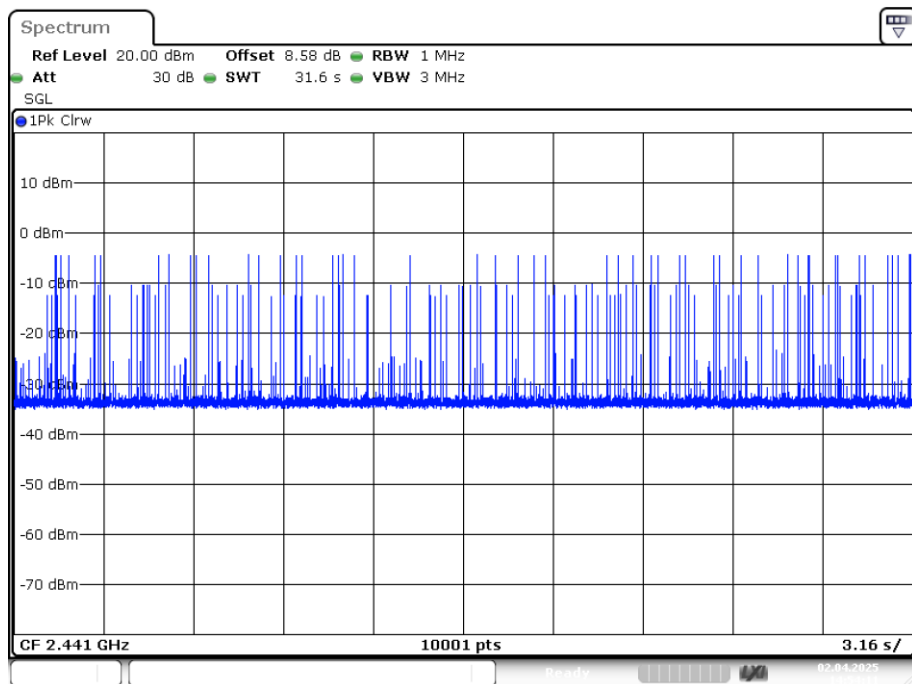


Date: 2.APR.2025 14:54:11

Dwell NVNT 3-DH5 2441MHz Ant1 One Burst

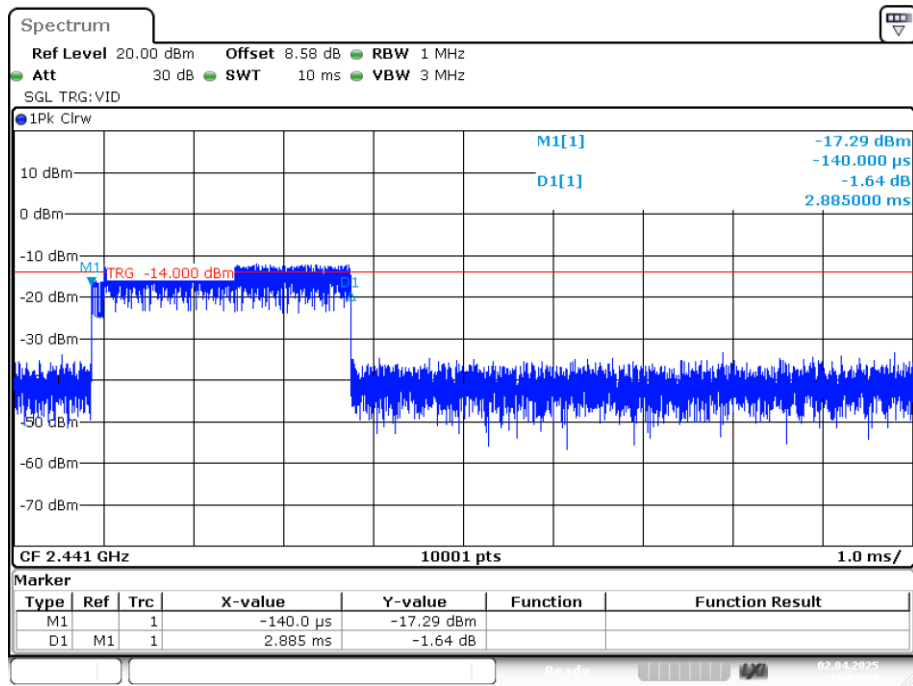

Date: 2.APR.2025 16:02:50

Dwell NVNT 3-DH5 2441MHz Ant1 Accumulated

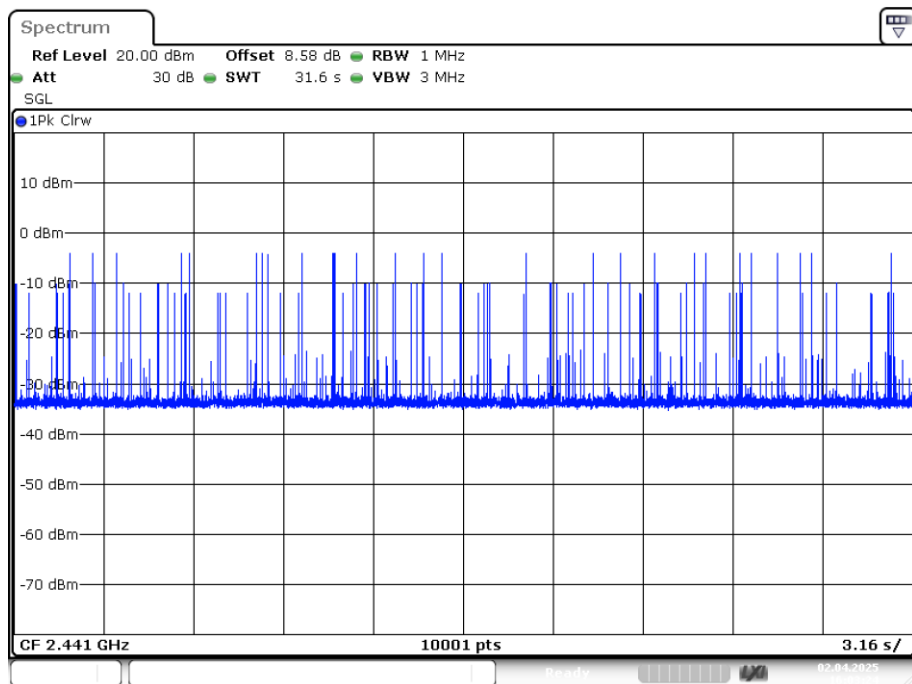

Date: 2.APR.2025 16:03:25

8. RADIATED SPURIOUS EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
0.009-0.490	300	2400/F(KHz)	/
0.490-1.705	30	24000/F(KHz)	/
1.705-30	30	30	29.5
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: The peak limit is 20 dB higher than the average limit

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength ($\mu\text{V/m}$ at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	$6.37/F$ (F in kHz)	300
490 - 1705 kHz	$63.7/F$ (F in kHz)	30
1.705 - 30 MHz	0.08	30


Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

8.2. Test Procedure


- (1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber.
- (2) Setup EUT and simulator as shown in section 1.4 and 6.1
- (3) Test antenna was located 3m from the EUT on an adjustable mast. Below pre-scan procedure was first performed in order to find prominent radiated emissions.
 - (a) Change work frequency or channel of device if practicable.
 - (b) Change modulation type of device if practicable.
- (c) Rotated EUT through three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions
- (4) Spectrum frequency from 9KHz to 25GHz (tenth harmonic of fundamental frequency) was investigated
- (5) For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.
- (6) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1MHz, VBW is set at 3MHz for Peak measure; RBW is set at 1MHz, VBW is set at 10Hz for Average measure.

8.3. Test setup


8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 30MHz

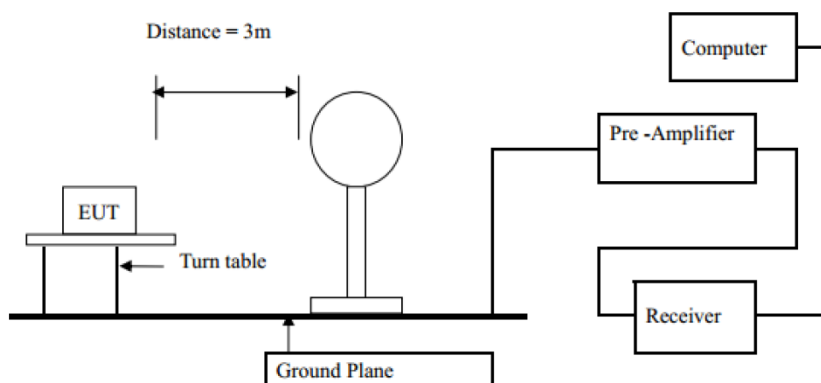

8.2.1 In 3m Anechoic Chamber Test Setup Diagram for below 1GHz

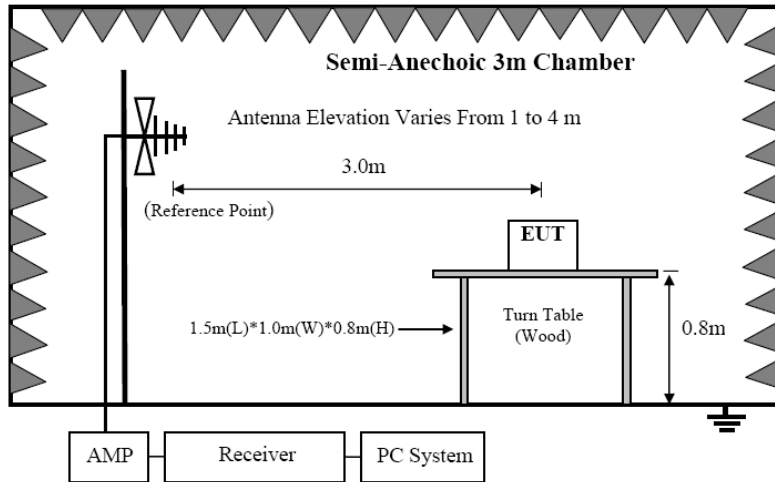

8.2.2 In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

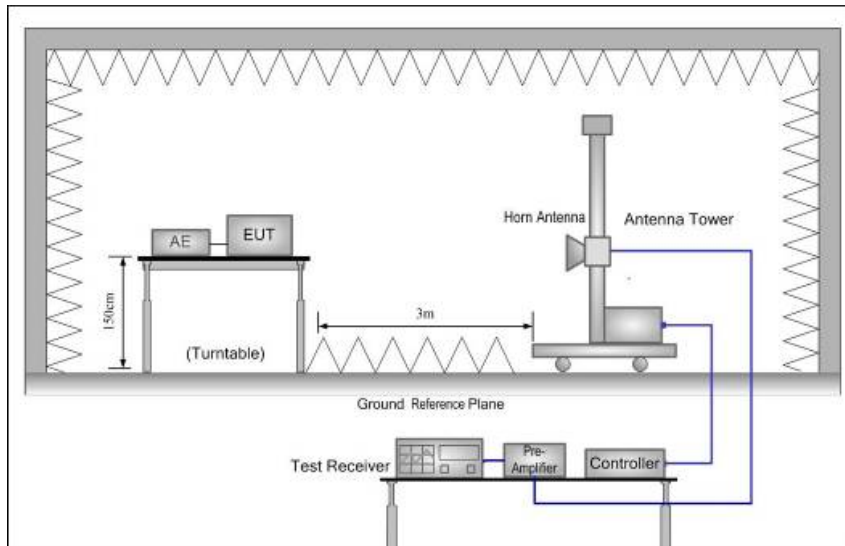

Note: For harmonic emissions test a appropriate high pass filter was inserted in the input port of AMP.

8.4. Test Result


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.
Detailed information please see the following page.

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

From 30MHz to 1000MHz: Conclusion: PASS


Vertical:

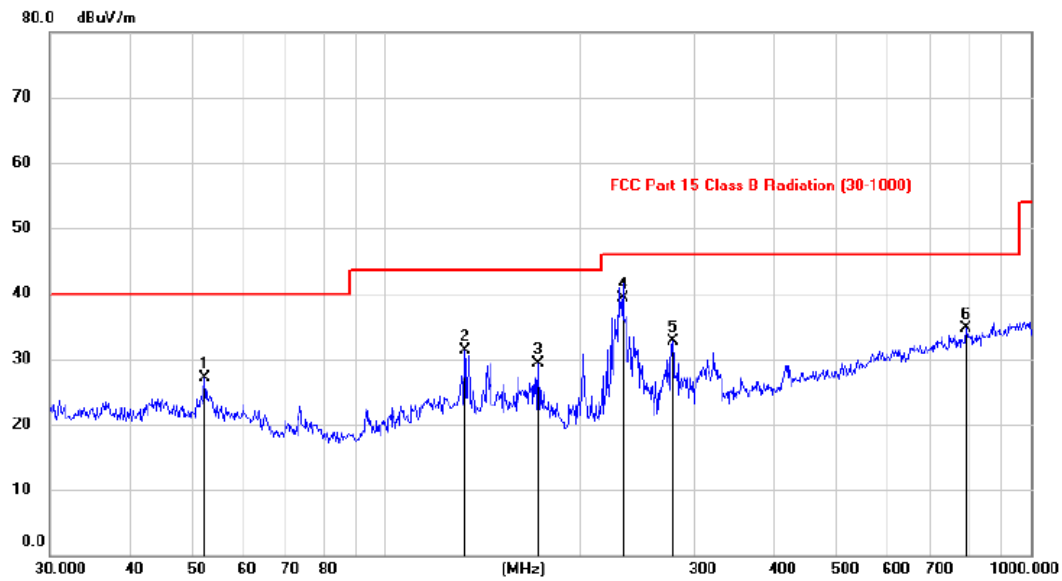

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	
										Comment
1		52.2383	13.19	13.84	27.03	40.00	-12.97			peak
2		132.6228	17.46	13.78	31.24	43.50	-12.26			peak
3		172.0346	15.46	13.79	29.25	43.50	-14.25			peak
4	*	232.9122	26.88	12.38	39.26	46.00	-6.74			QP
5		278.1643	19.20	13.52	32.72	46.00	-13.28			peak
6		795.6245	11.75	22.87	34.62	46.00	-11.38			peak

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

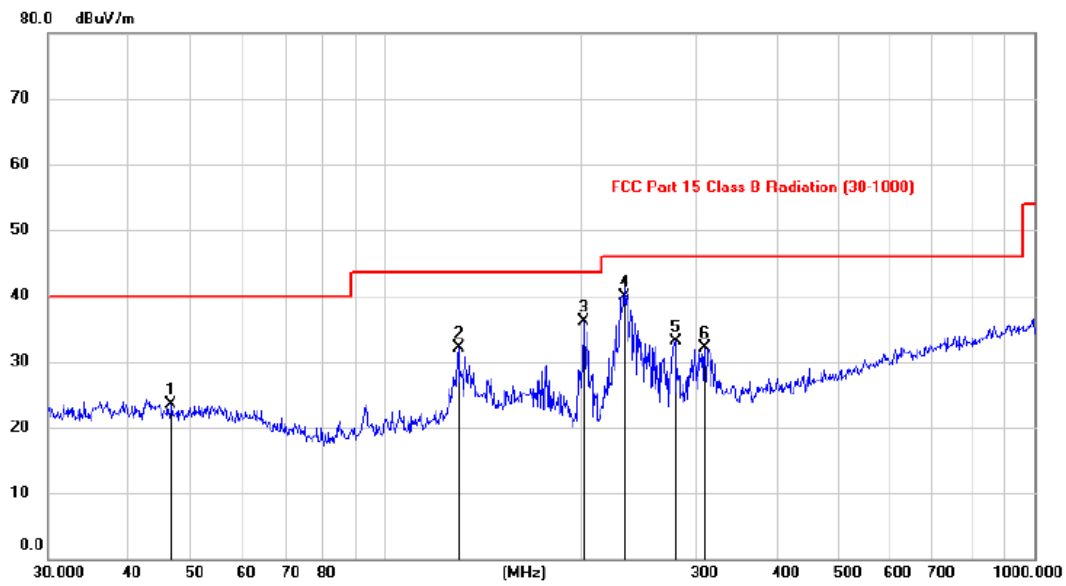Horizontal:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		46.6554	9.37	14.09	23.46	40.00	-16.54	peak		
2		129.0295	18.62	13.54	32.16	43.50	-11.34	peak		
3		201.6048	25.12	10.93	36.05	43.50	-7.45	peak		
4	*	232.6134	27.47	12.37	39.84	46.00	-6.16	QP		
5		279.7293	19.60	13.56	33.16	46.00	-12.84	peak		
6		311.0138	17.76	14.37	32.13	46.00	-13.87	peak		

Note:1. *:Maximum data; x:Over limit; !:over margin.

2.Measurement=Reading Level+Correct Factor; Correct Factor=Antenna Factor+Cable Loss.

Remark: All modes have been tested, and only worst data of GFSK 2402MHz was listed in this report.

From 1G-25GHz

Test Mode: GFSK TX Low									
Freq (MHz)	Read Level (dBuV/m)	Polar (H/V)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804	44.79	V	33.95	10.18	34.26	54.66	74	-19.34	PK
4804	35.72	V	33.95	10.18	34.26	45.59	54	-8.41	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
4804	46.32	H	33.95	10.18	34.26	56.19	74	-17.81	PK
4804	34.00	H	33.95	10.18	34.26	43.87	54	-10.13	AV
7206	/	/	/	/	/	/	/	/	/
9608	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX Mid									
4882	44.35	V	33.93	10.2	34.29	54.19	74	-19.81	PK
4882	36.31	V	33.93	10.2	34.29	46.15	54	-7.85	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
4882	43.77	H	33.93	10.2	34.29	53.61	74	-20.39	PK
4882	36.23	H	33.93	10.2	34.29	46.07	54	-7.93	AV
7323	/	/	/	/	/	/	/	/	/
9764	/	/	/	/	/	/	/	/	/
Test Mode: GFSK TX High									
4960	45.60	V	33.93	10.2	34.29	55.44	74	-18.56	PK
4960	34.28	V	33.93	10.2	34.29	44.12	54	-9.88	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
4960	46.74	H	33.93	10.2	34.29	56.58	74	-17.42	PK
4960	35.39	H	33.93	10.2	34.29	45.23	54	-8.77	AV
7440	/	/	/	/	/	/	/	/	/
9920	/	/	/	/	/	/	/	/	/
Note: 1, Result = Read level + Antenna factor + cable loss-Amp factor 2, All the other emissions not reported were too low to read and deemed to comply with FCC limit.									

Note:

Note:

9. CONDUCTED RF SPURIOUS EMISSION

9.1. Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20dB.

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

9.2. Test Procedure


The test receiver set RBW = 100kHz, VBW $\geq$ 3*RBW =300kHz, sweep time set auto, detail see the test plot

9.3. Test setup




9.4. Test Result

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Ref

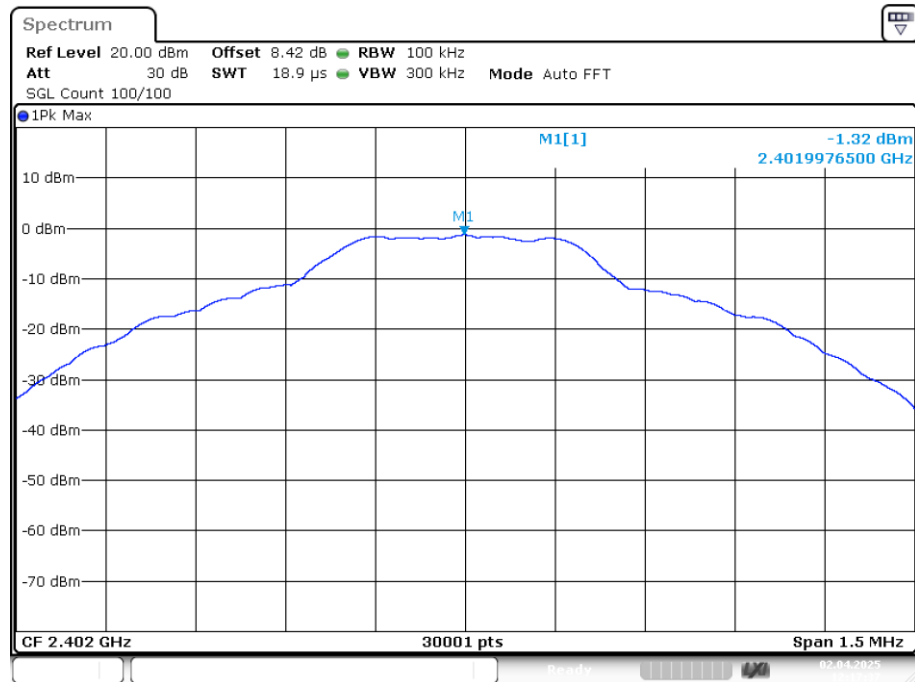


Date: 2.APR.2025 12:17:38

Tx. Spurious NVNT 1-DH5 2402MHz Ant1 Emission

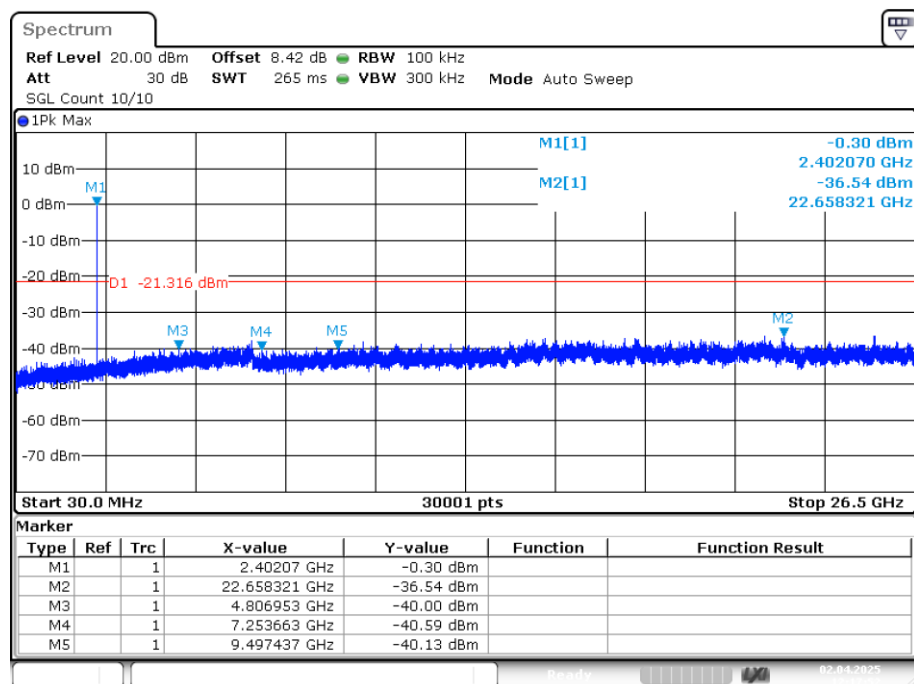


Date: 2.APR.2025 12:17:51


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Ref

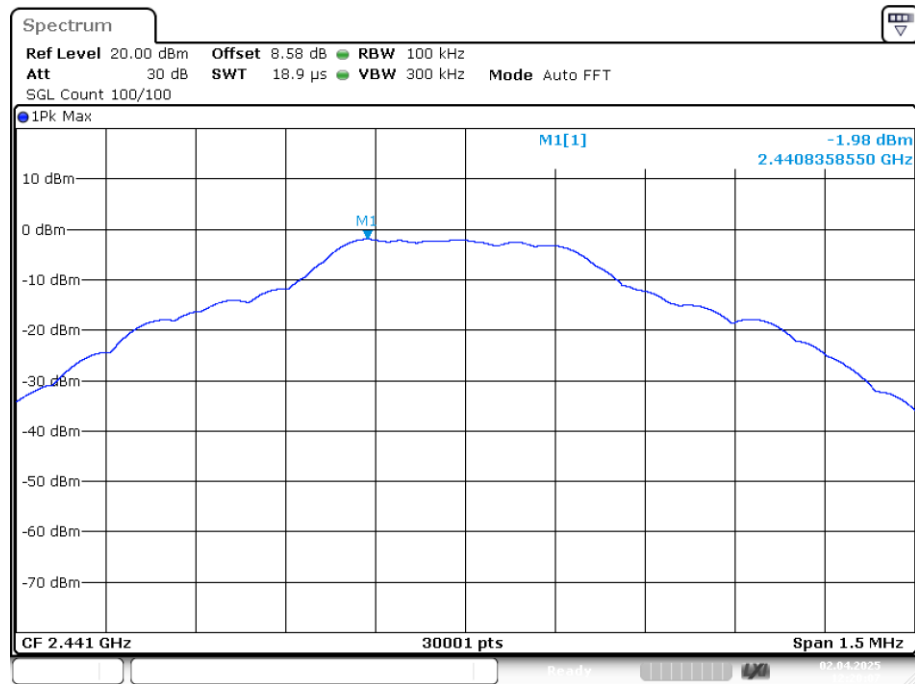


Tx. Spurious NVNT 1-DH5 2441MHz Ant1 Emission

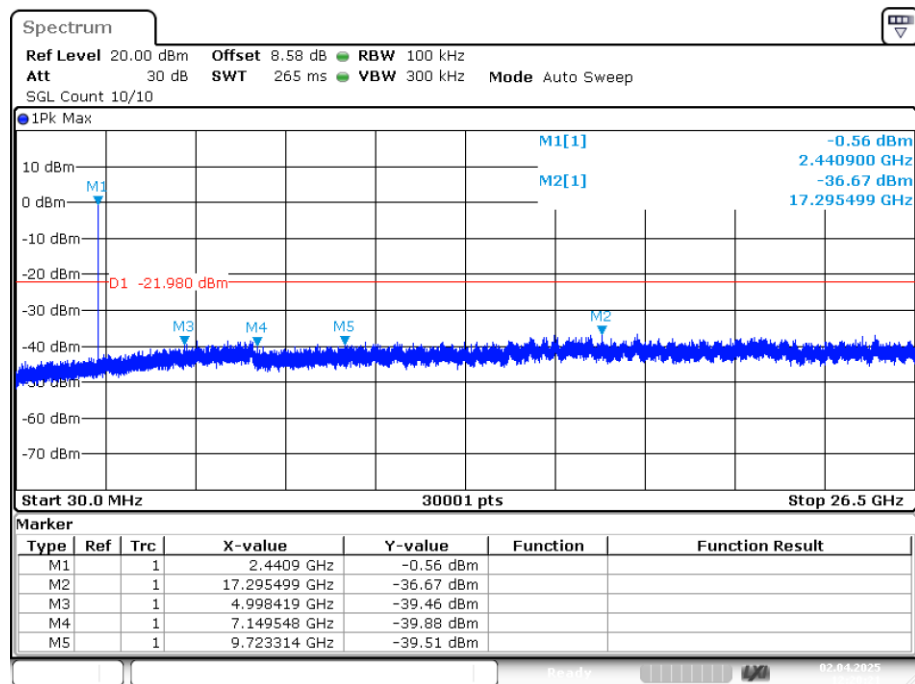


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Ref

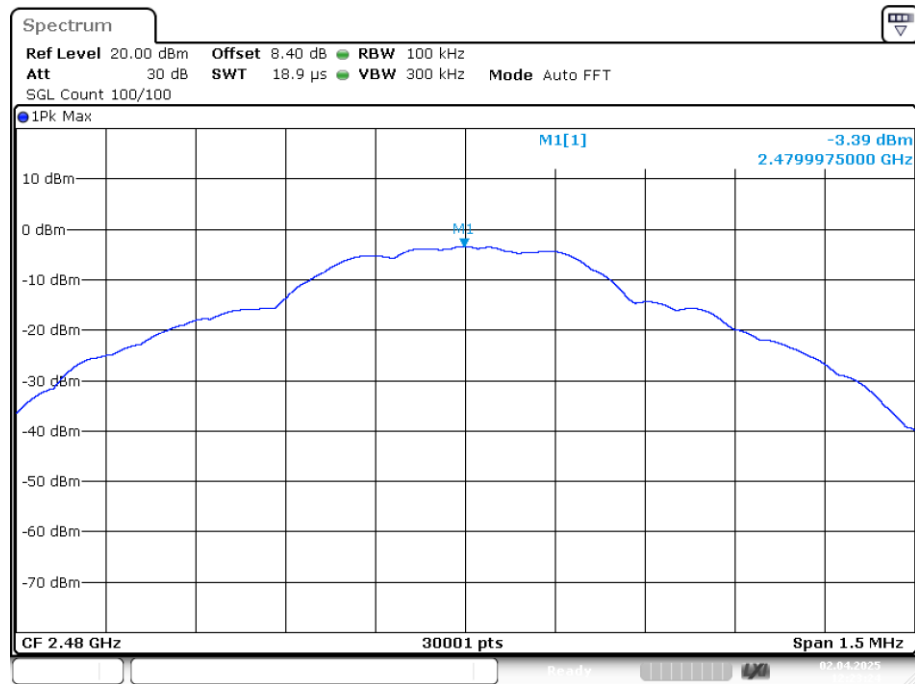


Tx. Spurious NVNT 1-DH5 2480MHz Ant1 Emission

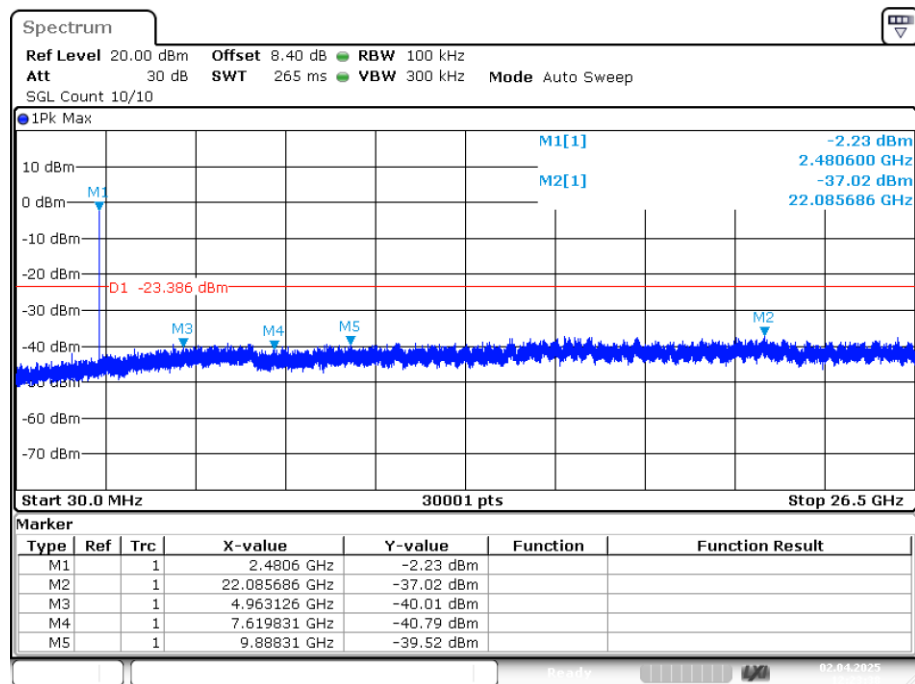


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Ref

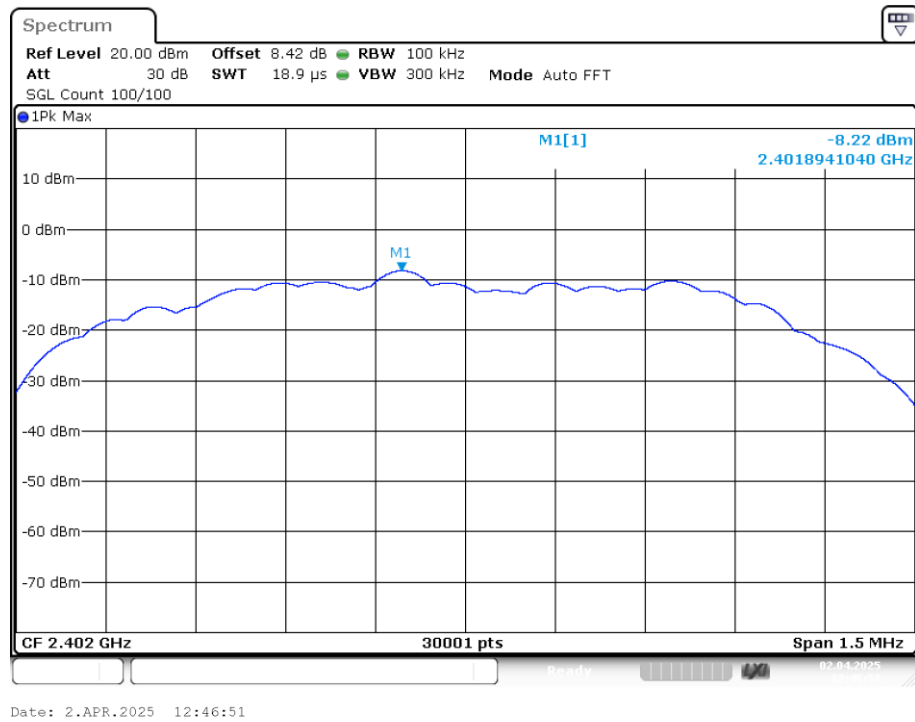


Tx. Spurious NVNT 2-DH5 2402MHz Ant1 Emission

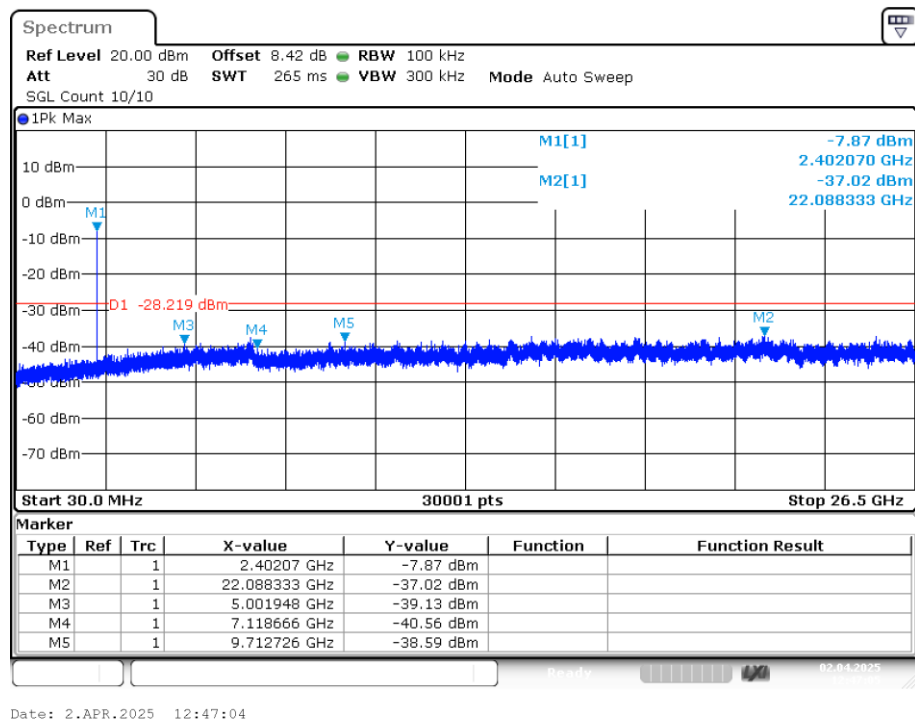


Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Ref

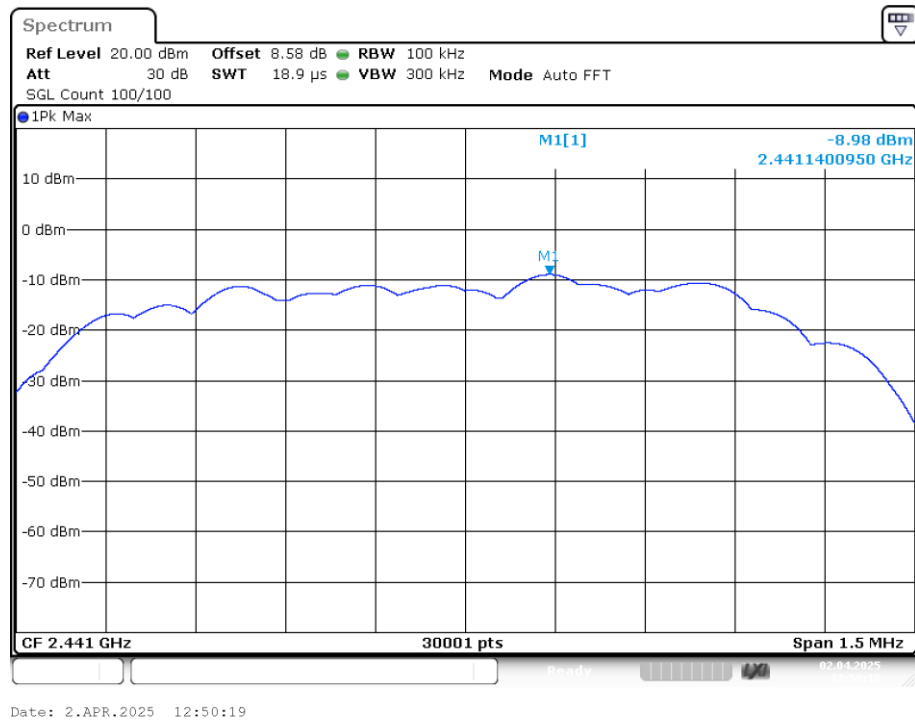

Tx. Spurious NVNT 2-DH5 2441MHz Ant1 Emission

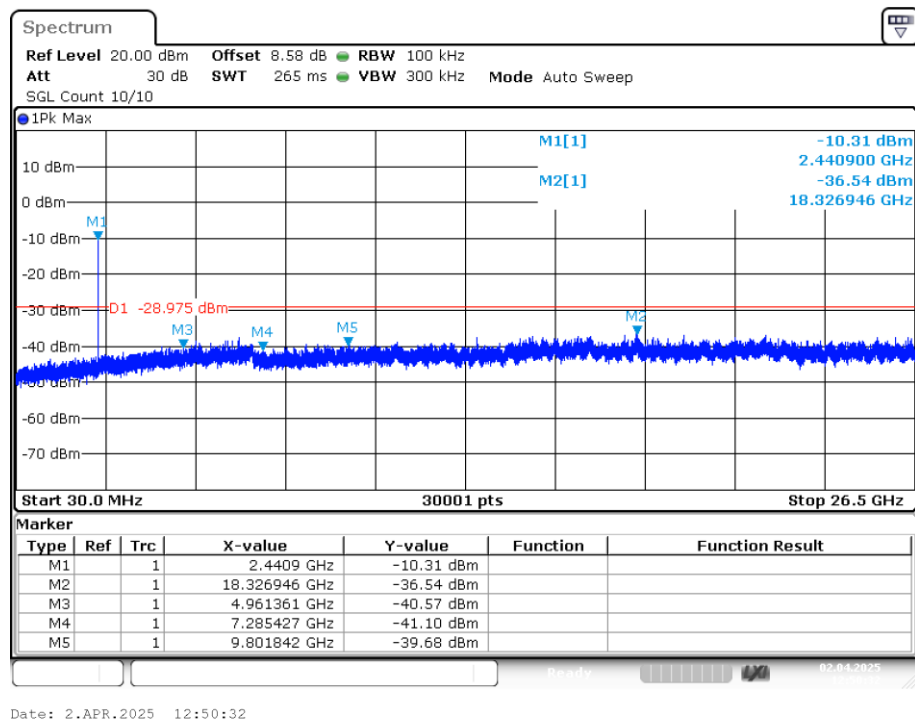


Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Ref

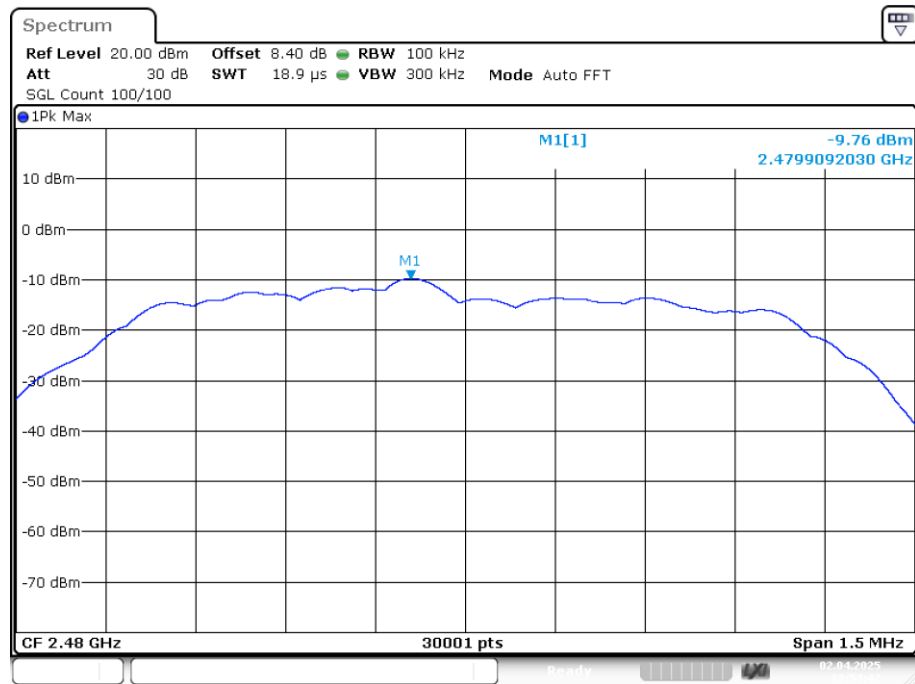


Date: 2.APR.2025 12:54:42

Tx. Spurious NVNT 2-DH5 2480MHz Ant1 Emission

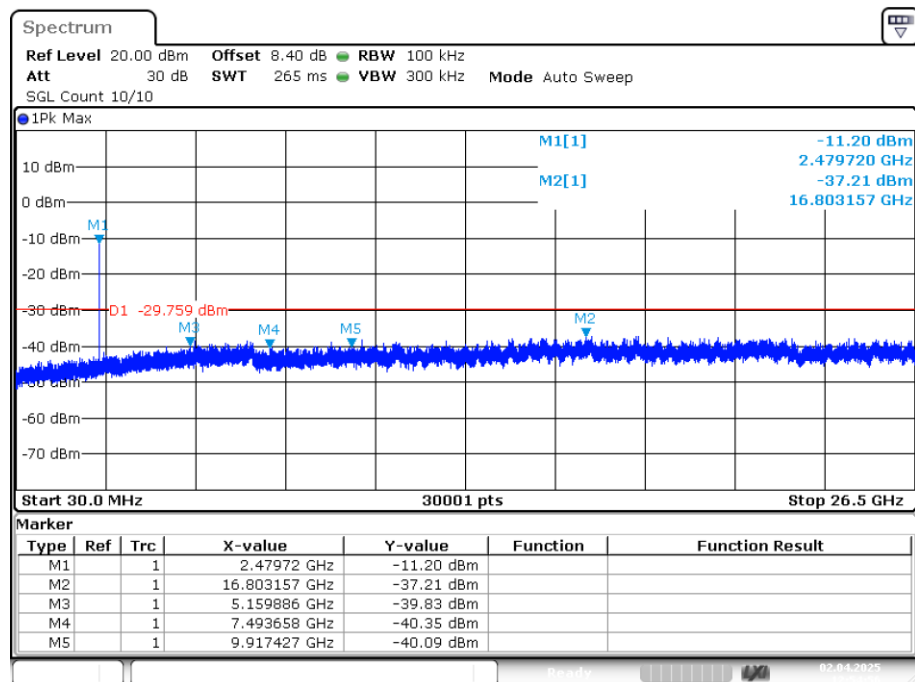


Date: 2.APR.2025 12:54:56


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Ref

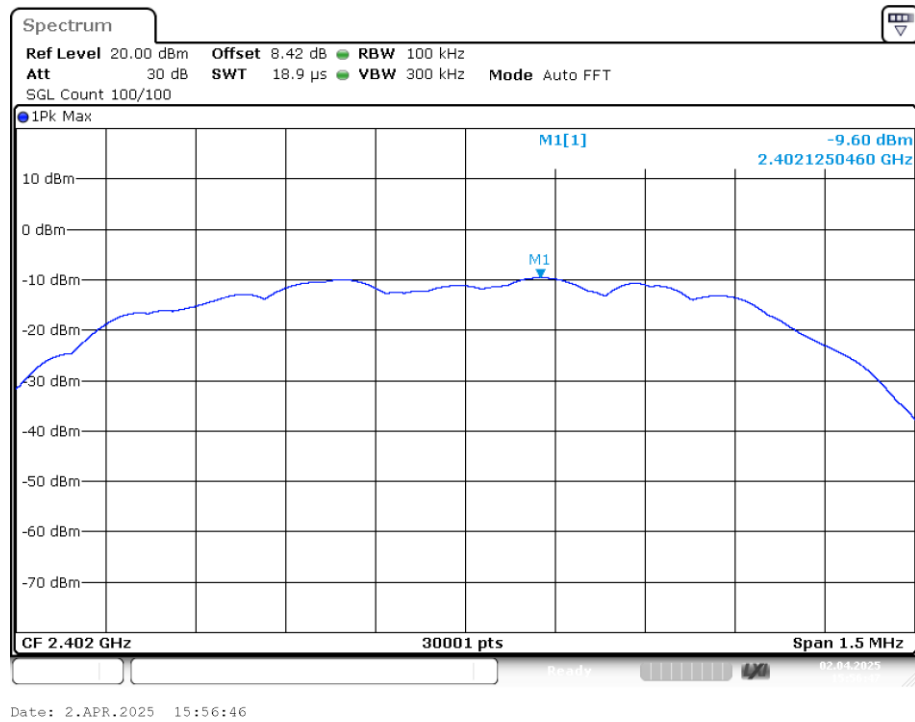


Tx. Spurious NVNT 3-DH5 2402MHz Ant1 Emission

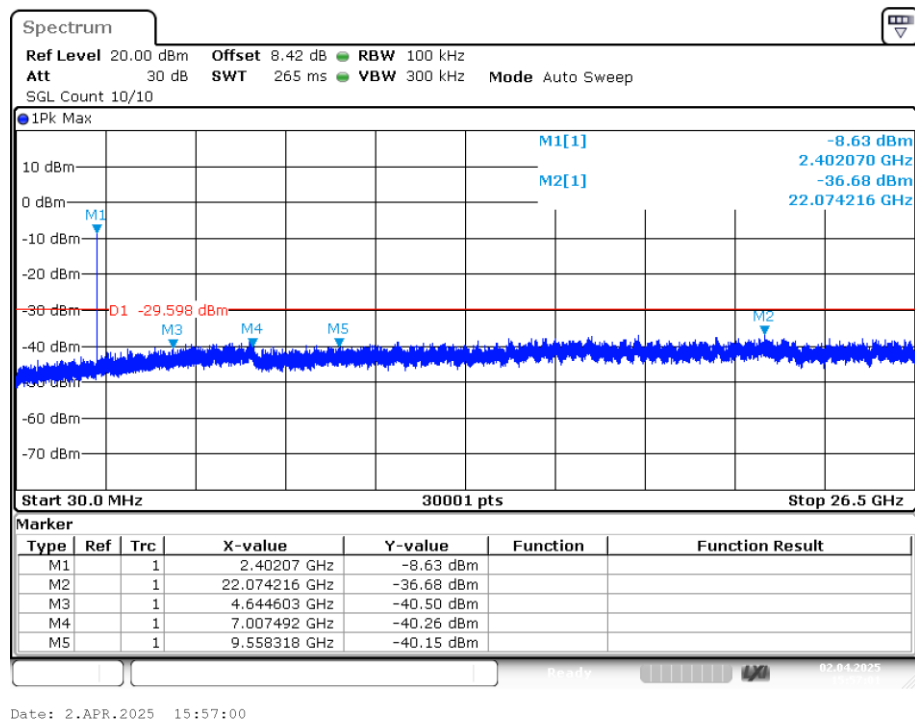


Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Ref

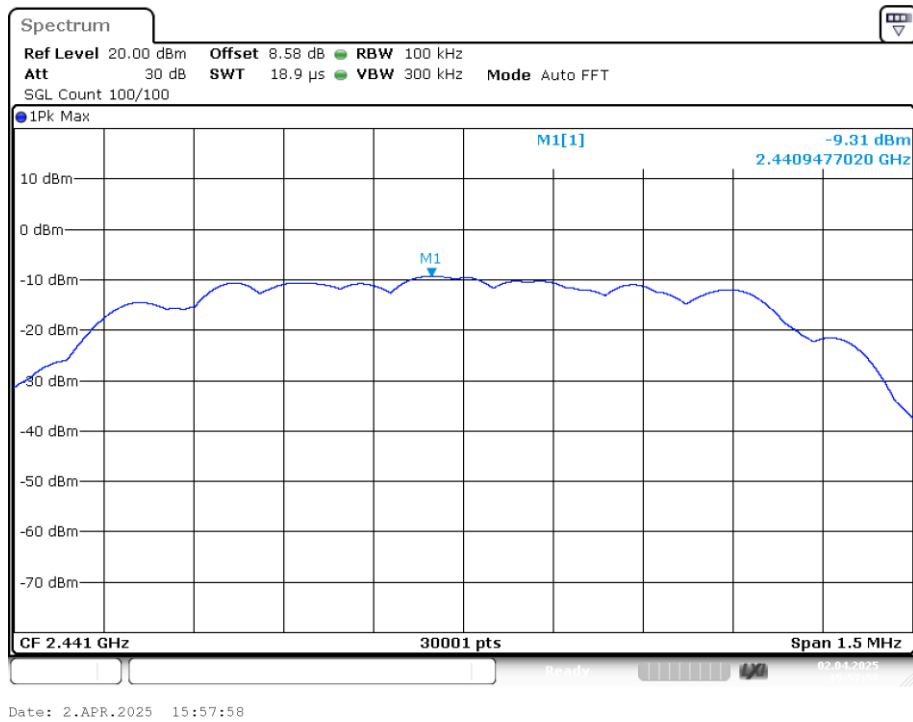

Tx. Spurious NVNT 3-DH5 2441MHz Ant1 Emission

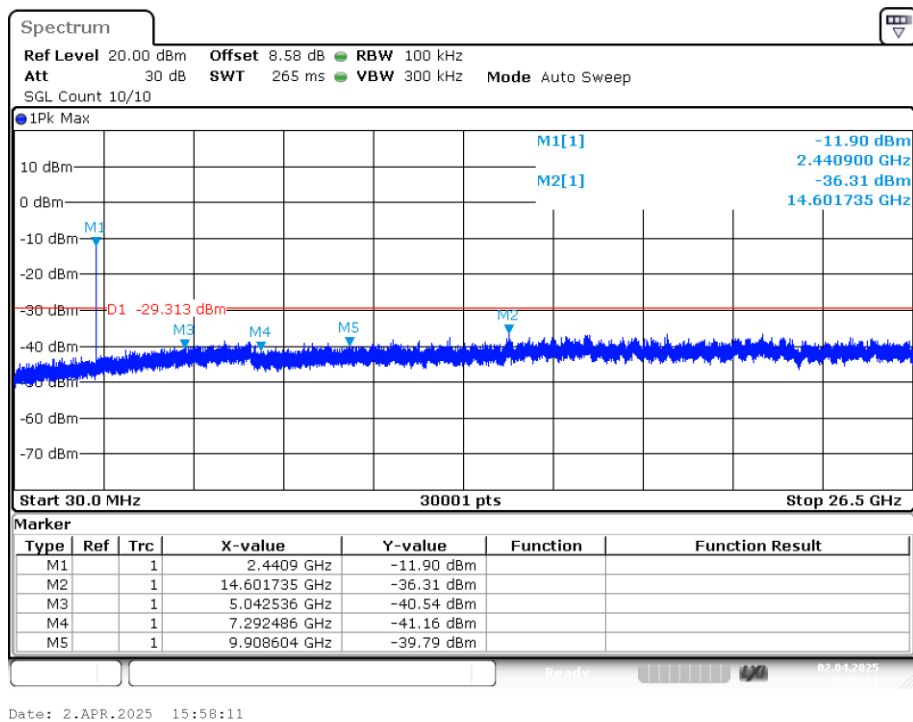

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Ref

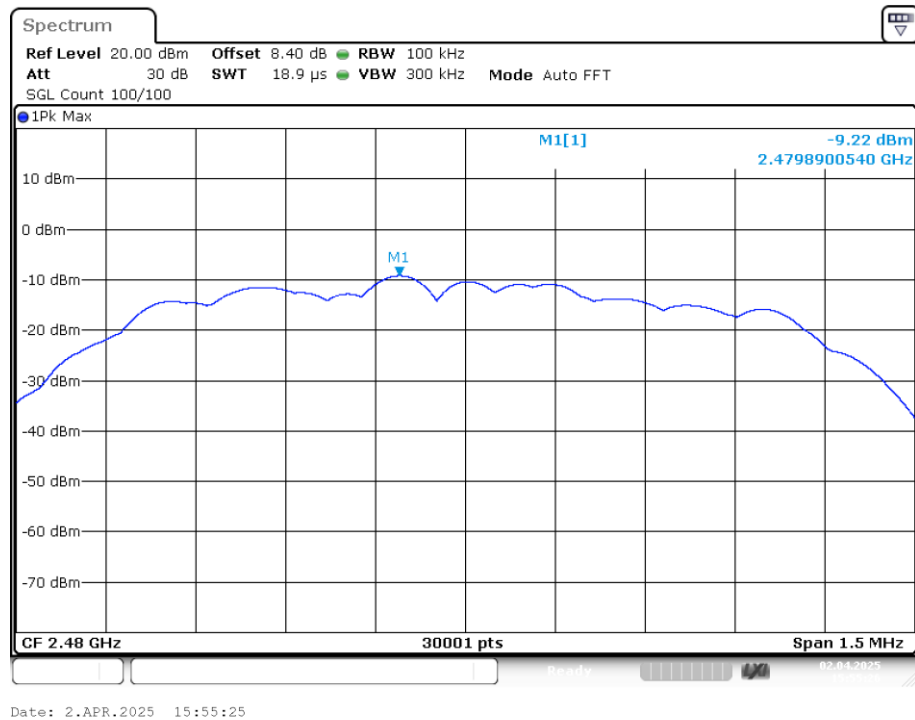

Tx. Spurious NVNT 3-DH5 2480MHz Ant1 Emission

