


## Appendix B. Radiated Emission Co-location Report

## 1. Results of Radiated Emissions for Co-located


|               |                                                      |                |                       |
|---------------|------------------------------------------------------|----------------|-----------------------|
| Temperature   | 24°C                                                 | Humidity       | 55%                   |
| Test Engineer | Eason Chen / Gino Huang /<br>Brian Sun / Lucke Hsieh | Configurations | 2.4GHz + 5GHz + 60GHz |

### Horizontal

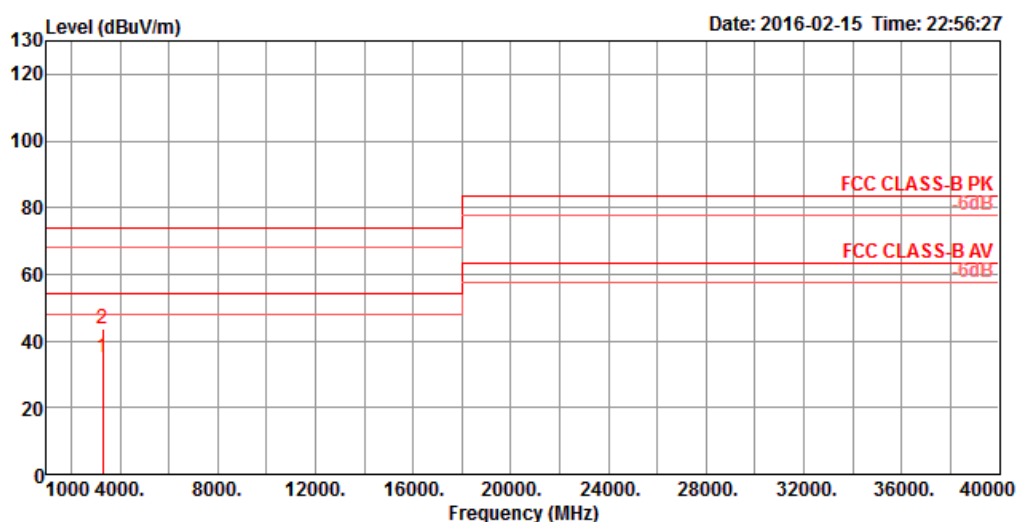

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark     | Pol/Phase  |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|------------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg        |            |
| 1 | 3282.55 | 34.94  | 54.00  | -19.06 | 36.24 | 5.43         | 29.94  | 36.67 | 133   | 53 Average | HORIZONTAL |
| 2 | 3282.65 | 43.84  | 74.00  | -30.16 | 45.14 | 5.43         | 29.94  | 36.67 | 133   | 53 Peak    | HORIZONTAL |

## Vertical

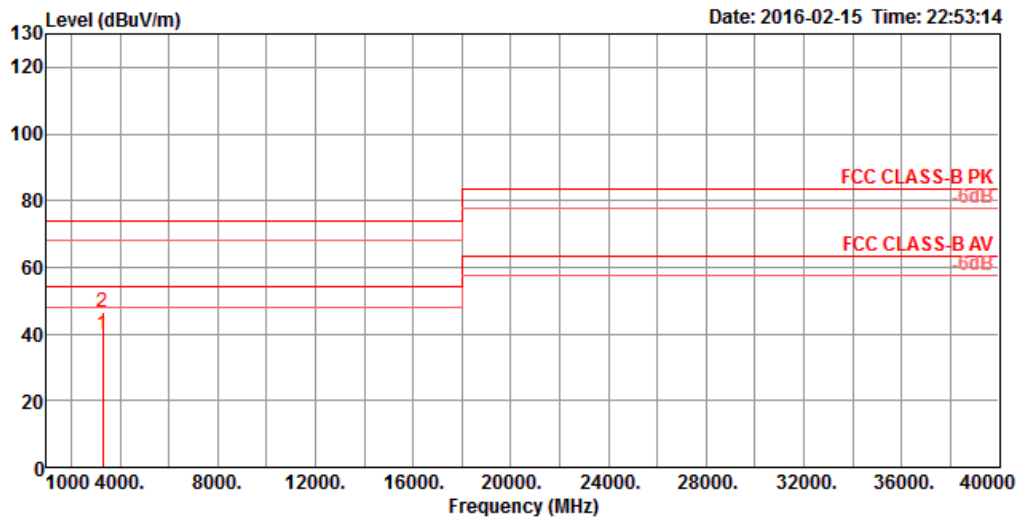

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | A/Pos | T/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg         |           |
| 1 | 3282.58 | 39.82  | 54.00  | -14.18 | 41.12 | 5.43         | 29.94  | 36.67 | 116   | 191 Average | VERTICAL  |
| 2 | 3282.74 | 46.58  | 74.00  | -27.42 | 47.88 | 5.43         | 29.94  | 36.67 | 116   | 191 Peak    | VERTICAL  |