



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	TP-LINK TECHNOLOGIES CO., LTD.
Applicant Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
FCC ID	TE7C5400
Manufacturer's company	TP-LINK TECHNOLOGIES CO., LTD.
Manufacturer Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Product Name	AC5400 Wireless Tri-Band MU-MIMO Gigabit Router
Brand Name	TP-LINK
Model No.	Archer C5400
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Oct. 28, 2015
Final Test Date	Nov. 02, 2015
Submission Type	Original Equipment

Statement

Test result included is only for the IEEE 802.11b/g, IEEE 802.11n and IEEE 802.11a/ac of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03, KDB 662911 D01 v02r01, KDB644545 D01 v01r02.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. VERIFICATION OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes	8
3.6. Table for Testing Locations.....	11
3.7. Table for Supporting Units	11
3.8. Table for Parameters of Test Software Setting	12
3.9. EUT Operation during Test	12
3.10. Duty Cycle.....	13
3.11. Test Configurations	14
4. TEST RESULT	16
4.1. AC Power Line Conducted Emissions Measurement.....	16
4.2. Maximum Conducted Output Power Measurement.....	20
4.3. Power Spectral Density Measurement	22
4.4. 6dB Spectrum Bandwidth Measurement	42
4.5. Radiated Emissions Measurement	53
4.6. Emissions Measurement	81
4.7. Antenna Requirements	110
5. LIST OF MEASURING EQUIPMENTS	111
6. MEASUREMENT UNCERTAINTY.....	112
APPENDIX A. TEST PHOTOS	A1 ~ A6
APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....	B1 ~ B3

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5N0101AA	Rev. 01	Initial issue of report	Nov. 18, 2015

1. VERIFICATION OF COMPLIANCE

Product Name : AC5400 Wireless Tri-Band MU-MIMO Gigabit Router
Brand Name : TP-LINK
Model No. : Archer C5400
Applicant : TP-LINK TECHNOLOGIES CO., LTD.
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 28, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	18.65 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	0.02 dB
4.3	15.247(e)	Power Spectral Density	Complies	1.67 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	4.38 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.02 dB
4.7	15.203	Antenna Requirements	Complies	-

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Product Type	WLAN (4TX, 4RX)
Radio Type	Intentional Transceiver
Power Type	From power adapter
Modulation	IEEE 802.11b: DSSS IEEE 802.11a/g: OFDM IEEE 802.11n/ac: see the below table
Data Modulation	IEEE 802.11b: DSSS (BPSK / QPSK / CCK) IEEE 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) IEEE 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM, 1024QAM)
Data Rate (Mbps)	IEEE 802.11b: DSSS (1/ 2/ 5.5/11) IEEE 802.11a/g: OFDM (6/9/12/18/24/36/48/54) IEEE 802.11n/ac: see the below table
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<u>For 2.4GHz Band:</u> 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <u>For 5GHz Band:</u> 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	<u>For 2.4GHz Band:</u> IEEE 802.11b: 10.42 MHz IEEE 802.11g: 15.98 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 17.19 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 36.47 MHz <u>For 5GHz Band:</u> IEEE 802.11a: 19.45 MHz IEEE 802.11ac MCS0/Nss1 (VHT20): 18.67 MHz IEEE 802.11ac MCS0/Nss1 (VHT40): 37.34 MHz IEEE 802.11ac MCS0/Nss1 (VHT80): 76.41 MHz

Maximum Conducted Output Power	<u>For 2.4GHz Band:</u> IEEE 802.11b: 29.97 dBm IEEE 802.11g: 29.97 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 29.76 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 24.61 dBm <u>For 5GHz Band:</u> IEEE 802.11a: 29.95 dBm IEEE 802.11ac MCS0/Nss1 (VHT20): 29.98 dBm IEEE 802.11ac MCS0/Nss1 (VHT40): 29.98 dBm IEEE 802.11ac MCS0/Nss1 (VHT80): 29.49 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Items	Description	
Beamforming Function	☐ With beamforming	☒ Without beamforming

Antenna and Band width

Antenna		Four (TX)		
Band width Mode		20 MHz	40 MHz	80 MHz
2.4G	IEEE 802.11b	V	X	X
	IEEE 802.11g	V	X	X
	IEEE 802.11n	V	V	X
	IEEE 802.11ac	V	V	X
5G	IEEE 802.11a	V	X	X
	IEEE 802.11n	V	V	X
	IEEE 802.11ac	V	V	V

IEEE 802.11n/ac Spec.

Protocol		Number of Transmit Chains (NTX)	Data Rate / MCS
2.4G	802.11n (HT20)	4	MCS0-31
	802.11n (HT40)	4	MCS0-31
	802.11ac (VHT20)	4	MCS 0-11/Nss1-4
	802.11ac (VHT40)	4	MCS 0-11/Nss1-4
5G	802.11n (HT20)	4	MCS0-31
	802.11n (HT40)	4	MCS0-31
	802.11ac (VHT20)	4	MCS 0-11/Nss1-4
	802.11ac (VHT40)	4	MCS 0-11/Nss1-4
	802.11ac (VHT80)	4	MCS 0-11/Nss1-4
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT supports HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT supports VHT20, VHT40 in 2.4GHz and VHT20, VHT40, VHT80 in 5GHz. Note 3: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac			

3.2. Accessories

Power	Brand	Model No.	Rating	Remark
Adapter	Huntkey	HKA06012050-7C	Input: 100-240Vac, 50/60Hz, 1.5A Output: 12.0Vdc, 5.0A	Cable (Non-shielded, 1.7m)
Other				
Power cable*1: Non-shielded, 1.5m				

3.3. Table for Filed Antenna


Ant.	Brand	Product Number	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	TP-LINK	3101500737	PCB Antenna	I-PEX	1.8	1.8
2	TP-LINK	3101500737	PCB Antenna	I-PEX	1.8	1.8
3	TP-LINK	3101500737	PCB Antenna	I-PEX	1.8	1.8
4	TP-LINK	3101500737	PCB Antenna	I-PEX	1.8	1.8
5	TP-LINK	3101500734	PCB Antenna	I-PEX	-	1.8
6	TP-LINK	3101500734	PCB Antenna	I-PEX	-	1.8
7	TP-LINK	3101500734	PCB Antenna	I-PEX	-	1.8
8	TP-LINK	3101500734	PCB Antenna	I-PEX	-	1.8

Note: 1. The EUT has eight antennas.

2. The EUT has three radios. (Radio 1 supports 5GHz band 1 WLAN function, Radio 2 supports 5GHz band 4 WLAN function and Radio 3 supports 2.4GHz WLAN function.)

3. The EUT supports WLAN (4TX, 4RX):

Chain 1, Chain 2, Chain 3 and Chain 4 could transmit/receive simultaneously.

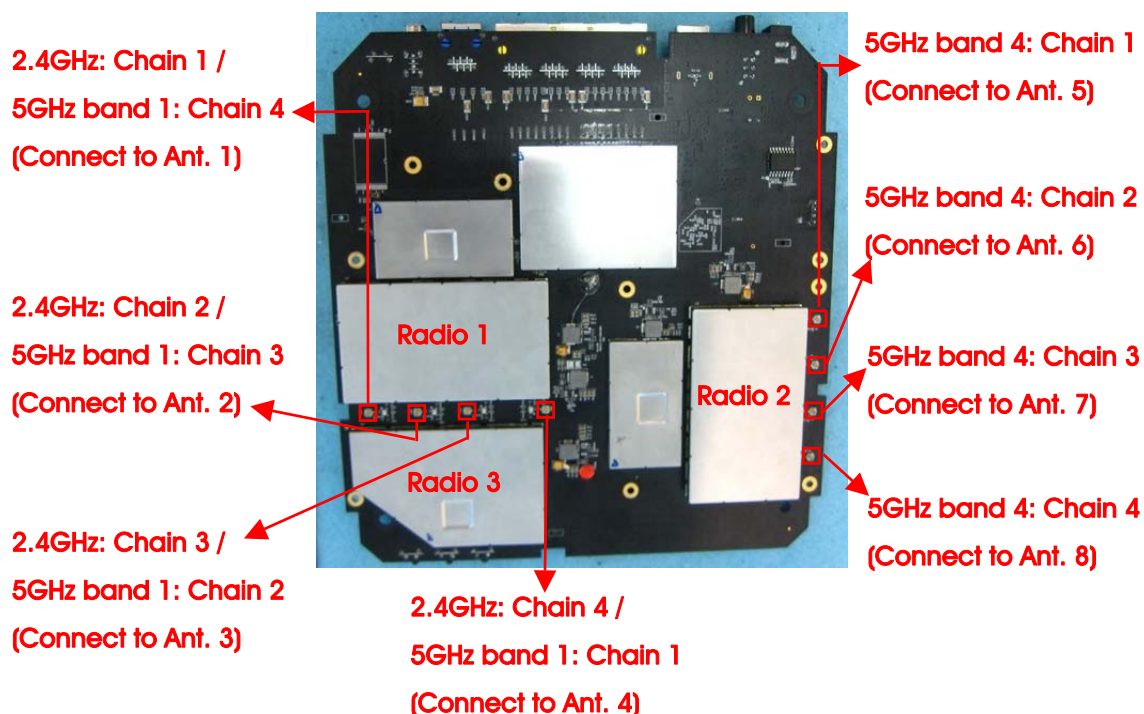

3.4. Table for Carrier Frequencies

For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 11.

For 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz	-	-

For 5GHz Band:

There are three bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

For 80MHz bandwidth systems, use Channel 155.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz Band 4	149	5745 MHz	157	5785 MHz
	151	5755 MHz	159	5795 MHz
	153	5765 MHz	161	5805 MHz
	155	5775 MHz	165	5825 MHz

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

For 2.4GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Power Spectral Density	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
6dB Spectrum Bandwidth	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4
Band Edge Emissions	11b/CCK	1 Mbps	1/6/11	1+2+3+4
	11g/BPSK	6 Mbps	1/6/11	1+2+3+4
	11ac VHT20	MCS0/Nss1	1/6/11	1+2+3+4
	11ac VHT40	MCS0/Nss1	3/6/9	1+2+3+4

For 5GHz Band:

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	CTX	-	-	-
Maximum Conducted Output Power	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Power Spectral Density	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
6dB Spectrum Bandwidth	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Radiated Emissions Below 1GHz	CTX	-	-	-
Radiated Emissions Above 1GHz	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4
Band Edge Emissions	11a/BPSK	6 Mbps	149/157/165	1+2+3+4
	11ac VHT20	MCS0/Nss1	149/157/165	1+2+3+4
	11ac VHT40	MCS0/Nss1	151/159	1+2+3+4
	11ac VHT80	MCS0/Nss1	155	1+2+3+4

Note: 1. The EUT has three radios. (Radio 1 supports 5GHz band 1 WLAN function, Radio 2 supports 5GHz band 4 WLAN function and Radio 3 supports 2.4GHz WLAN function.)

2. VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.

The following test modes were performed for all tests:

AC Power Line Conducted Emissions	
Test Mode	Description
1	2.4GHz WLAN function
2	5GHz band 1 WLAN function
3	5GHz band 4 WLAN function
Mode 2 is the worst case, so it was selected to record in this test report.	

Radiated Emissions Below 1GHz	
<u>For 2.4GHz WLAN function:</u> “EUT in Y axis + folded the antenna” generated the worst test result for Radiated emission above 1GHz test, thus the measurement for Radiated emission below 1GHz test will follow this same test configuration. <u>For 5GHz WLAN function:</u> “EUT in Y axis + antenna in 90°” generated the worst test result for Radiated emission above 1GHz test, thus the measurement for Radiated emission below 1GHz test will follow this same test configuration.	
Test Mode	Description
1	EUT in Y axis + folded the antenna (2.4GHz WLAN function)
2	EUT in Y axis + antenna in 90° (5GHz band 1 WLAN function)
3	EUT in Y axis + antenna in 90° (5GHz band 4 WLAN function)
Mode 3 is the worst case, so it was selected to record in this test report.	

Radiated Emissions Above 1GHz	
Test Mode	Description
1	EUT in Y axis + folded the antenna.
2	EUT in Z axis + folded the antenna.
3	EUT in Y axis + antenna in 90°
4	EUT in Z axis + antenna in 90°
<u>For 2.4GHz WLAN function:</u> Mode 1 has been evaluated to be the worst case after evaluating. Consequently, measurement will follow this same test mode. <u>For 5GHz WLAN function:</u> Mode 3 has been evaluated to be the worst case after evaluating. Consequently, measurement will follow this same test mode.	

Co-location MPE and Radiated Emission Co-location

The EUT could be applied with 2.4GHz WLAN function, 5GHz band 1 WLAN function and 5GHz band 4 WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA5N0101) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function, 5GHz band 1 WLAN function and 5GHz band 4 WLAN function.

3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

3.7. Table for Supporting Units

For Test Site No: 03CH01-CB and TH01-CB

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC

For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Flash disk	ADATA	C103	DoC
Flash disk	Silicon	I-Series	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

For 2.4GHz Band

Test Software Version	Mtool 2.0.2.8					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		
	2412 MHz	2437 MHz	2462 MHz	2422 MHz	2437 MHz	2452 MHz
802.11b	94	94	93	-	-	-
802.11g	75	94	79	-	-	-
802.11ac MCS0/Nss1 VHT20	81	94	80	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	62	74	67

For 5GHz Band

Test Software Version	Mtool 2.0.2.8					
Mode	Test Frequency (MHz)					
	NCB: 20MHz			NCB: 40MHz		NCB: 80MHz
	5745 MHz	5785 MHz	5825 MHz	5755 MHz	5795 MHz	5775 MHz
802.11a	97	98	98	-	-	-
802.11ac MCS0/Nss1 VHT20	98	99	99	-	-	-
802.11ac MCS0/Nss1 VHT40	-	-	-	100	100	-
802.11ac MCS0/Nss1 VHT80	-	-	-	-	-	92

3.9. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

3.10. Duty Cycle

Band	Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
2.4G	802.11b	100.000	100.000	100.00	0.00	0.01
	802.11g	2.057	2.094	98.23	0.08	0.01
	802.11ac MCS0/Nss1 VHT20	1.913	1.956	97.80	0.10	0.52
	802.11ac MCS0/Nss1 VHT40	0.943	0.982	96.03	0.18	1.06
5G	802.11a	2.050	2.080	98.56	0.06	0.01
	802.11ac MCS0/Nss1 VHT20	1.900	1.950	97.44	0.11	0.53
	802.11ac MCS0/Nss1 VHT40	0.910	0.962	94.59	0.24	1.10
	802.11ac MCS0/Nss1 VHT80	0.430	0.493	87.22	0.59	2.33


3.11. Test Configurations

3.11.1. AC Power Line Conduction Emissions Test Configuration

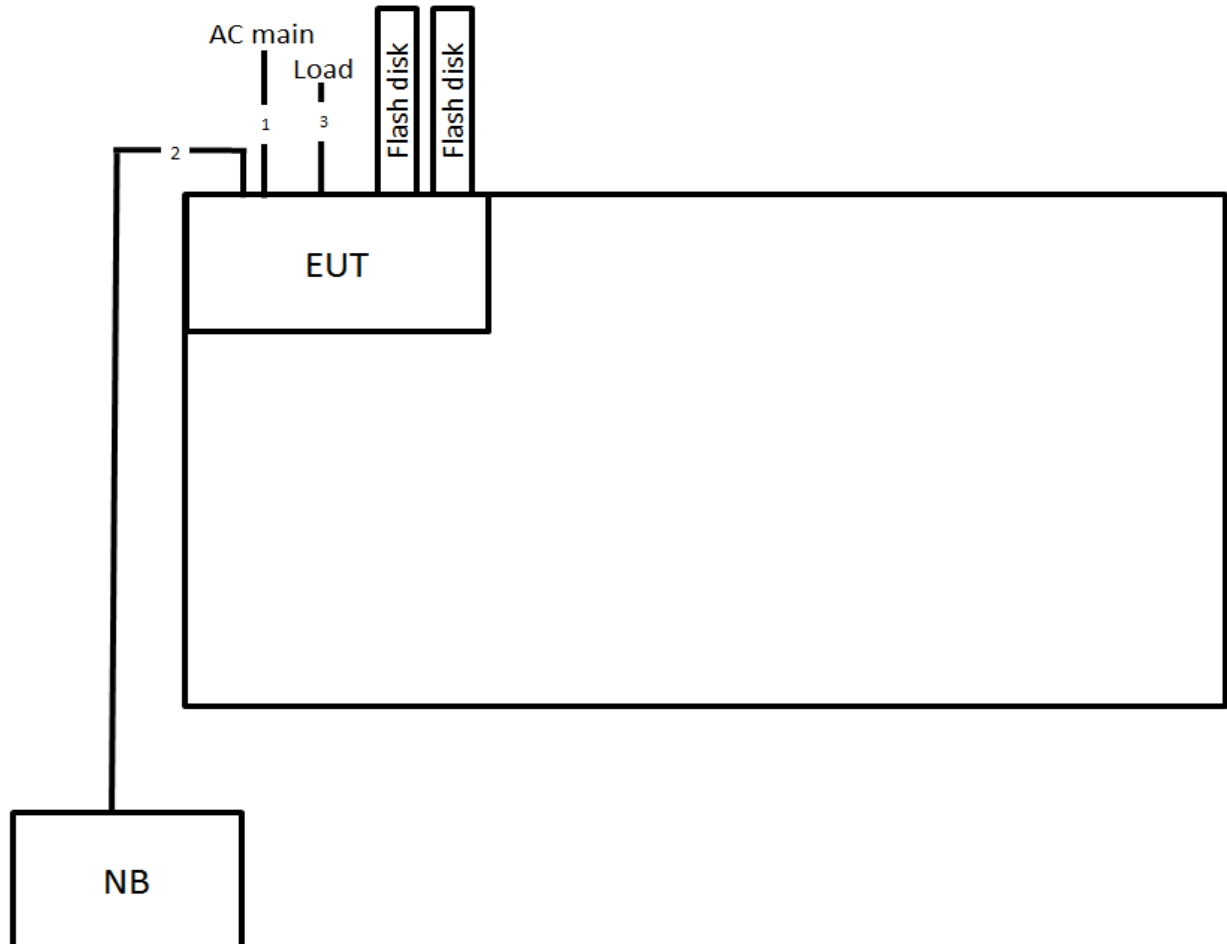

Item	Connection	Shielded	Length
1	Power cable	No	3.2m
2	RJ-45 cable	No	10m
3	RJ-45 cable*4	No	1.5m

3.11.2. Radiation Emissions Test Configuration

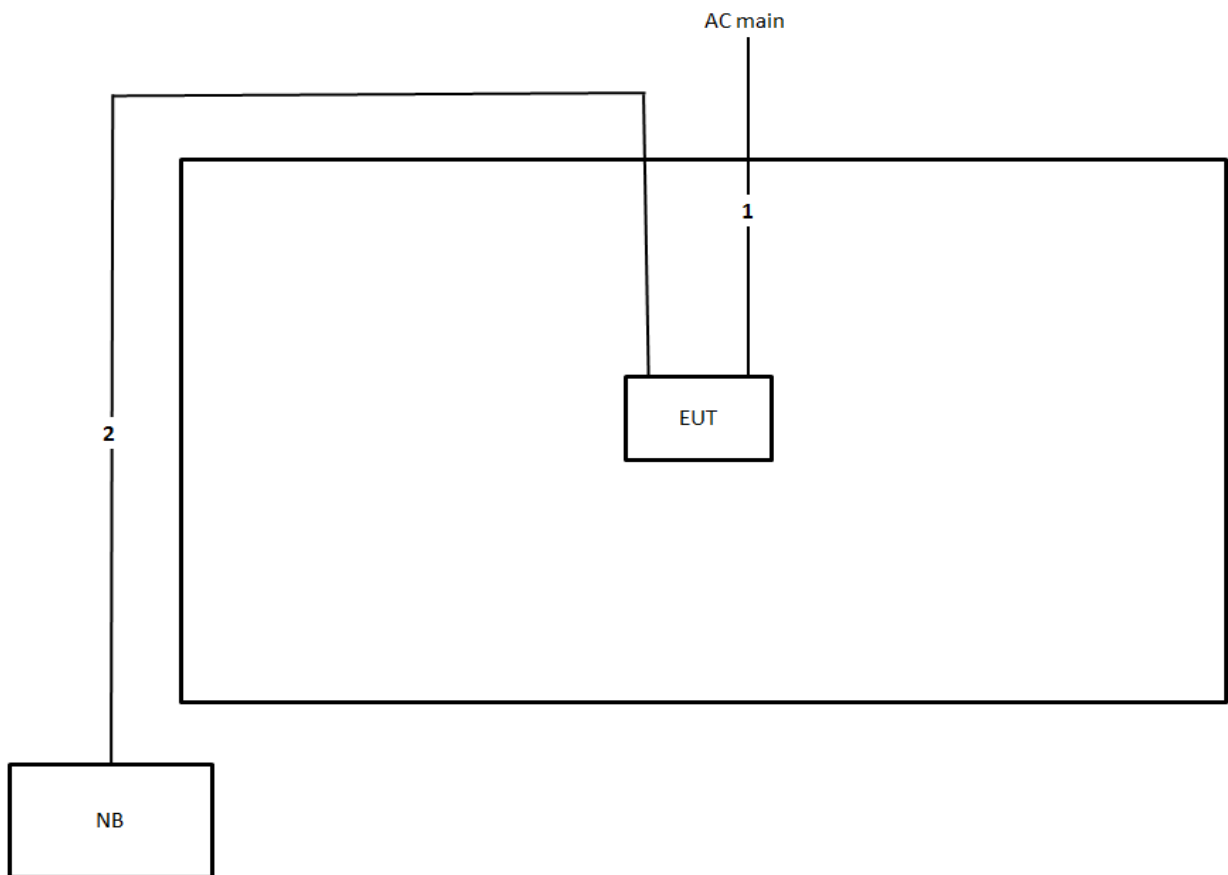

Item	Connection	Shielded	Length
1	Power cable	No	3.2m
2	RJ-45 cable	No	10m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

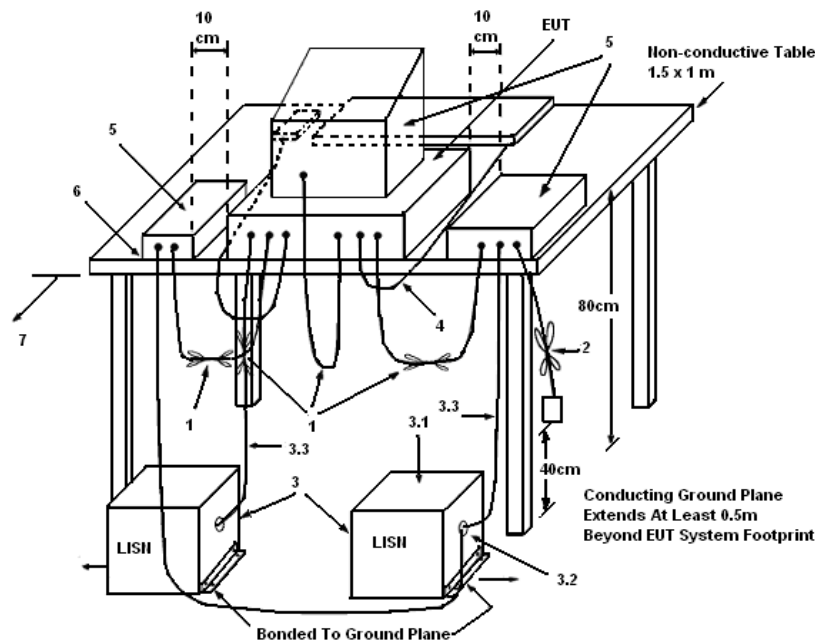

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	59%
Test Engineer	Da Deng	Phase	Line
Configuration	CTX	Test Mode	Mode 2

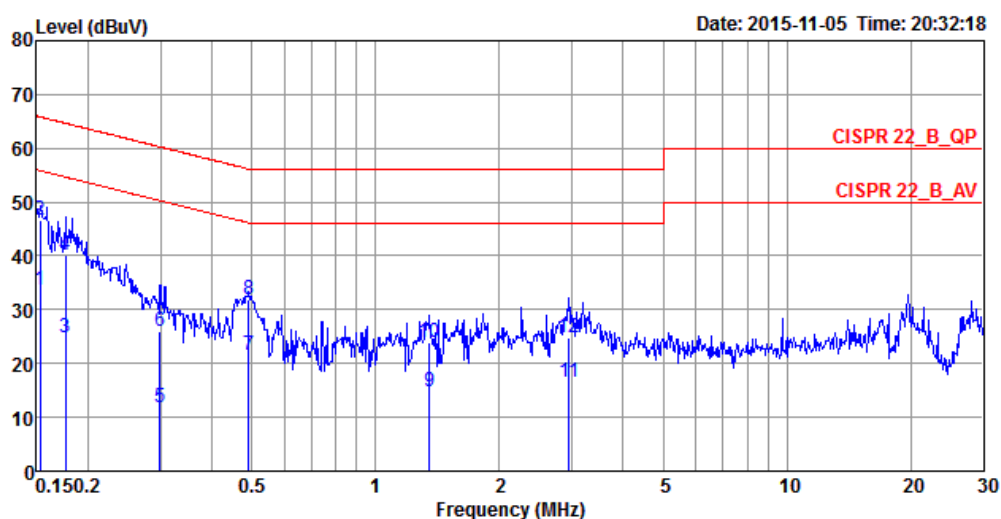

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1532	33.77	-22.05	55.82	23.82	9.93	0.02	LINE	Average
2	0.1532	46.63	-19.19	65.82	36.68	9.93	0.02	LINE	QP
3	0.1758	24.81	-29.87	54.68	14.86	9.93	0.02	LINE	Average
4	0.1758	40.17	-24.51	64.68	30.22	9.93	0.02	LINE	QP
5	0.2987	11.88	-38.40	50.28	1.91	9.93	0.04	LINE	Average
6	0.2987	25.89	-34.39	60.28	15.92	9.93	0.04	LINE	QP
7	0.4915	21.54	-24.60	46.14	11.56	9.94	0.04	LINE	Average
8	0.4915	31.96	-24.18	56.14	21.98	9.94	0.04	LINE	QP
9	1.3521	14.63	-31.37	46.00	4.61	9.97	0.05	LINE	Average
10	1.3521	23.89	-32.11	56.00	13.87	9.97	0.05	LINE	QP
11	2.9463	16.65	-29.35	46.00	6.59	10.01	0.05	LINE	Average
12	2.9463	24.90	-31.10	56.00	14.84	10.01	0.05	LINE	QP

Temperature	25°C	Humidity	59%
Test Engineer	Da Deng	Phase	Neutral
Configuration	CTX	Test Mode	Mode 2

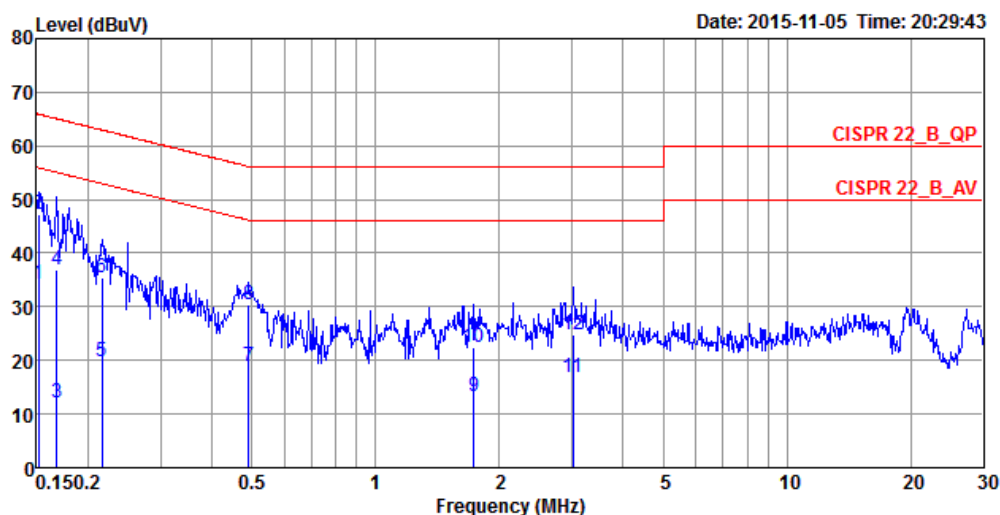

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Pol/Phase	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB		
1	0.1516	34.18	-21.73	55.91	24.38	9.78	0.02	NEUTRAL	Average
2	0.1516	47.26	-18.65	65.91	37.46	9.78	0.02	NEUTRAL	QP
3	0.1677	12.10	-42.98	55.08	2.30	9.78	0.02	NEUTRAL	Average
4	0.1677	37.02	-28.06	65.08	27.22	9.78	0.02	NEUTRAL	QP
5	0.2162	19.79	-33.17	52.96	9.98	9.79	0.02	NEUTRAL	Average
6	0.2162	35.33	-27.63	62.96	25.52	9.79	0.02	NEUTRAL	QP
7	0.4915	19.02	-27.12	46.14	9.19	9.79	0.04	NEUTRAL	Average
8	0.4915	30.49	-25.65	56.14	20.66	9.79	0.04	NEUTRAL	QP
9	1.7345	13.39	-32.61	46.00	3.50	9.83	0.06	NEUTRAL	Average
10	1.7345	22.39	-33.61	56.00	12.50	9.83	0.06	NEUTRAL	QP
11	3.0253	16.95	-29.05	46.00	7.04	9.86	0.05	NEUTRAL	Average
12	3.0253	24.89	-31.11	56.00	14.98	9.86	0.05	NEUTRAL	QP

Note:

Level = Read Level + LISN Factor + Cable Loss

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

The limit for output power is 30dBm.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Detector	Average

4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

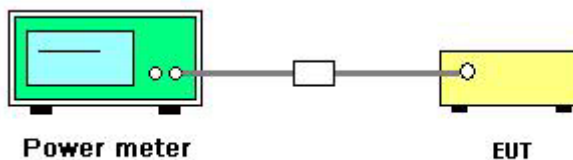

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	58%
Test Engineer	For 2.4GHz Band: Andy Tsai	Test Date	Oct. 29, 2015
	For 5GHz Band: Kenneth Huang		

For 2.4GHz Band

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	23.11	23.80	24.40	23.79	29.82	30.00	Complies
	2437 MHz	22.91	23.82	24.40	24.50	29.97	30.00	Complies
	2462 MHz	22.79	23.58	23.46	23.83	29.45	30.00	Complies
802.11g	2412 MHz	19.14	19.17	19.12	19.50	25.26	30.00	Complies
	2437 MHz	22.94	23.77	24.44	24.47	29.97	30.00	Complies
	2462 MHz	19.69	20.17	19.84	20.36	26.04	30.00	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	19.99	20.56	20.70	20.73	26.53	30.00	Complies
	2437 MHz	23.01	23.47	24.19	24.19	29.76	30.00	Complies
	2462 MHz	19.28	20.27	20.50	20.49	26.18	30.00	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	15.99	14.65	14.70	14.85	21.10	30.00	Complies
	2437 MHz	18.06	18.63	18.53	19.08	24.61	30.00	Complies
	2452 MHz	16.06	16.56	16.71	17.14	22.66	30.00	Complies

For 5GHz Band

Mode	Frequency	Conducted Power (dBm)					Max. Limit (dBm)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5745 MHz	24.11	23.76	23.18	24.56	29.95	30.00	Complies
	5785 MHz	23.89	23.72	23.70	24.08	29.87	30.00	Complies
	5825 MHz	24.22	23.55	23.55	23.92	29.84	30.00	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	24.12	23.68	23.22	24.69	29.98	30.00	Complies
	5785 MHz	24.05	23.95	23.66	24.17	29.98	30.00	Complies
	5825 MHz	24.19	23.55	23.77	24.02	29.91	30.00	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	24.02	23.81	23.36	24.57	29.98	30.00	Complies
	5795 MHz	23.79	23.57	23.56	23.91	29.73	30.00	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	23.66	23.34	23.01	23.83	29.49	30.00	Complies

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Set the span to 1.5 times the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span/RBW}$ (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be $\leq 8 \text{ dBm}$.

4.3.4. Test Setup Layout

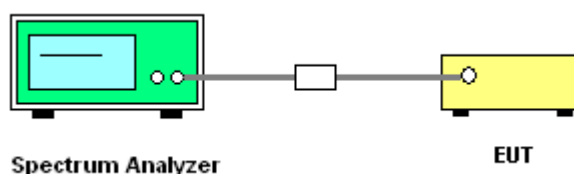

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	25°C	Humidity	58%
Test Engineer	For 2.4GHz Band: Andy Tsai		
	For 5GHz Band: Kenneth Huang		

For 2.4GHz Band

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11b	2412 MHz	-8.87	-7.61	-7.81	-7.67	-1.94	6.18	Complies
	2437 MHz	-9.20	-7.50	-7.39	-7.47	-1.81	6.18	Complies
	2462 MHz	-9.41	-7.74	-7.74	-7.93	-2.13	6.18	Complies
802.11g	2412 MHz	-8.77	-8.12	-8.32	-8.29	-2.35	6.18	Complies
	2437 MHz	-4.48	-3.38	-2.78	-2.63	2.76	6.18	Complies
	2462 MHz	-7.86	-7.34	-6.45	-7.09	-1.13	6.18	Complies
802.11ac	2412 MHz	-6.86	-6.95	-6.53	-5.51	-0.40	6.18	Complies
MCS0/Nss1	2437 MHz	-4.87	-4.01	-2.66	-3.53	2.33	6.18	Complies
VHT20	2462 MHz	-7.26	-7.83	-7.83	-7.51	-1.58	6.18	Complies
802.11ac	2422 MHz	-12.55	-12.92	-13.88	-11.92	-6.74	6.18	Complies
MCS0/Nss1	2437 MHz	-10.63	-9.76	-10.94	-9.38	-4.11	6.18	Complies
VHT40	2452 MHz	-8.58	-11.69	-10.49	-12.37	-4.51	6.18	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 7.82 \text{dBi} > 6 \text{dBi}$, so limit = $8 - (7.82 - 6) = 6.18 \text{dBm/3kHz}$.

For 5GHz Band

Mode	Frequency	Power Density (dBm/3kHz)					Power Density Limit (dBm/3kHz)	Result
		Chain 1	Chain 2	Chain 3	Chain 4	Total		
802.11a	5745 MHz	-1.67	-1.95	-2.68	-1.14	4.20	6.18	Complies
	5785 MHz	-1.43	-1.50	-1.74	-1.39	4.51	6.18	Complies
	5825 MHz	-1.40	-2.00	-2.15	-1.66	4.23	6.18	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	-1.62	-1.29	-2.79	-1.32	4.31	6.18	Complies
	5785 MHz	-1.84	-1.91	-1.75	-1.39	4.30	6.18	Complies
	5825 MHz	-1.46	-1.87	-1.88	-1.59	4.32	6.18	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	-3.31	-4.94	-4.90	-3.44	1.94	6.18	Complies
	5795 MHz	-4.81	-5.06	-4.76	-4.33	1.29	6.18	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	-7.71	-8.43	-8.71	-6.91	-1.86	6.18	Complies

Note: $Directional\ Gain = 10 \log \left[\frac{\sum_{j=1}^{N_{SS}} \left(\sum_{K=1}^{N_{ANT}} g_{j,k} \right)^2}{N_{ANT}} \right] = 7.82 \text{dBi} > 6 \text{dBi}$, so limit = $8 - (7.82 - 6) = 6.18 \text{dBm/3kHz}$.

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

For 2.4GHz Band

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 1



Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 2




Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 3



Power Density Plot on Configuration IEEE 802.11b / 2437 MHz / Chain 4




Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1

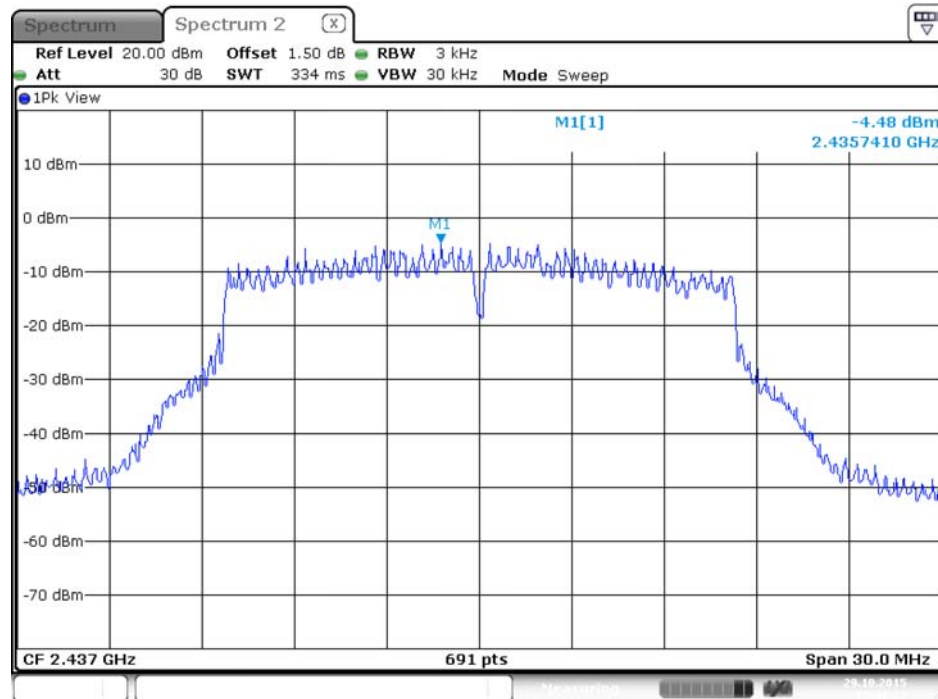


Date: 29.OCT.2015 15:41:37

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 2

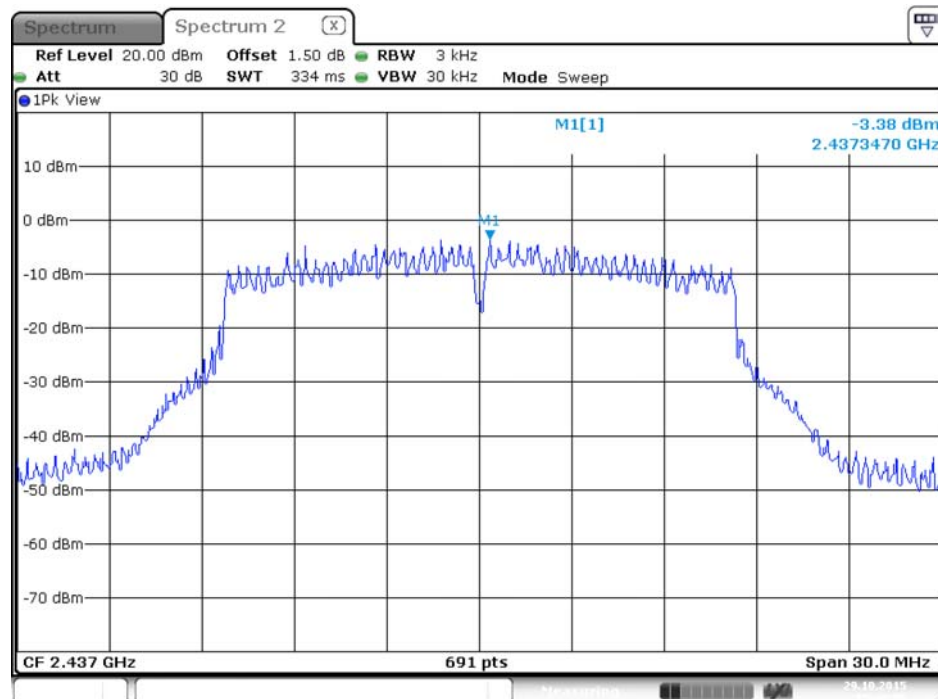


Date: 29.OCT.2015 15:40:55

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 3

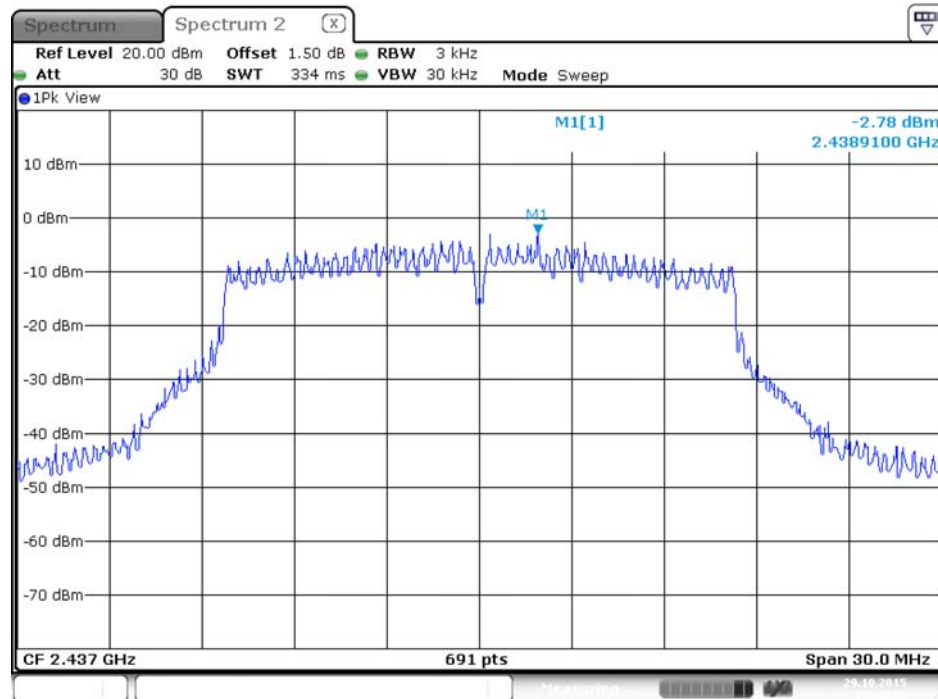


Date: 29.OCT.2015 15:40:24

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 4

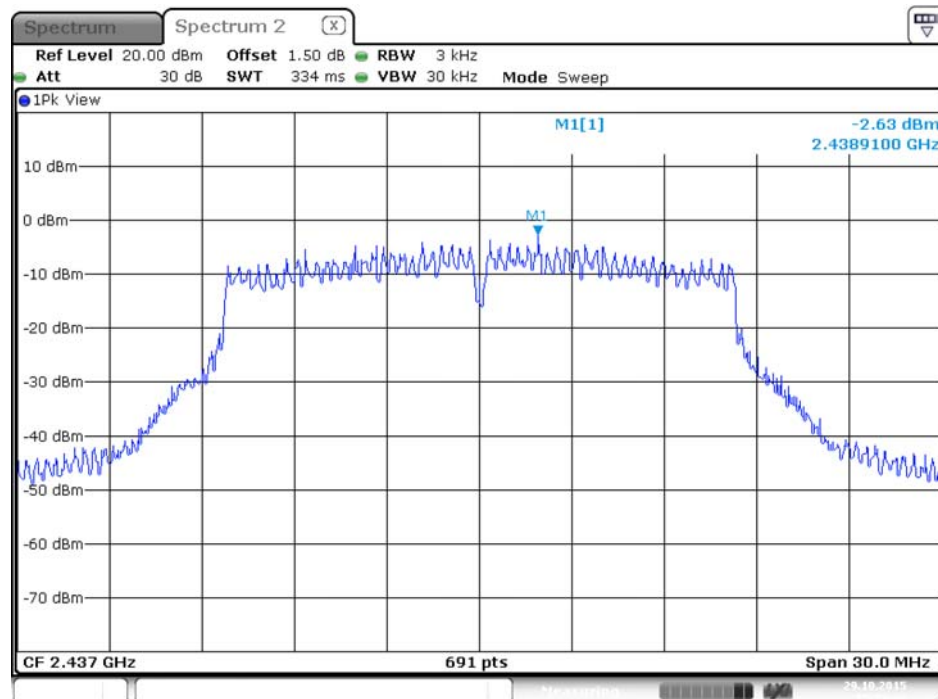


Date: 29.OCT.2015 15:39:47

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1

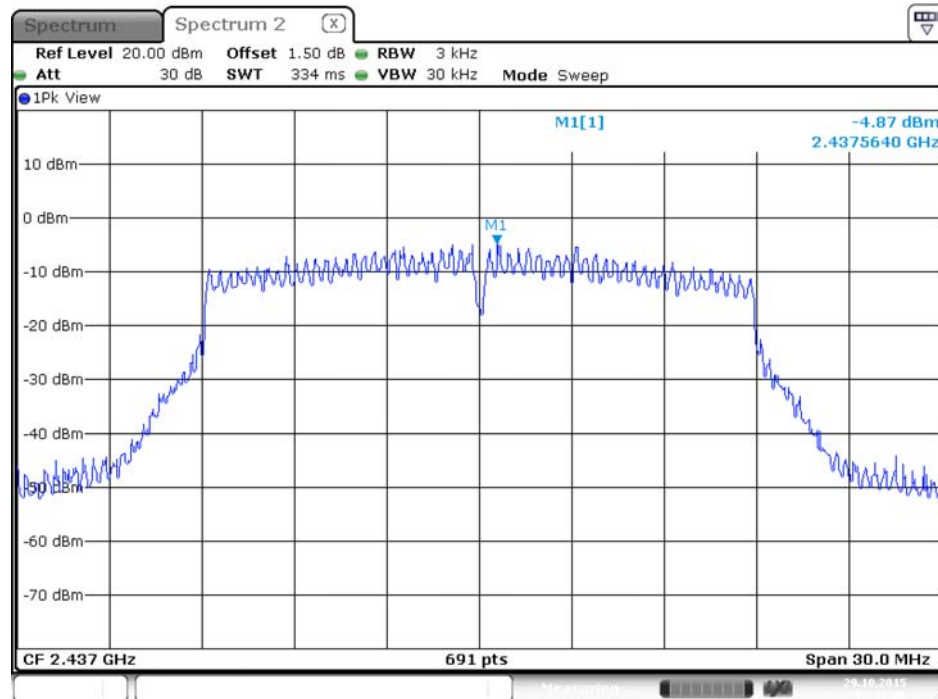


Date: 29.OCT.2015 15:52:36

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 2

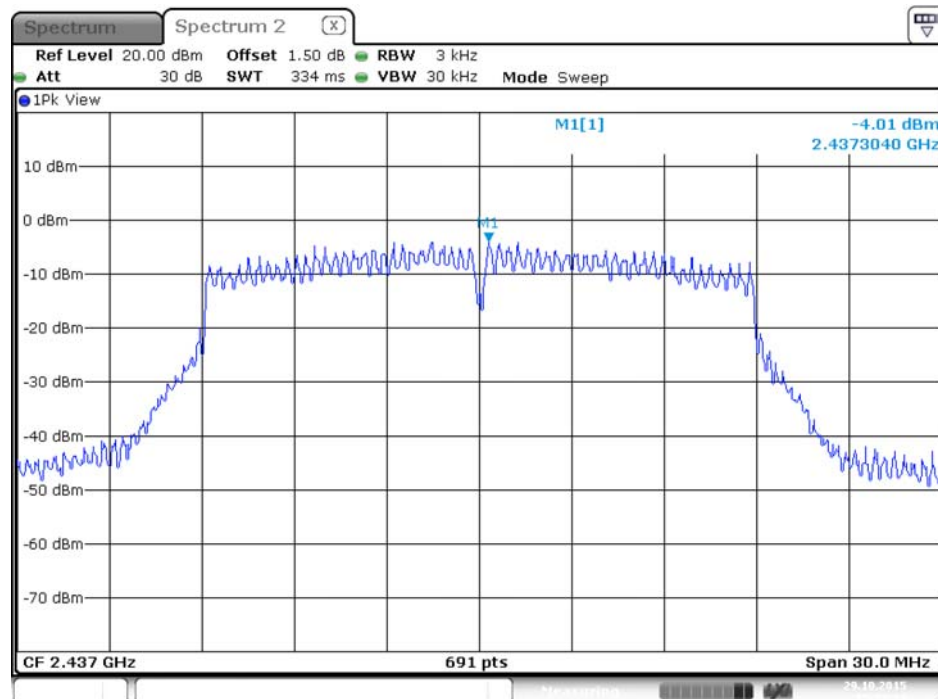


Date: 29.OCT.2015 15:53:19

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 3

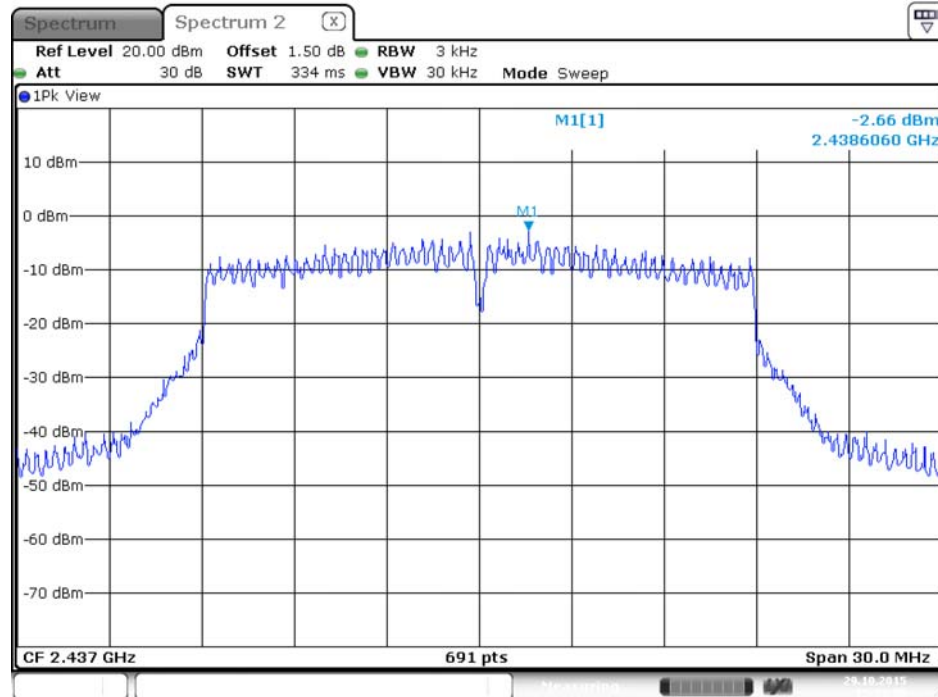


Date: 29.OCT.2015 15:53:58

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 4

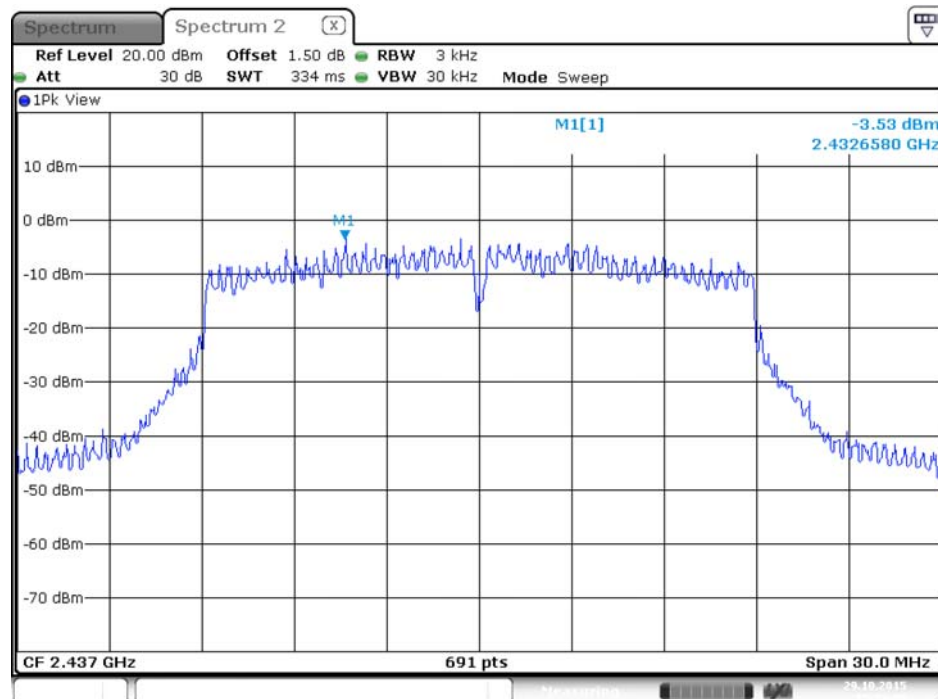


Date: 29.OCT.2015 15:54:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1

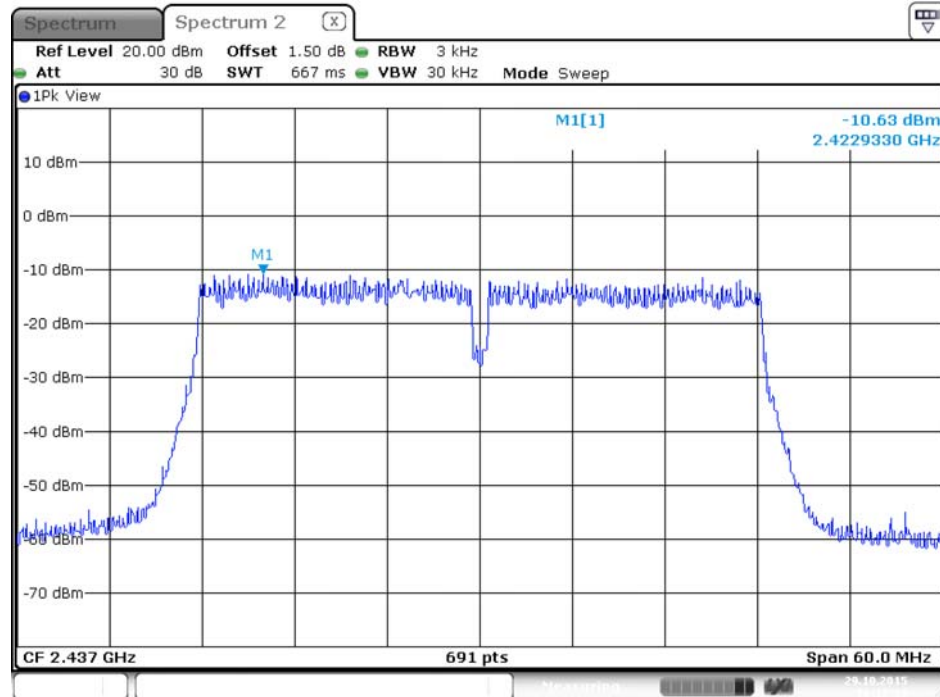


Date: 29.OCT.2015 16:17:10

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 2

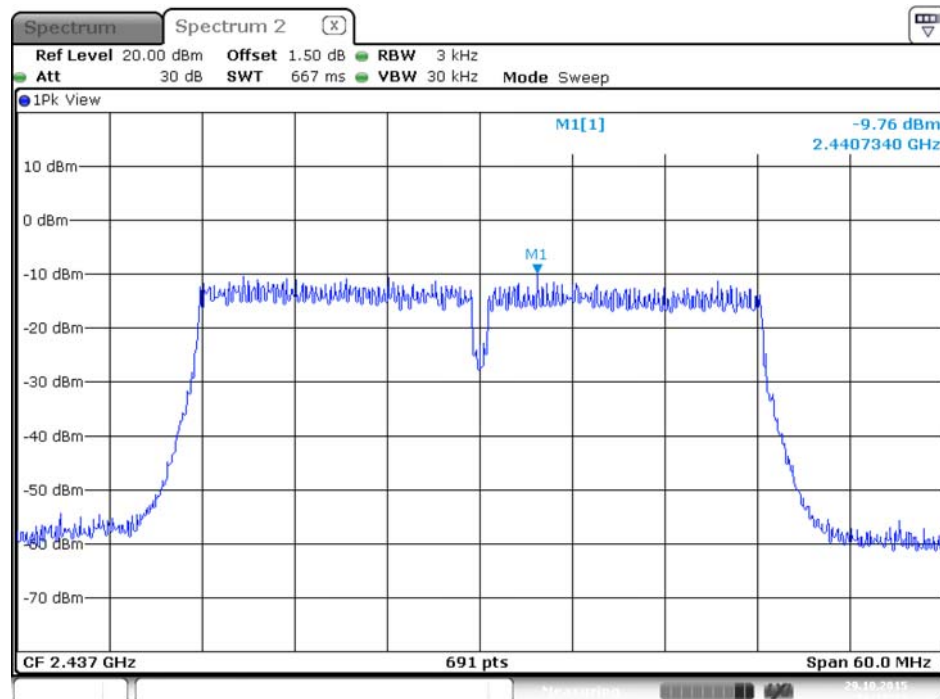


Date: 29.OCT.2015 16:17:37

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 3

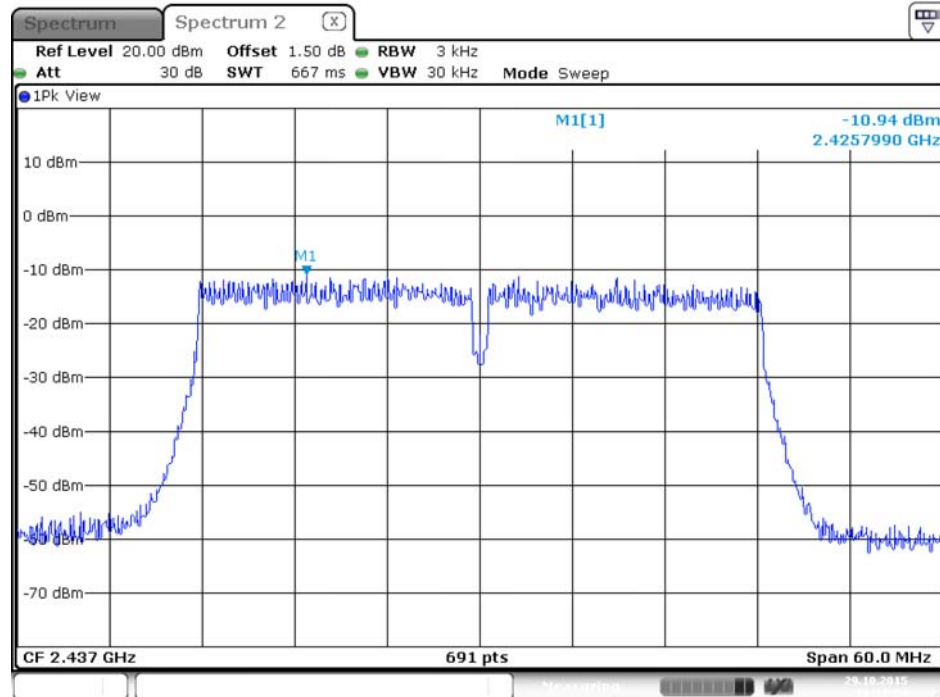

Date: 29.OCT.2015 16:17:55


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 4

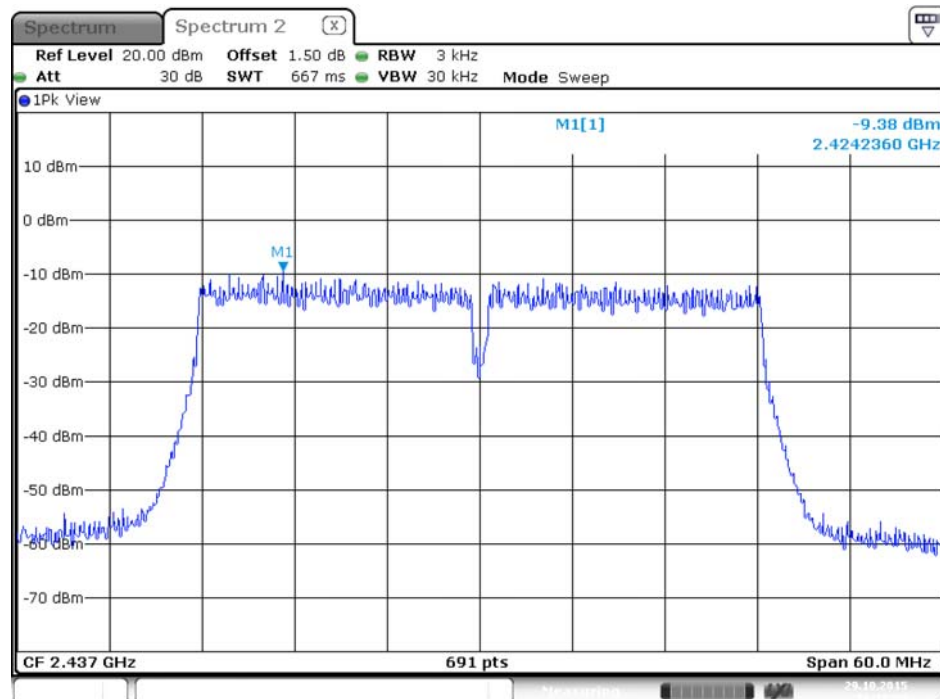

Date: 29.OCT.2015 16:18:24


For 5GHz Band

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1

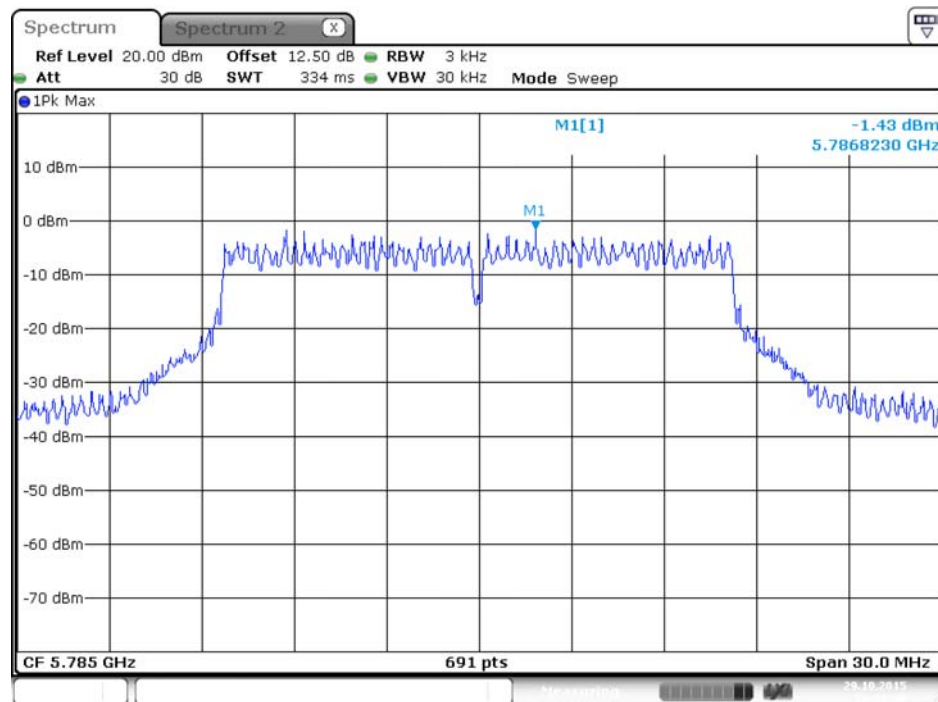


Date: 29.OCT.2015 20:32:47

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 2

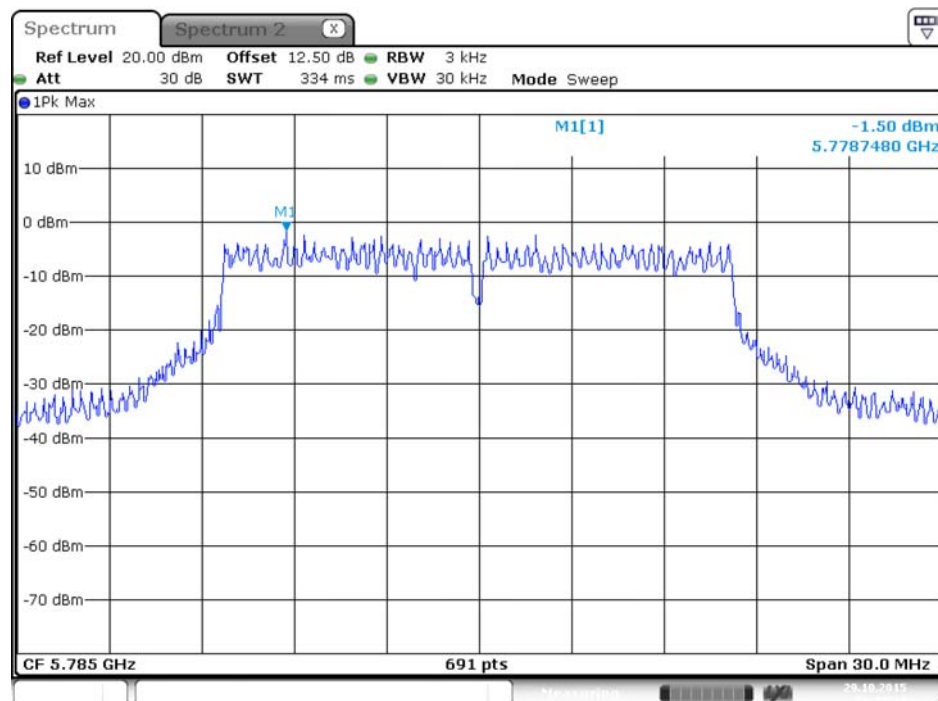


Date: 29.OCT.2015 20:32:14

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 3

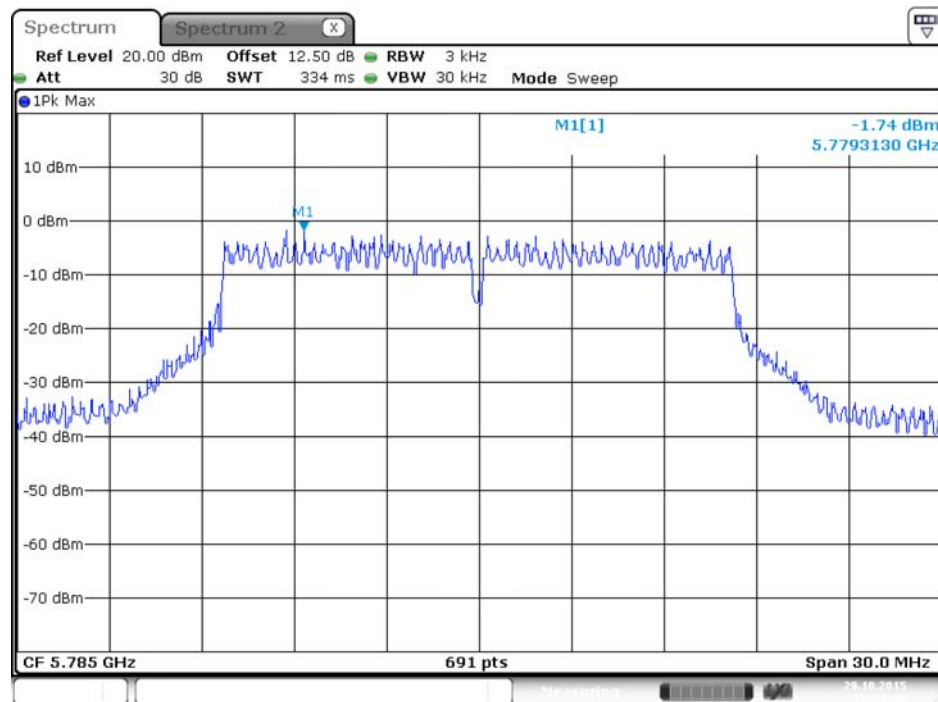


Date: 29.OCT.2015 20:31:46

Power Density Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 4

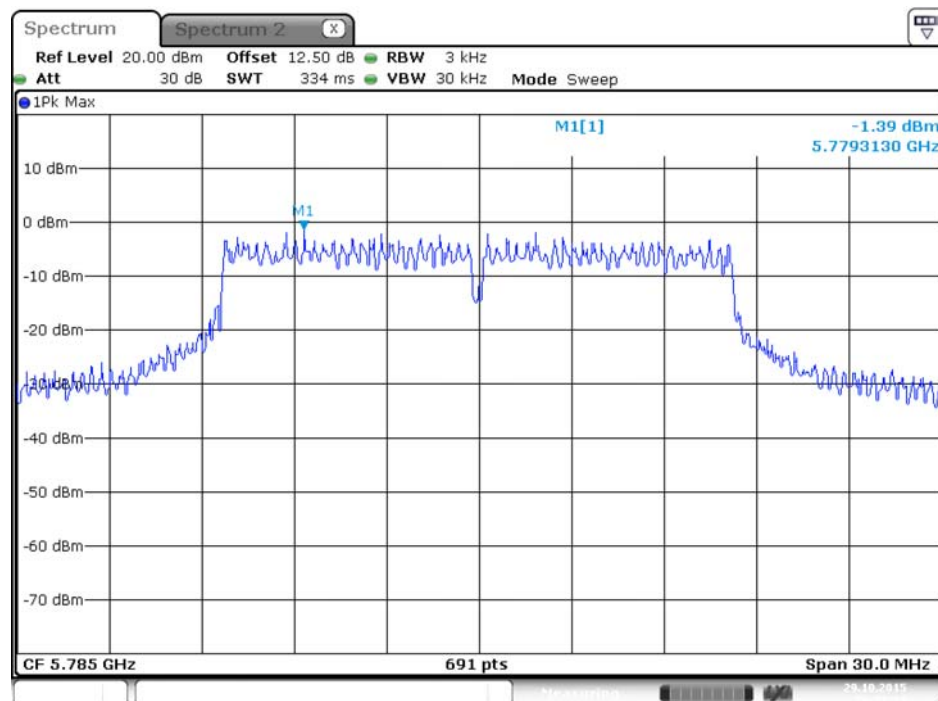


Date: 29.OCT.2015 20:31:10

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 1

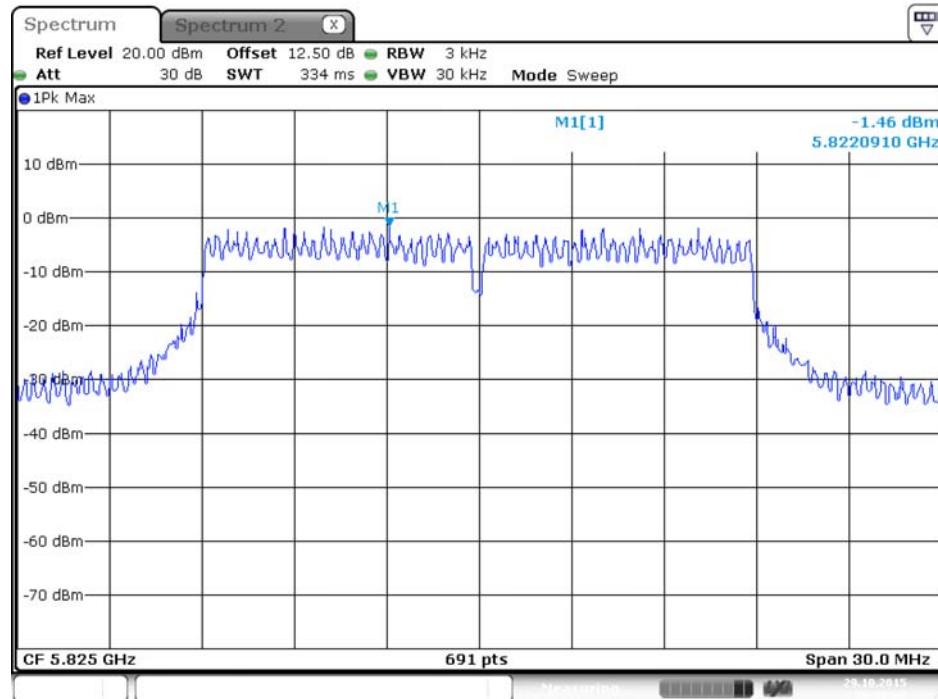


Date: 29.OCT.2015 20:38:47

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 2

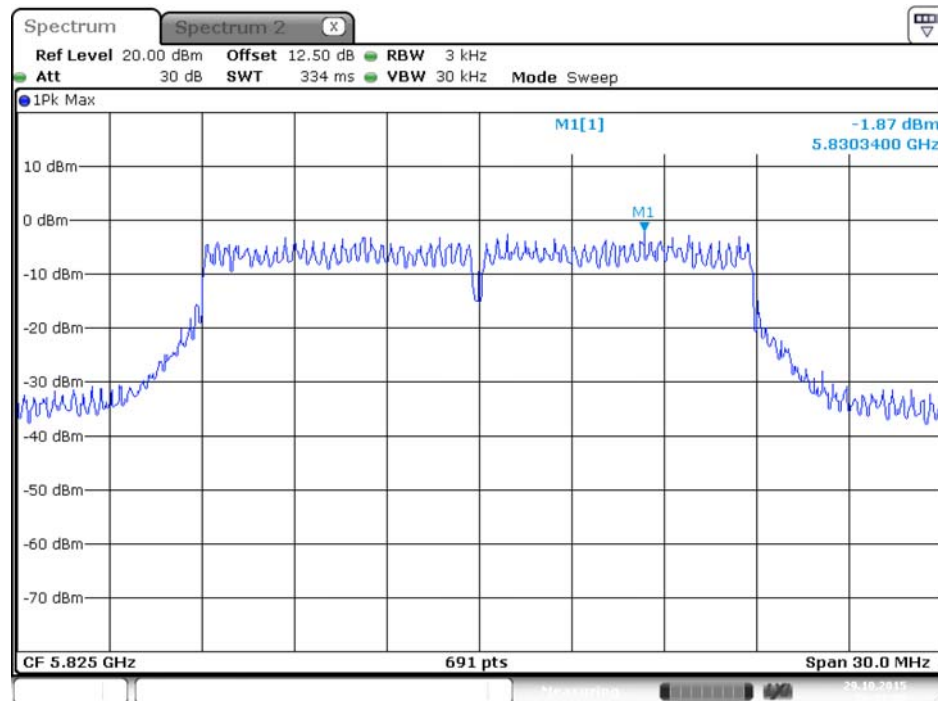


Date: 29.OCT.2015 20:38:00

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 3

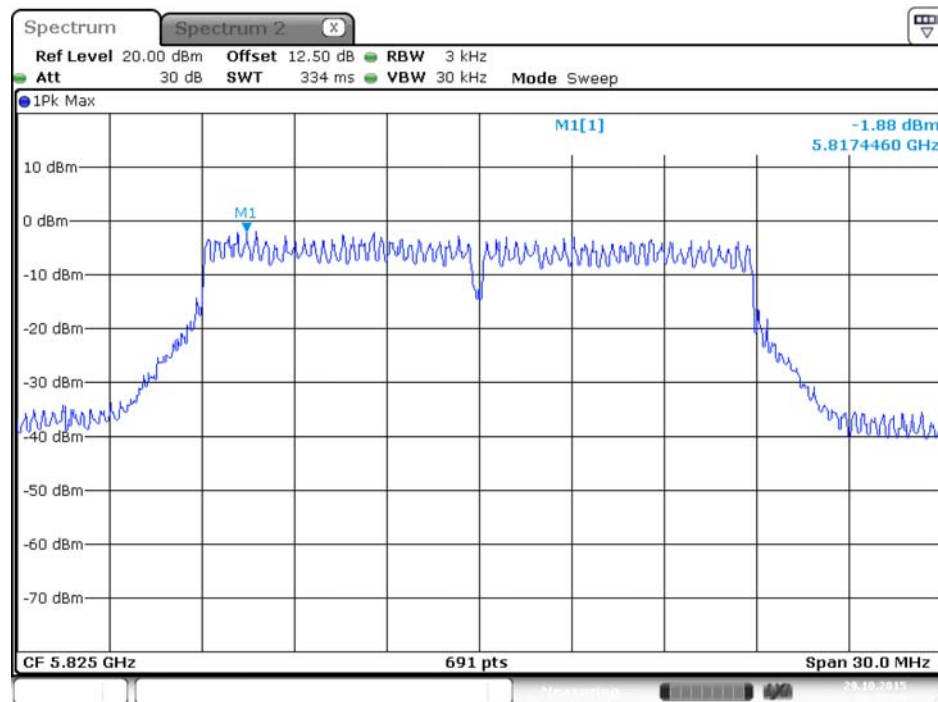


Date: 29.OCT.2015 20:37:30

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5825 MHz / Chain 4

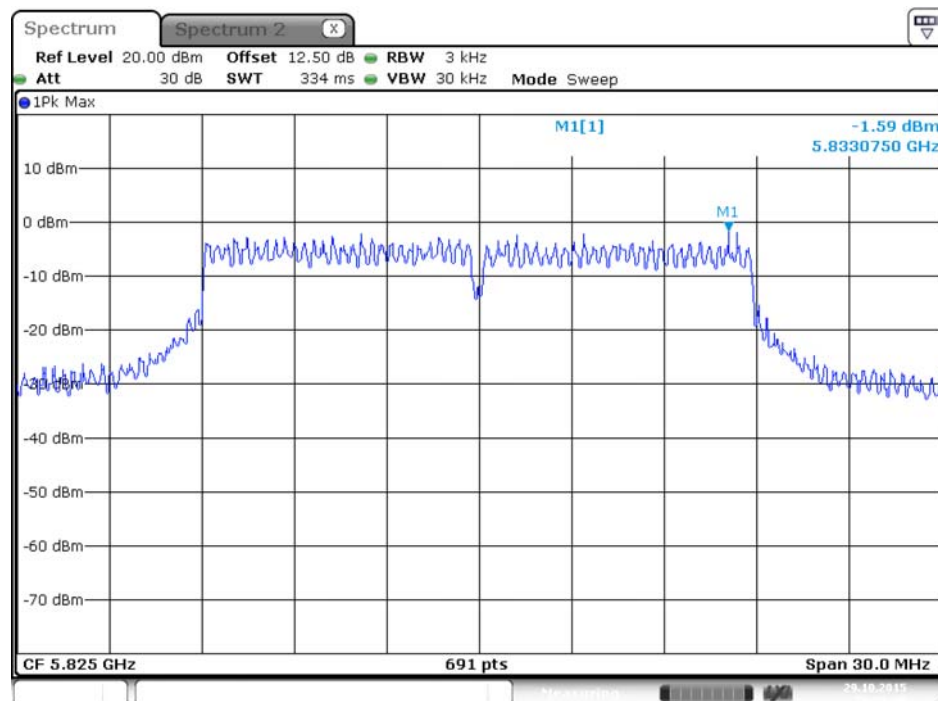


Date: 29.OCT.2015 20:36:40

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 1

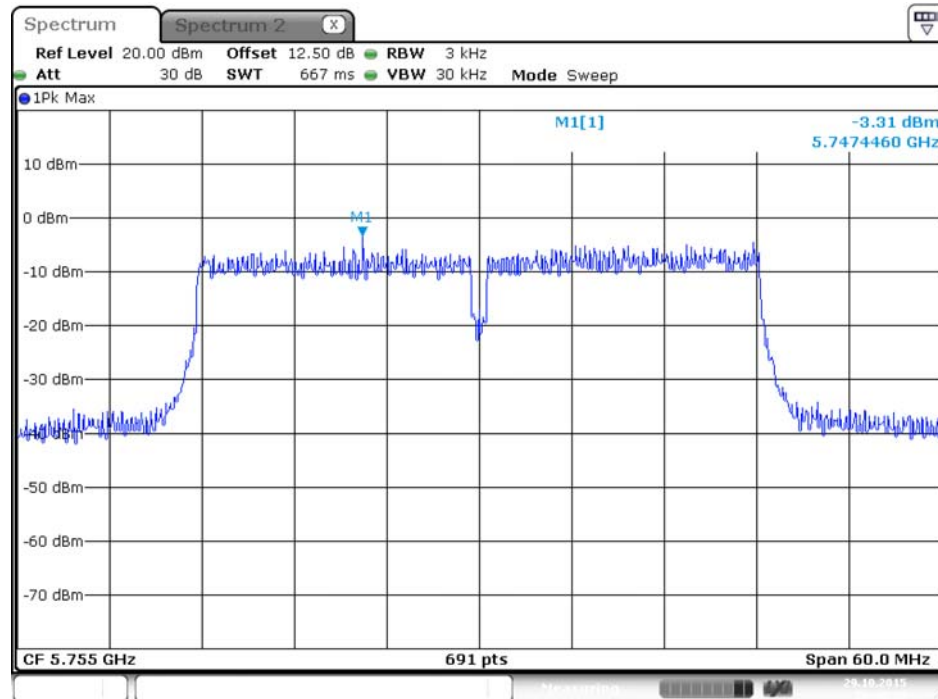


Date: 29.OCT.2015 20:45:24

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 2

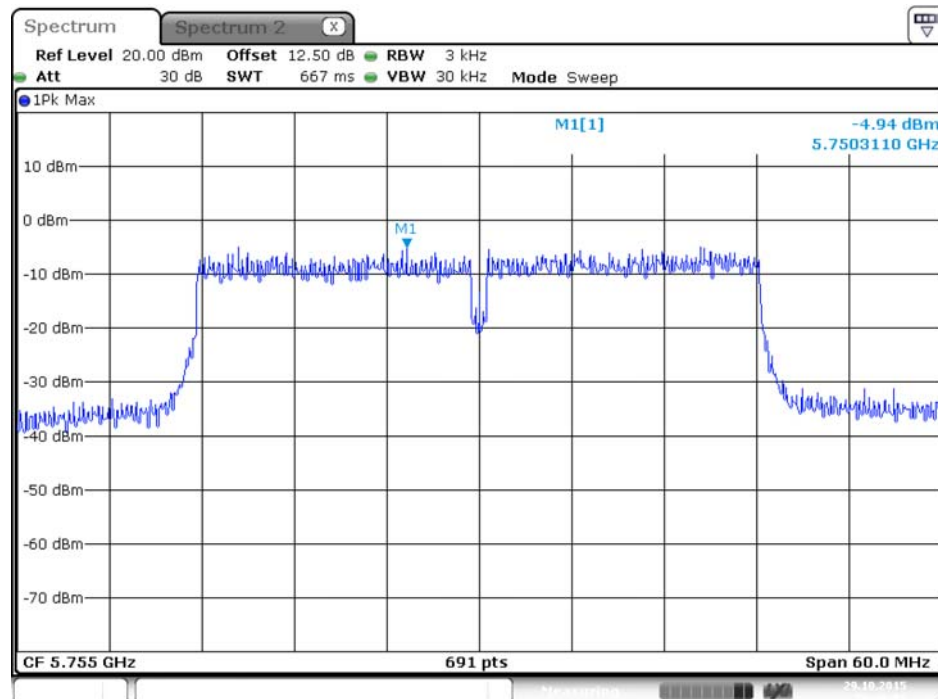


Date: 29.OCT.2015 20:46:01


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 3

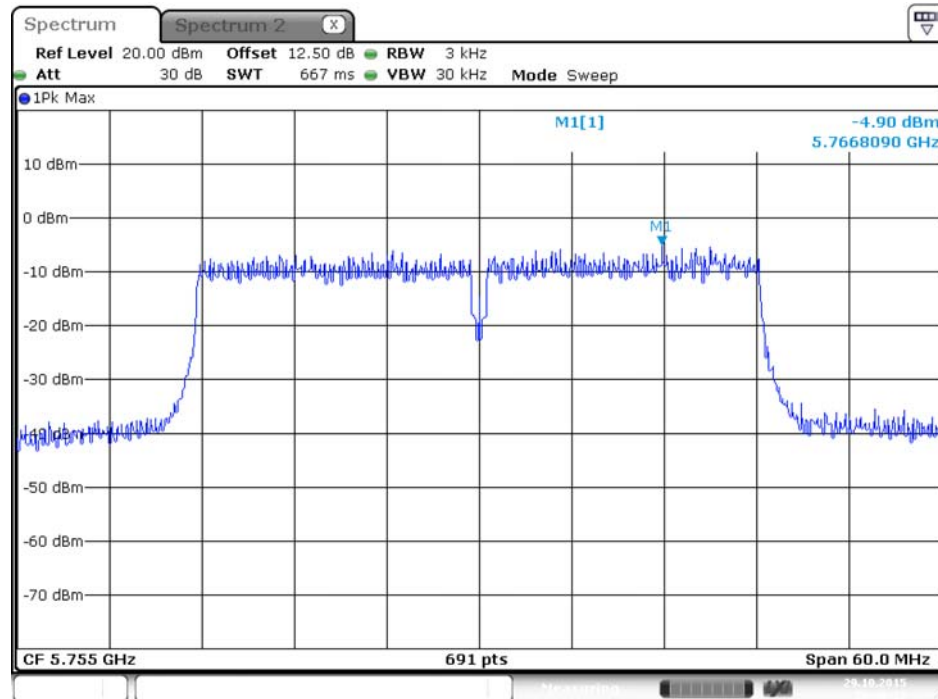

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5755 MHz / Chain 4

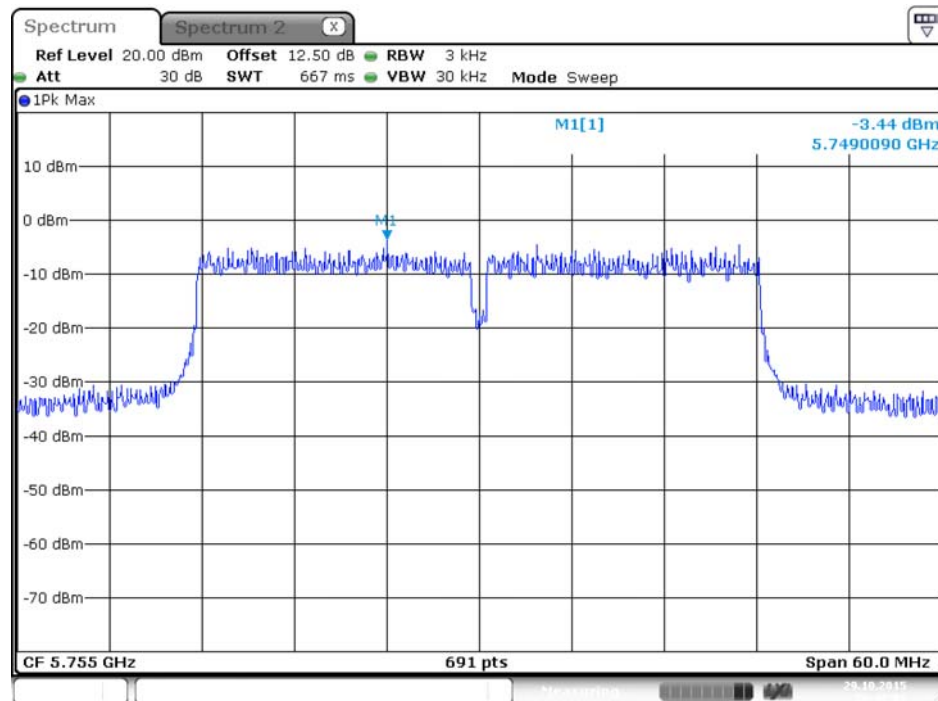


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1

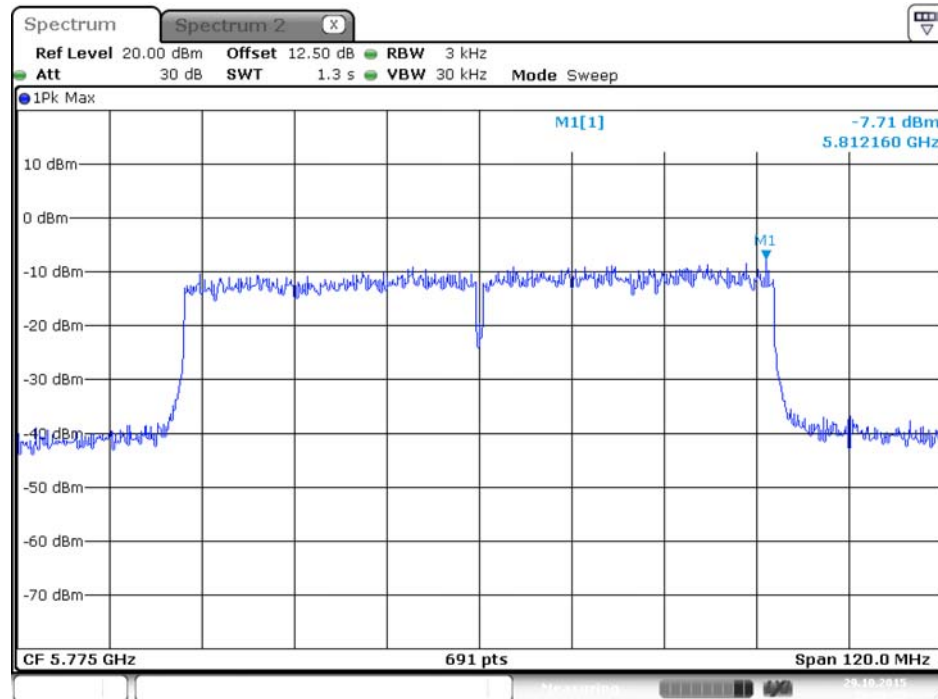


Date: 29.OCT.2015 20:26:24

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 2

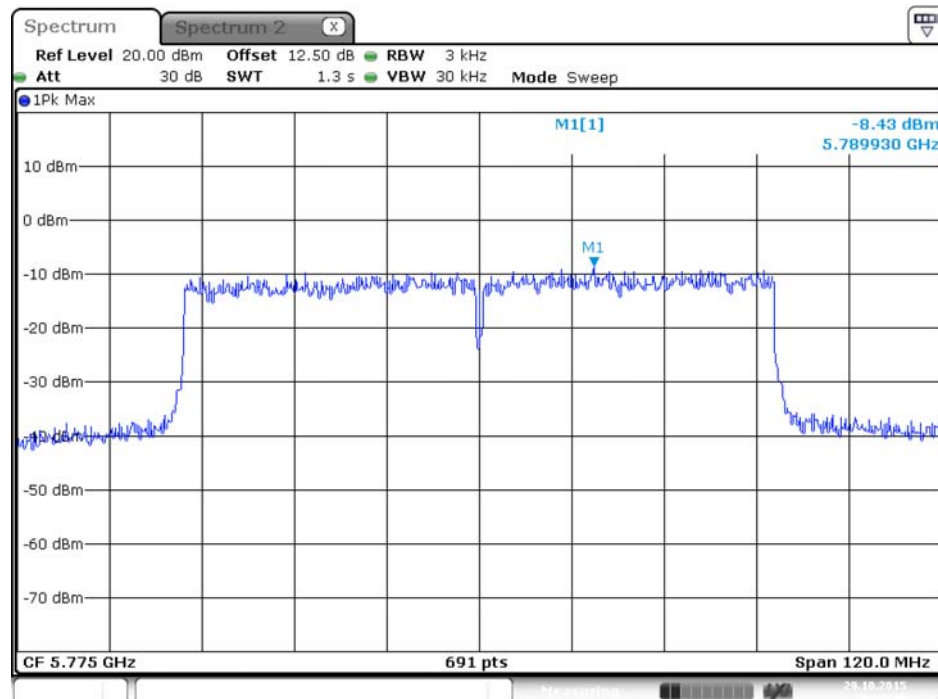


Date: 29.OCT.2015 20:25:48

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 3

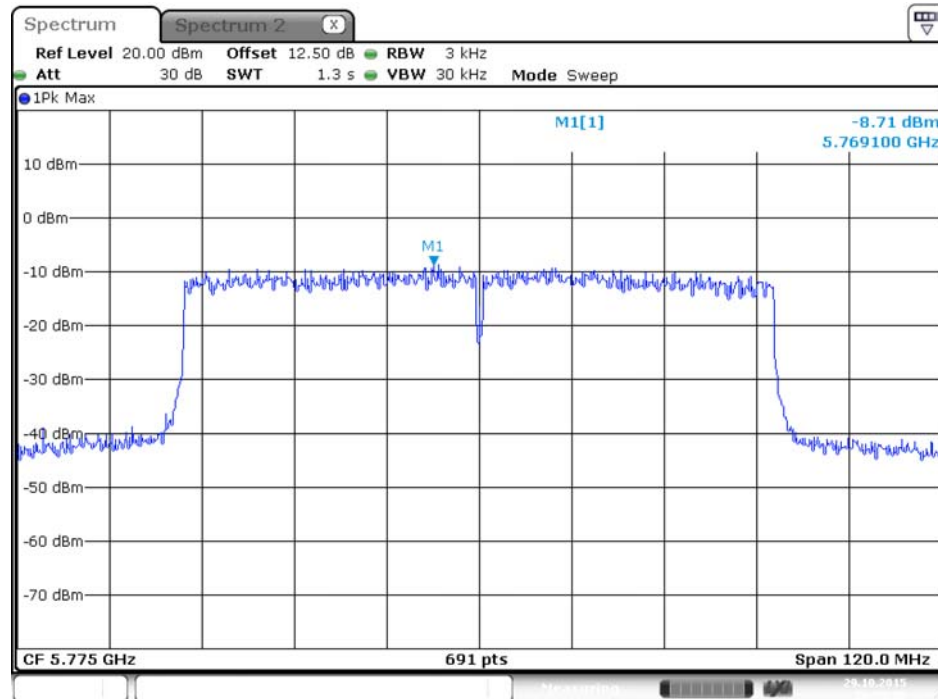

Date: 29.OCT.2015 20:25:08

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 4

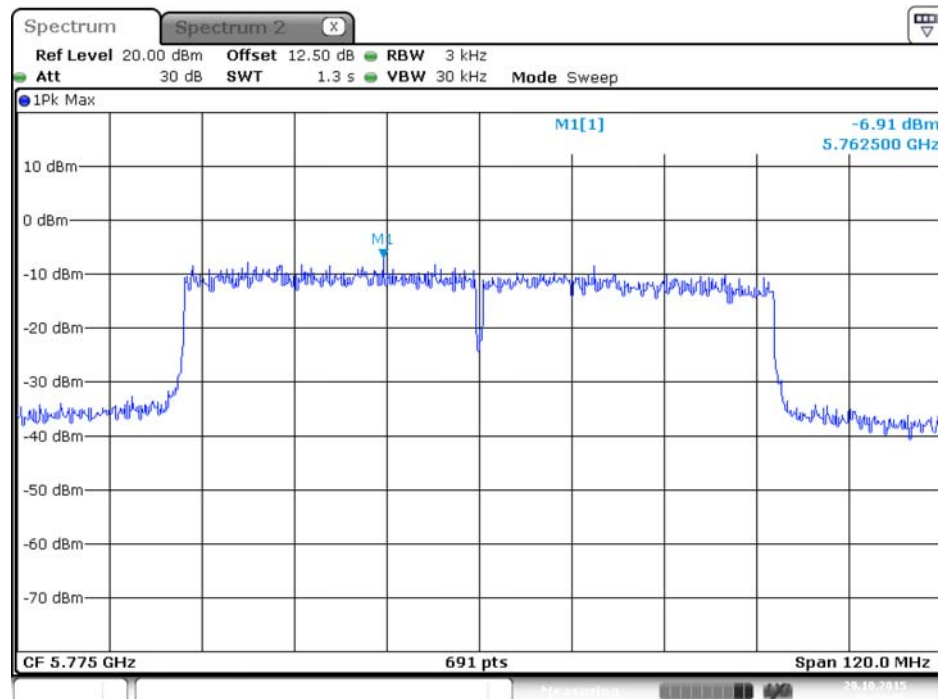

Date: 29.OCT.2015 20:23:56

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

6dB Spectrum Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

4.4.3. Test Procedures

For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measured the spectrum width with power higher than 6dB below carrier.

4.4.4. Test Setup Layout

For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	25°C	Humidity	58%
Test Engineer	For 2.4GHz Band: Andy Tsai		
	For 5GHz Band: Kenneth Huang		

For 2.4GHz Band

Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11b	2412 MHz	7.07	10.42	500	Complies
	2437 MHz	7.54	10.42	500	Complies
	2462 MHz	7.54	10.42	500	Complies
802.11g	2412 MHz	4.46	15.72	500	Complies
	2437 MHz	4.46	15.98	500	Complies
	2462 MHz	4.29	15.98	500	Complies
802.11ac MCS0/Nss1 VHT20	2412 MHz	10.14	16.93	500	Complies
	2437 MHz	10.49	17.19	500	Complies
	2462 MHz	10.14	17.11	500	Complies
802.11ac MCS0/Nss1 VHT40	2422 MHz	35.25	36.32	500	Complies
	2437 MHz	33.86	36.47	500	Complies
	2452 MHz	33.86	36.47	500	Complies

For 5GHz Band


Mode	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
802.11a	5745 MHz	14.55	18.23	500	Complies
	5785 MHz	14.49	19.45	500	Complies
	5825 MHz	6.90	19.10	500	Complies
802.11ac MCS0/Nss1 VHT20	5745 MHz	15.71	18.23	500	Complies
	5785 MHz	15.71	18.67	500	Complies
	5825 MHz	15.71	18.67	500	Complies
802.11ac MCS0/Nss1 VHT40	5755 MHz	32.00	37.05	500	Complies
	5795 MHz	31.30	37.34	500	Complies
802.11ac MCS0/Nss1 VHT80	5775 MHz	72.17	76.41	500	Complies

Note: All the test values were listed in the report.


For plots, only the channel with worse result was shown.

For 2.4GHz Band


6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

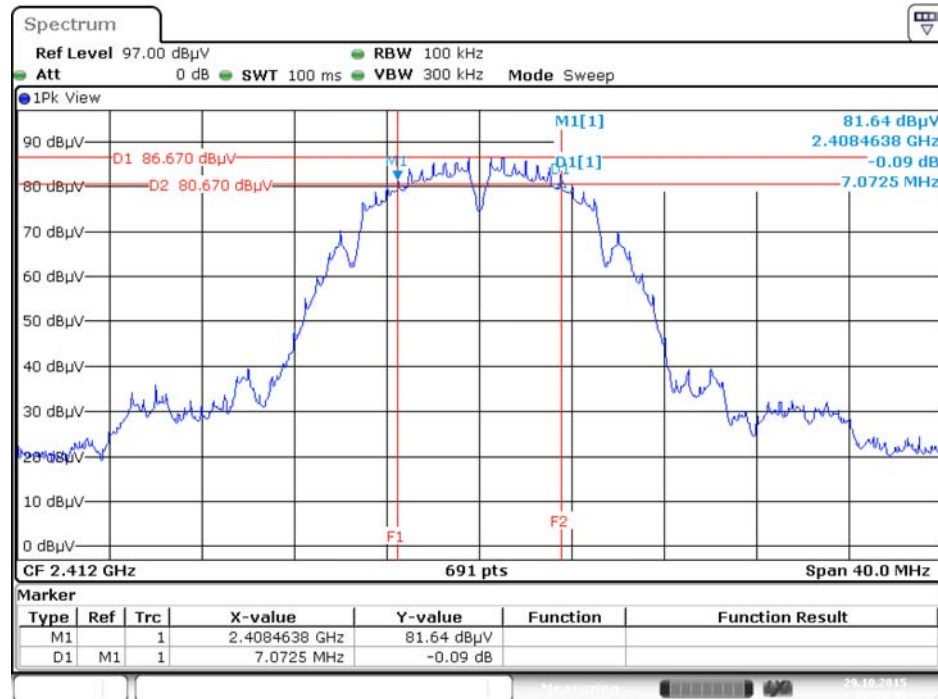

99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

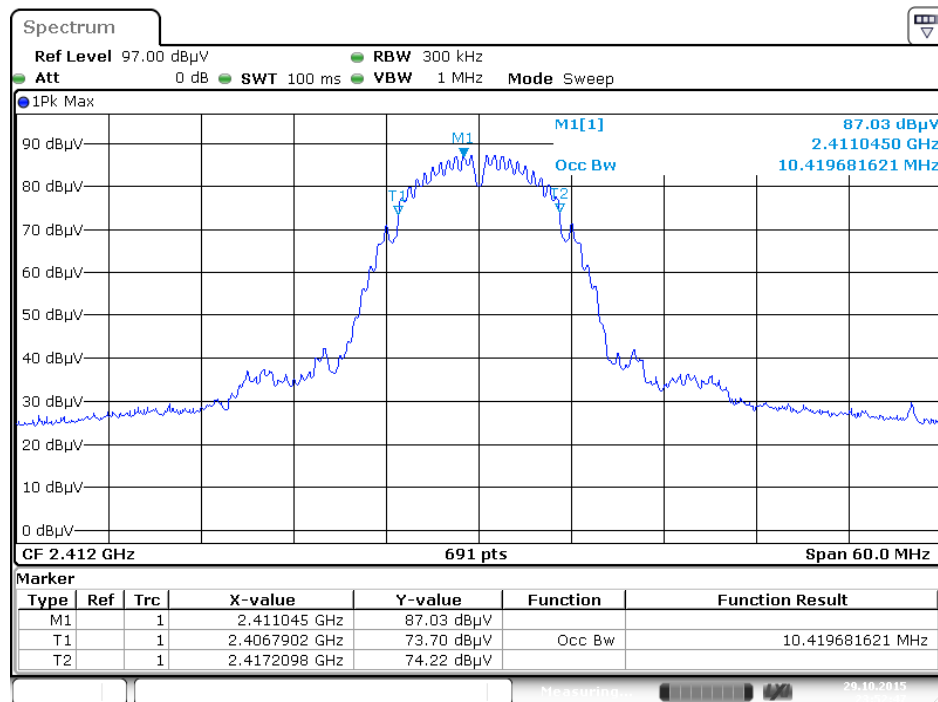


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

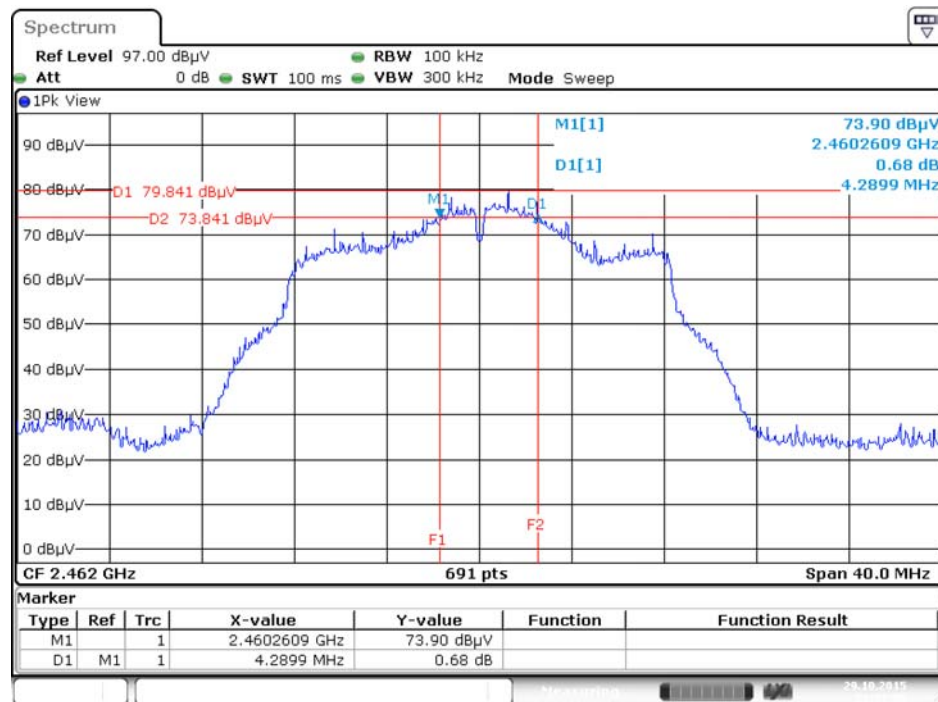


Date: 29.OCT.2015 23:57:55

99% Occupied Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

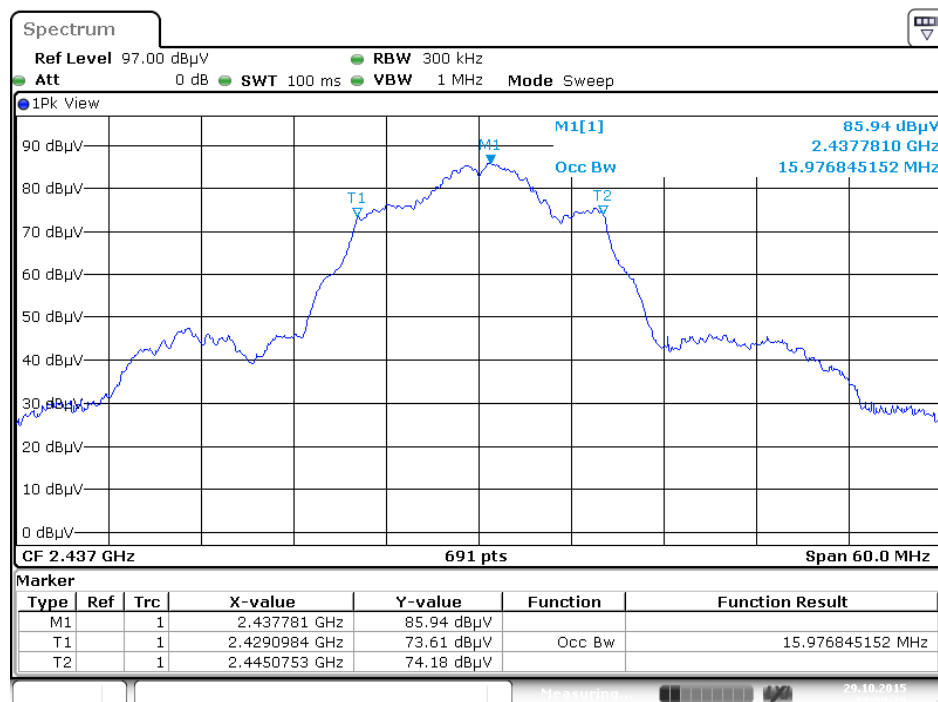

Date: 29.OCT.2015 23:59:29

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2412 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

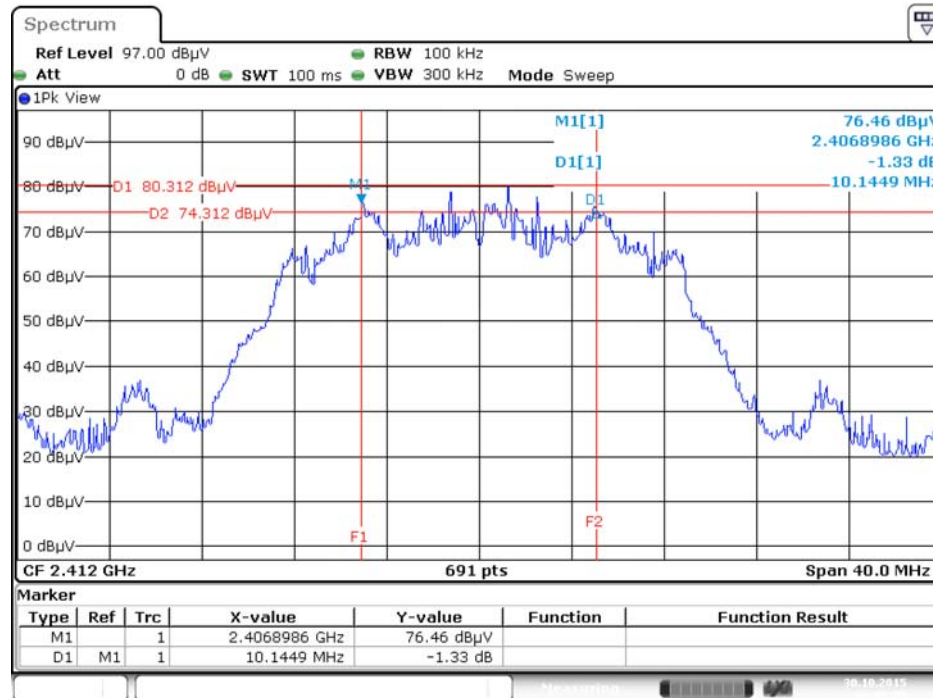


Date: 30.OCT.2015 00:02:58

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




Date: 30.OCT.2015 00:04:11

6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2422 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

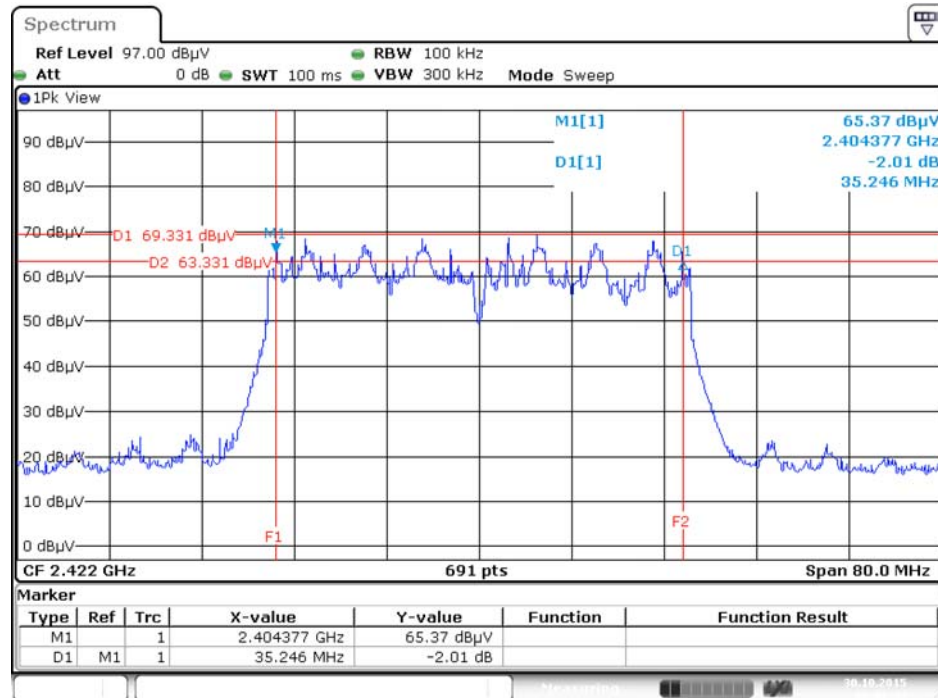

Date: 30.OCT.2015 00:06:44


99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 2437 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

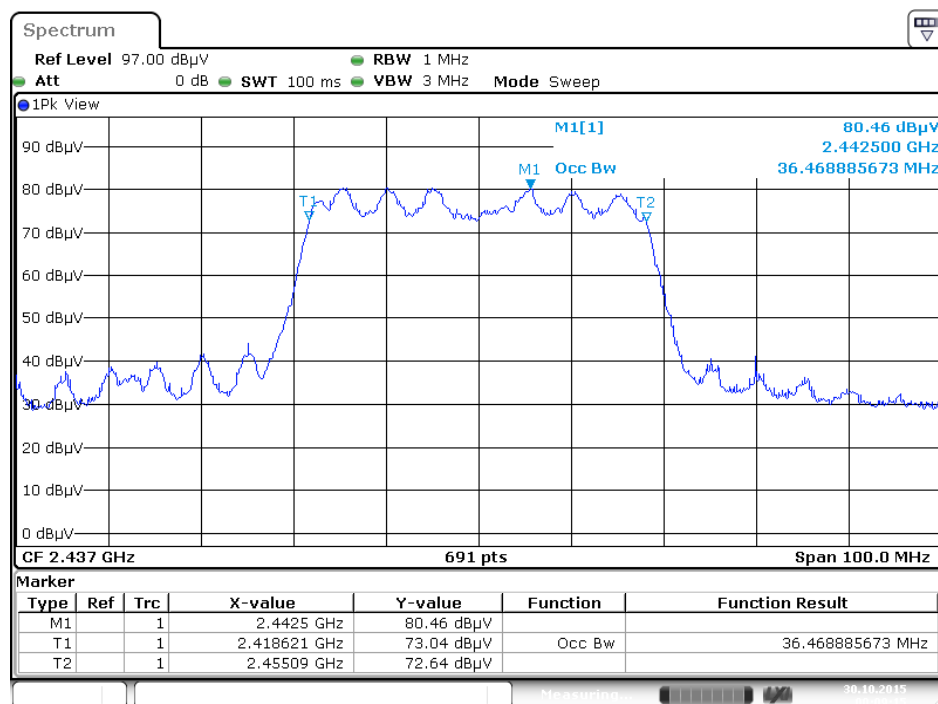

Date: 30.OCT.2015 00:09:15

For 5GHz Band


6 dB Bandwidth Plot on Configuration IEEE 802.11a / 5825 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

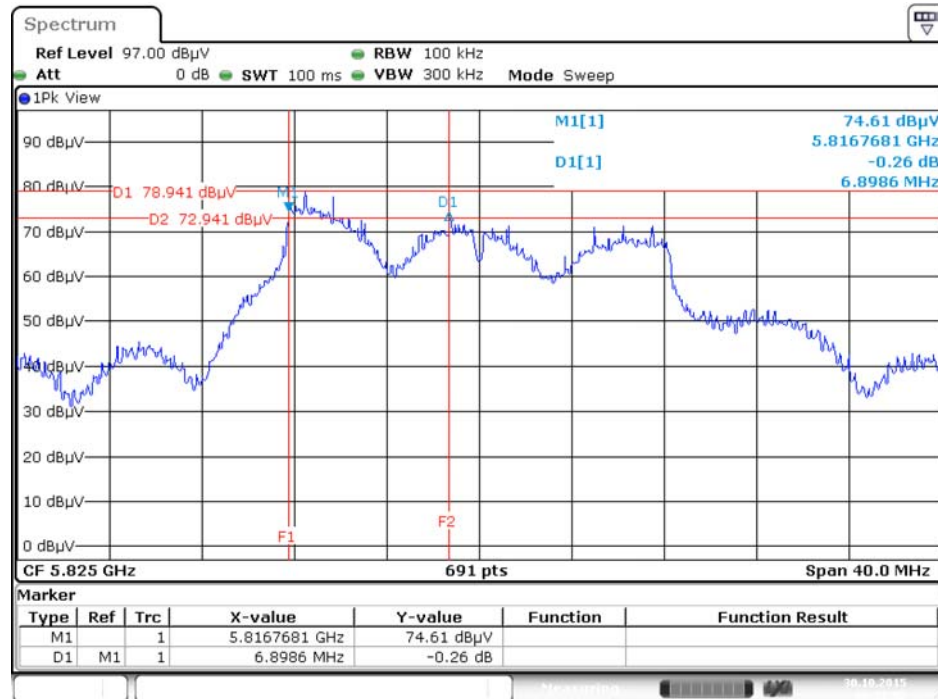

99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5785 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4




6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5745 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

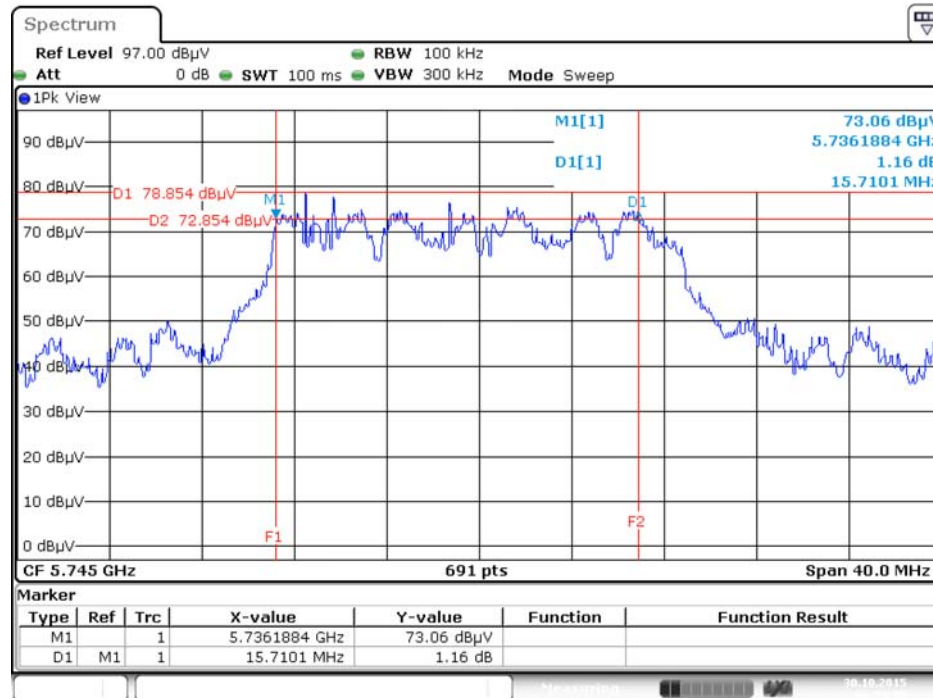


Date: 30.OCT.2015 00:35:59

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / 5785 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

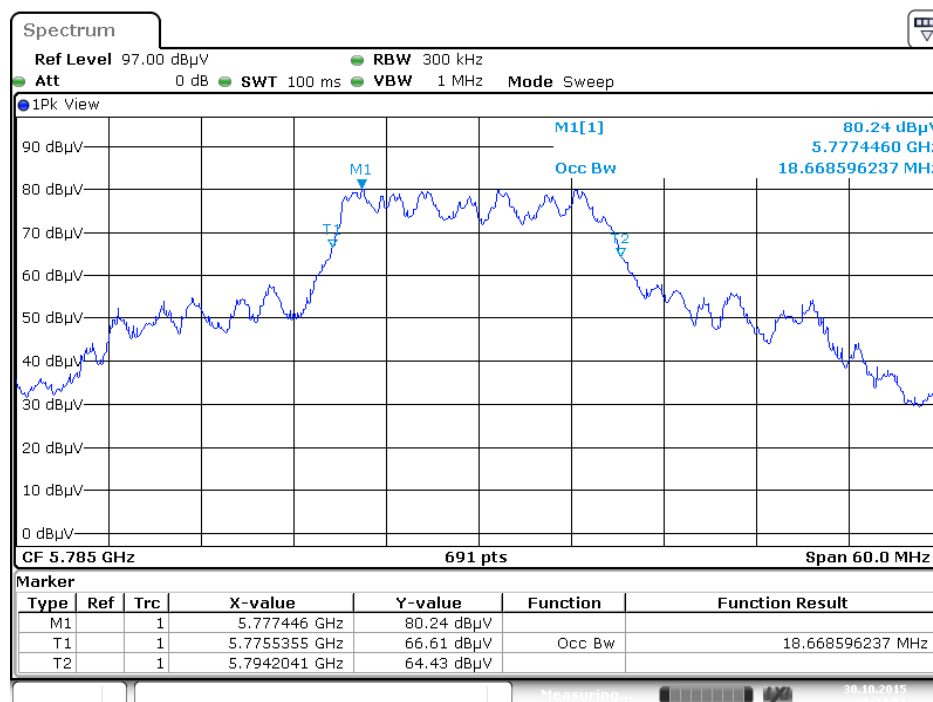


Date: 30.OCT.2015 00:34:51


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

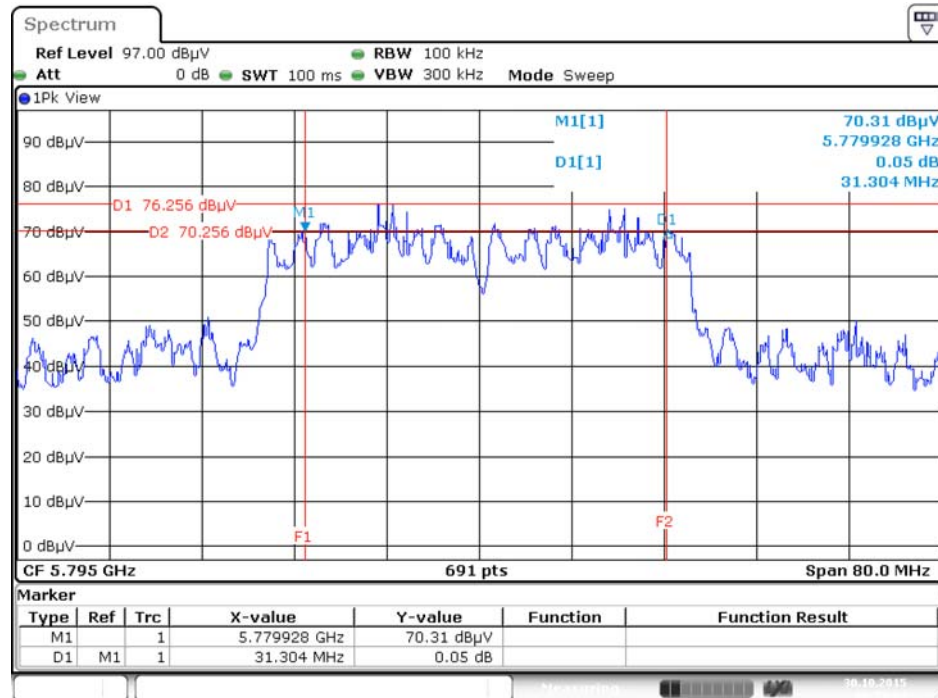

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / 5795 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

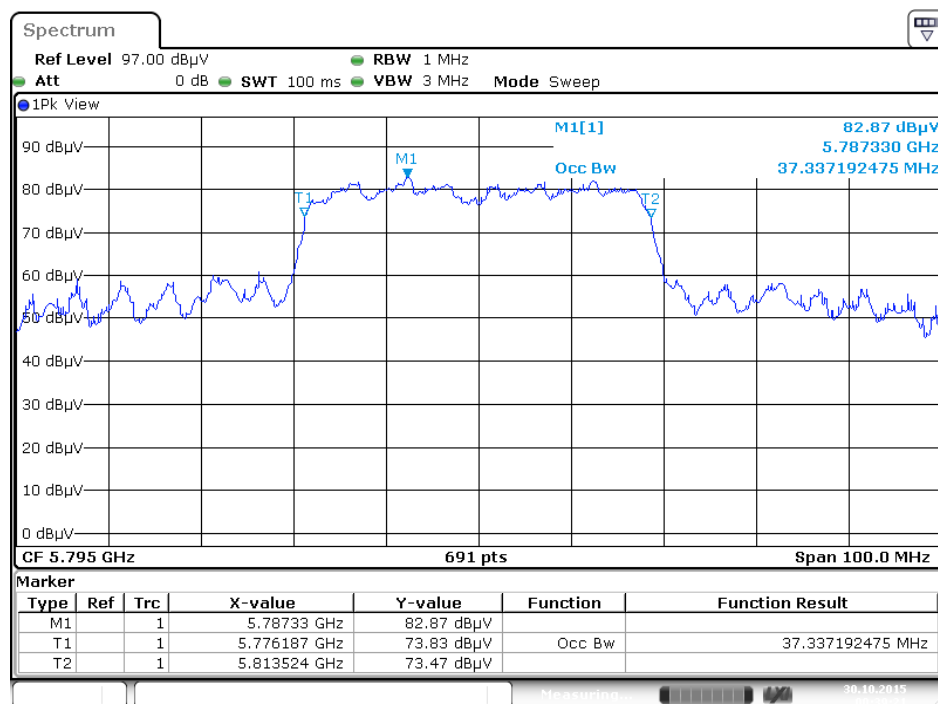


6 dB Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

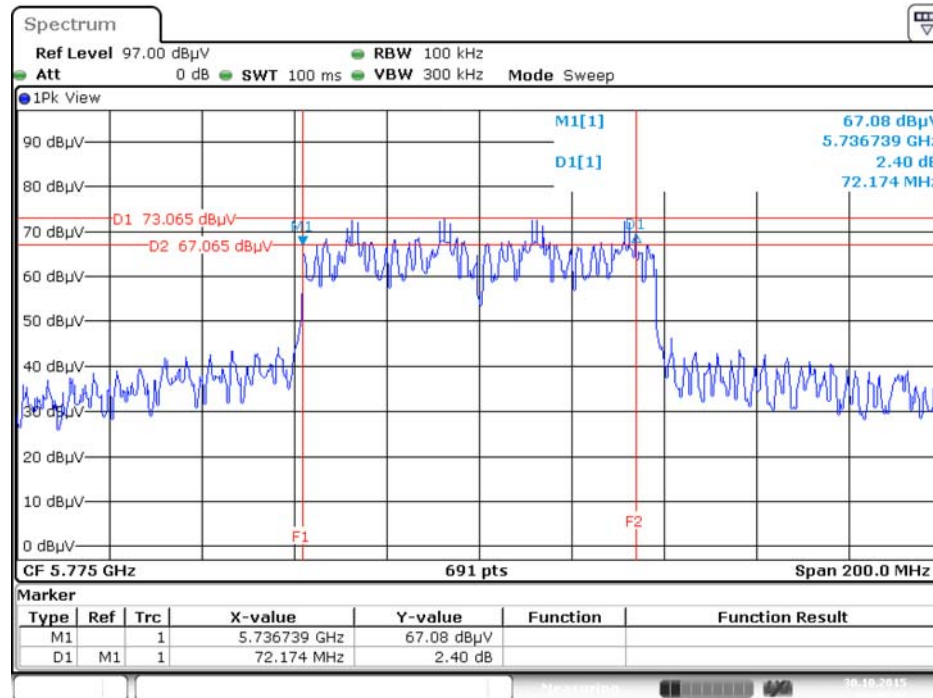

Date: 30.OCT.2015 00:40:42

99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / 5775 MHz / Chain 1 + Chain 2 + Chain 3 + Chain 4

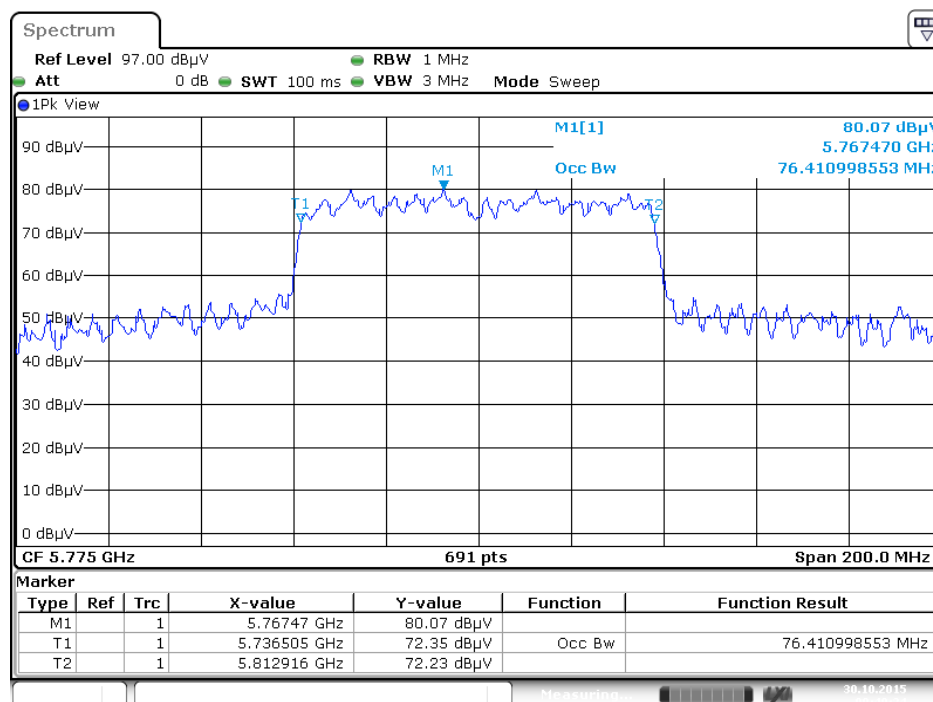

Date: 30.OCT.2015 00:40:24

4.5. Radiated Emissions Measurement

4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1GHz / RBW 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

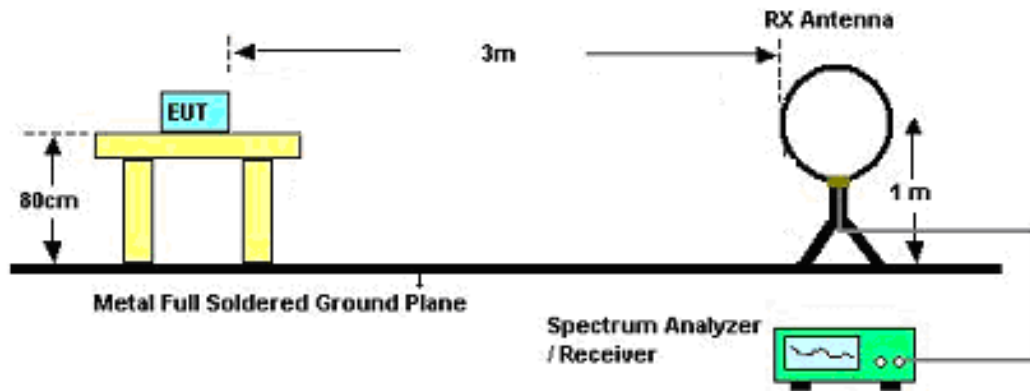

For Radiated Emissions: 30MHz~1GHz

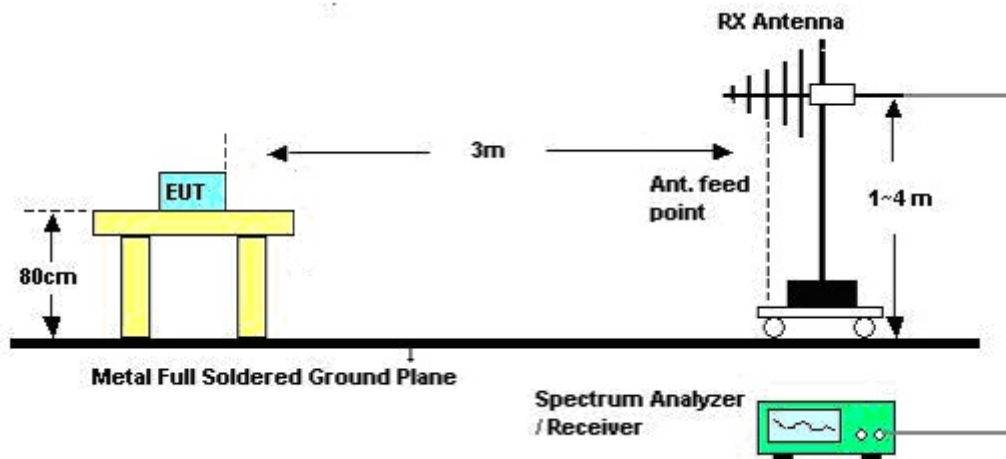

For Radiated Emissions: Above 1GHz

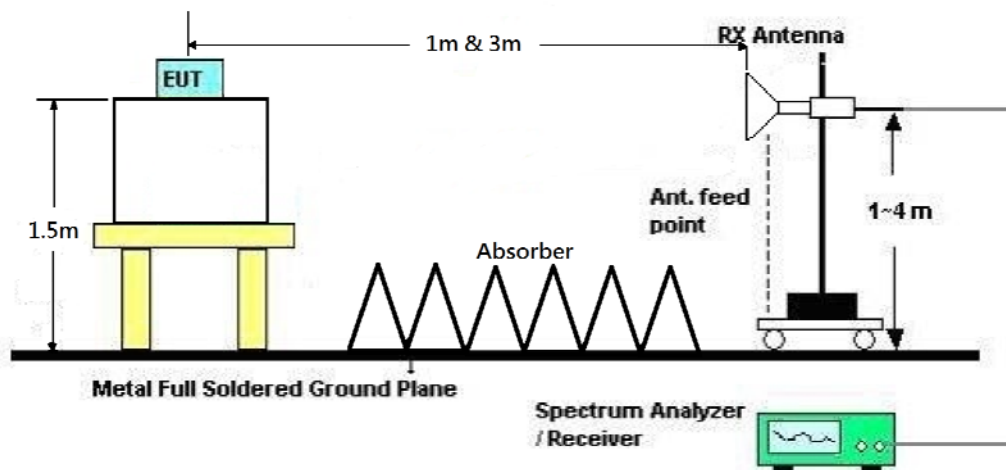

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	CTX
Test Date	Oct. 31, 2015	Test Mode	Mode 3

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	CTX
Test Mode	Mode 3		

Horizontal

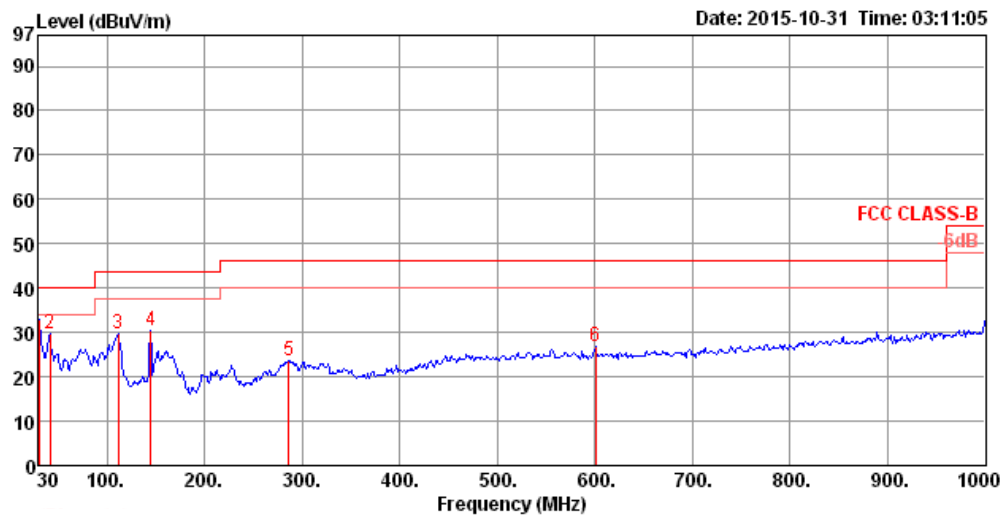

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.00	32.83	40.00	-7.17	35.89	0.64	19.90	23.60	300	166	HORIZONTAL Peak
2	41.64	29.88	40.00	-10.12	40.34	0.76	12.91	24.13	300	166	HORIZONTAL Peak
3	111.48	29.64	43.50	-13.86	42.70	1.26	12.44	26.76	300	166	HORIZONTAL Peak
4	144.46	30.47	43.50	-13.03	45.85	1.43	11.60	28.41	300	166	HORIZONTAL Peak
5	286.08	23.69	46.00	-22.31	37.78	2.06	13.52	29.67	300	166	HORIZONTAL Peak
6	600.36	26.80	46.00	-19.20	32.63	3.12	19.00	27.95	300	166	HORIZONTAL Peak

Vertical

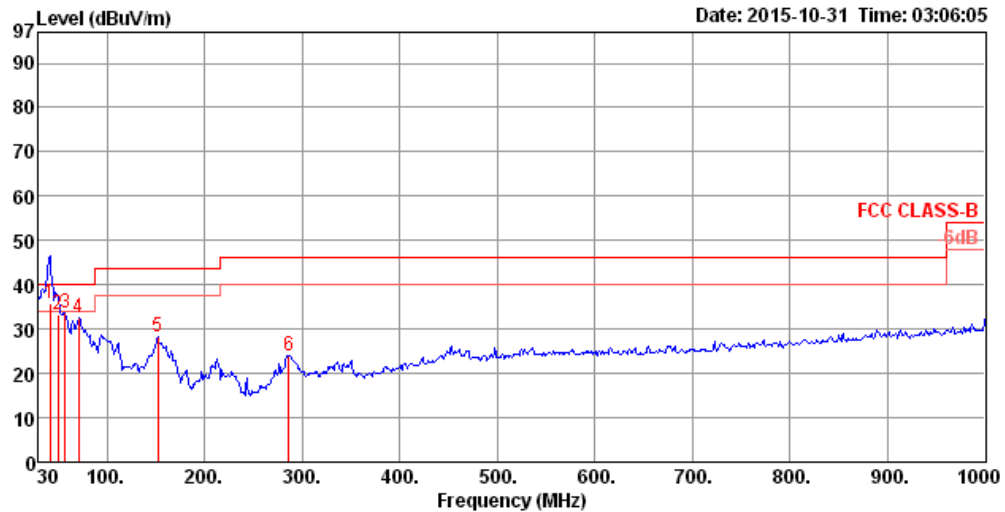

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	41.64	35.62	40.00	-4.38	46.08	0.76	12.91	24.13	100	195	VERTICAL QP
2	49.40	33.31	40.00	-6.69	47.70	0.83	9.19	24.41	100	305	VERTICAL QP
3	57.16	33.49	40.00	-6.51	49.98	0.88	7.37	24.74	300	360	VERTICAL Peak
4	70.74	32.60	40.00	-7.40	50.09	1.00	6.76	25.25	300	360	VERTICAL Peak
5	152.22	28.19	43.50	-15.31	44.47	1.48	10.99	28.75	300	360	VERTICAL Peak
6	286.08	24.03	46.00	-21.97	38.12	2.06	13.52	29.67	300	360	VERTICAL Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.21	46.64	74.00	-27.36	40.49	6.11	33.12	33.08	159	263	Peak	HORIZONTAL
2	4823.52	33.68	54.00	-20.32	27.53	6.11	33.12	33.08	159	263	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4823.04	33.61	54.00	-20.39	27.46	6.11	33.12	33.08	157	251	Average	VERTICAL
2	4824.84	46.55	74.00	-27.45	40.40	6.11	33.12	33.08	157	251	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.02	34.95	54.00	-19.05	28.72	6.08	33.23	33.08	160	285	Average	HORIZONTAL
2	4874.11	47.07	74.00	-26.93	40.84	6.08	33.23	33.08	160	285	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.26	47.39	74.00	-26.61	41.16	6.08	33.23	33.08	162	256	Peak	VERTICAL
2	4874.06	34.25	54.00	-19.75	28.02	6.08	33.23	33.08	162	256	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.24	34.17	54.00	-19.83	27.83	6.05	33.35	33.06	165	211	Average	HORIZONTAL
2	4924.47	47.57	74.00	-26.43	41.23	6.05	33.35	33.06	165	211	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.38	33.98	54.00	-20.02	27.64	6.05	33.35	33.06	161	221	Average	VERTICAL
2	4924.90	47.05	74.00	-26.95	40.71	6.05	33.35	33.06	161	221	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.09	46.38	74.00	-27.62	40.23	6.11	33.12	33.08	158	254	Peak	HORIZONTAL
2	4823.29	33.80	54.00	-20.20	27.65	6.11	33.12	33.08	158	254	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.05	46.62	74.00	-27.38	40.47	6.11	33.12	33.08	156	223	Peak	VERTICAL
2	4824.82	33.69	54.00	-20.31	27.54	6.11	33.12	33.08	156	223	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.08	33.90	54.00	-20.10	27.67	6.08	33.23	33.08	155	218	Average	HORIZONTAL
2	4874.54	46.78	74.00	-27.22	40.55	6.08	33.23	33.08	155	218	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.07	34.20	54.00	-19.80	27.97	6.08	33.23	33.08	158	208	Average	VERTICAL
2	4874.16	46.98	74.00	-27.02	40.75	6.08	33.23	33.08	158	208	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4924.24	47.35	74.00	-26.65	41.01	6.05	33.35	33.06	162	198	Peak	HORIZONTAL
2	4924.92	34.23	54.00	-19.77	27.89	6.05	33.35	33.06	162	198	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.36	34.08	54.00	-19.92	27.74	6.05	33.35	33.06	164	210	Average	VERTICAL
2	4923.74	47.72	74.00	-26.28	41.38	6.05	33.35	33.06	164	210	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.13	33.84	54.00	-20.16	27.69	6.11	33.12	33.08	159	212	Average	HORIZONTAL
2	4824.45	46.80	74.00	-27.20	40.65	6.11	33.12	33.08	159	212	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4823.50	46.44	74.00	-27.56	40.29	6.11	33.12	33.08	152	211	Peak	VERTICAL
2	4823.51	33.68	54.00	-20.32	27.53	6.11	33.12	33.08	152	211	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.89	46.75	74.00	-27.25	40.52	6.08	33.23	33.08	155	196	Peak	HORIZONTAL
2	4874.12	33.70	54.00	-20.30	27.47	6.08	33.23	33.08	155	196	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4873.87	34.54	54.00	-19.46	28.31	6.08	33.23	33.08	162	193	Average	VERTICAL
2	4874.46	47.70	74.00	-26.30	41.47	6.08	33.23	33.08	162	193	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.56	47.16	74.00	-26.84	40.82	6.05	33.35	33.06	157	201	Peak	HORIZONTAL
2	4924.52	34.05	54.00	-19.95	27.71	6.05	33.35	33.06	157	201	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4923.16	34.03	54.00	-19.97	27.69	6.05	33.35	33.06	155	187	Average	VERTICAL
2	4923.50	47.38	74.00	-26.62	41.04	6.05	33.35	33.06	155	187	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.51	46.78	74.00	-27.22	40.60	6.10	33.16	33.08	152	178	Peak	HORIZONTAL
2	4844.71	33.51	54.00	-20.49	27.33	6.10	33.16	33.08	152	178	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4843.20	46.75	74.00	-27.25	40.57	6.10	33.16	33.08	157	167	Peak	VERTICAL
2	4843.33	33.53	54.00	-20.47	27.35	6.10	33.16	33.08	157	167	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 6 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4873.74	47.69	74.00	-26.31	41.46	6.08	33.23	33.08	156	151	Peak	HORIZONTAL
2	4874.04	34.59	54.00	-19.41	28.36	6.08	33.23	33.08	156	151	Average	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4874.11	47.21	74.00	-26.79	40.98	6.08	33.23	33.08	162	147	Peak	VERTICAL
2	4874.26	33.90	54.00	-20.10	27.67	6.08	33.23	33.08	162	147	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4903.16	34.05	54.00	-19.95	27.74	6.07	33.31	33.07	164	147	Average	HORIZONTAL
2	4903.98	46.67	74.00	-27.33	40.36	6.07	33.31	33.07	164	147	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	4903.28	46.69	74.00	-27.31	40.38	6.07	33.31	33.07	159	127	Peak	VERTICAL
2	4904.64	33.91	54.00	-20.09	27.60	6.07	33.31	33.07	159	127	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11489.64	55.43	74.00	-18.57	39.21	10.71	38.88	33.37	195	231	Peak	HORIZONTAL
2	11489.68	42.98	54.00	-11.02	26.76	10.71	38.88	33.37	195	231	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11493.32	55.70	74.00	-18.30	39.47	10.72	38.88	33.37	196	223	Peak	VERTICAL
2	11494.92	42.56	54.00	-11.44	26.33	10.72	38.88	33.37	196	223	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11570.20	42.53	54.00	-11.47	26.22	10.76	38.94	33.39	197	225	Average	HORIZONTAL
2	11578.00	55.15	74.00	-18.85	38.84	10.76	38.94	33.39	197	225	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	Loss	Factor	Factor	cm	deg		
1	11560.28	42.40	54.00	-11.60	26.10	10.75	38.93	33.38	196	221	Average	VERTICAL
2	11571.12	55.73	74.00	-18.27	39.42	10.76	38.94	33.39	196	221	Peak	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11a CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11656.56	57.04	74.00	-16.96	40.65	10.81	38.99	33.41	182	219	Peak	HORIZONTAL
2	11660.00	44.03	54.00	-9.97	27.64	10.81	38.99	33.41	182	219	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11649.52	57.55	74.00	-16.45	41.17	10.81	38.98	33.41	179	216	Peak	VERTICAL
2	11657.60	43.98	54.00	-10.02	27.59	10.81	38.99	33.41	179	216	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 149 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11492.04	44.41	54.00	-9.59	28.19	10.71	38.88	33.37	178	218	Average	HORIZONTAL
2	11493.00	57.27	74.00	-16.73	41.05	10.71	38.88	33.37	178	218	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11492.04	57.04	74.00	-16.96	40.82	10.71	38.88	33.37	175	215	Peak	VERTICAL
2	11492.12	43.57	54.00	-10.43	27.35	10.71	38.88	33.37	175	215	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 157 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11567.40	55.88	74.00	-18.12	39.57	10.75	38.94	33.38	171	213	Peak
2	11573.20	43.07	54.00	-10.93	26.76	10.76	38.94	33.39	171	213	Average

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11560.96	55.86	74.00	-18.14	39.56	10.75	38.93	33.38	181	219	Peak	VERTICAL
2	11568.16	43.01	54.00	-10.99	26.70	10.75	38.94	33.38	181	219	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 165 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11651.44	57.00	74.00	-17.00	40.61	10.81	38.99	33.41	188	225	Peak	HORIZONTAL
2	11654.76	44.22	54.00	-9.78	27.83	10.81	38.99	33.41	188	225	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11646.12	57.59	74.00	-16.41	41.22	10.79	38.98	33.40	181	235	Peak	VERTICAL
2	11659.60	44.12	54.00	-9.88	27.73	10.81	38.99	33.41	181	235	Average	VERTICAL

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 151 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11518.04	42.55	54.00	-11.45	26.29	10.72	38.91	33.37	180	241	Average	HORIZONTAL
2	11518.24	54.92	74.00	-19.08	38.66	10.72	38.91	33.37	180	241	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11512.52	42.65	54.00	-11.35	26.40	10.72	38.90	33.37	177	239	Average
2	11517.56	55.29	74.00	-18.71	39.03	10.72	38.91	33.37	177	239	Peak

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 159 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11588.04	43.26	54.00	-10.74	26.94	10.76	38.95	33.39	175	227	Average	HORIZONTAL
2	11597.60	55.74	74.00	-18.26	39.41	10.78	38.95	33.40	175	227	Peak	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11593.56	43.40	54.00	-10.60	27.08	10.76	38.95	33.39	178	234	Average
2	11595.04	56.31	74.00	-17.69	39.99	10.76	38.95	33.39	178	234	Peak

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT80 CH 155 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 29, 2015		

Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	11547.08	55.23	74.00	-18.77	38.94	10.75	38.92	33.38	176	247	Peak	HORIZONTAL
2	11557.24	42.96	54.00	-11.04	26.66	10.75	38.93	33.38	176	247	Average	HORIZONTAL

Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	11542.76	42.97	54.00	-11.03	26.70	10.73	38.92	33.38	184	239	Average
2	11548.60	56.01	74.00	-17.99	39.71	10.75	38.93	33.38	184	239	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Emissions Measurement

4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure

4.6.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11b CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Channel 1

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.60	65.77	74.00	-8.23	33.09	4.37	28.31	0.00	237	344 Peak	HORIZONTAL
2	2390.00	53.86	54.00	-0.14	21.14	4.41	28.31	0.00	237	344 Average	HORIZONTAL
3	2411.20	120.51			87.76	4.41	28.34	0.00	237	344 Average	HORIZONTAL
4	2411.20	124.44			91.69	4.41	28.34	0.00	237	344 Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.00	59.61	74.00	-14.39	26.93	4.37	28.31	0.00	273	36 Peak	HORIZONTAL
2	2390.00	48.02	54.00	-5.98	15.30	4.41	28.31	0.00	273	36 Average	HORIZONTAL
3	2436.20	122.25			89.43	4.44	28.38	0.00	273	36 Average	HORIZONTAL
4	2438.20	126.50			93.65	4.44	28.41	0.00	273	36 Peak	HORIZONTAL
5	2484.20	60.64	74.00	-13.36	27.66	4.51	28.47	0.00	273	36 Peak	HORIZONTAL
6	2513.40	48.84	54.00	-5.16	15.73	4.55	28.56	0.00	273	36 Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2461.20	119.79			86.87	4.48	28.44	0.00	275	34 Average	HORIZONTAL
2	2461.20	123.78			90.86	4.48	28.44	0.00	275	34 Peak	HORIZONTAL
3	2483.50	53.45	54.00	-0.55	20.47	4.51	28.47	0.00	275	34 Average	HORIZONTAL
4	2483.50	64.94	74.00	-9.06	31.96	4.51	28.47	0.00	275	34 Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11g CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2388.99	70.53	74.00	-3.47	37.85	4.37	28.31	0.00	230	341	Peak	HORIZONTAL
2	2390.00	53.92	54.00	-0.08	21.20	4.41	28.31	0.00	230	341	Average	HORIZONTAL
3	2410.41	111.60			78.85	4.41	28.34	0.00	230	341	Average	HORIZONTAL
4	2410.41	123.22			90.47	4.41	28.34	0.00	230	341	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2385.66	70.43	74.00	-3.57	37.75	4.37	28.31	0.00	248	340	Peak	HORIZONTAL
2	2386.24	52.97	54.00	-1.03	20.29	4.37	28.31	0.00	248	340	Average	HORIZONTAL
3	2435.26	130.63			97.81	4.44	28.38	0.00	248	340	Peak	HORIZONTAL
4	2435.55	119.05			86.23	4.44	28.38	0.00	248	340	Average	HORIZONTAL
5	2484.08	53.86	54.00	-0.14	20.88	4.51	28.47	0.00	248	340	Average	HORIZONTAL
6	2486.10	73.30	74.00	-0.70	40.32	4.51	28.47	0.00	248	340	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2460.41	112.33			79.41	4.48	28.44	0.00	220	21	Average	HORIZONTAL
2	2460.41	123.94			91.02	4.48	28.44	0.00	220	21	Peak	HORIZONTAL
3	2483.50	53.98	54.00	-0.02	21.00	4.51	28.47	0.00	220	21	Average	HORIZONTAL
4	2483.50	70.03	74.00	-3.97	37.05	4.51	28.47	0.00	220	21	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT20 CH 1, 6, 11 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2386.82	73.78	74.00	-0.22	41.10	4.37	28.31	0.00	280	350	Peak	HORIZONTAL
2	2386.96	53.63	54.00	-0.37	20.95	4.37	28.31	0.00	280	350	Average	HORIZONTAL
3	2410.70	122.69			89.94	4.41	28.34	0.00	280	350	Peak	HORIZONTAL
4	2411.57	111.63			78.88	4.41	28.34	0.00	280	350	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2389.13	53.61	54.00	-0.39	20.93	4.37	28.31	0.00	116	343	Average	HORIZONTAL
2	2389.71	72.19	74.00	-1.81	39.51	4.37	28.31	0.00	116	343	Peak	HORIZONTAL
3	2434.68	117.66			84.84	4.44	28.38	0.00	116	343	Average	HORIZONTAL
4	2434.97	128.41			95.59	4.44	28.38	0.00	116	343	Peak	HORIZONTAL
5	2485.24	52.59	54.00	-1.41	19.61	4.51	28.47	0.00	116	343	Average	HORIZONTAL
6	2485.82	70.86	74.00	-3.14	37.88	4.51	28.47	0.00	116	343	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2461.42	111.69			78.77	4.48	28.44	0.00	300	344	Average	HORIZONTAL
2	2461.42	122.42			89.50	4.48	28.44	0.00	300	344	Peak	HORIZONTAL
3	2484.51	53.19	54.00	-0.81	20.21	4.51	28.47	0.00	300	344	Average	HORIZONTAL
4	2486.39	73.60	74.00	-0.40	40.62	4.51	28.47	0.00	300	344	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	25.2°C	Humidity	56%
Test Engineer	YC Chen	Configurations	IEEE 802.11ac MCS0/Nss1 VHT40 CH 3, 6, 9 / Chain 1 + Chain 2 + Chain 3 + Chain 4
Test Date	Oct. 28, 2015		

Channel 3

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2389.42	67.61	74.00	-6.39	34.93	4.37	28.31	0.00	150	360	Peak
2	2389.71	53.68	54.00	-0.32	21.00	4.37	28.31	0.00	150	360	Average
3	2409.26	112.23			79.48	4.41	28.34	0.00	150	360	Peak
4	2419.40	100.72			67.94	4.44	28.34	0.00	150	360	Average

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2390.00	53.57	54.00	-0.43	20.85	4.41	28.31	0.00	262	356	Average
2	2390.00	66.30	74.00	-7.70	33.58	4.41	28.31	0.00	262	356	Peak
3	2425.00	116.19			83.37	4.44	28.38	0.00	262	356	Peak
4	2430.20	105.05			72.23	4.44	28.38	0.00	262	356	Average
5	2484.20	50.65	54.00	-3.35	17.67	4.51	28.47	0.00	262	356	Average
6	2484.20	64.04	74.00	-9.96	31.06	4.51	28.47	0.00	262	356	Peak

Item 1, 2 are the fundamental frequency at 2437 MHz.

Channel 9

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2435.20	114.41			81.59	4.44	28.38	0.00	267	358	Peak
2	2440.40	103.20			70.35	4.44	28.41	0.00	267	358	Average
3	2484.40	65.85	74.00	-8.15	32.87	4.51	28.47	0.00	267	358	Peak
4	2484.80	53.79	54.00	-0.21	20.81	4.51	28.47	0.00	267	358	Average

Item 1, 2 are the fundamental frequency at 2452 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level

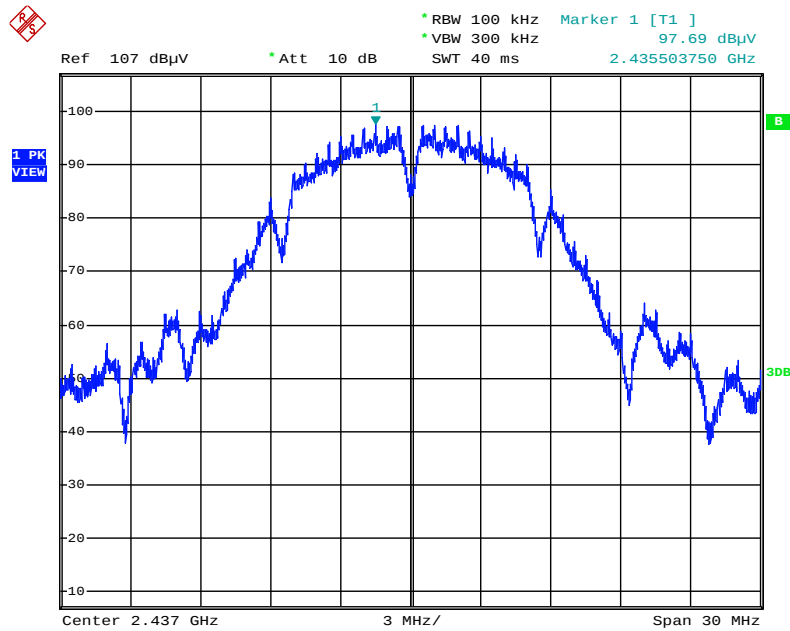


Date: 28.OCT.2015 20:17:22

Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc)

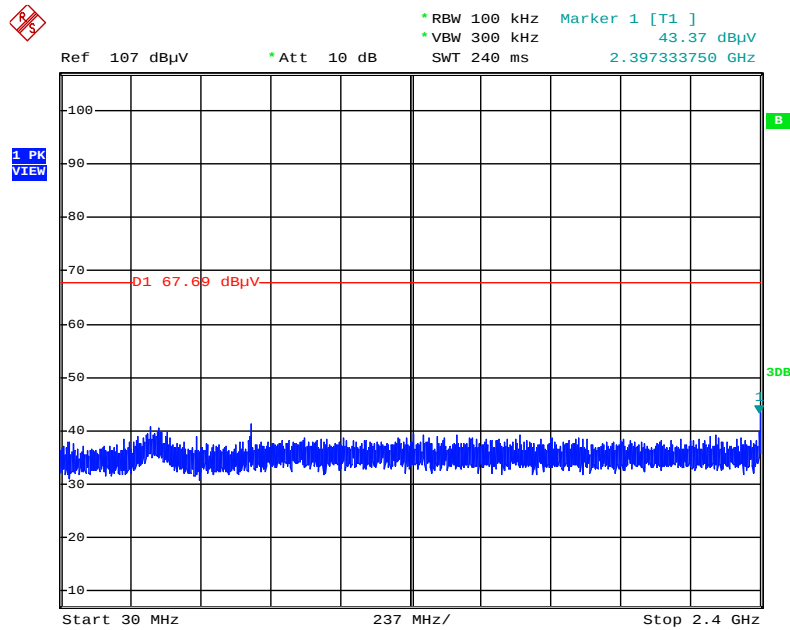


Date: 28.OCT.2015 20:18:49

Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc)

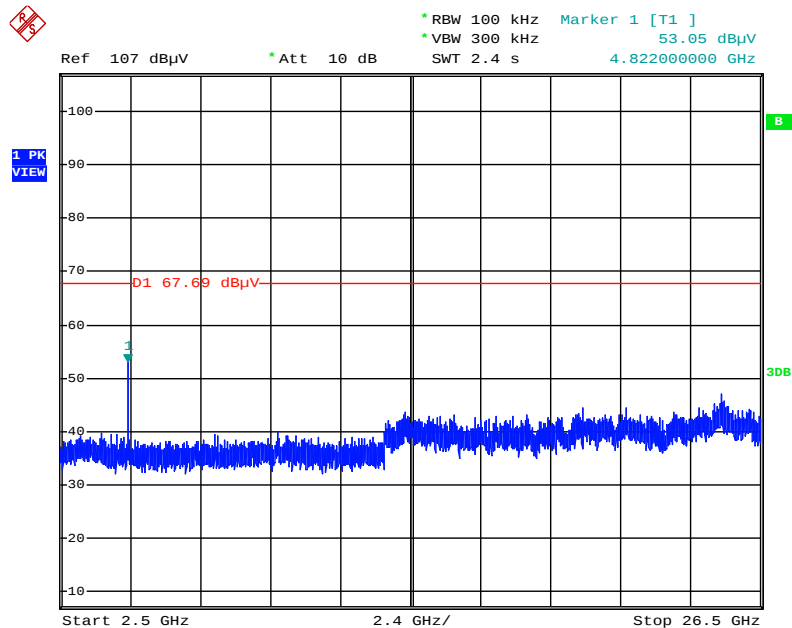


Date: 28.OCT.2015 20:19:13

Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc)

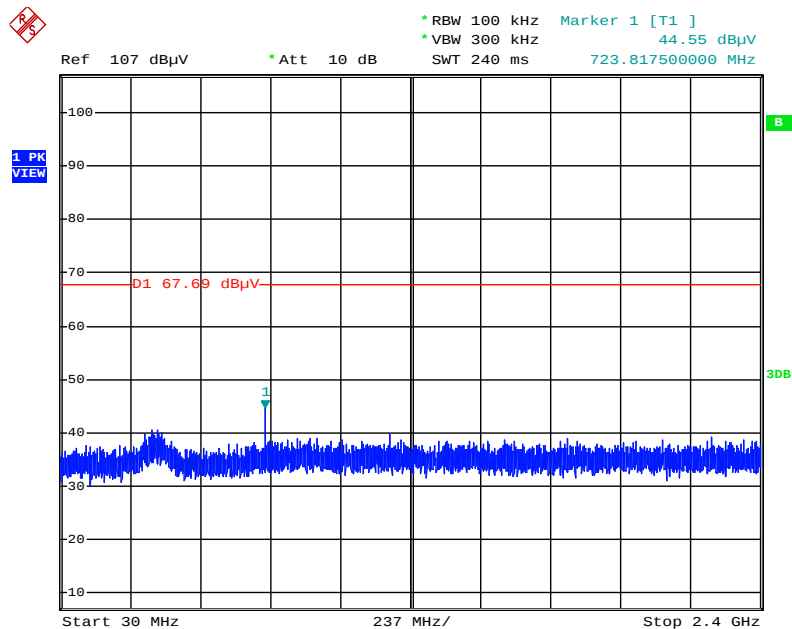


Date: 28.OCT.2015 20:20:37

Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc)

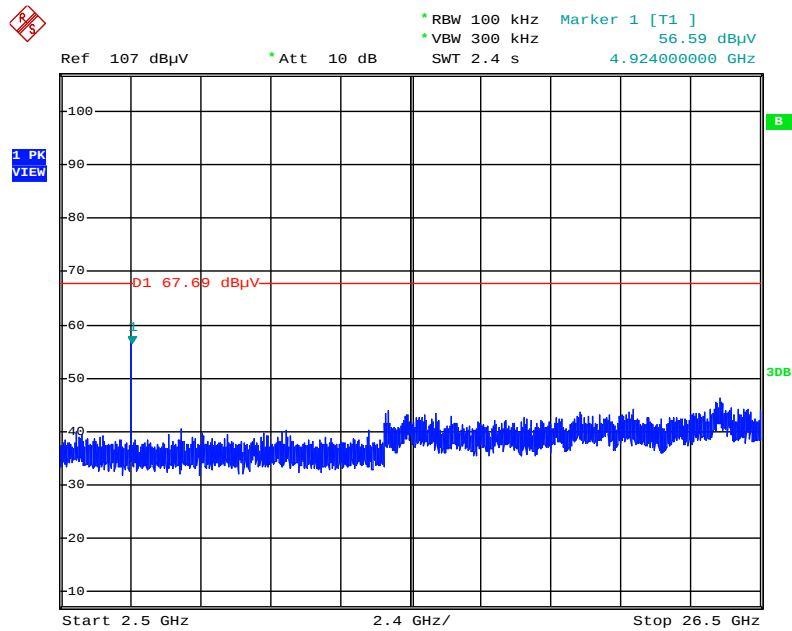


Date: 28.OCT.2015 20:20:16

Plot on Configuration IEEE 802.11g / Reference Level

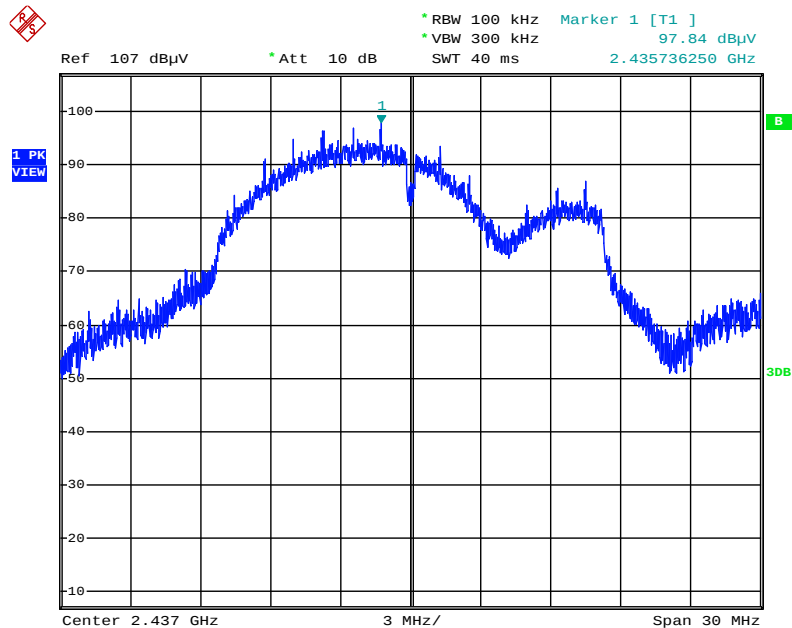


Date: 28.OCT.2015 20:24:33

Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc)

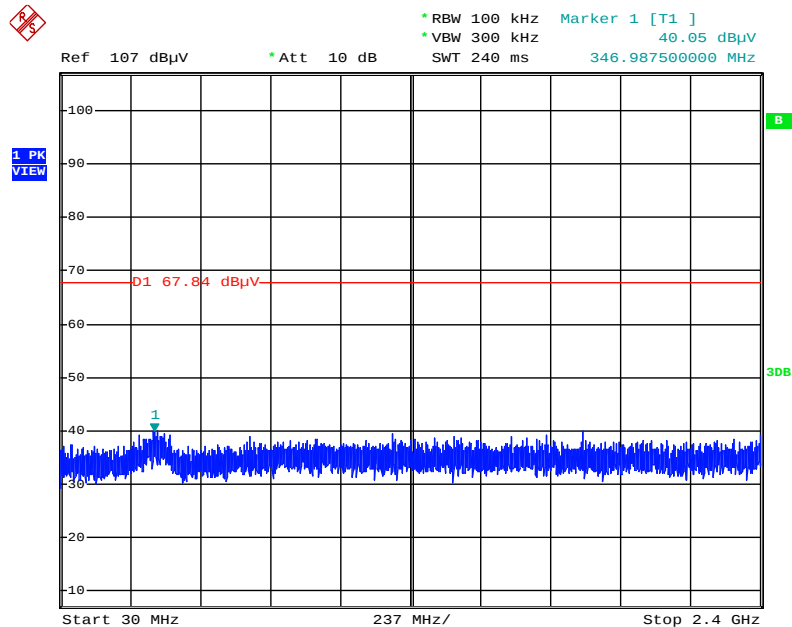


Date: 28.OCT.2015 20:26:37

Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc)

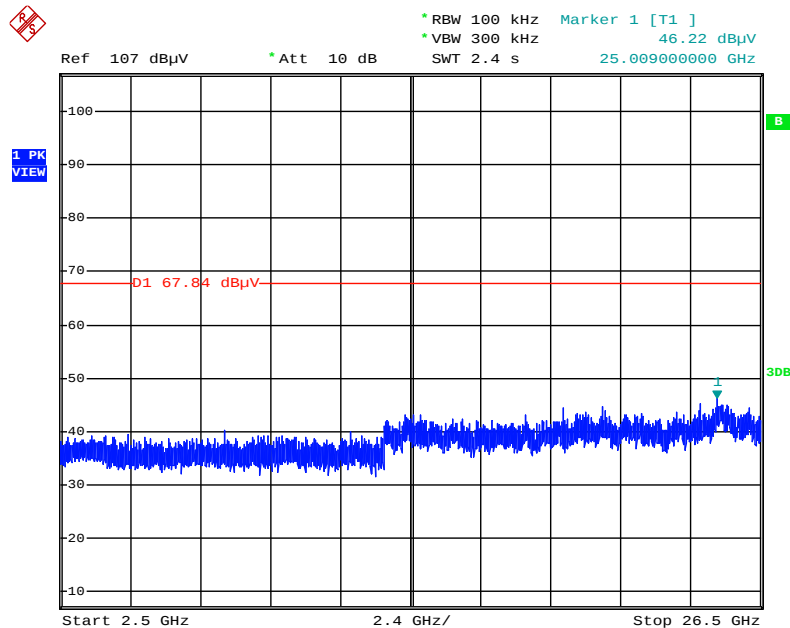


Date: 28.OCT.2015 20:27:02

Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc)

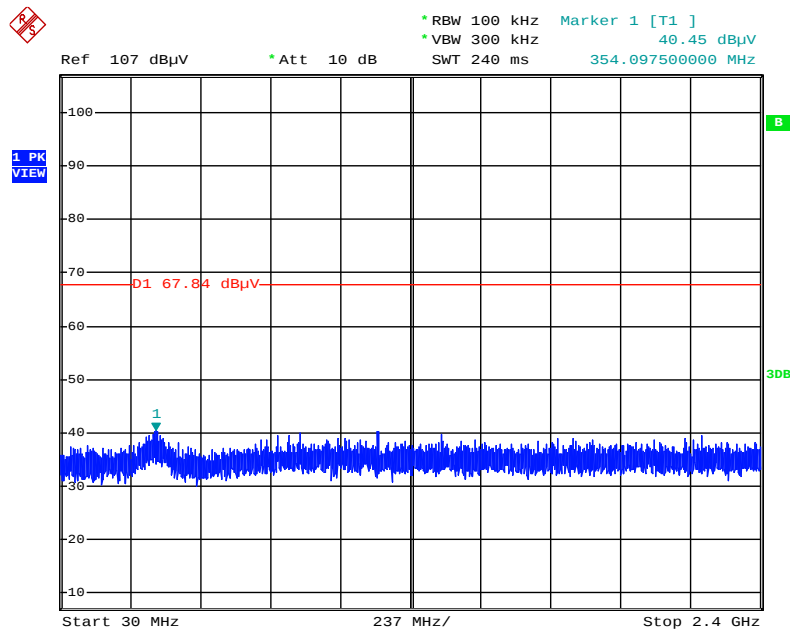


Date: 28.OCT.2015 20:29:10

Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc)

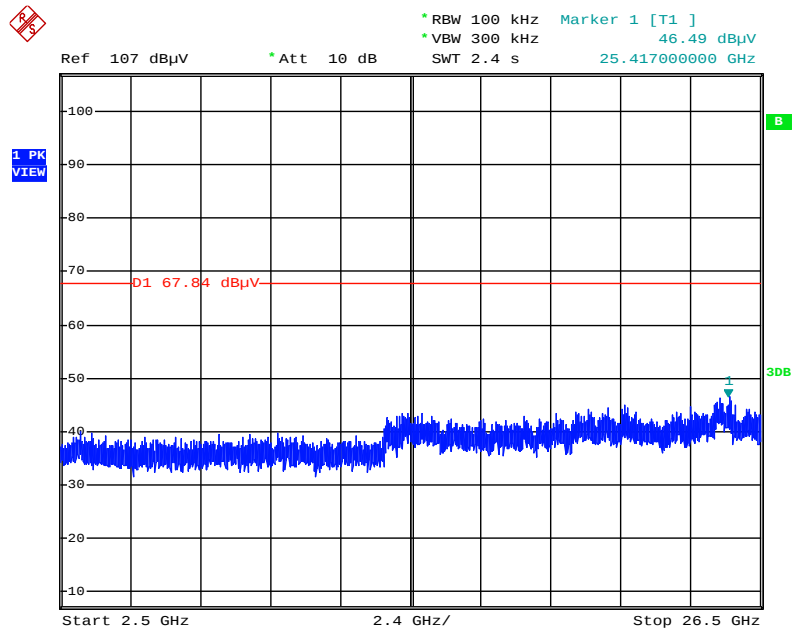


Date: 28.OCT.2015 20:28:23

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

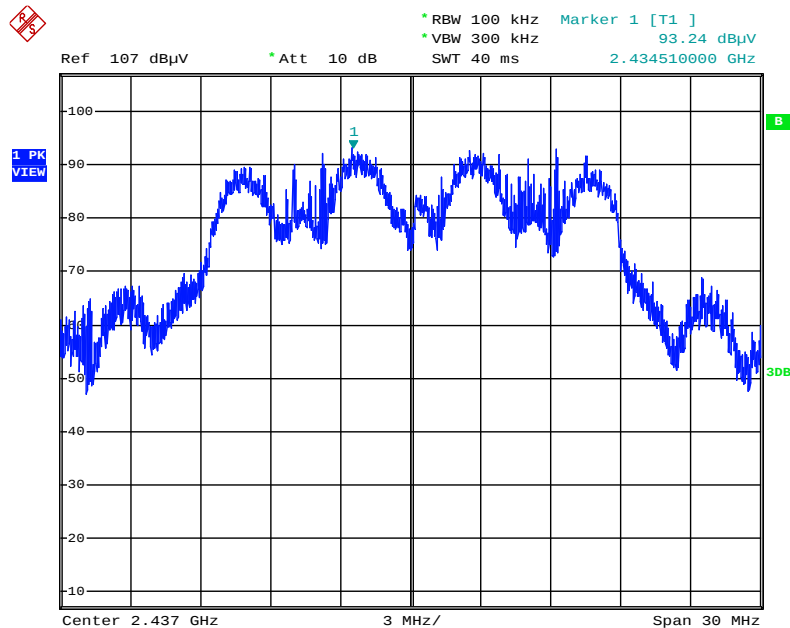


Date: 28.OCT.2015 20:34:15

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 30MHz~2400MHz (down 30dBc)

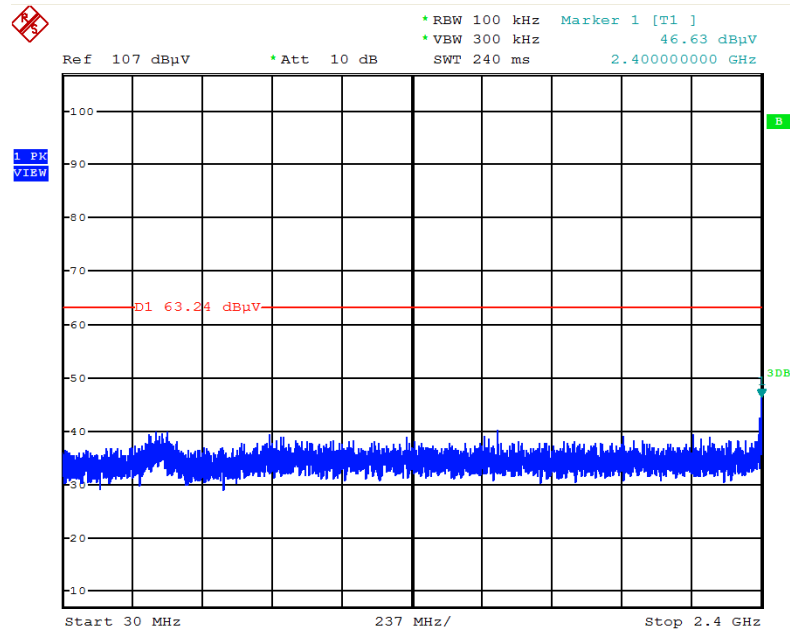


Date: 28.OCT.2015 20:36:15

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 1 / 2500MHz~26500MHz (down 30dBc)

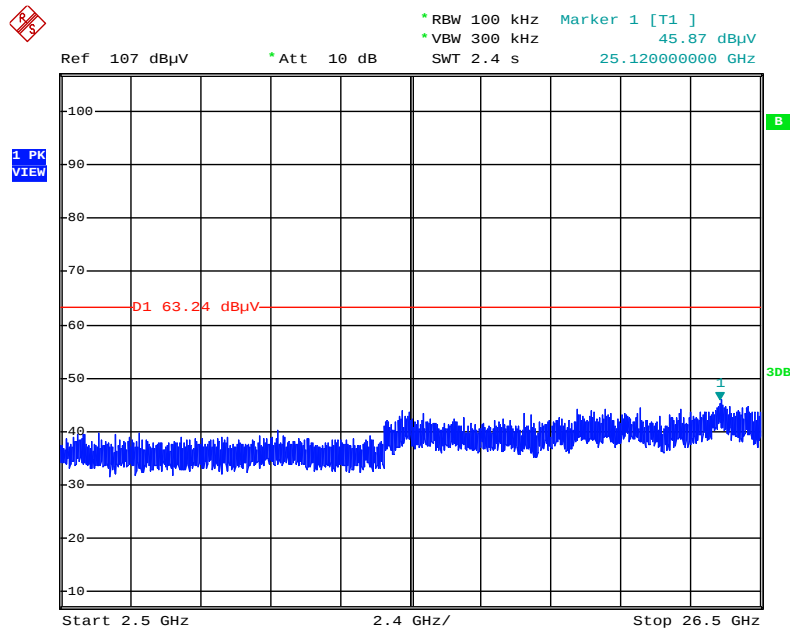


Date: 28.OCT.2015 20:38:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 30MHz~2400MHz (down 30dBc)

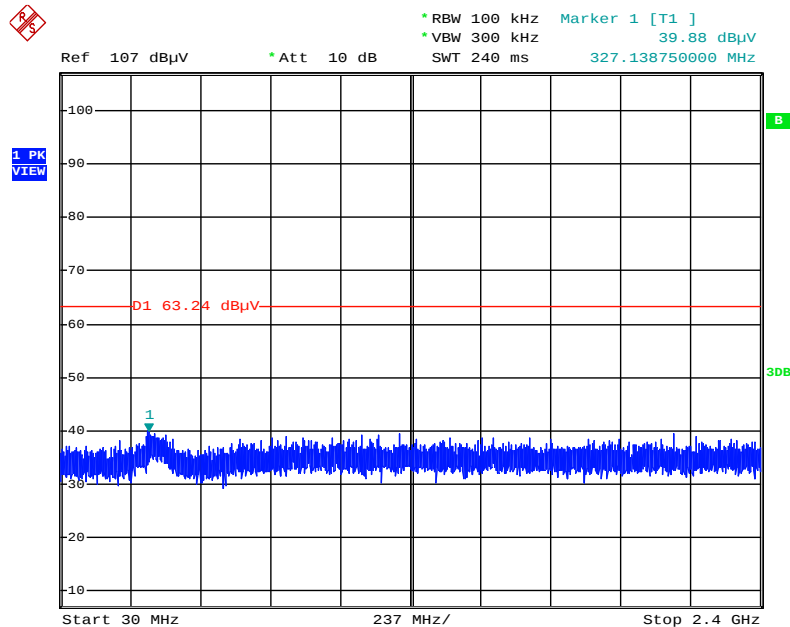


Date: 28.OCT.2015 20:40:17

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 11 / 2500MHz~26500MHz (down 30dBc)

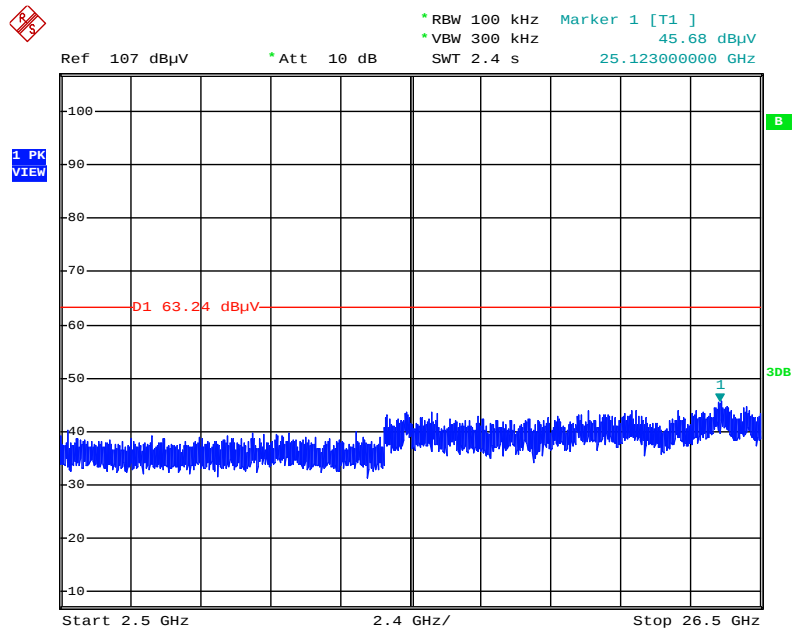


Date: 28.OCT.2015 20:39:43

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

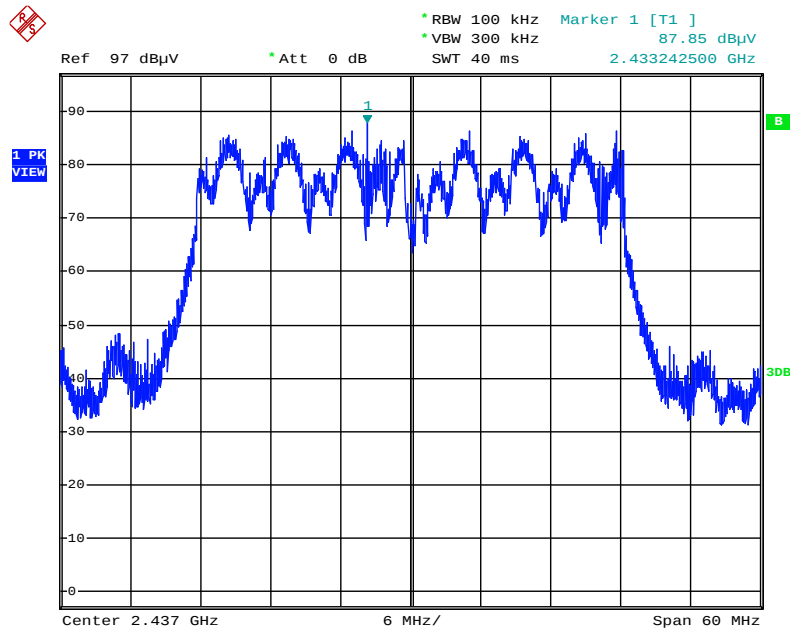


Date: 28.OCT.2015 20:43:55

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 3 / 30MHz~2400MHz (down 30dBc)

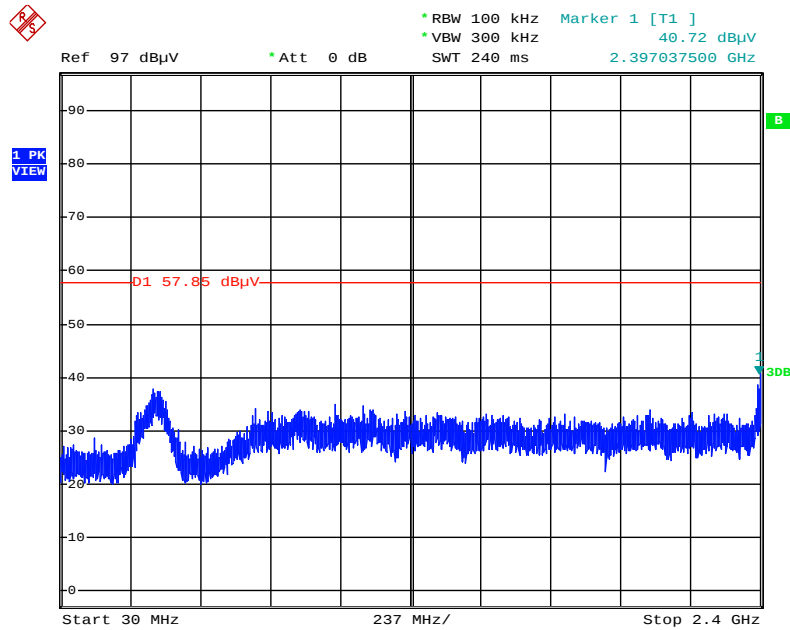


Date: 28.OCT.2015 20:46:28

Plot on Configuration IEEE 802.11n MCS0/Nss1 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc)

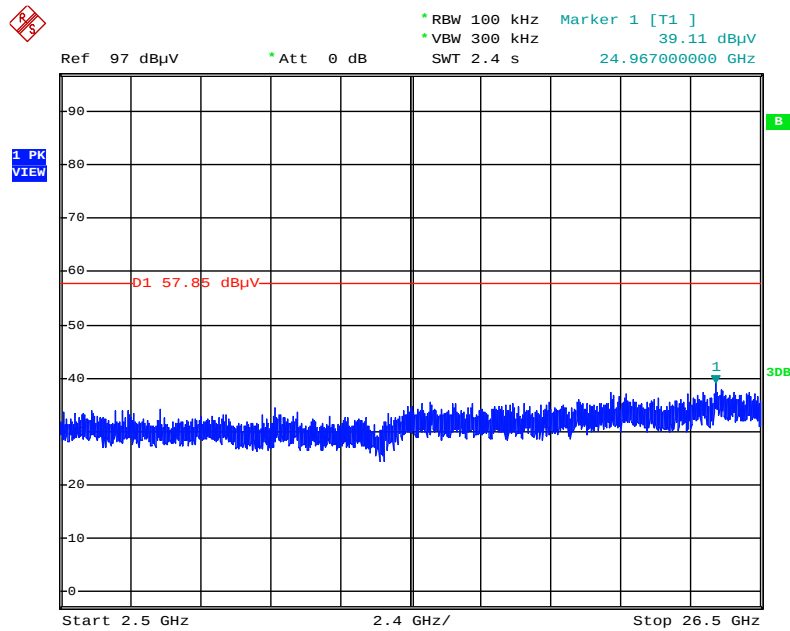


Date: 28.OCT.2015 20:47:08

Plot on Configuration IEEE 802.11n MCS0/Nss1 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc)

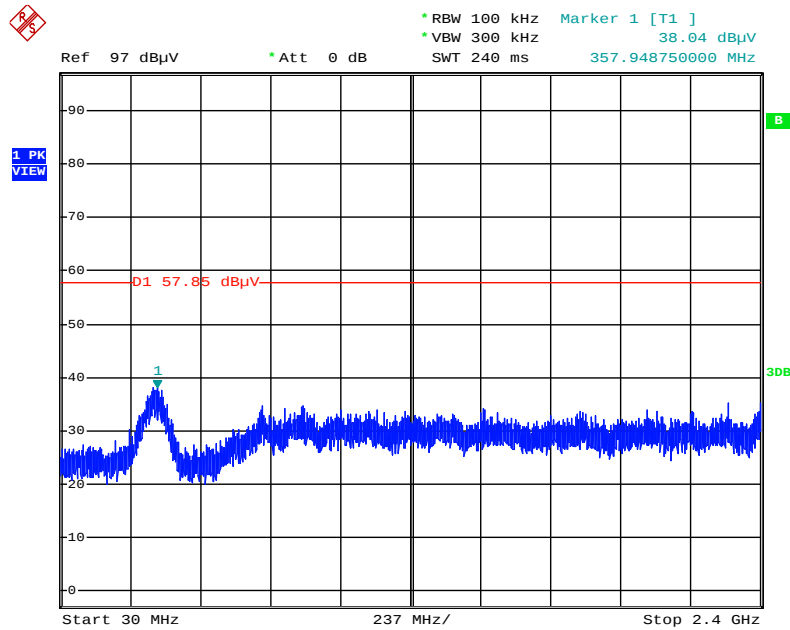


Date: 28.OCT.2015 20:48:54

Plot on Configuration IEEE 802.11n MCS0/Nss1 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc)

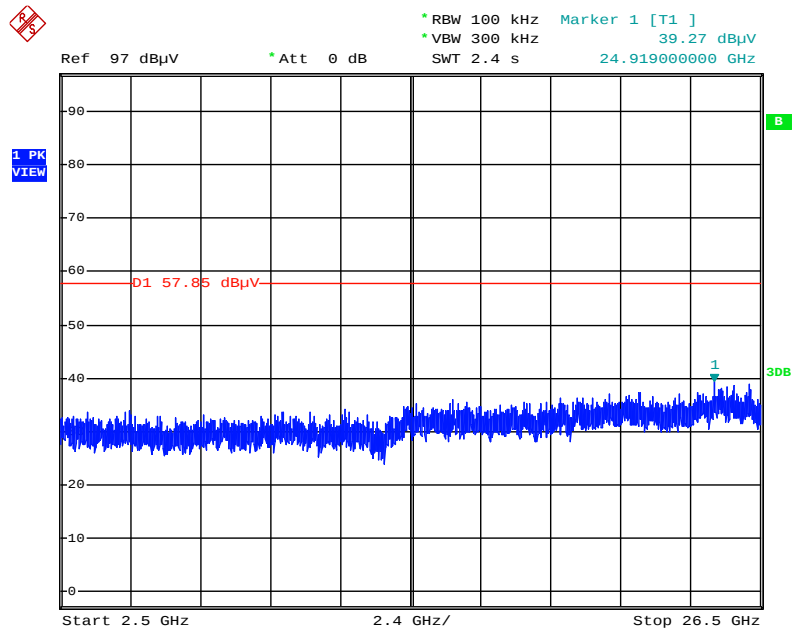


Date: 28.OCT.2015 20:48:23

Plot on Configuration IEEE 802.11a / Reference Level

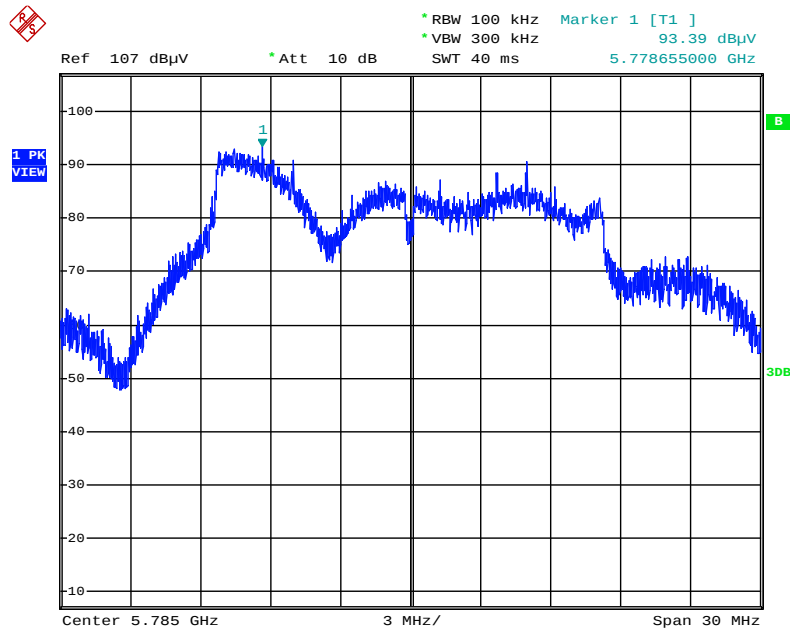


Date: 29.OCT.2015 02:31:51

Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc)

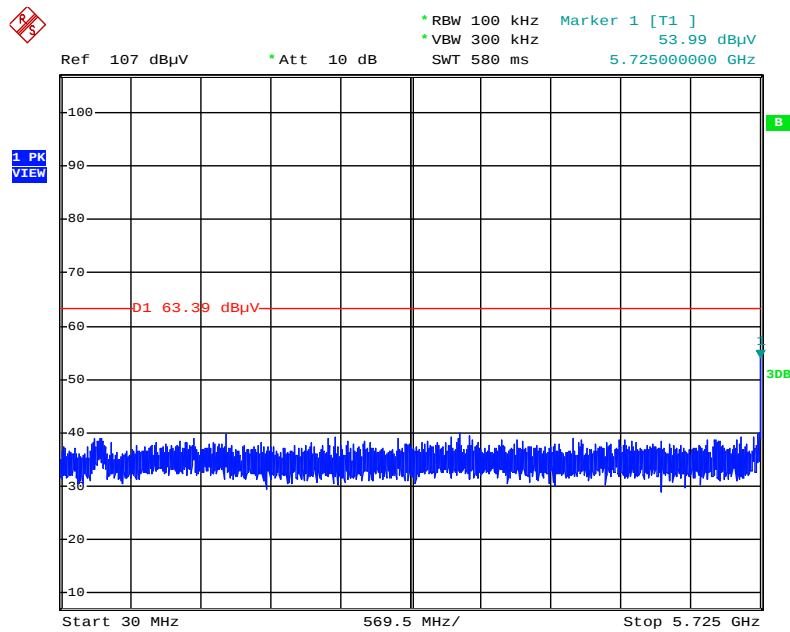


Date: 29.OCT.2015 02:33:12

Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc)

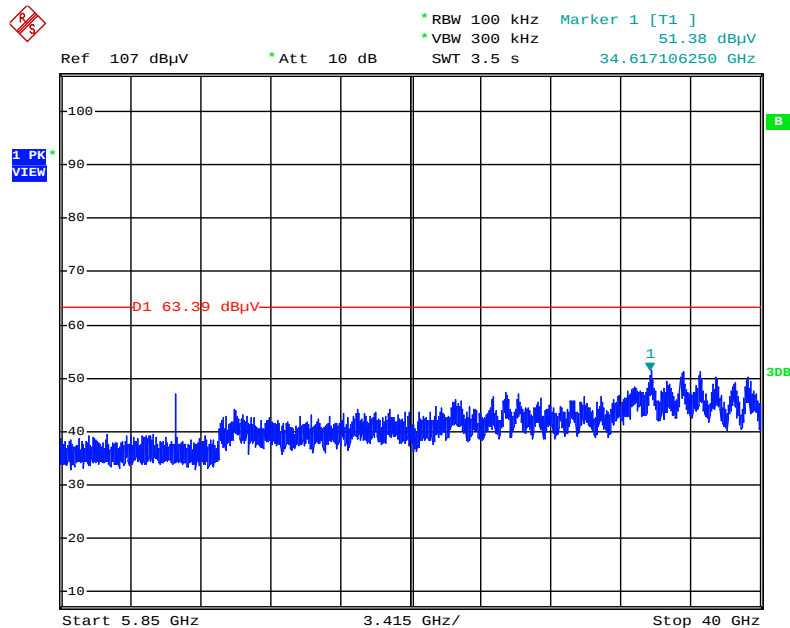


Date: 29.OCT.2015 02:33:51

Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc)

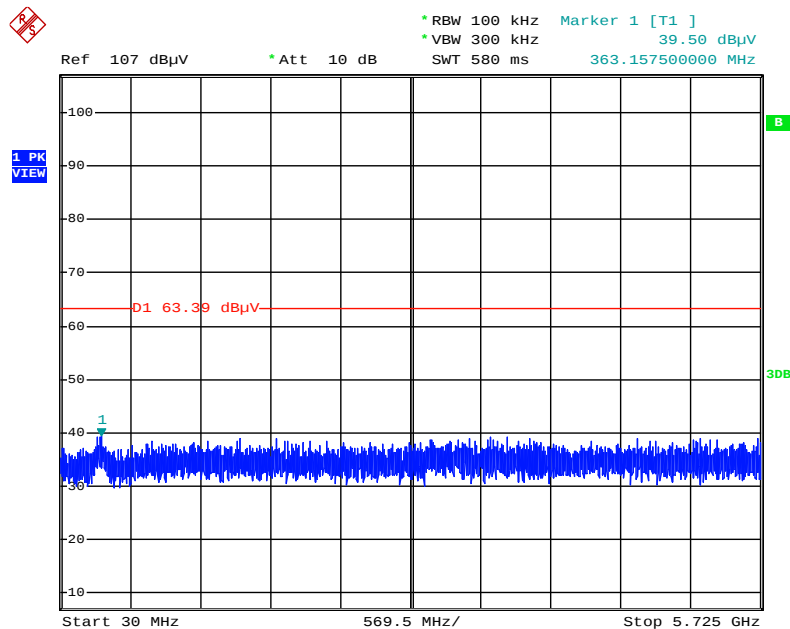


Date: 29.OCT.2015 02:35:33

Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc)

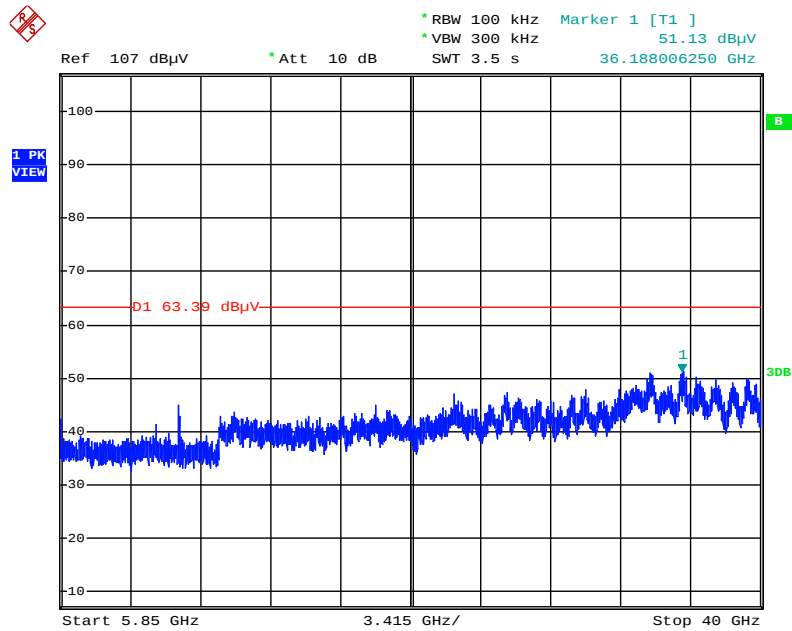


Date: 29.OCT.2015 02:35:03

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / Reference Level

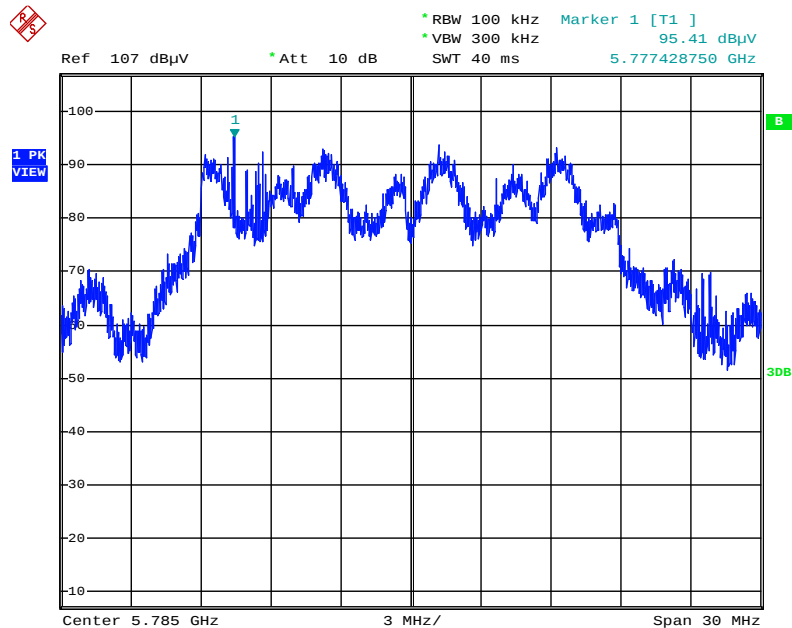


Date: 29.OCT.2015 02:25:54

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 30MHz~5725MHz (down 30dBc)

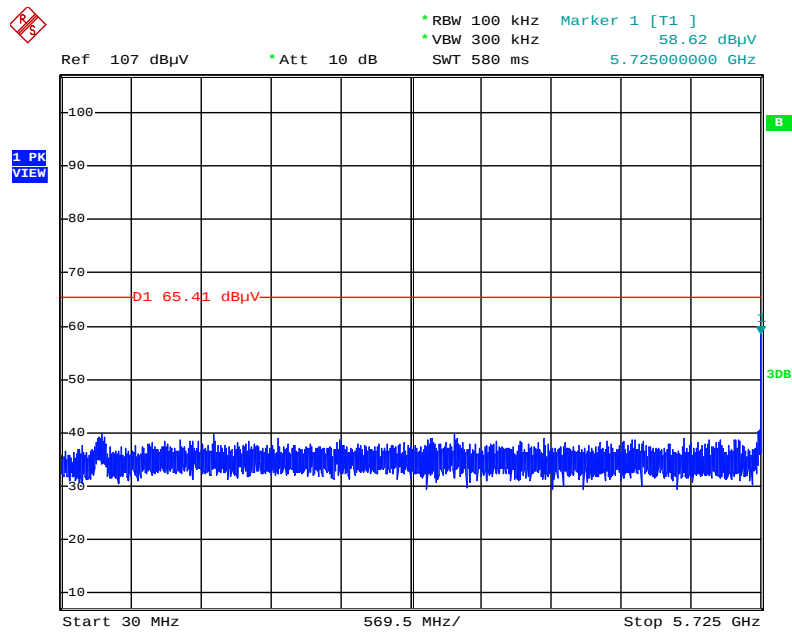


Date: 29.OCT.2015 02:27:45

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 149 / 5850MHz~40000MHz (down 30dBc)

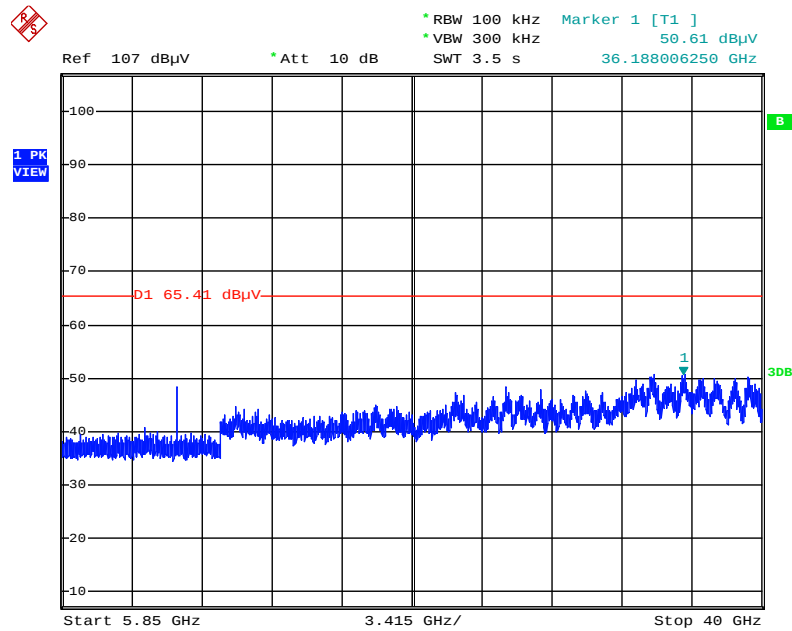


Date: 29.OCT.2015 02:28:40

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 30MHz~5725MHz (down 30dBc)

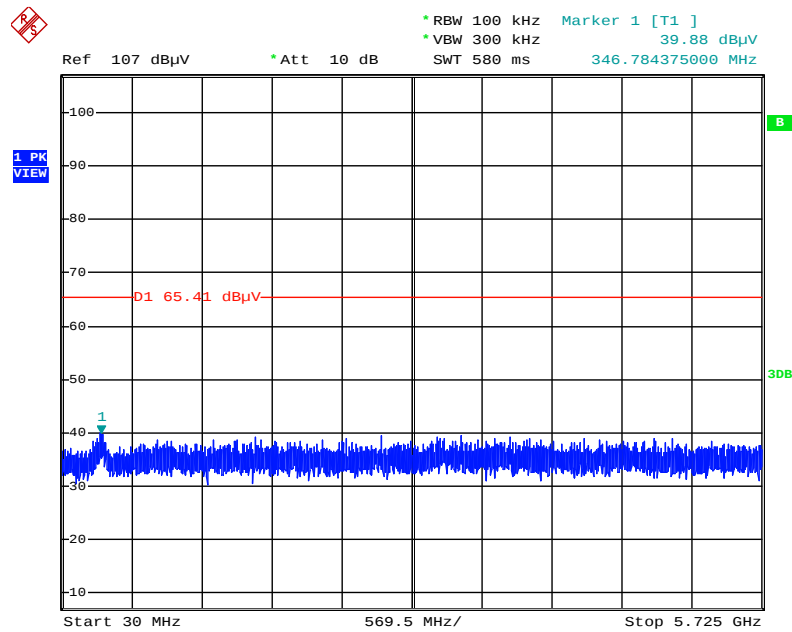


Date: 29.OCT.2015 02:30:29

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT20 / CH 165 / 5850MHz~40000MHz (down 30dBc)

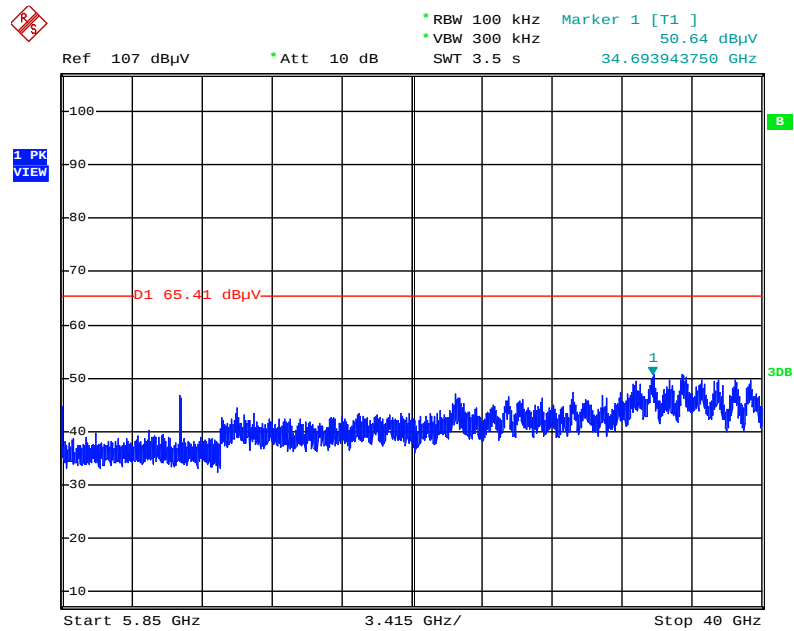


Date: 29.OCT.2015 02:29:58

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / Reference Level

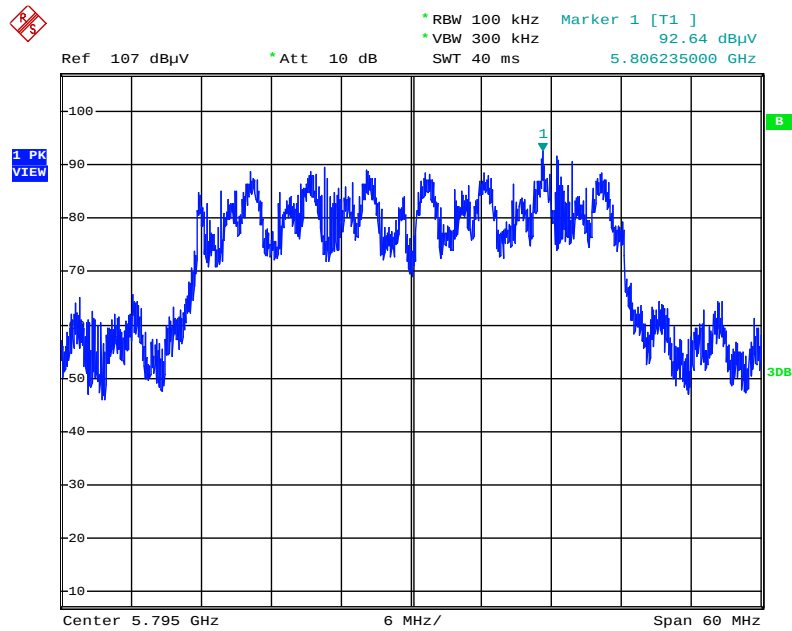


Date: 29.OCT.2015 02:18:13

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 30MHz~5725MHz (down 30dBc)

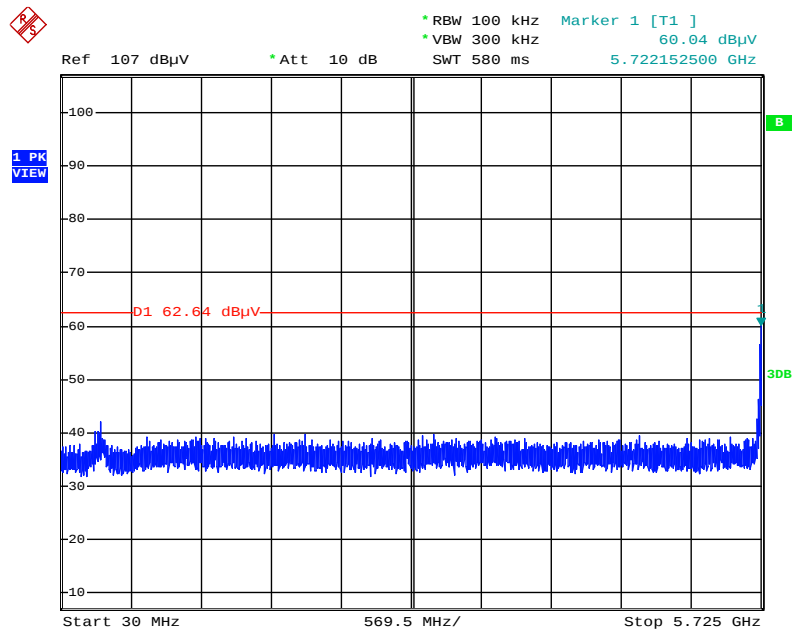


Date: 29.OCT.2015 02:23:10

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 151 / 5850MHz~40000MHz (down 30dBc)

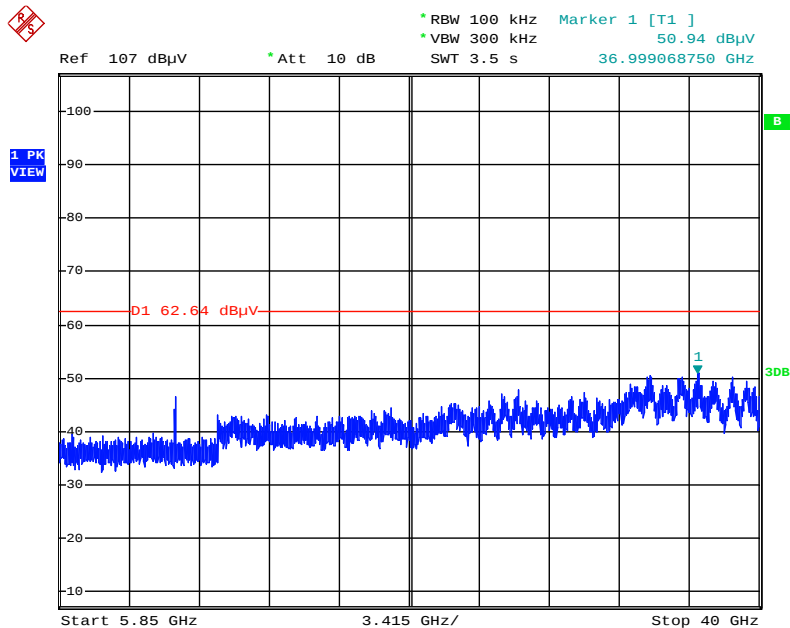


Date: 29.OCT.2015 02:22:13

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 30MHz~5725MHz (down 30dBc)

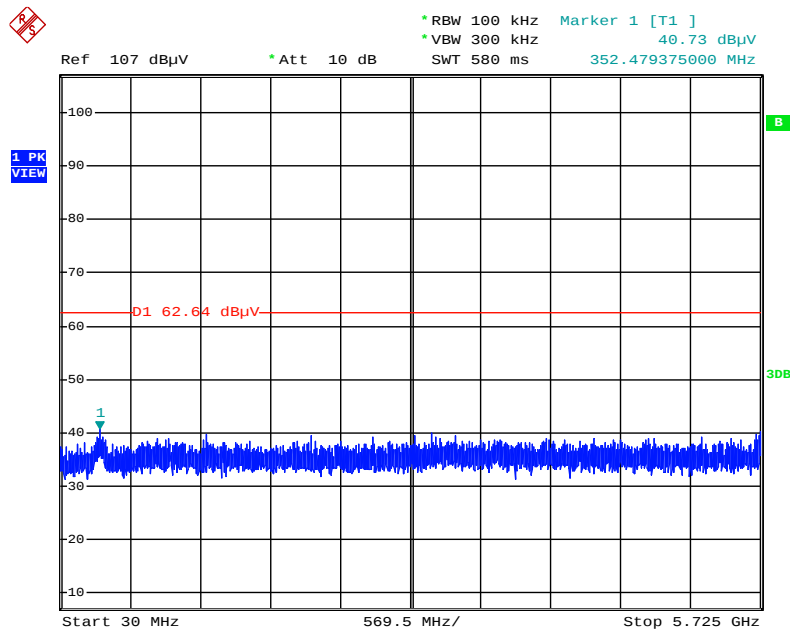


Date: 29.OCT.2015 02:20:18

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT40 / CH 159 / 5850MHz~40000MHz (down 30dBc)

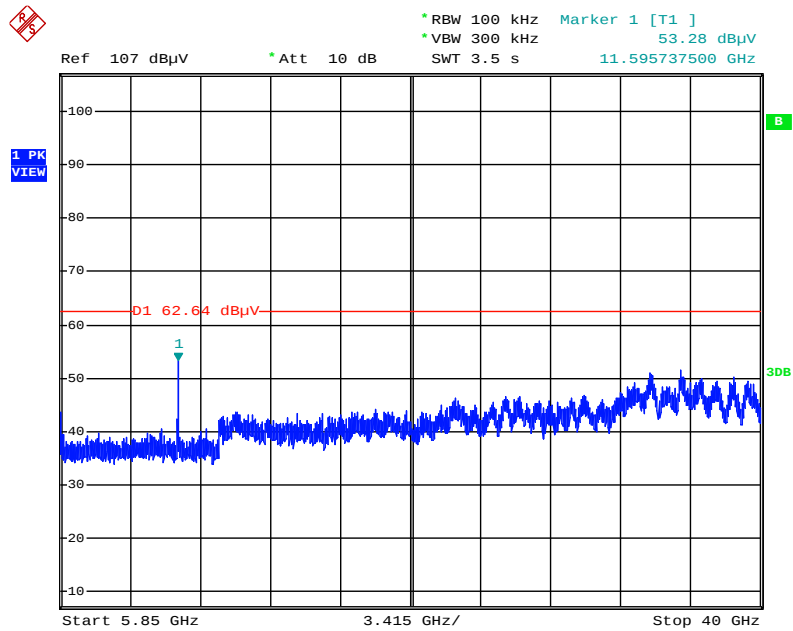


Date: 29.OCT.2015 02:20:46

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / Reference Level

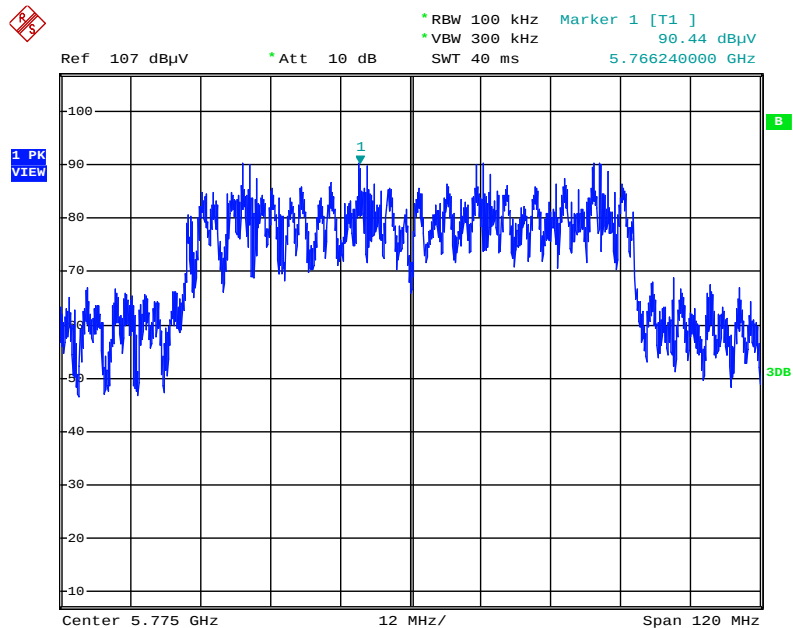


Date: 29.OCT.2015 02:09:30

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 30MHz~5725MHz (down 30dBc)

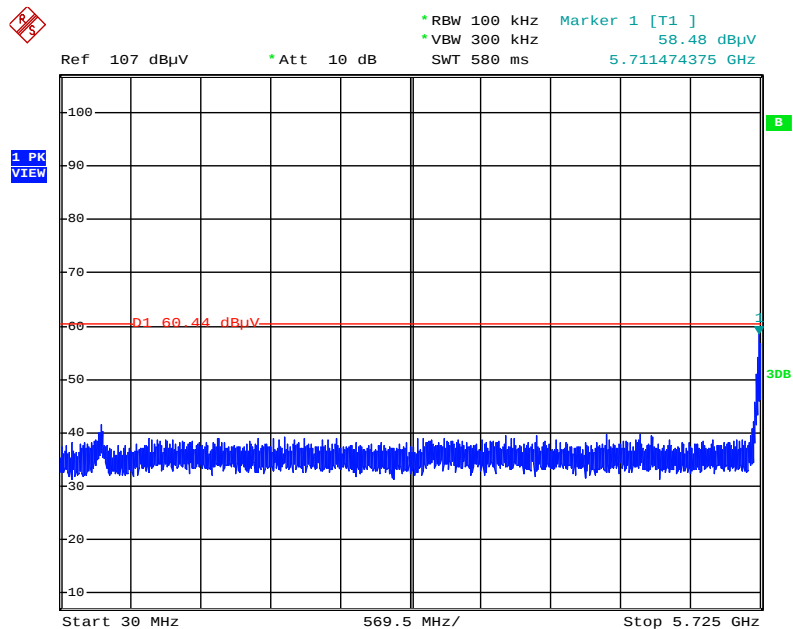

Date: 29.OCT.2015 02:14:27

Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT80 / CH 155 / 5850MHz~40000MHz (down 30dBc)

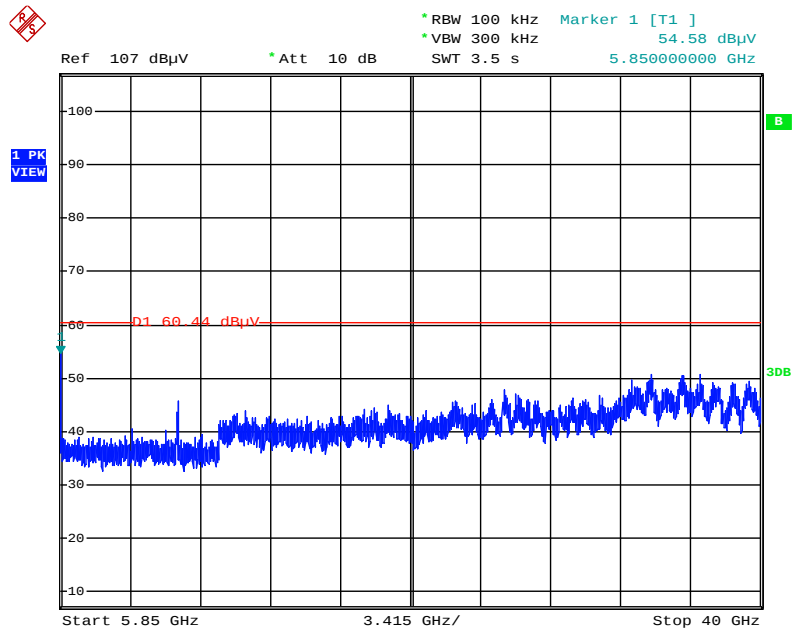

Date: 29.OCT.2015 02:15:35

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 02, 2014	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 02, 2014	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	Dec. 03, 2014	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	May 06, 2015	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Nov. 25, 2014	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	1 GHz ~ 40 GHz	Nov. 15, 2014	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSV40	100979	9kHz~40GHz	Dec. 12, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz ~ 26.5 GHz	Nov. 15, 2014	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 03, 2014	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“*” Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%