



FCC RF Test Report

APPLICANT : TP-LINK TECHNOLOGIES CO., LTD.
EQUIPMENT : AC750 Wi-Fi Range Extender with Smart Plug
BRAND NAME : TP-LINK
MODEL NAME : RE270K
FCC ID : TE7RE270K
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure

The product was received on Aug. 30, 2016 and testing was completed on Sep. 30, 2016. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Ken Chen / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town,
Nanshan District, Shenzhen, Guangdong, P. R. China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Testing Location	7
1.7 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	12
3 TEST RESULT	13
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	13
3.2 Maximum Conducted Output Power Measurement	16
3.3 Power Spectral Density Measurement	17
3.4 Unwanted Emissions Measurement.....	20
3.5 AC Conducted Emission Measurement.....	25
3.6 Frequency Stability Measurement.....	29
3.7 Automatically Discontinue Transmission	30
3.8 Antenna Requirements	31
4 LIST OF MEASURING EQUIPMENT	32
5 UNCERTAINTY OF EVALUATION	33
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. RADIATED TEST RESULTS	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR683003C	Rev. 01	Initial issue of report	Oct. 26, 2016



SUMMARY OF TEST RESULT

Report Section	FCC Rule	IC Rule	Description	Limit	Result	Remark
3.1	15.403(i)	RSS-247 Section 6	6dB, 26dB and 99% Occupied Bandwidth	> 500kHz	Pass	-
3.2	15.407(a)	RSS-247 Section 6	Maximum Conducted Output Power	≤ 30 dBm	Pass	-
3.3	15.407(a)	RSS-247 Section 6	Power Spectral Density	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	RSS-247 Section 6	Unwanted Emissions	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 0.15 dB at 17355.000 MHz
3.5	15.207	RSS-Gen 8.8	AC Conducted Emission	15.207(a)	Pass	Under limit 15.97 dB at 0.200 MHz
3.6	15.407(g)	-	Frequency Stability	Within Operation Band	Pass	-
3.7	15.407(c)	RSS-247 6.4(2)	Automatically Discontinue Transmission	Discontinue Transmission	Pass	-
3.8	15.203 & 15.407(a)	N/A	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

TP-LINK TECHNOLOGIES CO., LTD.

Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd.,
Nanshan, Shenzhen, China

1.2 Manufacturer

TP-LINK TECHNOLOGIES CO., LTD.

Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd.,
Nanshan, Shenzhen, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	AC750 Wi-Fi Range Extender with Smart Plug
Brand Name	TP-LINK
Model Name	RE270K
FCC ID	TE7RE270K
EUT supports Radios application	WLAN2.4GHz 802.11b/g/n HT20/HT40/ WLAN5GHz 802.11a/n HT20/HT40/ WLAN5GHz 802.11ac VHT20/VHT40/VHT80
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	5745 MHz ~ 5825 MHz
Maximum Output Power	802.11a : 20.75 dBm / 0.1189 W 802.11n HT20 : 20.64 dBm / 0.1159 W 802.11n HT40 : 20.55 dBm / 0.1135 W 802.11ac VHT20: 20.60 dBm / 0.1148 W 802.11ac VHT40: 20.45 dBm / 0.1109 W 802.11ac VHT80: 19.51 dBm / 0.0893 W
99% Occupied Bandwidth	802.11a : 28.87 MHz 802.11n HT20 : 32.82 MHz 802.11n HT40 : 60.44 MHz 802.11ac VHT20 : 32.72 MHz 802.11ac VHT40 : 58.54 MHz 802.11ac VHT80 : 79.36 MHz
Antenna Type	Dipole Antenna
Antenna Gain	1.92 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	
	TH01-SZ	CO01-SZ

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P. R. China TEL: +86-755- 3320-2398	
Test Site No.	Sporton Site No.	FCC/IC Registration No.
	03CH03-SZ	565805/4086F

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03
- ♦ ANSI C63.10-2013
- ♦ IC RSS-247 Issue 1
- ♦ IC RSS-Gen Issue 4

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conducted emission (150 kHz to 30 MHz) and radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5725-5850 MHz Band 4 (U-NII-3)	149	5745	157	5785
	151 [*]	5755	159 [*]	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Note:

1. The above Frequency and Channel in "^{*}" were 802.11n HT40 and 802.11ac VHT40.
2. The above Frequency and Channel in "[#]" were 802.11ac VHT80.

2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0


Test Cases	
AC Conducted Emission	Mode 1 : WLAN 5G Link (Client) + WLAN 5G Link (Master) + AC Load + RJ45 Link

Ch. #		Band IV : 5725-5850 MHz		
		802.11a	802.11n HT20	802.11n HT40
L	Low	149	149	151
M	Middle	157	157	-
H	High	165	165	159


Ch. #		Band IV : 5725-5850 MHz		
		802.11ac VHT20	802.11ac VHT40	802.11ac VHT80
L	Low	149	151	-
M	Middle	157	-	155
H	High	165	159	-

2.3 Connection Diagram of Test System

<Radiated Emission Mode>

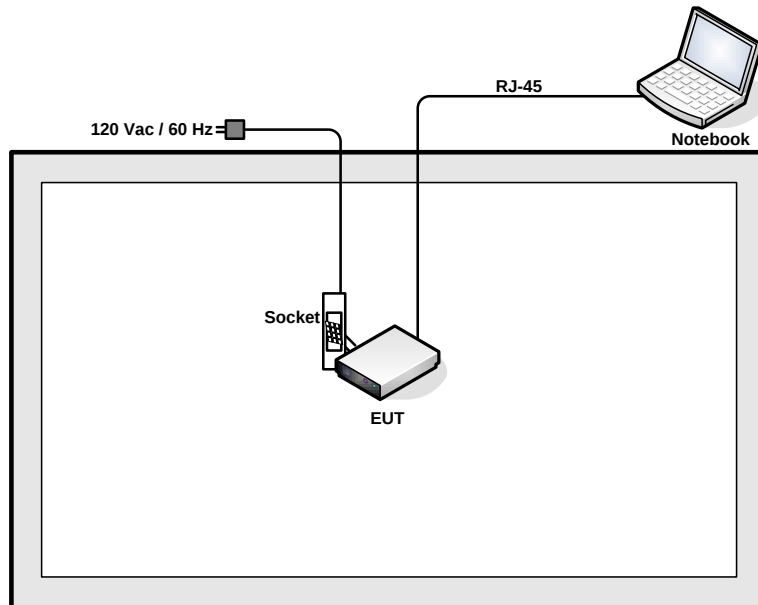

<AC Conducted Emission Mode>

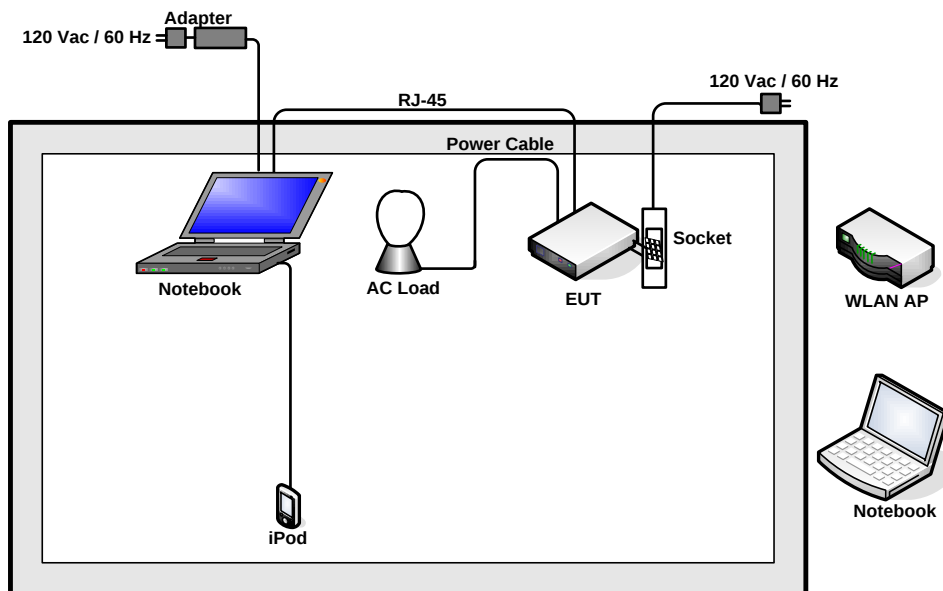

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-Link	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	E450	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	iPod nano 8GB	Apple	MC690ZP/A	FCC DoC	Shielded, 1.2m	N/A
4.	MicroSD Card	SanDisk	8G class 4	FCC DoC	N/A	N/A
5.	DC Power Supply	GWINSTEK	AnritsuGPS-3030D	N/A	N/A	Unshielded, 1.8 m
6.	AC Load	N/A	N/A	N/A	N/A	N/A
7.	Socket	N/A	N/A	N/A	N/A	N/A
8.	Power Cable	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit/receive.

For AC power line conducted emissions, the EUT was set to connect with the Notebook under large package sizes transmission.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 6 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 6 + 10 = 16 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures



1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03. Section C) Emission bandwidth for the band 5.725-5.85GHz
2. Set RBW = 100kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
7. Measure and record the results in the test report.


3.1.4 Test Setup

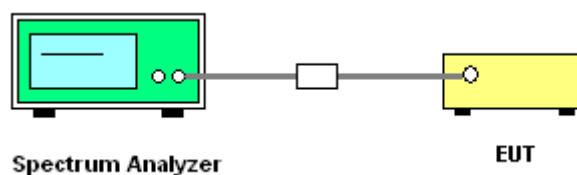

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

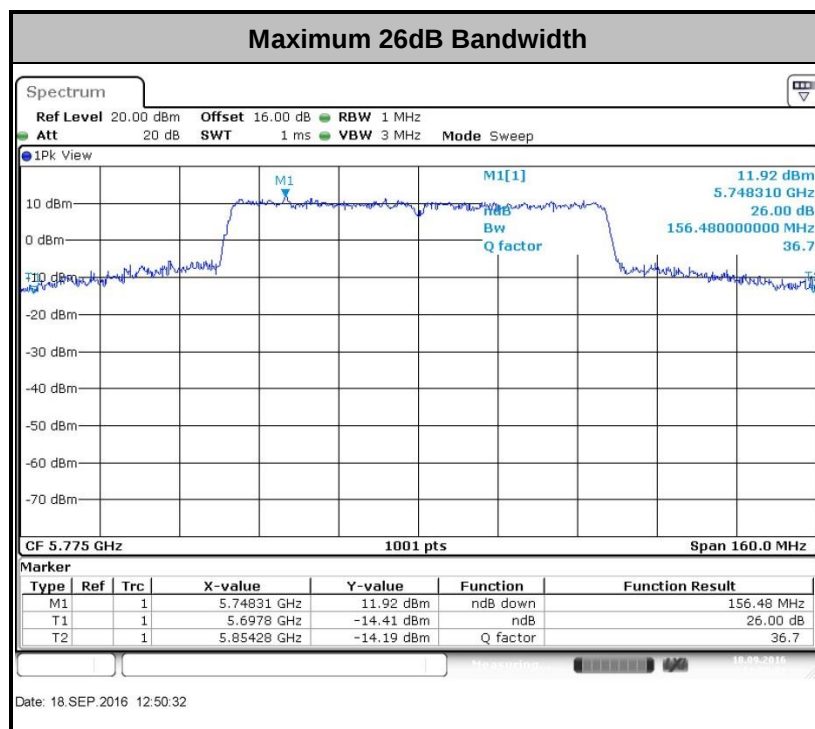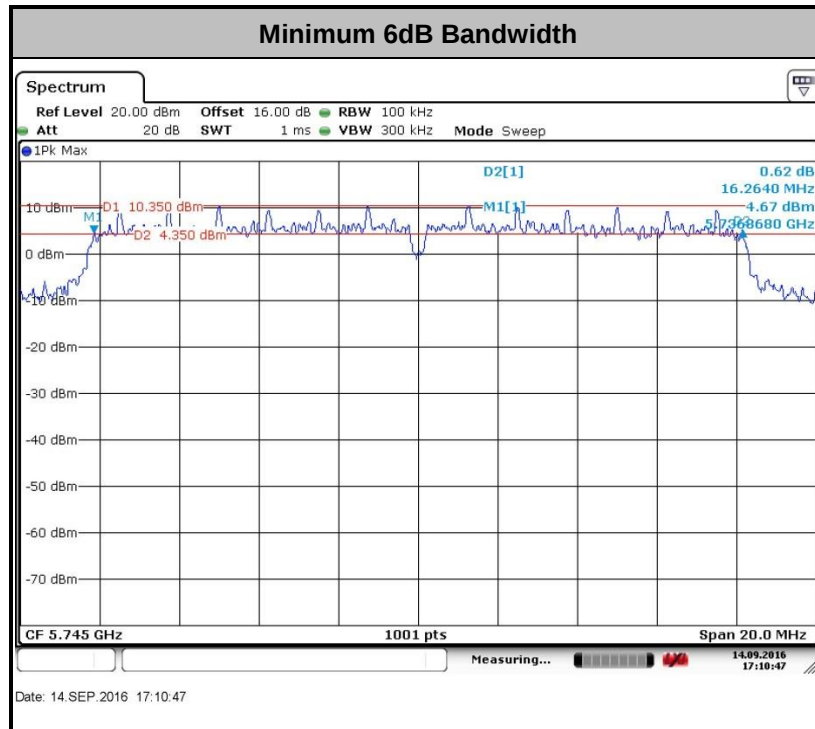

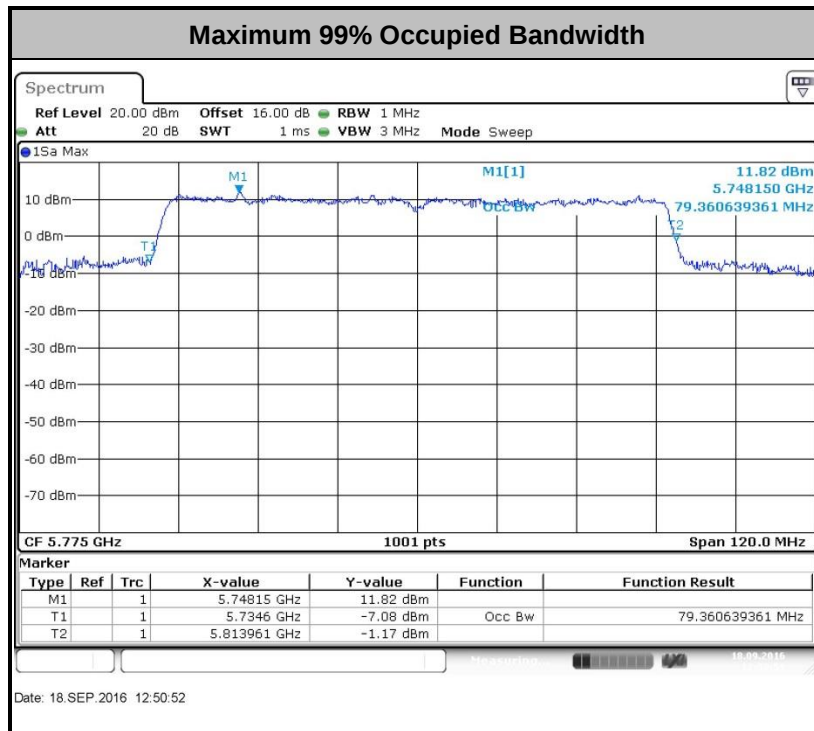

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

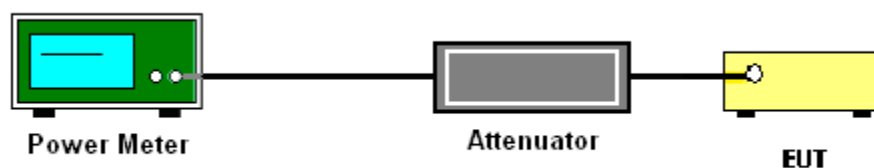

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
Section F) Maximum power spectral density.


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.
 - Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 300 kHz.
 - Set VBW $\geq$ 1 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.


2. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
3. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

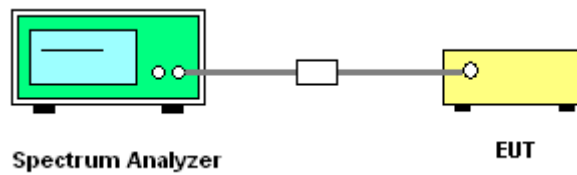

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

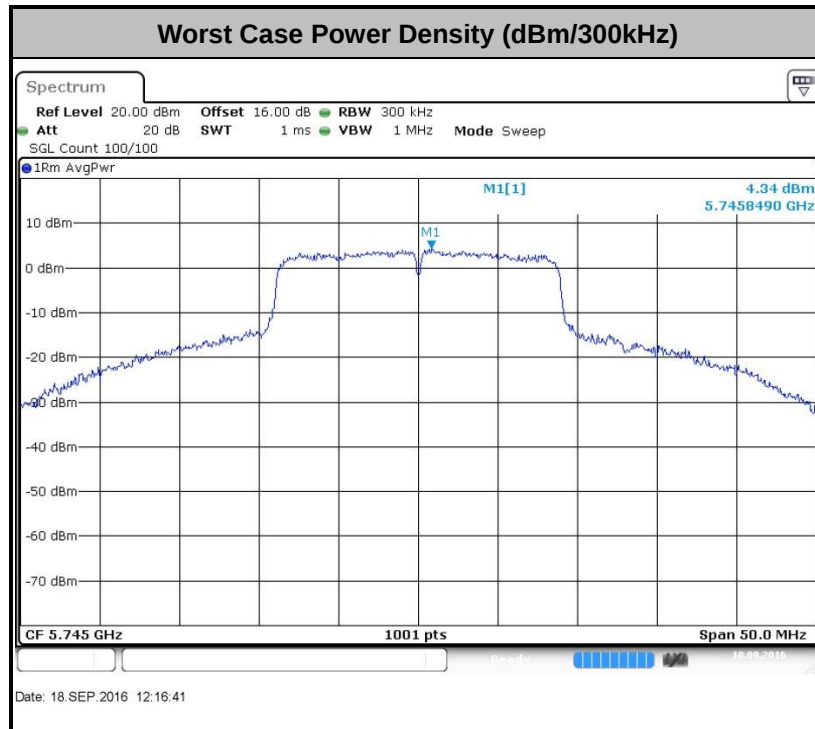

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5.725-5.85 GHz band:

15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (2) Unwanted spurious emissions fallen in restricted bands per FCC Part 15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
-17	78.3
- 27	68.3

- (3) KDB 789033 D02 General UNII Test Procedures New Rules v01r03 G)2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r03.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold

(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz


- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

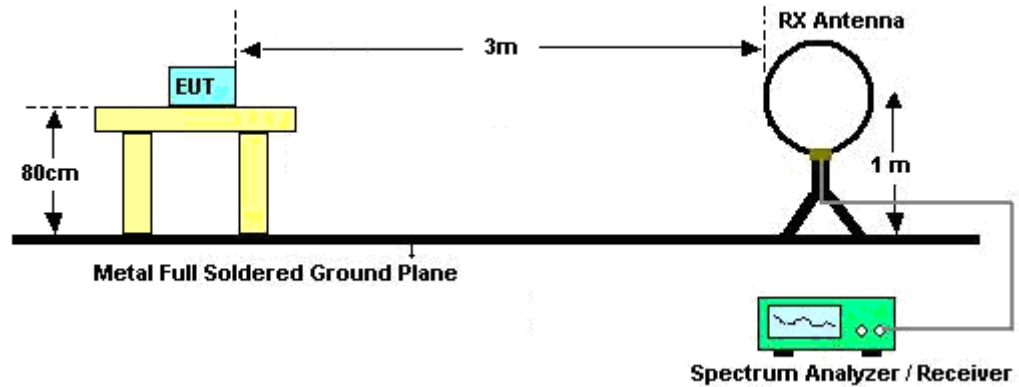

For radiated emissions from 30MHz to 1GHz

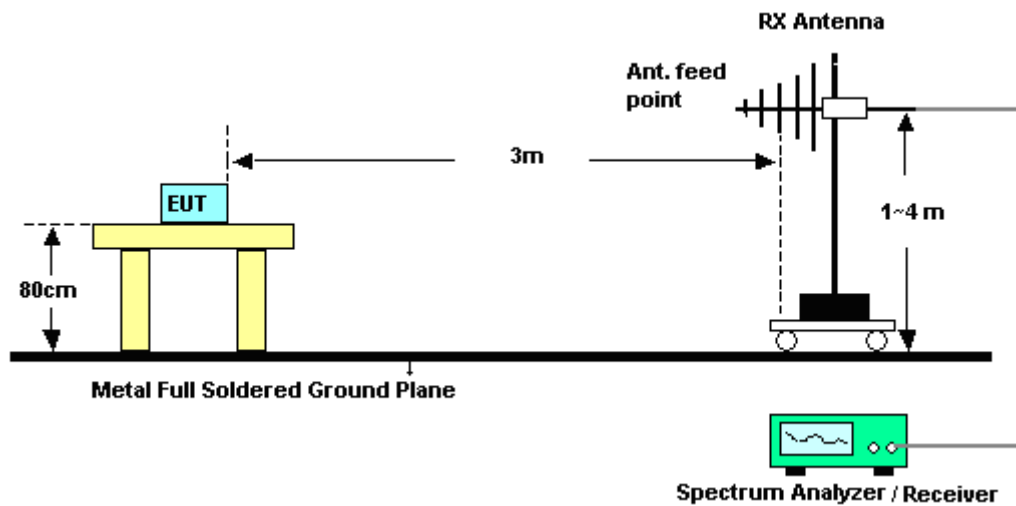

For radiated emissions above 1GHz

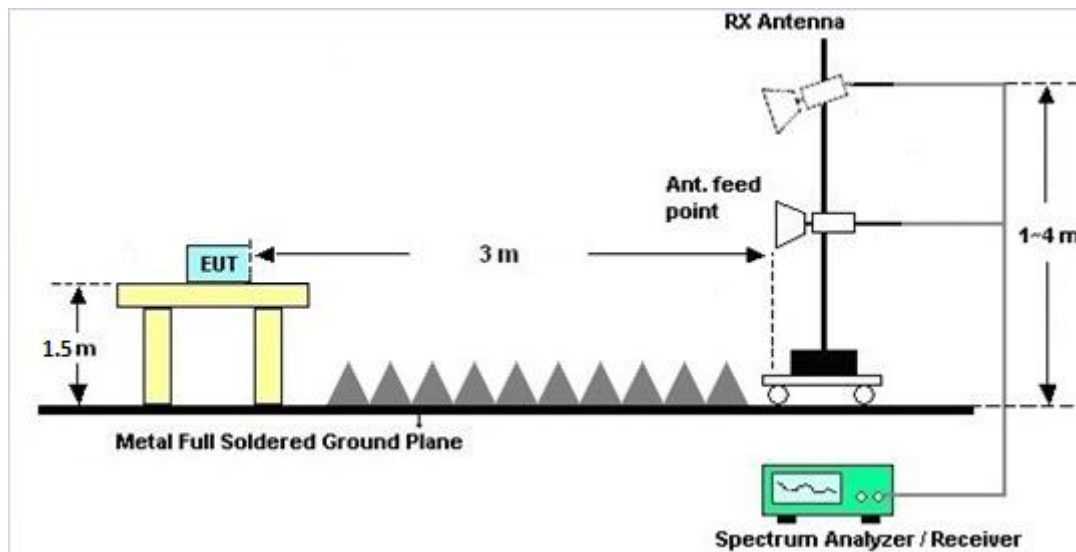

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix B.

3.4.7 Duty Cycle

Please refer to Appendix C.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

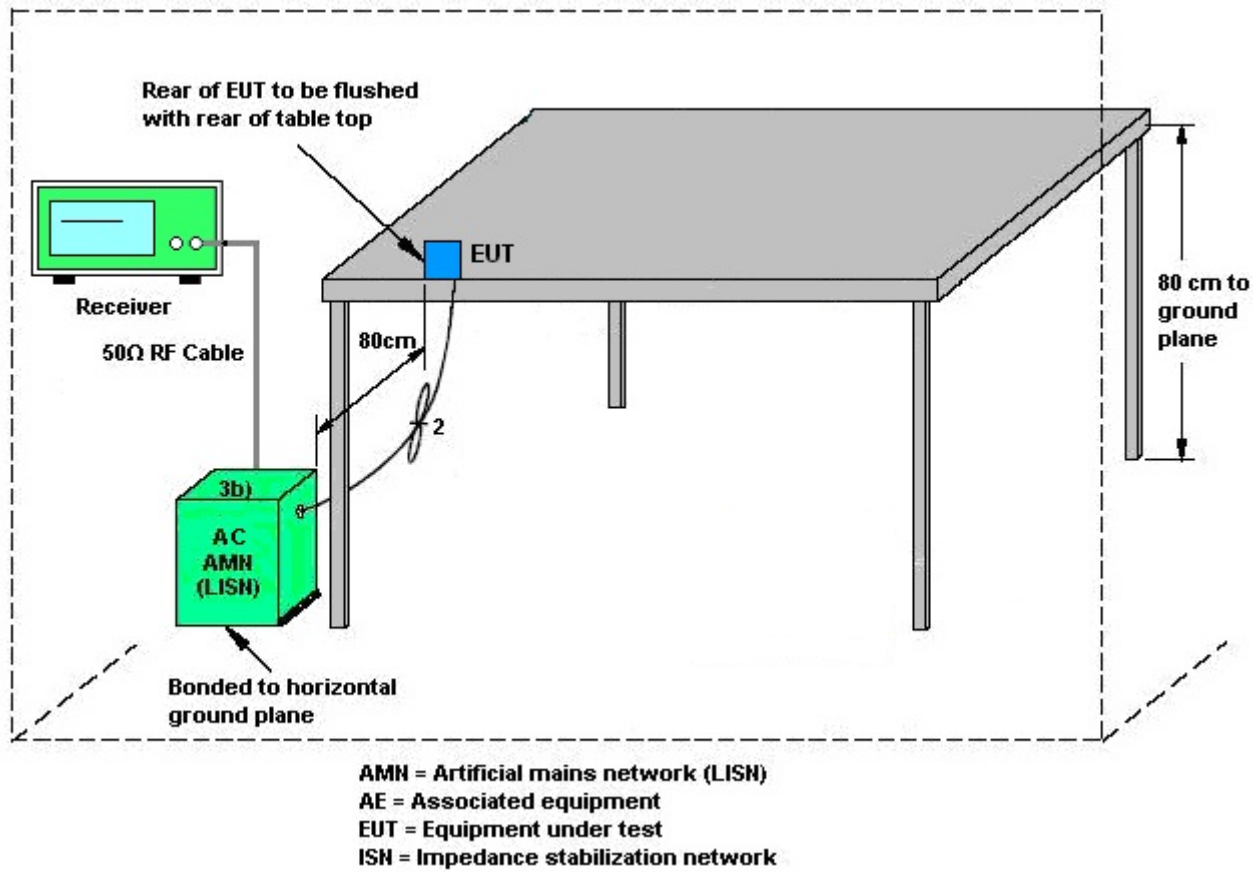

3.5.5 Test Result of AC Conducted Emission

Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Function Type :	WLAN 5G Link (Client) + WLAN 5G Link (Master) + AC Load + RJ45 Link		

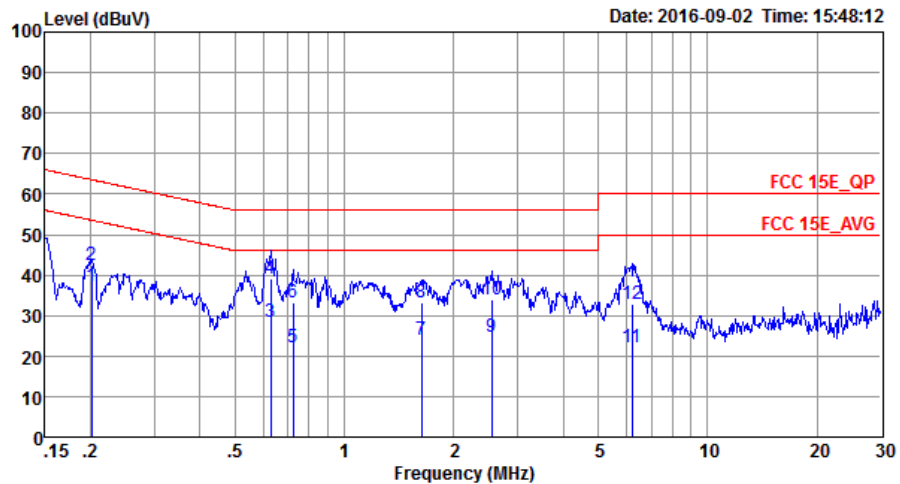


Site : C001-SZ
Condition: FCC 15E_QP LISN_20160509 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.20	37.11	-16.43	53.54	26.50	0.11	10.50	Average
2	0.20	42.41	-21.13	63.54	31.80	0.11	10.50	QP
3	0.63	28.59	-17.41	46.00	18.30	0.11	10.18	Average
4	0.63	39.09	-16.91	56.00	28.80	0.11	10.18	QP
5	0.72	22.07	-23.93	46.00	11.80	0.11	10.16	Average
6	0.72	33.17	-22.83	56.00	22.90	0.11	10.16	QP
7	1.63	24.08	-21.92	46.00	13.80	0.11	10.17	Average
8	1.63	33.28	-22.72	56.00	23.00	0.11	10.17	QP
9	2.54	24.70	-21.30	46.00	14.39	0.12	10.19	Average
10	2.54	33.80	-22.20	56.00	23.49	0.12	10.19	QP
11	6.19	22.24	-27.76	50.00	11.80	0.16	10.28	Average
12	6.19	32.84	-27.16	60.00	22.40	0.16	10.28	QP



Test Mode :	Mode 1	Temperature :	21~23℃
Test Engineer :	Tao Cheng	Relative Humidity :	41~42%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Function Type :	WLAN 5G Link (Client) + WLAN 5G Link (Master) + AC Load + RJ45 Link		

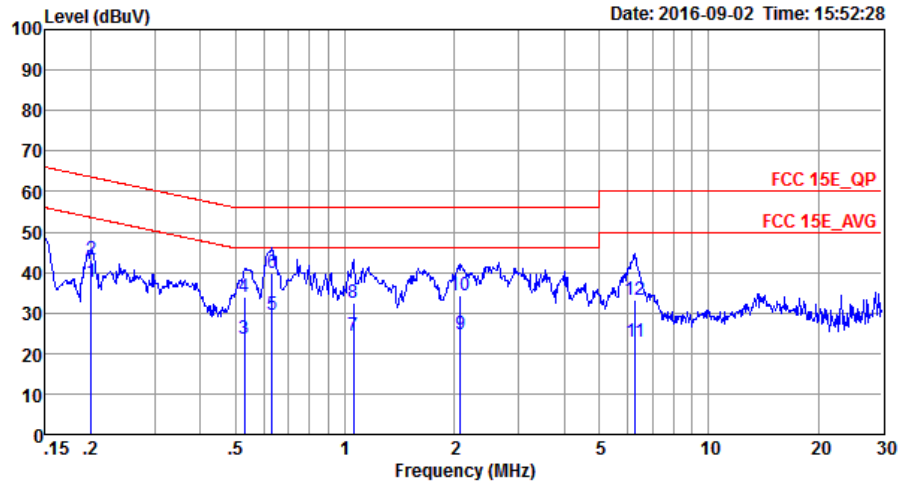

Site : CO01-SZ
Condition: FCC 15E_QP LISN_20160509 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.20	37.61	-15.97	53.58	27.00	0.11	10.50	Average
2	0.20	43.01	-20.57	63.58	32.40	0.11	10.50	QP
3	0.53	23.52	-22.48	46.00	13.20	0.11	10.21	Average
4	0.53	34.02	-21.98	56.00	23.70	0.11	10.21	QP
5	0.63	29.69	-16.31	46.00	19.40	0.11	10.18	Average
6	0.63	39.99	-16.01	56.00	29.70	0.11	10.18	QP
7	1.05	24.27	-21.73	46.00	14.00	0.11	10.16	Average
8	1.05	32.37	-23.63	56.00	22.10	0.11	10.16	QP
9	2.08	24.88	-21.12	46.00	14.60	0.11	10.17	Average
10	2.08	34.38	-21.62	56.00	24.10	0.11	10.17	QP
11	6.29	22.85	-27.15	50.00	12.41	0.16	10.28	Average
12	6.29	33.25	-26.75	60.00	22.81	0.16	10.28	QP

3.6 Frequency Stability Measurement

3.6.1 Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

3.6.4 Test Setup

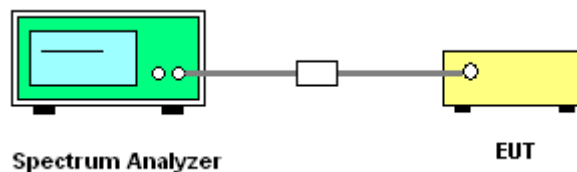

3.6.5 Test Result of Frequency Stability

Please refer to Appendix A.



3.7 Automatically Discontinue Transmission

3.7.1 Limit of Automatically Discontinue Transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

3.7.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.7.3 Test Result of Automatically Discontinue Transmission

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.



3.8 Antenna Requirements

3.8.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.8.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.8.3 Antenna Gain

The antenna gain is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	May 07, 2016	Sep. 14, 2016~ Sep. 22, 2016	May 06, 2017	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1207253	30MHz~40GHz	Jan. 12, 2016	Sep. 14, 2016~ Sep. 22, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Jan. 12, 2016	Sep. 14, 2016~ Sep. 22, 2016	Jan. 11, 2017	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhonggroup	LP-150U	H2014081803	-40~+150°C	Jul. 16, 2016	Sep. 14, 2016~ Sep. 22, 2016	Jul. 15, 2017	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	May 07, 2016	Sep. 28, 2016~ Sep. 30, 2016	May 06, 2017	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz	May 07, 2016	Sep. 28, 2016~ Sep. 30, 2016	May 06, 2017	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	May 07, 2016	Sep. 28, 2016~ Sep. 30, 2016	May 06, 2017	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	May 21, 2016	Sep. 28, 2016~ Sep. 30, 2016	May 20, 2017	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBEC K	BBHA9120D	9120D-1355	1GHz~18GHz	May 07, 2016	Sep. 28, 2016~ Sep. 30, 2016	May 06, 2017	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Aug. 10, 2016	Sep. 28, 2016~ Sep. 30, 2016	Aug. 09, 2017	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 20, 2015	Sep. 28, 2016~ Sep. 30, 2016	Oct. 19, 2016	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-001 01800-30-10 P-R	1943528	1GHz~18GHz	Oct. 20, 2015	Sep. 28, 2016~ Sep. 30, 2016	Oct. 19, 2016	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5G Hz	Jan. 12, 2016	Sep. 28, 2016~ Sep. 30, 2016	Jan. 11, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 16, 2016	Sep. 28, 2016~ Sep. 30, 2016	Jul. 15, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Sep. 28, 2016~ Sep. 30, 2016	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 28, 2016~ Sep. 30, 2016	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 28, 2016~ Sep. 30, 2016	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESCI7	100724	9kHz~3GHz	Nov. 23, 2015	Sep. 02, 2016	Nov. 22, 2016	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103892	9kHz~30MHz	Jan. 12, 2016	Sep. 02, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103912	9kHz~30MHz	Jan. 12, 2016	Sep. 02, 2016	Jan. 11, 2017	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 16, 2016	Sep. 02, 2016	Jul. 15, 2017	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct. 20, 2015	Sep. 02, 2016	Oct. 19, 2016	Conduction (CO01-SZ)

5 Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.8dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



Appendix A. Conducted Test Results

Report Number : FR683003C

Test Engineer:	Sam Zheng	Temperature:	24~26	°C
Test Date:	2016/9/14 ~ 2016/9/22	Relative Humidity:	50~53	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	28.62	40.36	16.26	0.5	Pass
11a	6Mbps	1	157	5785	28.62	40.31	16.3	0.5	Pass
11a	6Mbps	1	165	5825	28.87	39.91	16.28	0.5	Pass
HT20	MCS 0	1	149	5745	32.22	45.9	16.64	0.5	Pass
HT20	MCS 0	1	157	5785	32.82	45.6	16.52	0.5	Pass
HT20	MCS 0	1	165	5825	32.12	44.61	16.52	0.5	Pass
HT40	MCS 0	1	151	5755	60.14	89.19	35.33	0.5	Pass
HT40	MCS 0	1	159	5795	60.44	89.64	35.64	0.5	Pass
VHT20	MCS 0	1	149	5745	32.72	45.16	16.78	0.5	Pass
VHT20	MCS 0	1	157	5785	30.97	43.41	16.52	0.5	Pass
VHT20	MCS 0	1	165	5825	31.82	44.16	16.76	0.5	Pass
VHT40	MCS 0	1	151	5755	58.54	85.68	36	0.5	Pass
VHT40	MCS 0	1	159	5795	50.75	81.19	35.64	0.5	Pass
VHT80	MCS 0	1	155	5775	79.36	156.48	75.05	0.5	Pass

TEST RESULTS DATA
Average Power Table

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.60	20.75	30.00	1.92	Pass
11a	6Mbps	1	157	5785	0.60	20.43	30.00	1.92	Pass
11a	6Mbps	1	165	5825	0.60	20.11	30.00	1.92	Pass
HT20	MCS 0	1	149	5745	0.64	20.64	30.00	1.92	Pass
HT20	MCS 0	1	157	5785	0.64	19.93	30.00	1.92	Pass
HT20	MCS 0	1	165	5825	0.64	19.98	30.00	1.92	Pass
HT40	MCS 0	1	151	5755	1.14	20.55	30.00	1.92	Pass
HT40	MCS 0	1	159	5795	1.14	19.84	30.00	1.92	Pass
VHT20	MCS 0	1	149	5745	0.60	20.60	30.00	1.92	Pass
VHT20	MCS 0	1	157	5785	0.60	19.92	30.00	1.92	Pass
VHT20	MCS 0	1	165	5825	0.60	19.57	30.00	1.92	Pass
VHT40	MCS 0	1	151	5755	1.14	20.45	30.00	1.92	Pass
VHT40	MCS 0	1	159	5795	1.14	19.71	30.00	1.92	Pass
VHT80	MCS 0	1	155	5775	2.03	19.51	30.00	1.92	Pass

TEST RESULTS DATA
Power Spectral Density

Band IV										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.60	2.22	6.97	30.00	1.92	Pass
11a	6Mbps	1	157	5785	0.60	2.22	7.08	30.00	1.92	Pass
11a	6Mbps	1	165	5825	0.60	2.22	6.63	30.00	1.92	Pass
HT20	MCS 0	1	149	5745	0.64	2.22	7.01	30.00	1.92	Pass
HT20	MCS 0	1	157	5785	0.64	2.22	6.49	30.00	1.92	Pass
HT20	MCS 0	1	165	5825	0.64	2.22	6.36	30.00	1.92	Pass
HT40	MCS 0	1	151	5755	1.14	2.22	3.35	30.00	1.92	Pass
HT40	MCS 0	1	159	5795	1.14	2.22	3.54	30.00	1.92	Pass
VHT20	MCS 0	1	149	5745	0.60	2.22	7.16	30.00	1.92	Pass
VHT20	MCS 0	1	157	5785	0.60	2.22	6.20	30.00	1.92	Pass
VHT20	MCS 0	1	165	5825	0.60	2.22	6.03	30.00	1.92	Pass
VHT40	MCS 0	1	151	5755	1.14	2.22	3.68	30.00	1.92	Pass
VHT40	MCS 0	1	159	5795	1.14	2.22	2.34	30.00	1.92	Pass
VHT80	MCS 0	1	155	5775	2.03	2.22	0.46	30.00	1.92	Pass

TEST RESULTS DATA
Frequency Stability

Band IV									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	90
11a	6M bps	1	149	5745	5744.950	-0.050	-8.70	20	135
11a	6M bps	1	149	5745	5744.975	-0.025	-4.35	20	120
11a	6M bps	1	149	5745	5745.000	0.000	0.00	-30	120
11a	6M bps	1	149	5745	5744.975	-0.025	-4.35	50	120



Appendix B. Radiated Spurious Emission

Band 4 - 5725~5850MHz

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 149 5745MHz		5605.2	53.75	-14.55	68.3	46.48	33.12	7.64	33.49	250	11	P	H
		5697.2	68.3	-34.94	103.24	60.9	33.23	7.68	33.51	250	11	P	H
		5720	83.1	-27.8	110.9	75.67	33.27	7.68	33.52	250	11	P	H
		5724.6	91.56	-29.83	121.39	84.13	33.27	7.68	33.52	250	11	P	H
		5745	114.05	-	-	106.55	33.29	7.74	33.53	250	11	P	H
		5745	104.54	-	-	97.04	33.29	7.74	33.53	250	11	A	H
		5628.2	50.88	-17.42	68.3	43.58	33.14	7.65	33.49	250	61	P	V
		5698.4	68.31	-35.81	104.12	60.91	33.23	7.68	33.51	250	61	P	V
		5717.2	79.4	-30.72	110.12	71.99	33.25	7.68	33.52	250	61	P	V
		5723.8	85.96	-33.6	119.56	78.53	33.27	7.68	33.52	250	61	P	V
		5745	112.5	-	-	105	33.29	7.74	33.53	250	61	P	V
		5745	102.53	-	-	95.03	33.29	7.74	33.53	250	61	A	V



WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 157 5785MHz		5611.6	51.74	-16.56	68.3	44.46	33.12	7.65	33.49	250	0	P	H
		5698	56.25	-47.58	103.83	48.85	33.23	7.68	33.51	250	0	P	H
		5719.8	61.87	-48.97	110.84	54.44	33.27	7.68	33.52	250	0	P	H
		5725	65.64	-56.66	122.3	58.21	33.27	7.68	33.52	250	0	P	H
		5785	114.03	-	-	106.44	33.33	7.8	33.54	250	0	P	H
		5785	104.57	-	-	96.98	33.33	7.8	33.54	250	0	A	H
		5854.4	64.26	-48.01	112.27	56.52	33.43	7.87	33.56	250	0	P	H
		5857.6	61.69	-48.48	110.17	53.95	33.43	7.87	33.56	250	0	P	H
		5880.8	52.8	-48.19	100.99	45.03	33.46	7.87	33.56	250	0	P	H
		5932	50.74	-17.56	68.3	42.85	33.52	7.95	33.58	250	0	P	H
		5608.6	50.61	-17.69	68.3	43.33	33.12	7.65	33.49	250	60	P	V
		5699.4	52.65	-52.21	104.86	45.25	33.23	7.68	33.51	250	60	P	V
		5720	60.52	-50.38	110.9	53.09	33.27	7.68	33.52	250	60	P	V
		5722.6	61.74	-55.09	116.83	54.31	33.27	7.68	33.52	250	60	P	V
		5785	112.42	-	-	104.83	33.33	7.8	33.54	250	60	P	V
		5785	104.43	-	-	96.84	33.33	7.8	33.54	250	60	A	V
		5853	62.28	-53.18	115.46	54.56	33.41	7.87	33.56	250	60	P	V
		5861.4	56.52	-52.59	109.11	48.78	33.43	7.87	33.56	250	60	P	V
		5875.8	54.26	-50.45	104.71	46.49	33.46	7.87	33.56	250	60	P	V
		5925.4	49.48	-18.82	68.3	41.63	33.52	7.91	33.58	250	60	P	V



WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 165 5825MHz		5825	112.06	-	-	104.38	33.39	7.84	33.55	247	11	P	H
		5825	104.18	-	-	96.5	33.39	7.84	33.55	247	11	A	H
		5855	81.74	-29.16	110.9	74	33.43	7.87	33.56	247	11	P	H
		5855	81.74	-29.16	110.9	74	33.43	7.87	33.56	247	11	P	H
		5876.2	65.4	-39.01	104.41	57.63	33.46	7.87	33.56	247	11	P	H
		5925	51.07	-17.23	68.3	43.22	33.52	7.91	33.58	247	11	P	H
		5825	111.7	-	-	104.02	33.39	7.84	33.55	250	61	P	V
		5825	102.27	-	-	94.59	33.39	7.84	33.55	250	61	A	V
		5850.8	84.01	-36.47	120.48	76.29	33.41	7.87	33.56	250	61	P	V
		5856	75.69	-34.93	110.62	67.95	33.43	7.87	33.56	250	61	P	V
		5877	66.08	-37.73	103.81	58.31	33.46	7.87	33.56	250	61	P	V
		5932.4	49.03	-19.27	68.3	41.14	33.52	7.95	33.58	250	61	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11a (Harmonic @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 149 5745MHz		11490	55.1	-18.9	74	64.05	39.7	11.1	59.75	150	286	P	H
		11490	43.72	-10.28	54	52.67	39.7	11.1	59.75	150	286	A	H
		17235	64.1	-4.2	68.3	67.4	40.06	14.89	58.25	150	0	P	H
		11490	51.13	-22.87	74	60.08	39.7	11.1	59.75	150	300	P	V
		11490	41.16	-12.84	54	50.11	39.7	11.1	59.75	150	300	A	V
		17235	63.34	-4.96	68.3	66.64	40.06	14.89	58.25	150	0	P	V
802.11a CH 157 5785MHz		11570	54	-20	74	63	39.66	11.17	59.83	250	0	P	H
		11570	45.1	-8.9	54	54.1	39.66	11.17	59.83	250	0	A	H
		17355	68.15	-0.15	68.3	70.83	40.34	14.78	57.8	150	0	P	H
		11570	51.96	-22.04	74	60.96	39.66	11.17	59.83	250	0	P	V
		11570	41.49	-12.51	54	50.49	39.66	11.17	59.83	250	0	A	V
		17355	63.8	-4.5	68.3	66.48	40.34	14.78	57.8	150	0	P	V
802.11a CH 165 5825MHz		11650	53.01	-20.99	74	62.06	39.62	11.23	59.9	250	0	P	H
		11650	44.09	-9.91	54	53.14	39.62	11.23	59.9	250	0	A	H
		17475	66.94	-1.36	68.3	69	40.62	14.67	57.35	150	0	P	H
		11650	52.19	-21.81	74	61.24	39.62	11.23	59.9	250	0	P	V
		11650	43.01	-10.99	54	52.06	39.62	11.23	59.9	250	0	A	V
		17475	62.81	-5.49	68.3	64.87	40.62	14.67	57.35	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 149 5745MHz		5645	52.9	-15.4	68.3	45.57	33.17	7.65	33.49	250	9	P	H
		5690	68.37	-29.56	97.93	60.97	33.23	7.68	33.51	250	9	P	H
		5720	86.95	-23.95	110.9	79.52	33.27	7.68	33.52	250	9	P	H
		5723.6	87.88	-31.23	119.11	80.45	33.27	7.68	33.52	250	9	P	H
		5745	113.02	-	-	105.52	33.29	7.74	33.53	250	9	P	H
		5745	104.53	-	-	97.03	33.29	7.74	33.53	250	9	A	H
		5650	52.4	-15.9	68.3	45.03	33.19	7.67	33.49	250	67	P	V
		5697	67.74	-35.35	103.09	60.34	33.23	7.68	33.51	250	67	P	V
		5716.6	83.53	-26.42	109.95	76.12	33.25	7.68	33.52	250	67	P	V
		5724.4	87.33	-33.6	120.93	79.9	33.27	7.68	33.52	250	67	P	V
		5745	111.72	-	-	104.22	33.29	7.74	33.53	250	67	P	V
		5745	103.34	-	-	95.84	33.29	7.74	33.53	250	67	A	V



WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 157 5785MHz		5610.6	51.52	-16.78	68.3	44.24	33.12	7.65	33.49	219	7	P	H
		5697.4	54.54	-48.84	103.38	47.14	33.23	7.68	33.51	219	7	P	H
		5717.2	61.92	-48.2	110.12	54.51	33.25	7.68	33.52	219	7	P	H
		5724.6	67.3	-54.09	121.39	59.87	33.27	7.68	33.52	219	7	P	H
		5785	113.58	-	-	105.99	33.33	7.8	33.54	219	7	P	H
		5785	104.47	-	-	96.88	33.33	7.8	33.54	219	7	A	H
		5853.4	65.76	-48.79	114.55	58.04	33.41	7.87	33.56	219	7	P	H
		5856.6	63.74	-46.71	110.45	56	33.43	7.87	33.56	219	7	P	H
		5877.8	56.79	-46.43	103.22	49.02	33.46	7.87	33.56	219	7	P	H
		5925.8	52.29	-16.01	68.3	44.4	33.52	7.95	33.58	219	7	P	H
		5643.8	50.28	-18.02	68.3	42.95	33.17	7.65	33.49	250	63	P	V
		5695.6	53.92	-48.14	102.06	46.52	33.23	7.68	33.51	250	63	P	V
		5719.2	61.11	-49.57	110.68	53.68	33.27	7.68	33.52	250	63	P	V
		5723.6	63.41	-55.7	119.11	55.98	33.27	7.68	33.52	250	63	P	V
		5785	110.9	-	-	103.31	33.33	7.8	33.54	250	63	P	V
		5785	101.69	-	-	94.1	33.33	7.8	33.54	250	63	A	V
		5852.2	63.22	-54.06	117.28	55.5	33.41	7.87	33.56	250	63	P	V
		5855	60.53	-50.37	110.9	52.79	33.43	7.87	33.56	250	63	P	V
		5875	53.94	-51.36	105.3	46.17	33.46	7.87	33.56	250	63	P	V
		5927	49.54	-18.76	68.3	41.65	33.52	7.95	33.58	250	63	P	V



WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 165 5825MHz		5825	114.25	-	-	106.57	33.39	7.84	33.55	215	7	P	H
		5825	104.78	-	-	97.1	33.39	7.84	33.55	215	7	A	H
		5852	85.92	-31.82	117.74	78.2	33.41	7.87	33.56	215	7	P	H
		5856	84.33	-26.29	110.62	76.59	33.43	7.87	33.56	215	7	P	H
		5875.2	70.63	-34.52	105.15	62.86	33.46	7.87	33.56	215	7	P	H
		5939	53.12	-15.18	68.3	45.21	33.54	7.95	33.58	215	7	P	H
		5825	111.59	-	-	103.91	33.39	7.84	33.55	250	61	P	V
		5825	102.26	-	-	94.58	33.39	7.84	33.55	250	61	A	V
		5851.4	82.35	-36.76	119.11	74.63	33.41	7.87	33.56	250	61	P	V
		5856.4	82.52	-27.99	110.51	74.78	33.43	7.87	33.56	250	61	P	V
		5877	65.37	-38.44	103.81	57.6	33.46	7.87	33.56	250	61	P	V
		5935.8	50.3	-18	68.3	42.41	33.52	7.95	33.58	250	61	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT20 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT20 CH 149 5745MHz		11490	54.03	-19.97	74	62.98	39.7	11.1	59.75	250	0	P	H
		11490	44.07	-9.93	54	53.02	39.7	11.1	59.75	250	0	A	H
		17235	65.18	-3.12	68.3	68.48	40.06	14.89	58.25	150	0	P	H
		11490	52.11	-21.89	74	61.06	39.7	11.1	59.75	250	0	P	V
		11490	43.11	-10.89	54	52.06	39.7	11.1	59.75	250	0	A	V
		17235	67.03	-1.27	68.3	70.33	40.06	14.89	58.25	150	0	P	V
802.11n HT20 CH 157 5785MHz		11570	54.87	-19.13	74	63.87	39.66	11.17	59.83	250	0	P	H
		11570	45.03	-8.97	54	54.03	39.66	11.17	59.83	250	0	A	H
		17355	63.74	-4.56	68.3	66.42	40.34	14.78	57.8	150	0	P	H
		11570	51.26	-22.74	74	60.26	39.66	11.17	59.83	250	0	P	V
		11570	42.06	-11.94	54	51.06	39.66	11.17	59.83	250	0	A	V
		17355	66.28	-2.02	68.3	68.96	40.34	14.78	57.8	150	0	P	V
802.11n HT20 CH 165 5825MHz		11650	54.39	-19.61	74	63.44	39.62	11.23	59.9	150	232	P	H
		11650	43.8	-30.2	74	52.85	39.62	11.23	59.9	150	232	P	H
		17475	63.2	-5.1	68.3	65.26	40.62	14.67	57.35	150	0	P	H
		11650	52.59	-21.41	74	61.64	39.62	11.23	59.9	150	351	P	V
		11650	42.46	-11.54	54	51.51	39.62	11.23	59.9	150	351	A	V
		17475	63.77	-4.53	68.3	65.83	40.62	14.67	57.35	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 151 5755MHz		5645.8	63.94	-4.36	68.3	56.59	33.17	7.67	33.49	250	360	P	H
		5700	76.28	-29.02	105.3	68.88	33.23	7.68	33.51	250	360	P	H
		5717.2	89.38	-20.74	110.12	81.97	33.25	7.68	33.52	250	360	P	H
		5723	90.98	-26.76	117.74	83.55	33.27	7.68	33.52	250	360	P	H
		5755	111.26	-	-	103.74	33.31	7.74	33.53	250	360	P	H
		5755	101.55	-	-	94.03	33.31	7.74	33.53	250	360	A	H
		5850.4	65.54	-55.85	121.39	57.82	33.41	7.87	33.56	250	360	P	H
		5861.2	66.87	-42.29	109.16	59.13	33.43	7.87	33.56	250	360	P	H
		5891.6	62.85	-30.13	92.98	55.03	33.48	7.91	33.57	250	360	P	H
		5943.2	53.14	-15.16	68.3	45.23	33.54	7.95	33.58	250	360	P	H
		5647.2	62.33	-5.97	68.3	54.98	33.17	7.67	33.49	250	62	P	V
		5697.6	80.92	-22.61	103.53	73.52	33.23	7.68	33.51	250	62	P	V
		5718	89.5	-20.84	110.34	82.07	33.27	7.68	33.52	250	62	P	V
		5723	90.67	-27.07	117.74	83.24	33.27	7.68	33.52	250	62	P	V
		5755	109.88	-	-	102.36	33.31	7.74	33.53	250	62	P	V
		5755	100.94	-	-	93.42	33.31	7.74	33.53	250	62	A	V
		5851.4	63.35	-55.76	119.11	55.63	33.41	7.87	33.56	250	62	P	V
		5856.4	63.57	-46.94	110.51	55.83	33.43	7.87	33.56	250	62	P	V
		5876	59.35	-45.21	104.56	51.58	33.46	7.87	33.56	250	62	P	V
		5925.8	52.86	-15.44	68.3	44.97	33.52	7.95	33.58	250	62	P	V



WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 159 5795MHz		5639	55.12	-13.18	68.3	47.79	33.17	7.65	33.49	211	6	P	H
		5699.4	69.27	-35.59	104.86	61.87	33.23	7.68	33.51	211	6	P	H
		5717.6	70.43	-39.8	110.23	63	33.27	7.68	33.52	211	6	P	H
		5720.4	71.95	-39.86	111.81	64.52	33.27	7.68	33.52	211	6	P	H
		5795	111.46	-	-	103.85	33.35	7.8	33.54	211	6	P	H
		5795	102.35	-	-	94.74	33.35	7.8	33.54	211	6	A	H
		5850.2	79.36	-42.48	121.84	71.64	33.41	7.87	33.56	211	6	P	H
		5855.2	75.9	-34.94	110.84	68.16	33.43	7.87	33.56	211	6	P	H
		5877.2	70.61	-33.06	103.67	62.84	33.46	7.87	33.56	211	6	P	H
		5930.4	61.45	-6.85	68.3	53.56	33.52	7.95	33.58	211	6	P	H
		5648.4	55.45	-12.85	68.3	48.1	33.17	7.67	33.49	250	60	P	V
		5699	66.19	-38.37	104.56	58.79	33.23	7.68	33.51	250	60	P	V
		5712.8	67.47	-41.42	108.89	60.06	33.25	7.68	33.52	250	60	P	V
		5721	69.69	-43.49	113.18	62.26	33.27	7.68	33.52	250	60	P	V
		5795	108.66	-	-	101.05	33.35	7.8	33.54	250	60	P	V
		5795	100.15	-	-	92.54	33.35	7.8	33.54	250	60	A	V
		5851.6	78.83	-39.82	118.65	71.11	33.41	7.87	33.56	250	60	P	V
		5859.4	74.49	-35.18	109.67	66.75	33.43	7.87	33.56	250	60	P	V
		5875	67.62	-37.68	105.3	59.85	33.46	7.87	33.56	250	60	P	V
		5927.4	57.63	-10.67	68.3	49.74	33.52	7.95	33.58	250	60	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11n HT40 CH 151 5755MHz		11510	52.48	-21.52	74	61.44	39.7	11.1	59.76	250	319	P	H
		11510	42.64	-11.36	54	51.6	39.7	11.1	59.76	250	319	A	H
		17265	59.7	-8.6	68.3	62.84	40.14	14.85	58.13	148	0	P	H
		11550	48.4	-25.6	74	57.41	39.67	11.13	59.81	250	0	P	V
		17265	62.4	-5.9	68.3	65.54	40.14	14.85	58.13	148	0	P	V
802.11n HT40 CH 159 5795MHz		11590	50.76	-23.24	74	59.79	39.65	11.17	59.85	250	0	P	H
		17385	60.69	-7.61	68.3	63.2	40.42	14.74	57.67	150	0	P	H
		11590	49.93	-24.07	74	58.96	39.65	11.17	59.85	250	0	P	V
		17385	63.12	-5.18	68.3	65.63	40.42	14.74	57.67	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 4 5725~5850MHz

WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac VHT80 CH 155 5775MHz		5642.4	67.37	-0.93	68.3	60.04	33.17	7.65	33.49	234	8	P	H
		5697	83.45	-19.64	103.09	76.05	33.23	7.68	33.51	234	8	P	H
		5712.6	87.38	-21.45	108.83	79.97	33.25	7.68	33.52	234	8	P	H
		5724.6	87.7	-33.69	121.39	80.27	33.27	7.68	33.52	234	8	P	H
		5775	107.08	-	-	99.48	33.33	7.8	33.53	234	8	P	H
		5775	98.14	-	-	90.54	33.33	7.8	33.53	234	8	A	H
		5851.4	85.3	-33.81	119.11	77.58	33.41	7.87	33.56	234	8	P	H
		5857	83.13	-27.21	110.34	75.39	33.43	7.87	33.56	234	8	P	H
		5875.8	78.95	-25.76	104.71	71.18	33.46	7.87	33.56	234	8	P	H
		5932.4	66.82	-1.48	68.3	58.93	33.52	7.95	33.58	234	8	P	H
		5649	67.17	-1.13	68.3	59.82	33.17	7.67	33.49	250	61	P	V
		5699.8	85	-20.15	105.15	77.6	33.23	7.68	33.51	250	61	P	V
		5713.2	86.21	-22.79	109	78.8	33.25	7.68	33.52	250	61	P	V
		5721.2	89.37	-24.27	113.64	81.94	33.27	7.68	33.52	250	61	P	V
		5775	106.21	-	-	98.61	33.33	7.8	33.53	250	61	P	V
		5775	97.07	-	-	89.47	33.33	7.8	33.53	250	61	A	V
		5850.8	84.94	-35.54	120.48	77.22	33.41	7.87	33.56	250	61	P	V
		5857.8	84.19	-25.92	110.11	76.45	33.43	7.87	33.56	250	61	P	V
		5879.8	75.97	-25.76	101.73	68.2	33.46	7.87	33.56	250	61	P	V
		5929	66.46	-1.84	68.3	58.57	33.52	7.95	33.58	250	61	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Band 4 5725~5850MHz****WIFI 802.11ac VHT80 (Harmonic @ 3m)**

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ac		11550	50.04	-23.96	74	59.05	39.67	11.13	59.81	250	0	P	H
VHT80		17325	55.87	-12.43	68.3	58.76	40.26	14.78	57.93	150	0	P	H
CH 155		11550	48.66	-25.34	74	57.67	39.67	11.13	59.81	250	0	P	V
5775MHz		17325	56.69	-11.61	68.3	59.58	40.26	14.78	57.93	150	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

5GHz WIFI 802.11a (LF @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
5GHz 802.11a LF		30	25.56	-14.44	40	30.02	26.7	0.62	31.78	-	-	P	H
		399.57	26.88	-19.12	46	30.3	26	1.82	31.24	-	-	P	H
		724.52	29.89	-16.11	46	31.17	27.5	2.44	31.22	-	-	P	H
		849.65	31.38	-14.62	46	31.83	28.1	2.71	31.26	-	-	P	H
		900.09	31.77	-14.23	46	31.78	28.5	2.77	31.28	100	0	P	H
		971.87	32.56	-21.44	54	30.8	29.84	3.19	31.27	-	-	P	H
		31.94	26.82	-13.18	40	32.12	25.86	0.62	31.78	100	0	P	V
		101.78	21.46	-22.04	43.5	33.28	18.76	0.99	31.57	-	-	P	V
		398.6	26.98	-19.02	46	30.51	25.89	1.82	31.24	-	-	P	V
		703.18	29.77	-16.23	46	30.87	27.68	2.44	31.22	-	-	P	V
		864.2	30.49	-15.51	46	30.83	28.22	2.71	31.27	-	-	P	V
		984.48	31.68	-22.32	54	29.66	30.09	3.19	31.26	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical

A calculation example for radiated spurious emission is shown as below:

WIFI Ant. 1+2	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 01		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Level(dBμV/m) =

Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

2. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11a	87.14	1.44	0.70	1kHz
802.11n HT20	86.39	1.35	0.74	1kHz
802.11n HT40	76.99	0.68	1.48	3kHz
802.11ac VHT80	62.59	0.34	2.96	3kHz

802.11a

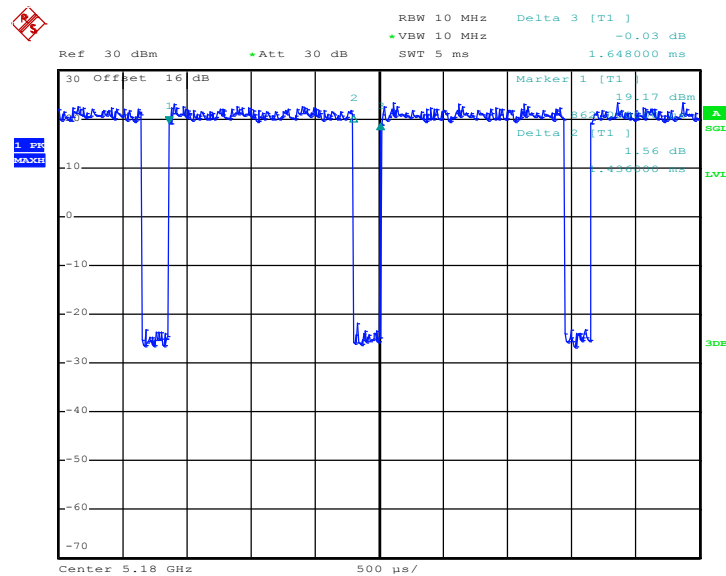




802.11n HT20

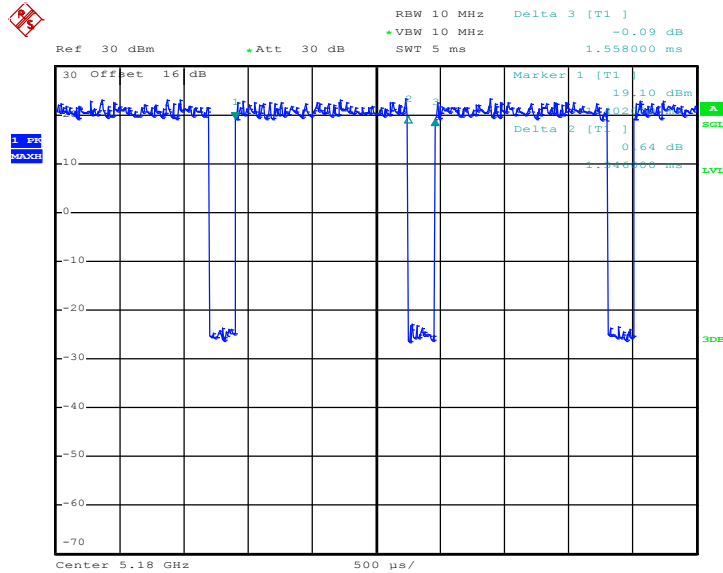

802.11n HT40

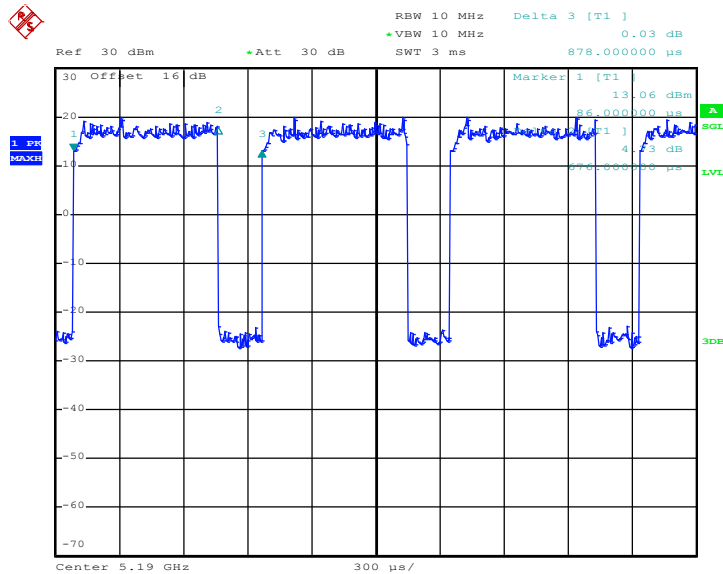



802.11ac VHT80

