



A D T

FCC TEST REPORT

(CO-LOCATED)

REPORT NO.: RF130410C18-2

MODEL NO.: TD-W8980

FCC ID: TE7TDW8980V1

RECEIVED: Apr. 10, 2013

TESTED: Jul. 29 ~ Jul. 30, 2013

ISSUED: Jul. 30, 2013

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

ADDRESS: Building 24 (floors 1,3,4,5) and 28 (floors 1-4)
Central Science and Technology Park, Shennan
Rd, Nanshan, Shenzhen, China

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist.,
New Taipei City, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim
product certification, approval, or endorsement by
TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.



TABLE OF CONTENTS

RELEASE CONTROL RECORD	3
1. CERTIFICATION	4
2. SUMMARY OF TEST RESULTS	5
2.1 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 DESCRIPTION OF TEST MODES	8
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	10
3.3 DESCRIPTION OF SUPPORT UNITS	11
3.3.1 CONFIGURATION OF SYSTEM UNDER TEST	12
3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS	12
4. TEST TYPES AND RESULTS	13
4.1 RADIATED EMISSION AND BANDEdge MEASUREMENT	13
4.1.1 LIMITS OF RADIATED EMISSION AND BANDEdge MEASUREMENT	13
4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS ..	13
4.1.3 TEST INSTRUMENTS	14
4.1.4 TEST PROCEDURES	15
4.1.5 DEVIATION FROM TEST STANDARD	15
4.1.6 TEST SETUP	16
4.1.7 EUT OPERATING CONDITIONS	16
4.1.8 TEST RESULTS	17
4.2 CONDUCTED EMISSION MEASUREMENT	23
4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	23
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES	24
4.2.4 DEVIATION FROM TEST STANDARD	24
4.2.5 TEST SETUP	25
4.2.6 EUT OPERATING CONDITIONS	25
4.2.7 TEST RESULTS	26
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	30
6. INFORMATION ON THE TESTING LABORATORIES	31
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	32



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130410C18-2	Original release	Jul. 30, 2013



A D T

1. CERTIFICATION

PRODUCT: N600 Wireless Dual Band Gigabit ADSL2+ Modem Router

MODEL NO.: TD-W8980

BRAND: TP-LINK

APPLICANT: TP-LINK TECHNOLOGIES CO., LTD.

TESTED: Jul. 29 ~ Jul. 30, 2013

TEST SAMPLE: PRODUCTION SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

The above equipment (model: TD-W8980) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , DATE : Jul. 30, 2013
Pettie Chen / Senior Specialist

APPROVED BY :  , DATE : Jul. 30, 2013
Ken Liu / Senior Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247) FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207 15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -6.77dB at 0.50547MHz.
15.247(d) 15.407(b/1/2/3) (b)(6)	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.9dB at 4874.00MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~ 1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	N600 Wireless Dual Band Gigabit ADSL2+ Modem Router
MODEL NO.	TD-W8980
POWER SUPPLY	12Vdc (Adapter)
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps
OPERATING FREQUENCY	2.4GHz: 2412 ~ 2462MHz 5.0GHz: 5180 ~ 5240MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g, 802.11n (20MHz) 7 for 802.11n (40MHz) 5.0GHz: 5180 ~ 5240MHz: 4 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n (20MHz) 2 for 802.11n (40MHz)
OUTPUT POWER	154.813mW for 2412 ~ 2462MHz 48.142mW for 5180 ~ 5240MHz 548.206mW for 5745 ~ 5825MHz
ANTENNA TYPE	2.4GHz: PIFA antenna with 3.5dBi gain 5.0GHz: Dipole antenna with 5.0dBi gain
ANTENNA CONNECTOR	Embedded; Case mounting Weld for PIFA antenna RP-SMA-Female for Dipole antenna
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Adapter



A D T

NOTE:

1. The EUT provides three completed transmitters and three receivers.

2.4GHz Band	
MODULATION MODE	TX FUNCTION
802.11b	2TX
802.11g	2TX
802.11n (20MHz)	2TX
802.11n (40MHz)	2TX

5.0GHz Band	
MODULATION MODE	TX FUNCTION
802.11a	3TX
802.11n (20MHz)	3TX
802.11n (40MHz)	3TX

2. The EUT consumes power from the following adapter.

BRAND:	Huntkey
MODEL:	HKA01812015-2K
INPUT:	100-240Vac, 50/60Hz, 0.5A
OUTPUT:	12Vdc, 1.5A
POWER LINE:	1.5m non-shielded cable without core

3. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



3.2 DESCRIPTION OF TEST MODES

FOR 2.4GHz:

11 channels are provided for 802.11b, 802.11g and 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

7 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

FOR 5180 ~ 5240MHz:

4 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190MHz	46	5230MHz



A D T

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz		

2 channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
151	5755MHz	159	5795MHz



A D T

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO			DESCRIPTION
	RE≥1G	RE<1G	PLC	
-	✓	✓	✓	-

Where

RE≥1G: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

NOTE:

The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. RANGE (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 36	DBPSK
		5180 ~ 5240	36 to 48		BPSK
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 149	DBPSK
		5745 ~ 5825	149 to 165		BPSK

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. RANGE (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 36	DBPSK
		5180 ~ 5240	36 to 48		BPSK
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 149	DBPSK
		5745 ~ 5825	149 to 165		BPSK



A D T

CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. RANGE (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 36	DBPSK
		5180 ~ 5240	36 to 48		BPSK
-	802.11b+802.11a	2412 ~ 2462	1 to 11	6 + 149	DBPSK
		5745 ~ 5825	149 to 165		BPSK

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 71%RH	120Vac, 60Hz	Brad Tung
RE<1G	25deg. C, 71%RH	120Vac, 60Hz	Brad Tung
PLC	25deg. C, 68%RH	120Vac, 60Hz	Brad Tung

3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	USB Flash Drive	Transcend	V85	538455 4490	NA
2	USB Flash Drive	Transcend	V85	569992-8209	NA
3	Notebook	DELL	E5410	1HC2XM1	FCC DoC Approved
4	Notebook	DELL	E5420	BPQ7MQ1	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA
3	10m RJ45 cable
4	10m RJ45 cable

NOTE:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item 3, 4 acted as communication partners to transfer data.

3.3.1 CONFIGURATION OF SYSTEM UNDER TEST

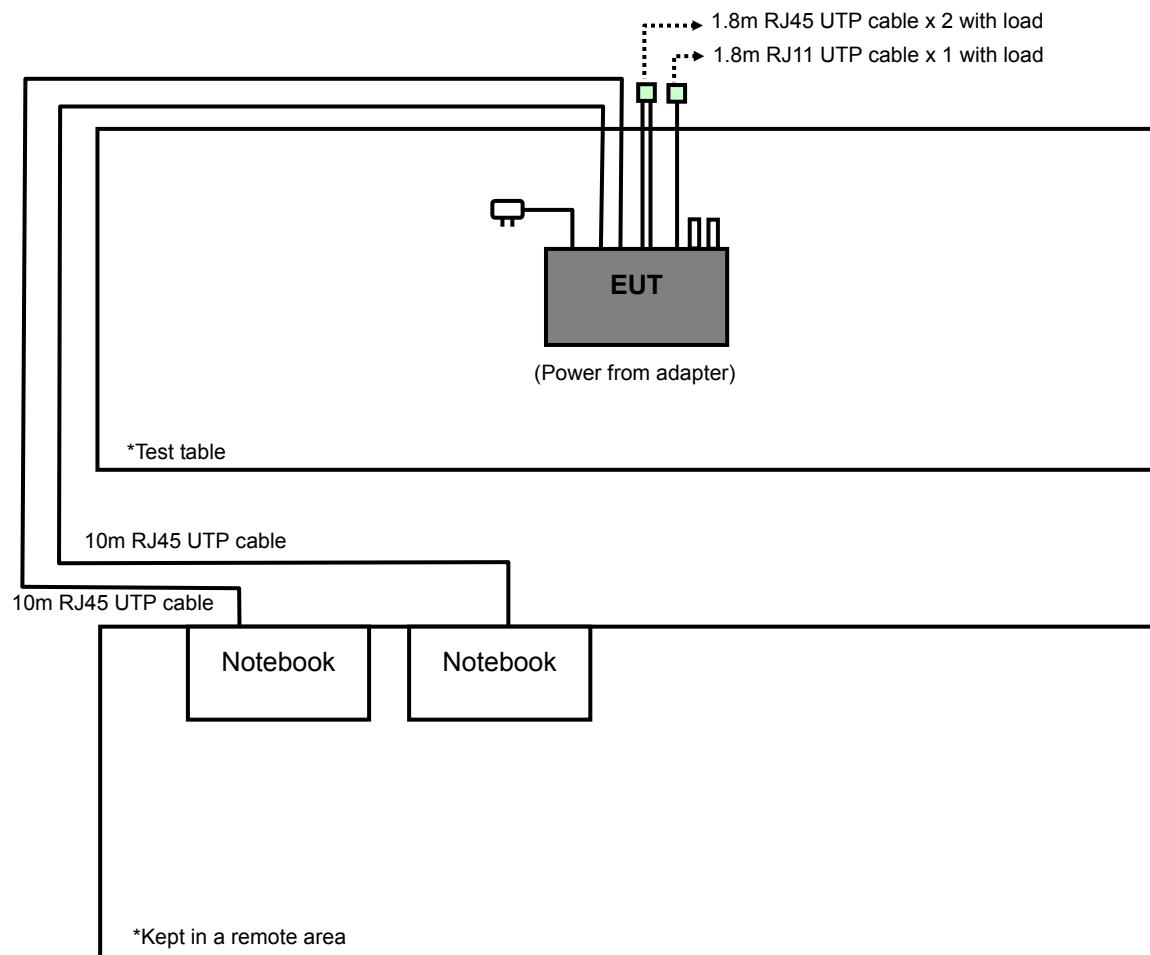

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (Section 15.247)

FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
FIELD STRENGTH AT 3m (dB _u V/m)		
✓	PK	AV
	74	54
EIRP LIMIT (dBm)		EQUIVALENT FIELD STRENGTH AT 3m (dB _u V/m)
PK		PK
-27		68.3

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m}, \text{ where } P \text{ is the eirp (Watts).}$$



A D T

4.1.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Aug. 21, 2012	Aug. 20, 2013
Spectrum Analyzer ROHDE & SCHWARZ	FSU 43	100115	Oct. 25, 2012	Oct. 24, 2013
BILOG Antenna SCHWARZBECK	VULB9168	9168-155	Mar. 25, 2013	Mar. 24, 2014
HORN Antenna SCHWARZBECK	BBHA 9120D	9120D-404	Dec. 22, 2012	Dec. 21, 2013
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2012	Dec. 24, 2013
Preamplifier Agilent	8449B	3008A01961	Oct. 25, 2012	Oct. 24, 2013
Preamplifier Agilent	8447D	2944A10738	Oct. 23, 2012	Oct. 22, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309220/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250724/4	Aug. 28, 2012	Aug. 27, 2013
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	295012/4	Aug. 28, 2012	Aug. 27, 2013
Software BV ADT	ADT_Radiated_ V7.6.15.9.4	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	010303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	019303	NA	NA
Turn Table BV ADT	TT100.	TT93021704	NA	NA
Turn Table Controller BV ADT	SC100.	SC93021704	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	815221	Oct. 25, 2012	Oct. 24, 2013

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HwaYa Chamber 4.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 460141.
5. The IC Site Registration No. is IC7450F-4.



A D T

4.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz(Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.5 DEVIATION FROM TEST STANDARD

No deviation.

4.1.6 TEST SETUP

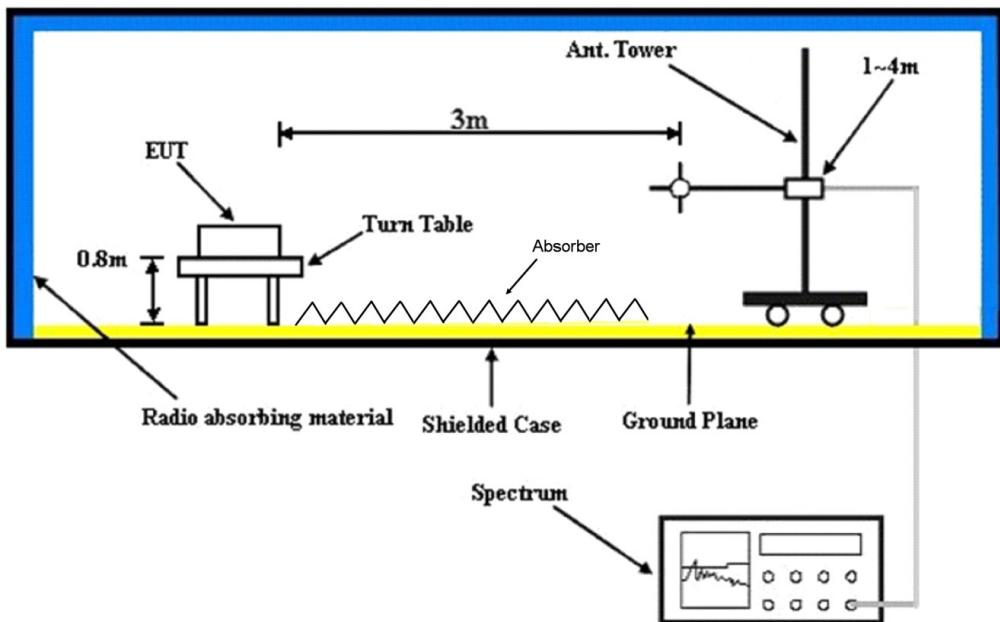

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.7 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebooks to act as communication partners and placed them outside of testing area.
- c. The communication partners connected with EUT via RJ45 cables and ran a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The communication partners sent data to EUT by command "PING".
- e. The necessary accessories enabled the system in full functions.



A D T

4.1.8 TEST RESULTS

Above 1GHz data

802.11b+802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.5 PK			1.35 H	277	66.70	35.80
2	*2437.00	98.7 AV			1.35 H	277	62.90	35.80
3	4874.00	52.3 PK	74.0	-21.7	1.00 H	295	9.10	43.20
4	4874.00	49.9 AV	54.0	-4.1	1.00 H	295	6.70	43.20
5	5150.00	65.0 PK	74.0	-9.0	1.03 H	155	59.40	5.60
6	5150.00	43.1 AV	54.0	-10.9	1.03 H	155	37.50	5.60
7	*5180.00	98.7 PK			1.08 H	156	54.80	43.90
8	*5180.00	88.6 AV			1.08 H	156	44.70	43.90
9	10360.00	63.5 PK	74.0	-10.5	1.35 H	200	51.20	12.30
10	10360.00	46.1 AV	54.0	-7.9	1.35 H	200	33.80	12.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.5 PK			1.18 V	316	73.70	35.80
2	*2437.00	106.1 AV			1.18 V	316	70.30	35.80
3	4874.00	56.1 PK	74.0	-17.9	1.00 V	50	12.90	43.20
4	4874.00	53.0 AV	54.0	-1.0	1.00 V	50	9.80	43.20
5	5150.00	67.0 PK	74.0	-7.0	1.00 V	140	61.40	5.60
6	5150.00	44.0 AV	54.0	-10.0	1.00 V	140	38.40	5.60
7	*5180.00	111.1 PK			1.00 V	155	67.20	43.90
8	*5180.00	101.2 AV			1.00 V	155	57.30	43.90
9	10360.00	64.3 PK	74.0	-9.7	1.45 V	188	52.00	12.30
10	10360.00	47.1 AV	54.0	-6.9	1.45 V	188	34.80	12.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



A D T

802.11b+802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Brad Tung

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.8 PK			1.40 H	234	67.00	35.80
2	*2437.00	99.0 AV			1.40 H	234	63.20	35.80
3	4874.00	52.6 PK	74.0	-21.4	1.04 H	280	9.40	43.20
4	4874.00	49.8 AV	54.0	-4.2	1.04 H	280	6.60	43.20
5	#5725.00	63.8 PK	78.2	-14.4	1.32 H	322	57.50	6.30
6	#5725.00	54.1 AV	68.5	-14.4	1.32 H	322	47.80	6.30
7	*5745.00	98.2 PK			1.38 H	319	53.60	44.60
8	*5745.00	88.5 AV			1.38 H	319	43.90	44.60
9	11490.00	64.6 PK	74.0	-9.4	1.35 H	119	50.20	14.40
10	11490.00	51.3 AV	54.0	-2.7	1.35 H	119	36.90	14.40

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	109.7 PK			1.24 V	330	73.90	35.80
2	*2437.00	106.3 AV			1.24 V	330	70.50	35.80
3	4874.00	56.5 PK	74.0	-17.5	1.00 V	30	13.30	43.20
4	4874.00	53.1 AV	54.0	-0.9	1.00 V	30	9.90	43.20
5	#5725.00	79.5 PK	94.0	-14.5	1.40 V	320	73.20	6.30
6	#5725.00	70.1 AV	84.6	-14.5	1.40 V	320	63.80	6.30
7	*5745.00	114.0 PK			1.34 V	326	69.40	44.60
8	*5745.00	104.6 AV			1.34 V	326	60.00	44.60
9	11490.00	66.3 PK	74.0	-7.7	1.32 V	296	51.90	14.40
10	11490.00	52.8 AV	54.0	-1.2	1.32 V	296	38.40	14.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

Below 1GHz data


802.11b+802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	CH 6 + CH 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	45.42	27.1 QP	40.0	-12.9	1.74 H	44	41.50	-14.40
2	179.31	30.3 QP	43.5	-13.2	1.99 H	262	45.40	-15.10
3	287.97	38.8 QP	46.0	-7.2	1.24 H	230	51.80	-13.00
4	319.02	38.8 QP	46.0	-7.2	1.00 H	147	51.00	-12.20
5	621.72	32.2 QP	46.0	-13.8	1.50 H	12	38.80	-6.60
6	749.79	31.2 QP	46.0	-14.8	1.24 H	8	35.50	-4.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

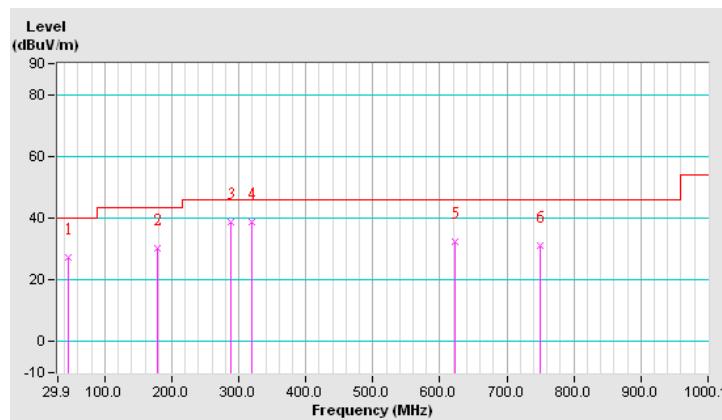




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	CH 6 + CH 36	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	33.78	32.4 QP	40.0	-7.6	1.49 V	108	48.50	-16.10
2	287.97	36.9 QP	46.0	-9.1	1.49 V	149	49.90	-13.00
3	319.02	35.2 QP	46.0	-10.8	1.49 V	227	47.40	-12.20
4	400.52	32.3 QP	46.0	-13.7	1.00 V	179	43.50	-11.20
5	431.56	32.0 QP	46.0	-14.0	1.00 V	135	42.30	-10.30
6	577.09	32.1 QP	46.0	-13.9	1.00 V	351	39.90	-7.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

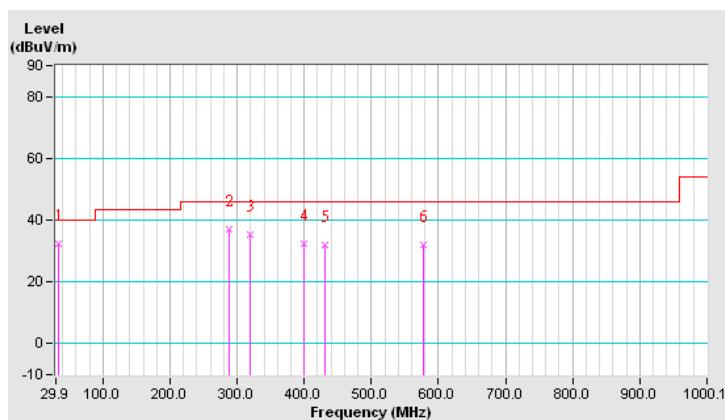



A D T


802.11b+802.11a

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	CH 6 + CH 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	60.95	28.7 QP	40.0	-11.3	1.50 H	158	43.50	-14.80
2	179.31	30.8 QP	43.5	-12.7	1.50 H	260	45.90	-15.10
3	287.97	38.8 QP	46.0	-7.2	1.26 H	206	51.80	-13.00
4	319.02	37.7 QP	46.0	-8.3	1.26 H	151	49.90	-12.20
5	431.56	32.0 QP	46.0	-14.0	1.99 H	75	42.30	-10.30
6	749.79	32.5 QP	46.0	-13.5	1.26 H	12	36.80	-4.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

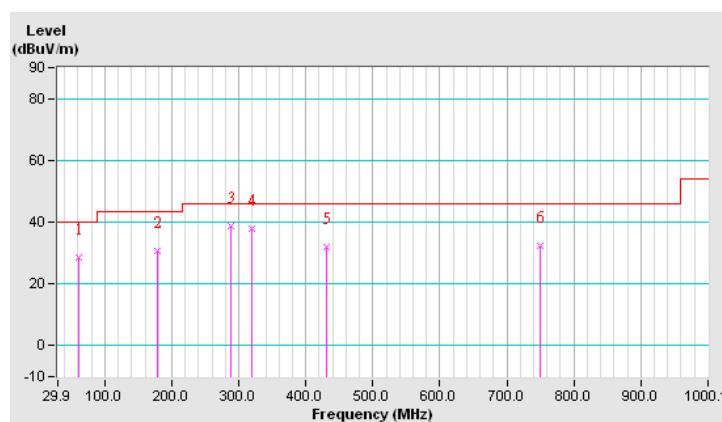




A D T

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	CH 6 + CH 149	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	26deg. C, 69%RH	TESTED BY	Alan Wu

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.66	33.2 QP	40.0	-6.8	1.49 V	192	48.50	-15.30
2	142.44	30.8 QP	43.5	-12.7	1.00 V	118	45.40	-14.60
3	287.97	36.7 QP	46.0	-9.3	1.49 V	86	49.70	-13.00
4	319.02	35.5 QP	46.0	-10.5	1.24 V	225	47.70	-12.20
5	400.52	33.3 QP	46.0	-12.7	1.24 V	192	44.50	-11.20
6	577.09	30.8 QP	46.0	-15.2	1.00 V	345	38.60	-7.80

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

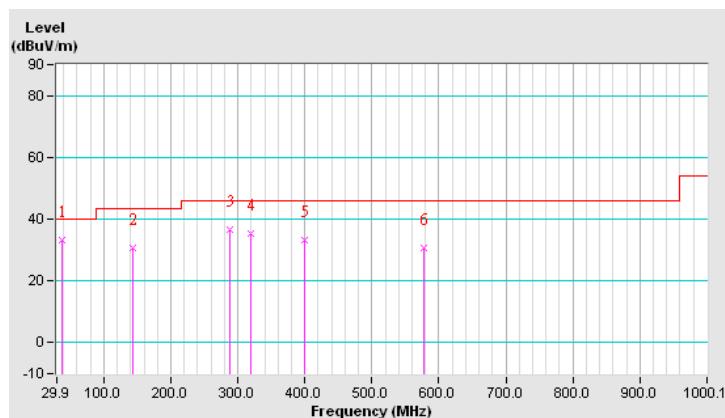



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 16, 2012	Nov. 15, 2013
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 28, 2012	Dec. 27, 2013
SCHWARZBECK (Peripheral)	NNBL 8226-2	8226-142	Jun. 27, 2013	Jun. 26, 2014
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 04, 2013	Feb. 03, 2014
Software ADT	BV ADT_Cond_V7.3.7.3	NA	NA	NA

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 1.
3. The VCCI Site Registration No. is C-2040.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

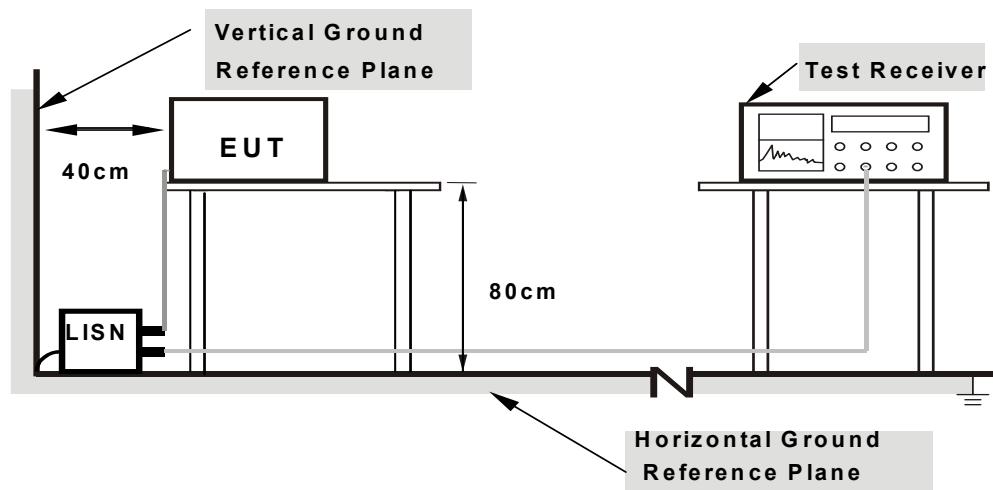

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:


802.11b+802.11a

CHANNEL	CH 6 + CH 36	6dB BANDWIDTH	9kHz
PHASE	Line 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15001	0.16	51.45	40.70	51.61	40.86	66.00	56.00	-14.39	-15.14
2	0.19687	0.16	47.06	34.56	47.22	34.72	63.74	53.74	-16.52	-19.02
3	0.50547	0.23	47.97	35.66	48.20	35.89	56.00	46.00	-7.80	-10.11
4	0.88828	0.25	36.11	21.61	36.36	21.86	56.00	46.00	-19.64	-24.14
5	3.01563	0.35	32.75	23.06	33.10	23.41	56.00	46.00	-22.90	-22.59
6	5.53906	0.48	30.32	21.69	30.80	22.17	60.00	50.00	-29.20	-27.83

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

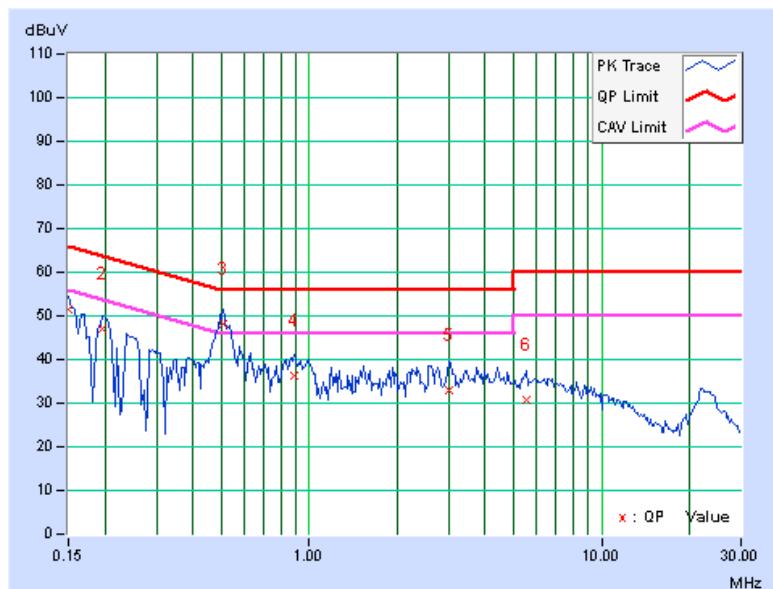




A D T

CHANNEL	CH 6 + CH 36	6dB BANDWIDTH	9kHz
PHASE	Line 2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	Q.P.	[dB (uV)]	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15391	0.17	46.87	37.41	47.04	37.58	65.79	55.79	-18.75	-18.21
2	0.19297	0.17	45.63	28.70	45.80	28.87	63.91	53.91	-18.11	-25.04
3	0.49766	0.24	44.92	32.26	45.16	32.50	56.04	46.04	-10.88	-13.54
4	0.62656	0.24	36.17	24.83	36.41	25.07	56.00	46.00	-19.59	-20.93
5	0.91172	0.25	34.30	22.36	34.55	22.61	56.00	46.00	-21.45	-23.39
6	3.72656	0.37	29.53	20.48	29.90	20.85	56.00	46.00	-26.10	-25.15

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

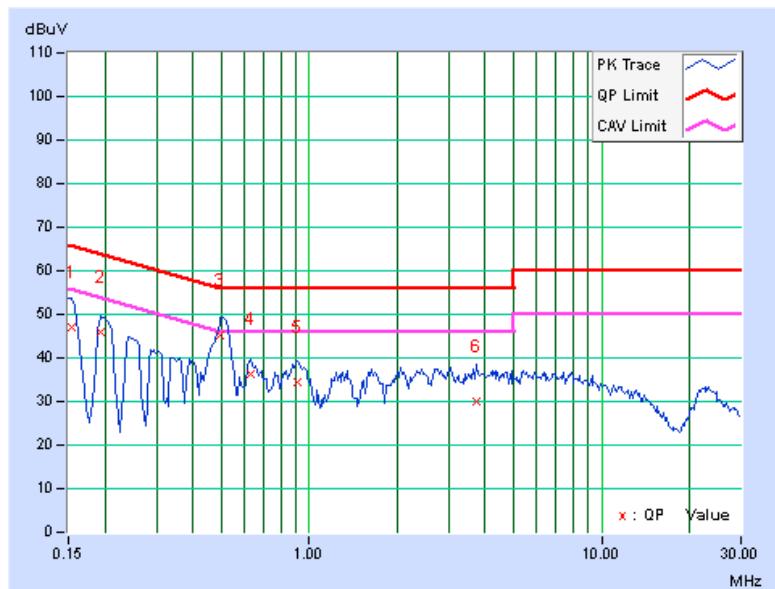



A D T


802.11b+802.11a

CHANNEL	CH 6 + CH 149	6dB BANDWIDTH	9kHz
PHASE	Line 1		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	Q.P.	AV.	[dB (uV)]	Q.P.	AV.	[dB (uV)]	Q.P.
1	0.15391	0.16	49.50	40.50	49.66	40.66	65.79	55.79	-16.13	-15.13
2	0.19687	0.16	43.58	28.78	43.74	28.94	63.74	53.74	-20.00	-24.80
3	0.50547	0.23	49.00	37.01	49.23	37.24	56.00	46.00	-6.77	-8.76
4	0.63438	0.24	36.86	23.11	37.10	23.35	56.00	46.00	-18.90	-22.65
5	0.88828	0.25	37.96	26.02	38.21	26.27	56.00	46.00	-17.79	-19.73
6	2.40625	0.31	34.19	24.44	34.50	24.75	56.00	46.00	-21.50	-21.25

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

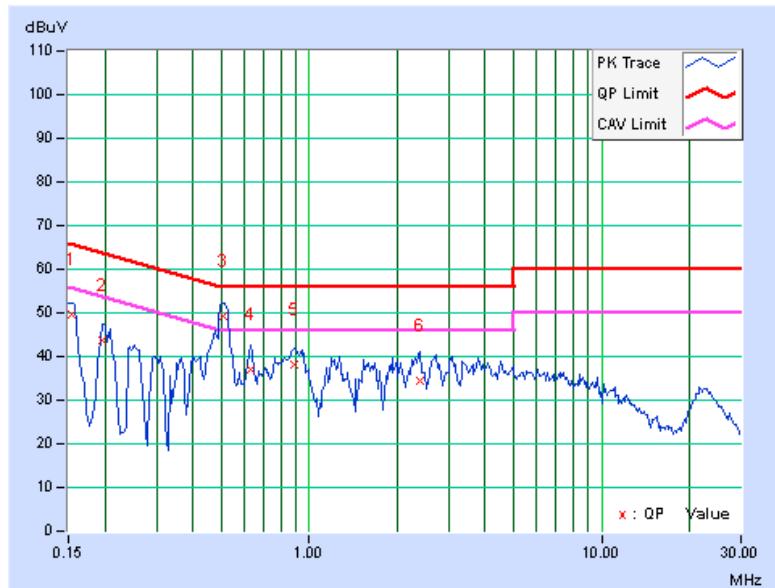




A D T

CHANNEL	CH 6 + CH 149	6dB BANDWIDTH	9kHz
PHASE	Line 2		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]	Q.P.	[dB (uV)]	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15781	0.17	48.76	33.67	48.93	33.84	65.58	55.58	-16.65	-21.74
2	0.19297	0.17	44.85	27.69	45.02	27.86	63.91	53.91	-18.89	-26.05
3	0.47031	0.24	39.07	25.53	39.31	25.77	56.51	46.51	-17.20	-20.74
4	0.50938	0.24	46.20	35.84	46.44	36.08	56.00	46.00	-9.56	-9.92
5	0.88047	0.25	35.15	25.25	35.40	25.50	56.00	46.00	-20.60	-20.50
6	2.74609	0.32	32.40	23.78	32.72	24.10	56.00	46.00	-23.28	-21.90

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

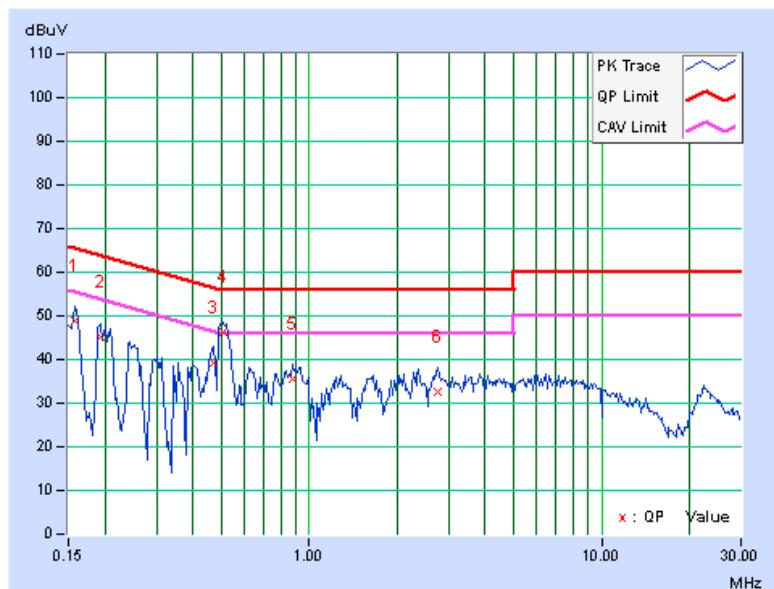



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



A D T

6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---