




# FCC RADIO TEST REPORT

**FCC ID** : TVE-121101A  
**Equipment** : Wireless Network Extender  
**Brand Name** : FORTINET  
**Model Name** : FortiExtender 211Exxxxxx,  
FORTIEXTENDER-211Exxxxxx, FEX-211Exxxxxx  
(Please refer to section 1.1.5 for detail information.)  
**Applicant** : Fortinet, Inc.  
899 Kifer Road, Sunnyvale, CA 94086 USA  
**Manufacturer** : Fortinet, Inc.  
899 Kifer Road, Sunnyvale, CA 94086 USA  
**Standard** : 47 CFR FCC Part 15.247

The product was received on Apr. 09, 2019, and testing was started from Sep. 03, 2019 and completed on May 25, 2020. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

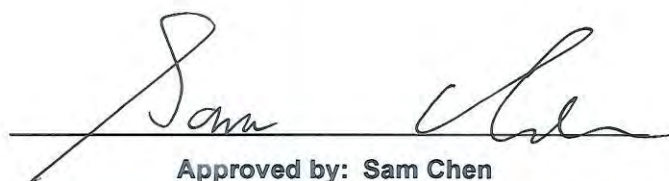

Approved by: Sam Chen

**SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory**  
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



## Table of Contents

|                                                                                |           |
|--------------------------------------------------------------------------------|-----------|
| <b>History of this test report.....</b>                                        | <b>3</b>  |
| <b>Summary of Test Result.....</b>                                             | <b>4</b>  |
| <b>1 General Description .....</b>                                             | <b>5</b>  |
| 1.1 Information.....                                                           | 5         |
| 1.2 Applicable Standards .....                                                 | 7         |
| 1.3 Testing Location Information .....                                         | 7         |
| 1.4 Measurement Uncertainty .....                                              | 7         |
| <b>2 Test Configuration of EUT.....</b>                                        | <b>8</b>  |
| 2.1 Test Channel Mode .....                                                    | 8         |
| 2.2 The Worst Case Measurement Configuration.....                              | 9         |
| 2.3 EUT Operation during Test .....                                            | 10        |
| 2.4 Accessories .....                                                          | 10        |
| 2.5 Support Equipment.....                                                     | 11        |
| 2.6 Test Setup Diagram .....                                                   | 12        |
| <b>3 Transmitter Test Result .....</b>                                         | <b>15</b> |
| 3.1 AC Power-line Conducted Emissions .....                                    | 15        |
| 3.2 DTS Bandwidth .....                                                        | 18        |
| 3.3 Maximum Conducted Output Power .....                                       | 19        |
| 3.4 Power Spectral Density .....                                               | 22        |
| 3.5 Emissions in Non-restricted Frequency Bands .....                          | 24        |
| 3.6 Emissions in Restricted Frequency Bands.....                               | 25        |
| <b>4 Test Equipment and Calibration Data .....</b>                             | <b>29</b> |
| <b>Appendix A. Test Results of AC Power-line Conducted Emissions</b>           |           |
| <b>Appendix B. Test Results of DTS Bandwidth</b>                               |           |
| <b>Appendix C. Test Results of Maximum Conducted Output Power</b>              |           |
| <b>Appendix D. Test Results of Power Spectral Density</b>                      |           |
| <b>Appendix E. Test Results of Emissions in Non-restricted Frequency Bands</b> |           |
| <b>Appendix F. Test Results of Emissions in Restricted Frequency Bands</b>     |           |
| <b>Appendix G. Test Photos</b>                                                 |           |
| <b>Photographs of EUT v01</b>                                                  |           |



TEL : 886-3-656-9065  
FAX : 886-3-656-9085  
Report Template No.: CB-A10\_6 Ver1.2



## Summary of Test Result

| Report Clause | Ref Std. Clause | Test Items                                  | Result (PASS/FAIL) | Remark |
|---------------|-----------------|---------------------------------------------|--------------------|--------|
| 1.1.2         | 15.203          | Antenna Requirement                         | PASS               | -      |
| 3.1           | 15.207          | AC Power-line Conducted Emissions           | PASS               | -      |
| 3.2           | 15.247(a)       | DTS Bandwidth                               | PASS               | -      |
| 3.3           | 15.247(b)       | Maximum Conducted Output Power              | PASS               | -      |
| 3.4           | 15.247(e)       | Power Spectral Density                      | PASS               | -      |
| 3.5           | 15.247(d)       | Emissions in Non-restricted Frequency Bands | PASS               | -      |
| 3.6           | 15.247(d)       | Emissions in Restricted Frequency Bands     | PASS               | -      |

Note:

Reference to Sporton Project No.: 8D2027 (After evaluating, related test items have been verified, and the original test data is replaced.)

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

1. The test configuration, test mode and test software were written in this test report are declared by the manufacturer.
2. The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Sam Chen**

**Report Producer: Vicky Huang**



# 1 General Description

## 1.1 Information

### 1.1.1 RF General Information

| Frequency Range (MHz) | Bluetooth Mode | Ch. Frequency (MHz) | Channel Number |
|-----------------------|----------------|---------------------|----------------|
| 2400-2483.5           | LE             | 2402-2480           | 0-39 [40]      |

| Band          | Mode         | BWch (MHz) | Nant |
|---------------|--------------|------------|------|
| 2.4-2.4835GHz | BT-LE(1Mbps) | 1.0        | 1    |
| 2.4-2.4835GHz | BT-LE(2Mbps) | 2.0        | 1    |

Note:

- ♦ Bluetooth LE uses a GFSK modulation.
- ♦ BWch is the nominal channel bandwidth.

### 1.1.2 Antenna Information

| Ant. | Port | Brand | Model Name  | Antenna Type     | Connector | Gain (dBi) |
|------|------|-------|-------------|------------------|-----------|------------|
| 1    | 1    | -     | RF11C02360S | Printing Antenna | N/A       | 4          |

Note1: The above information was declared by manufacturer.

Note2: The EUT has one antenna.

#### For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Port 1 can be used as transmitting/receiving antenna.

### 1.1.3 Mode Test Duty Cycle

| Mode         | DC    | DCF(dB) | T(s)    | VBW(Hz) $\geq 1/T$ |
|--------------|-------|---------|---------|--------------------|
| BT-LE(1Mbps) | 0.61  | 2.15    | 381.25u | 3k                 |
| BT-LE(2Mbps) | 0.315 | 5.02    | 197.5u  | 10k                |

Note:

- ♦ DC is Duty Cycle.
- ♦ DCF is Duty Cycle Factor.

**1.1.4 EUT Operational Condition**

|                              |                                     |                              |                          |                |
|------------------------------|-------------------------------------|------------------------------|--------------------------|----------------|
| <b>EUT Power Type</b>        | From AC Adapter or PoE              |                              |                          |                |
| <b>Function</b>              | <input checked="" type="checkbox"/> | Point-to-multipoint          | <input type="checkbox"/> | Point-to-point |
| <b>Test Software Version</b> | WCN Combo tool                      |                              |                          |                |
| <b>Support Mode</b>          | <input checked="" type="checkbox"/> | LE 1M PHY: 1 Mb/s            |                          |                |
|                              | <input type="checkbox"/>            | LE Coded PHY (S=2): 500 Kb/s |                          |                |
|                              | <input type="checkbox"/>            | LE Coded PHY (S=8): 125 Kb/s |                          |                |
|                              | <input checked="" type="checkbox"/> | LE 2M PHY: 2 Mb/s            |                          |                |

Note: The above information was declared by manufacturer.

**1.1.5 Table for Multiple Listing**

The model names in the following table are all refer to the identical product.

| Model Name                                                                                                                      | LTE Module                   | BT   | PCBA      | Description                                                                                           |
|---------------------------------------------------------------------------------------------------------------------------------|------------------------------|------|-----------|-------------------------------------------------------------------------------------------------------|
| FortiExtender 211Exxxxxx                                                                                                        | LTE module chip:<br>EM7565*1 | BT*1 | Same PCBA | All the models are identical, the difference model for difference brand served as marketing strategy. |
| FORTIEXTENDER-211Exxxxxx                                                                                                        | LTE module chip:<br>EM7565*1 | BT*1 | Same PCBA |                                                                                                       |
| FEX-211Exxxxxx                                                                                                                  | LTE module chip:<br>EM7565*1 | BT*1 | Same PCBA |                                                                                                       |
| (where “x” can be “0-9”, or “A-Z”, or “-“, or blank for marketing purposes or software changes only and no HW related changes.) |                              |      |           |                                                                                                       |

From the above models, model: FEX-211E was selected as representative model for the test and its data was recorded in this report.



## 1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 558074 D01 v05r02
- ♦ FCC KDB 414788 D01 v01r01

## 1.3 Testing Location Information

| Testing Location                    |        |                                                                                                                               |
|-------------------------------------|--------|-------------------------------------------------------------------------------------------------------------------------------|
| <input type="checkbox"/>            | HWA YA | ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)<br>TEL : 886-3-327-3456 FAX : 886-3-327-0973        |
| <input checked="" type="checkbox"/> | JHUBEI | ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065 FAX : 886-3-656-9085 |

| Test Condition           | Test Site No. | Test Engineer | Test Environment         | Test Date                       |
|--------------------------|---------------|---------------|--------------------------|---------------------------------|
| RF Conducted             | TH01-HY       | Barry Hsiao   | 24~26°C / 51~56%         | Sep. 03, 2019~<br>Sep. 05, 2019 |
| Radiated<br>(Below 1GHz) | 03CH04-CB     | Stim Sung     | 23.9~24.7°C / 65~67%     | May 21, 2020                    |
| Radiated<br>(Above 1GHz) | 03CH09-HY     | Daniel Hsu    | 22.1~23.3°C / 57.5~59.4% | Sep. 05, 2019                   |
| AC Conduction            | CO01-CB       | Ryo Fan       | 22~24°C / 59~60%         | May 25, 2020                    |

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.

## 1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

For AC Conduction and Radiated(Below 1GHz) tests:

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 2.0 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 4.3 dB      | Confidence levels of 95% |

For RF Conducted and Radiated(Above 1GHz) tests:

| Test Items                        | Uncertainty | Remark                   |
|-----------------------------------|-------------|--------------------------|
| Radiated Emission (1GHz ~ 18GHz)  | 3.9 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz) | 3.5 dB      | Confidence levels of 95% |
| Conducted Emission                | 1.3 dB      | Confidence levels of 95% |
| Temperature                       | 0.7 °C      | Confidence levels of 95% |
| Humidity                          | 4 %         | Confidence levels of 95% |



## **2 Test Configuration of EUT**

### **2.1 Test Channel Mode**

| <b>Mode</b>  | <b>Power Setting</b> |
|--------------|----------------------|
| BT-LE(1Mbps) | -                    |
| 2402MHz      | 7                    |
| 2440MHz      | 6                    |
| 2480MHz      | 7                    |
| BT-LE(2Mbps) | -                    |
| 2402MHz      | 7                    |
| 2440MHz      | 6                    |
| 2480MHz      | 7                    |

## 2.2 The Worst Case Measurement Configuration

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                            |
|-------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | AC power-line conducted emissions                          |
| <b>Condition</b>                                                                                                              | AC power-line conducted measurement for line and neutral   |
| <b>Operating Mode</b>                                                                                                         | Normal Link                                                |
| 1                                                                                                                             | EUT + GPS + Bluetooth + LTE Band 2(SIM Slot 1) + Adapter   |
| 2                                                                                                                             | EUT + GPS + Bluetooth + WCDMA Band 2(SIM Slot 1) + Adapter |
| Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode. |                                                            |
| 3                                                                                                                             | EUT + GPS + Bluetooth + LTE Band 2(SIM Slot 2) + PoE       |
| For operating mode 1 is the worst case and it was record in this test report.                                                 |                                                            |

| The Worst Case Mode for Following Conformance Tests |                                                                                                                          |
|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                   | DTS Bandwidth<br>Maximum Conducted Output Power<br>Power Spectral Density<br>Emissions in Non-restricted Frequency Bands |
| <b>Test Condition</b>                               | Conducted measurement at transmit chains                                                                                 |

| The Worst Case Mode for Following Conformance Tests                                                                           |                                                                                                                                                                                                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                                                             | Emissions in Restricted Frequency Bands                                                                                                                                                                                                             |
| <b>Test Condition</b>                                                                                                         | Radiated measurement<br>If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. |
| <b>Operating Mode &lt; 1GHz</b>                                                                                               | Normal Link                                                                                                                                                                                                                                         |
| 1                                                                                                                             | EUT at Z-axis + GPS + Bluetooth + LTE Band 2(SIM Slot 1) + Adapter                                                                                                                                                                                  |
| 2                                                                                                                             | EUT at Y-axis + GPS + Bluetooth + LTE Band 2(SIM Slot 1) + Adapter                                                                                                                                                                                  |
| Mode 1 has been evaluated to be the worst case between Mode 1~2, thus measurement for Mode 3 will follow this same test mode. |                                                                                                                                                                                                                                                     |
| 3                                                                                                                             | EUT at Z-axis + GPS + Bluetooth + WCDMA Band 2(SIM Slot 1) + Adapter                                                                                                                                                                                |
| Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode.   |                                                                                                                                                                                                                                                     |
| 4                                                                                                                             | EUT at Z-axis + GPS + Bluetooth + LTE Band 2(SIM Slot 2) + PoE                                                                                                                                                                                      |
| For operating mode 4 is the worst case and it was record in this test report.                                                 |                                                                                                                                                                                                                                                     |



|                                                                                                                                                                            |               |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| <b>Operating Mode &gt; 1GHz</b>                                                                                                                                            | CTX           |
| The EUT was performed at Z axis and Y axis position. The worst case was found at Z axis, so it was selected to perform test and its test result was written in the report. |               |
| 1                                                                                                                                                                          | EUT at Z-axis |

| <b>The Worst Case Mode for Following Conformance Tests</b>                         |                                                                         |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| <b>Tests Item</b>                                                                  | Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation |
| <b>Test Condition</b>                                                              | Radiated measurement                                                    |
| <b>Operating Mode</b>                                                              | Normal Link                                                             |
| 1                                                                                  | Bluetooth+WWAN(LTE)                                                     |
| 2                                                                                  | Bluetooth+WWAN(WCDMA)                                                   |
| Refer to Sporton Test Report No.: FA903129 for Co-location RF Exposure Evaluation. |                                                                         |

Note:

1. The EUT contains a certified WWAN module (FCC ID: N7NEM75)
2. The EUT was powered by Adapter or PoE, and the Adapter and PoE was for measurement only, would not be marketed.

The Adapter and PoE information as below:

| <b>Support Unit</b> | <b>Brand Name</b> | <b>Model Name</b> |
|---------------------|-------------------|-------------------|
| Adapter             | APD               | WA-30J12R         |
| Adapter             | HOLOTO            | ADS-25SGP-12      |
| PoE                 | Fortinet          | Fortiswitch 224E  |

## 2.3 EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 2.4 Accessories

N/A



## 2.5 Support Equipment

**For AC Conduction:**

| Support Equipment |                  |             |              |        |
|-------------------|------------------|-------------|--------------|--------|
| No.               | Equipment        | Brand Name  | Model Name   | FCC ID |
| A                 | SIM Card         | N/A         | N/A          | N/A    |
| B                 | LAN1 NB          | DELL        | E6430        | N/A    |
| C                 | LAN4 NB          | DELL        | E6430        | N/A    |
| D                 | Flash disk3.0    | Transcend   | JetFlash-700 | N/A    |
| E                 | iPad             | Apple       | A1430        | N/A    |
| F                 | LTE Base station | Anritsu     | MT8820C      | N/A    |
| G                 | GPS Simulator    | WELNAVIGATE | GS-100       | N/A    |
| H                 | WAN NB           | DELL        | E6430        | N/A    |
| I                 | Adapter          | APD         | WA-30J12R    | N/A    |

**For Radiated (below 1GHz):**

| Support Equipment |                  |               |                  |        |
|-------------------|------------------|---------------|------------------|--------|
| No.               | Equipment        | Brand Name    | Model Name       | FCC ID |
| A                 | PoE              | Fortinet      | Fortiswitch 224E | N/A    |
| B                 | iPad             | Apple         | A1430            | N/A    |
| C                 | LTE base station | Anritsu       | MT8820C          | N/A    |
| D                 | WAN NB           | DELL          | E4300            | N/A    |
| E                 | GPS Simulator    | WELNAVIGATE   | GS-100           | N/A    |
| F                 | LAN NB           | DELL          | E4300            | N/A    |
| G                 | Flash disk3.0    | Silicon Power | B06              | N/A    |
| H                 | SIM Card         | N/A           | N/A              | N/A    |


**For Radiated (above 1GHz):**


| Support Equipment |           |            |              |        |
|-------------------|-----------|------------|--------------|--------|
| No.               | Equipment | Brand Name | Model Name   | FCC ID |
| A                 | Adapter   | HOLOTO     | ADS-25SGP-12 | N/A    |

**For RF Conducted:**


| Support Equipment |                |            |            |        |
|-------------------|----------------|------------|------------|--------|
| No.               | Equipment      | Brand Name | Model Name | FCC ID |
| A                 | Notebook       | DELL       | E5410      | DoC    |
| B                 | Adapter for NB | DELL       | HA65NM130  | DoC    |

## 2.6 Test Setup Diagram

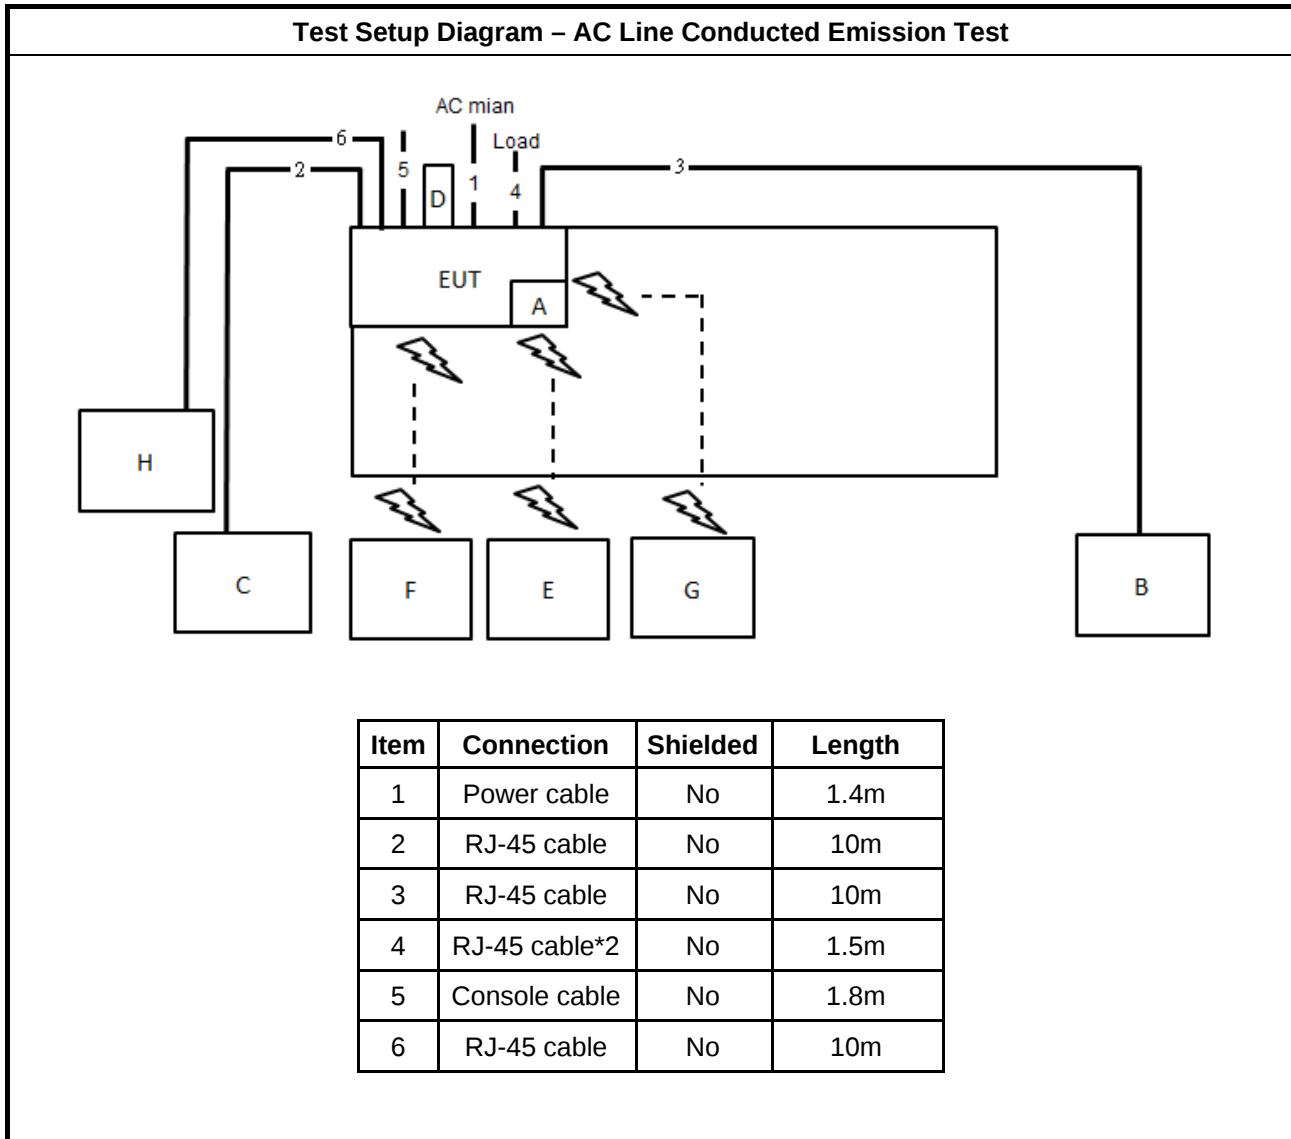

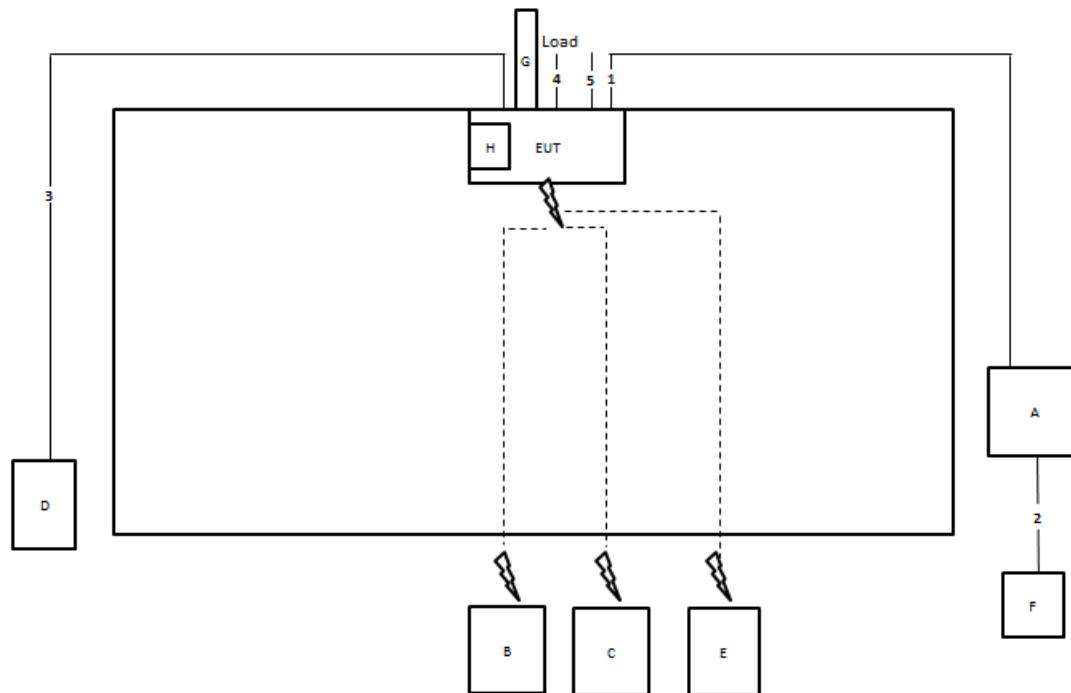**Test Setup Diagram - Radiated Test < 1GHz**


| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | RJ-45 cable   | No       | 10m    |
| 2    | RJ-45 cable   | No       | 1.5m   |
| 3    | RJ-45 cable   | No       | 10m    |
| 4    | RJ-45 cable*3 | No       | 1.5m   |
| 5    | Console cable | No       | 1.8m   |

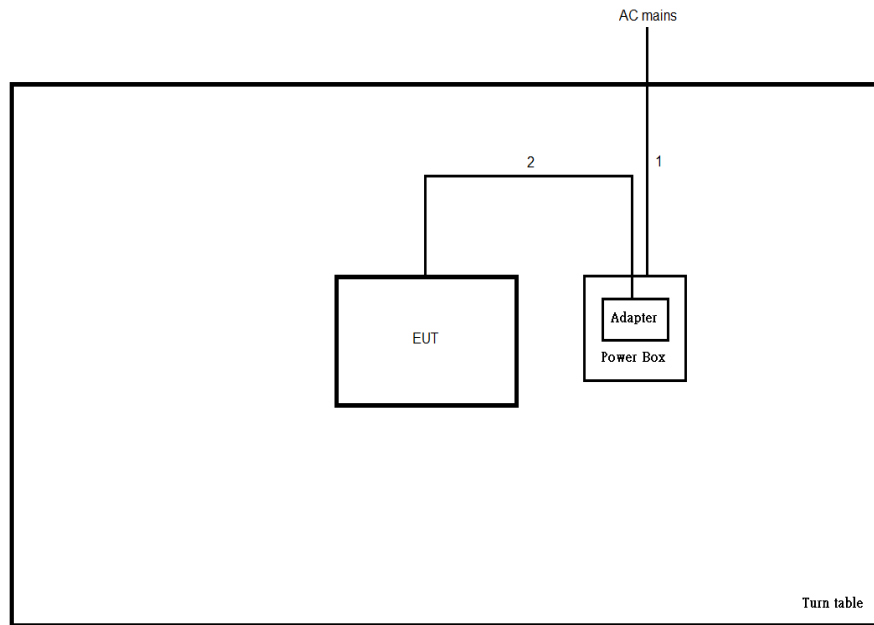**Test Setup Diagram - Radiated Test > 1GHz**


| Item | Connection    | Shielded | Length |
|------|---------------|----------|--------|
| 1    | AC Power line | No       | 1.8m   |
| 2    | DC Power line | No       | 1.45m  |



### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

| AC Power-line Conducted Emissions Limit |            |           |
|-----------------------------------------|------------|-----------|
| Frequency Emission (MHz)                | Quasi-Peak | Average   |
| 0.15-0.5                                | 66 - 56 *  | 56 - 46 * |
| 0.5-5                                   | 56         | 46        |
| 5-30                                    | 60         | 50        |

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures

| Test Method                                                                    |
|--------------------------------------------------------------------------------|
| ▪ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions. |

### 3.1.4 Test Setup

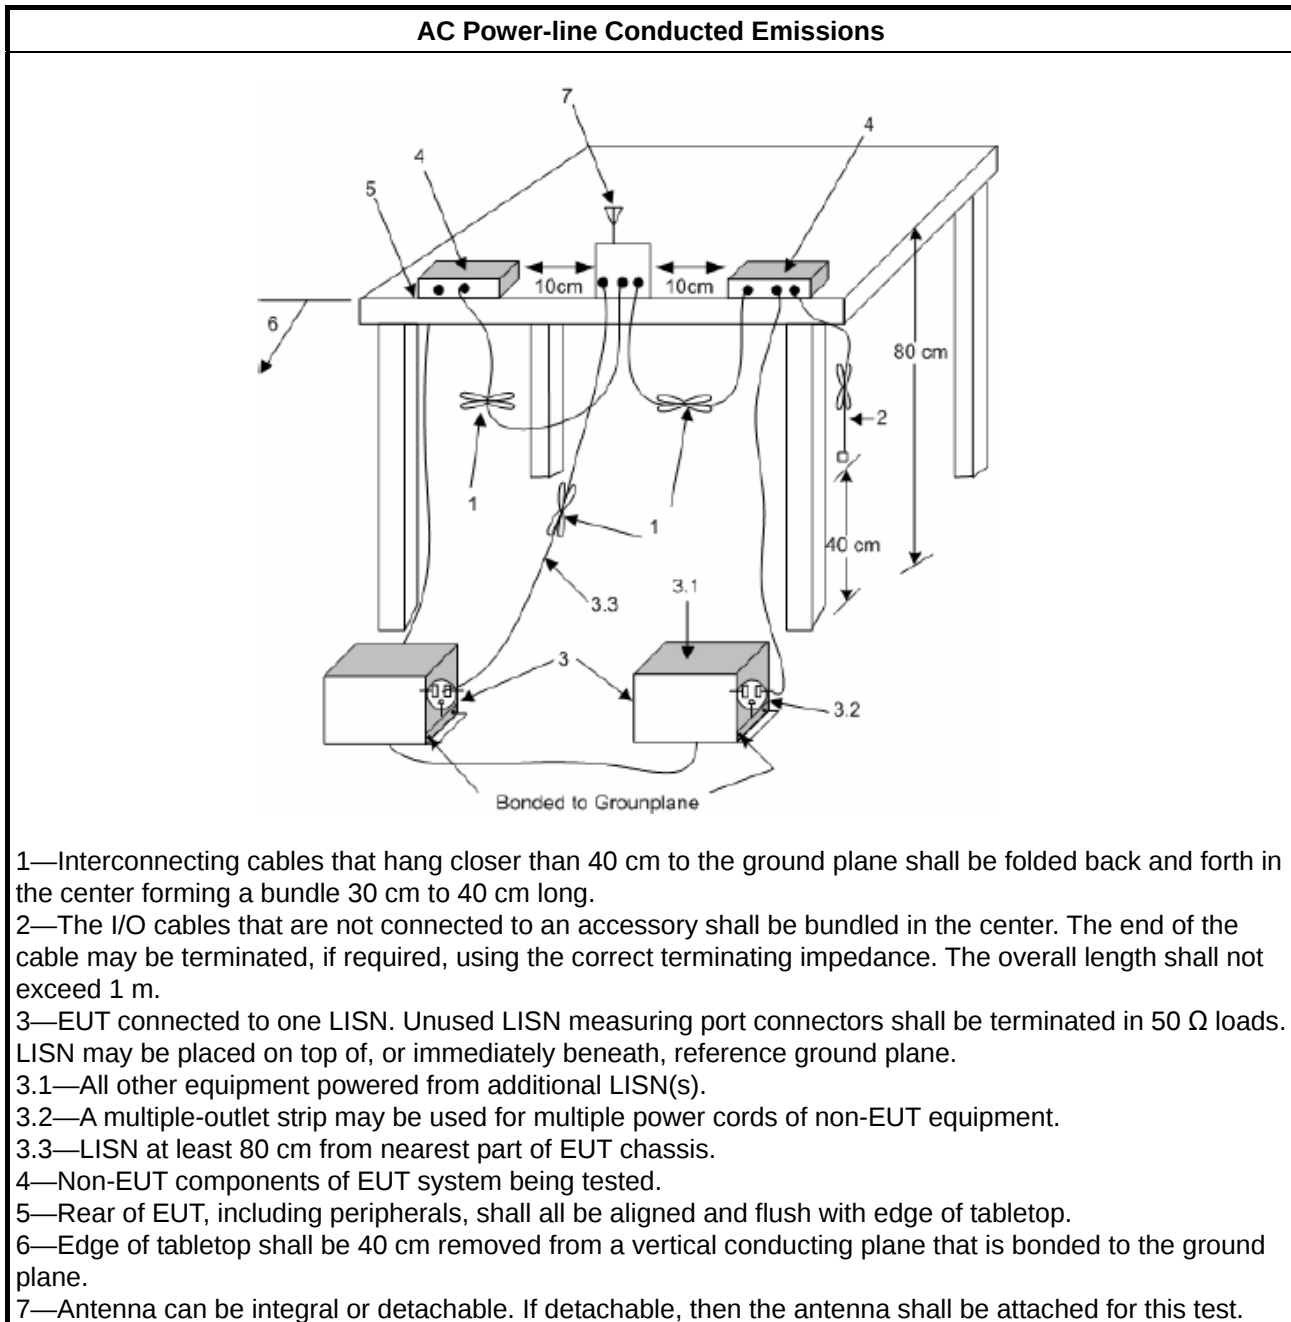

### 3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a.  $\text{Corrected Reading (dBuV)} = \text{LISN Factor} + \text{Cable Loss} + \text{Read Level} = \text{Level}$
- b.  $\text{Margin} = -\text{Limit} + (\text{Read Level} + \text{LISN Factor} + \text{Cable Loss})$

### 3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A



## 3.2 DTS Bandwidth

### 3.2.1 6dB Bandwidth Limit

| 6dB Bandwidth Limit                                 |                                |
|-----------------------------------------------------|--------------------------------|
| <b>Systems using digital modulation techniques:</b> |                                |
| ▪                                                   | 6 dB bandwidth $\geq$ 500 kHz. |


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

| Test Method                         |                                                                                                     |
|-------------------------------------|-----------------------------------------------------------------------------------------------------|
| ▪                                   | For the emission bandwidth shall be measured using one of the options below:                        |
| <input checked="" type="checkbox"/> | Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.1 Option 1 for 6 dB bandwidth measurement. |
| <input type="checkbox"/>            | Refer as FCC KDB 558074, clause 8.2 & C63.10 clause 11.8.2 Option 2 for 6 dB bandwidth measurement. |
| <input type="checkbox"/>            | Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.                                  |

### 3.2.4 Test Setup

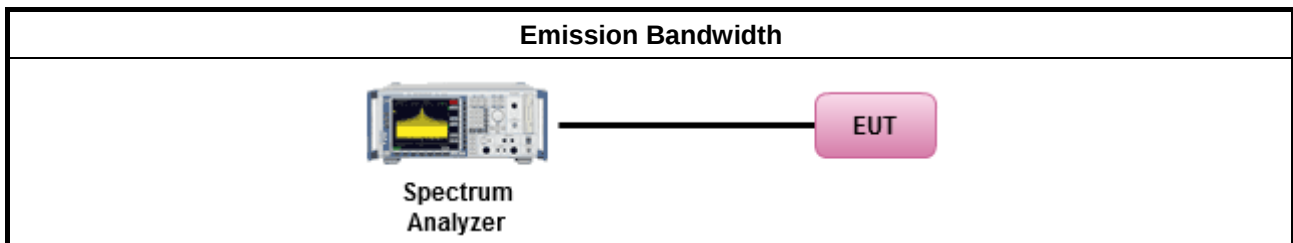

### 3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B

### 3.3 Maximum Conducted Output Power

#### 3.3.1 Maximum Conducted Output Power Limit

| Maximum Conducted Output Power Limit                                                                                                                              |                                                                                                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                   | ▪ If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)                                           |
|                                                                                                                                                                   | ▪ Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm     |
|                                                                                                                                                                   | ▪ Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm        |
|                                                                                                                                                                   | ▪ Smart antenna system (SAS):                                                                        |
|                                                                                                                                                                   | - Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm                         |
|                                                                                                                                                                   | - Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm                        |
|                                                                                                                                                                   | - Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dB dBm |
| $P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm,<br>$G_{TX}$ = the maximum transmitting antenna directional gain in dBi. |                                                                                                      |


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Maximum Peak Conducted Output Power</li> </ul>                                                                                                                                                                                                                                                                                  |                                                                                                                           |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.1.1 & C63.10 clause 11.9.1.1 (RBW ≥ EBW method).                                      |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.1.3 & C63.10 clause 11.9.1.3 (peak power meter).                                      |
| <ul style="list-style-type: none"> <li>Maximum Conducted Output Power</li> </ul>                                                                                                                                                                                                                                                                                       |                                                                                                                           |
| [duty cycle ≥ 98% or external video / power trigger]                                                                                                                                                                                                                                                                                                                   |                                                                                                                           |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.2 Method AVGSA-1.                                        |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.3 Method AVGSA-1A. (alternative)                         |
| duty cycle < 98% and average over on/off periods with duty factor                                                                                                                                                                                                                                                                                                      |                                                                                                                           |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.4 Method AVGSA-2.                                        |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.5 Method AVGSA-2A (alternative)                          |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.6 Method AVGSA-3                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.2 & C63.10 clause 11.9.2.2.7 Method AVGSA-3A (alternative)                          |
| Measurement using a power meter (PM)                                                                                                                                                                                                                                                                                                                                   |                                                                                                                           |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                               | Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.1 Method AVGPM (using an RF average power meter).        |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                    | Refer as FCC KDB 558074, clause 8.3.2.3 & C63.10 clause 11.9.2.3.2 Method AVGPM-G (using an gate RF average power meter). |
| <ul style="list-style-type: none"> <li>For conducted measurement.</li> </ul>                                                                                                                                                                                                                                                                                           |                                                                                                                           |
| <ul style="list-style-type: none"> <li>If the EUT supports multiple transmit chains using options given below:<br/>Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.</li> </ul> |                                                                                                                           |
| <ul style="list-style-type: none"> <li>If multiple transmit chains, EIRP calculation could be following as methods:<br/> <math display="block">P_{total} = P_1 + P_2 + \dots + P_n</math> (calculated in linear unit [mW] and transfer to log unit [dBm])<br/> <math display="block">EIRP_{total} = P_{total} + DG</math> </li> </ul>                                  |                                                                                                                           |

### 3.3.4 Test Setup

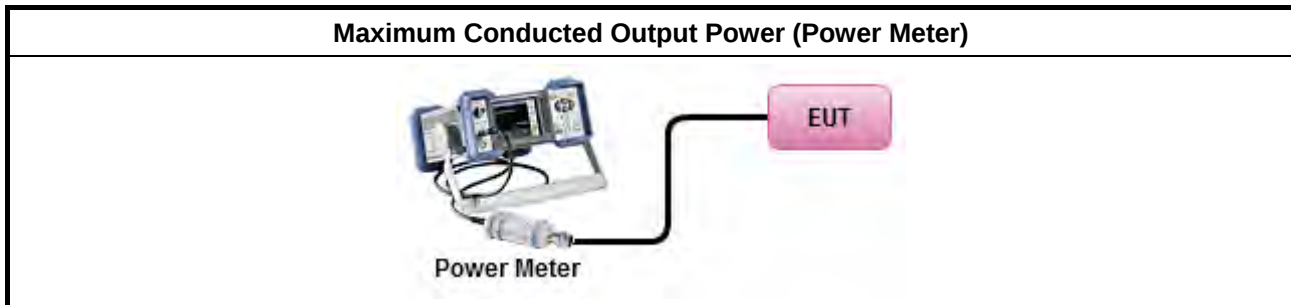

### 3.3.5 Test Result of Maximum Conducted Output Power

Refer as Appendix C



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

| Power Spectral Density Limit                     |
|--------------------------------------------------|
| ▪ Power Spectral Density (PSD) $\leq 8$ dBm/3kHz |


#### 3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

| Test Method                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ▪ Peak power spectral density procedures that the same method as used to determine the conducted output power. If maximum peak conducted output power was measured to demonstrate compliance to the output power limit, then the peak PSD procedure below (Method PKPSD) shall be used. If maximum conducted output power was measured to demonstrate compliance to the output power limit, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option). |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input checked="" type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Refer as FCC KDB 558074, clause 8.4 & C63.10 clause 11.10 Method Max. PSD.<br>[duty cycle $\geq 98\%$ or external video / power trigger]                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| ▪ For conducted measurement.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| ▪ If The EUT supports multiple transmit chains using options given below:                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,                                                                                                                                                                                                         |
| <input type="checkbox"/>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Option 3: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.                                                                                                                                                                                                                                                                                                        |

### 3.4.4 Test Setup

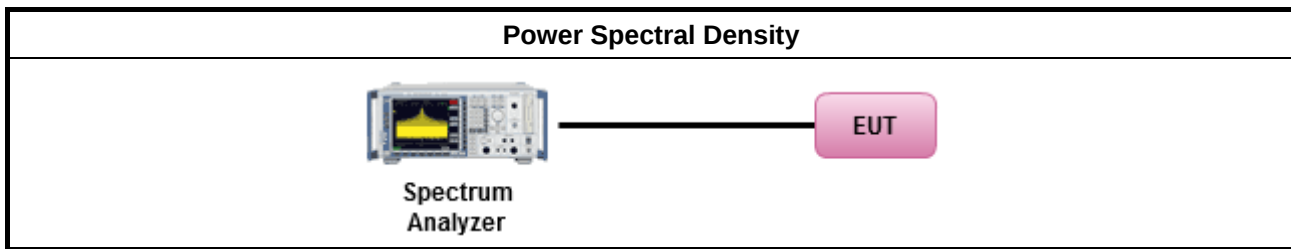

### 3.4.5 Test Result of Power Spectral Density

Refer as Appendix D

### 3.5 Emissions in Non-restricted Frequency Bands

#### 3.5.1 Emissions in Non-restricted Frequency Bands Limit

| Un-restricted Band Emissions Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| RF output power procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Limit (dBc) |
| Peak output power procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 20          |
| Average output power procedure                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 30          |
| <p>Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.</p> <p>Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.</p> |             |


#### 3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

#### 3.5.3 Test Procedures

| Test Method                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.5 for unwanted emissions into non-restricted bands.</li> </ul> |

#### 3.5.4 Test Setup

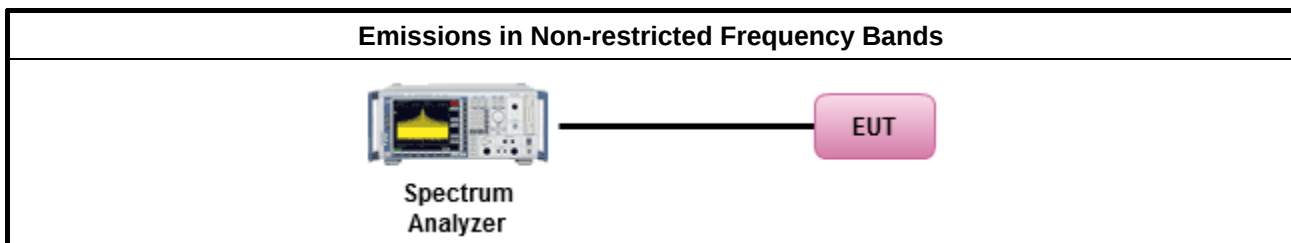

#### 3.5.5 Test Result of Emissions in Non-restricted Frequency Bands

Refer as Appendix E



### 3.6 Emissions in Restricted Frequency Bands

#### 3.6.1 Emissions in Restricted Frequency Bands Limit

| Restricted Band Emissions Limit |                       |                         |                      |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)           | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                     | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                     | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                      | 30                    | 29                      | 30                   |
| 30~88                           | 100                   | 40                      | 3                    |
| 88~216                          | 150                   | 43.5                    | 3                    |
| 216~960                         | 200                   | 46                      | 3                    |
| Above 960                       | 500                   | 54                      | 3                    |

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB / decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m.

#### 3.6.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.




### 3.6.3 Test Procedures

| Test Method                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>The average emission levels shall be measured in [duty cycle <math>\geq 98</math> or duty factor].</li> </ul>                                                                        |                                                                                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>Refer as ANSI C63.10, clause 6.10.3 band-edge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.</li> </ul> |                                                                                                                                                                                                                                                                                                                                                                                                |
| <ul style="list-style-type: none"> <li>For the transmitter unwanted emissions shall be measured using following options below:</li> </ul>                                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.6 for unwanted emissions into restricted bands.</li> </ul>                                                                                                                                                                                                                                                            |
|                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.1(trace averaging for duty cycle $\geq 98\%$ ).                                                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.2(trace averaging + duty factor).                                                                                                                                                                                                                                                                       |
|                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.5.3(Reduced VBW $\geq 1/T$ ).                                                                                                                                                                                                                                                                  |
|                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as ANSI C63.10, clause 11.12.2.5.3 (Reduced VBW). VBW $\geq 1/T$ , where T is pulse time.                                                                                                                                                                                                                                                                       |
|                                                                                                                                                                                                                             | <input type="checkbox"/> Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.                                                                                                                                                                                                                                                                                                   |
|                                                                                                                                                                                                                             | <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 8.6 & C63.10 clause 11.12.2.4 measurement procedure peak limit.                                                                                                                                                                                                                                                            |
| <ul style="list-style-type: none"> <li>For the transmitter band-edge emissions shall be measured using following options below:</li> </ul>                                                                                  |                                                                                                                                                                                                                                                                                                                                                                                                |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 558074 clause 8.7 &amp; c63.10 clause 11.13.1, When the performing peak or average radiated measurements, emissions within 2 MHz of the authorized band edge may be measured using the marker-delta method described below.</li> </ul>                                                                                                 |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.7 (ANSI C63.10, clause 6.10.6) for marker-delta method for band-edge measurements.</li> </ul>                                                                                                                                                                                                                         |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>Refer as FCC KDB 558074, clause 8.7 for narrower resolution bandwidth (100kHz) using the band power and summing the spectral levels (i.e., 1 MHz).</li> </ul>                                                                                                                                                                                           |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>For conducted unwanted emissions into restricted bands (absolute emission limits). Devices with multiple transmit chains using options given below:<br/>(1) Measure and sum the spectra across the outputs or<br/>(2) Measure and add 10 log(N) dB</li> </ul>                                                                                           |
|                                                                                                                                                                                                                             | <ul style="list-style-type: none"> <li>For FCC KDB 662911 The methodology described here may overestimate array gain, thereby resulting in apparent failures to satisfy the out-of-band limits even if the device is actually compliant. In such cases, compliance may be demonstrated by performing radiated tests around the frequencies at which the apparent failures occurred.</li> </ul> |

### 3.6.4 Test Setup

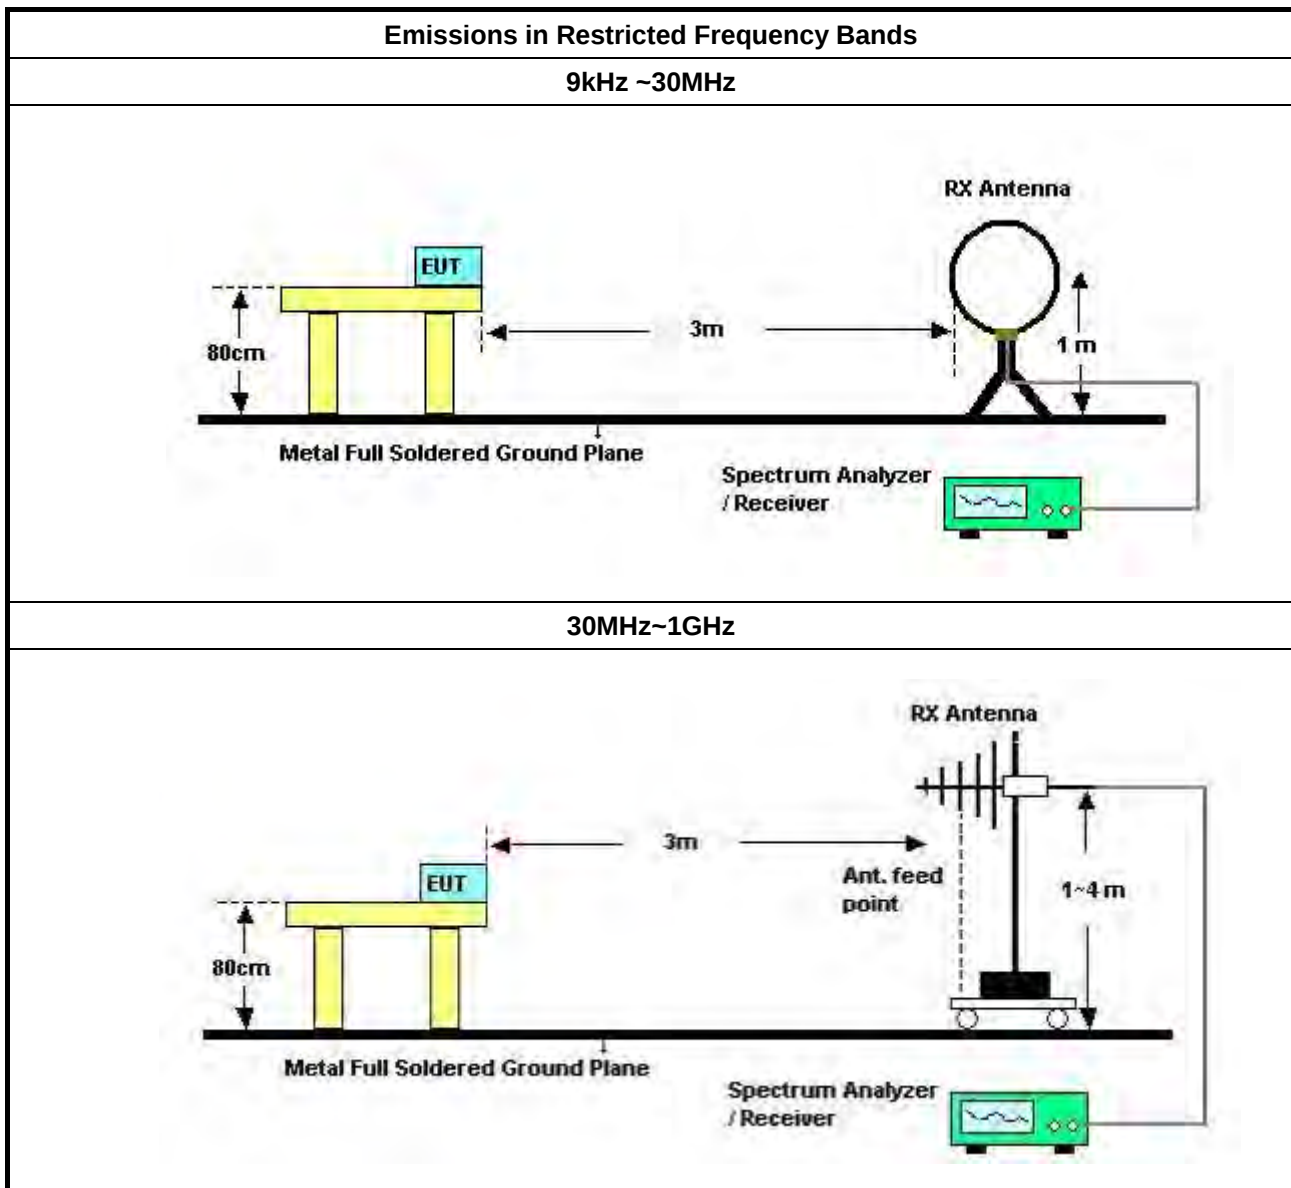

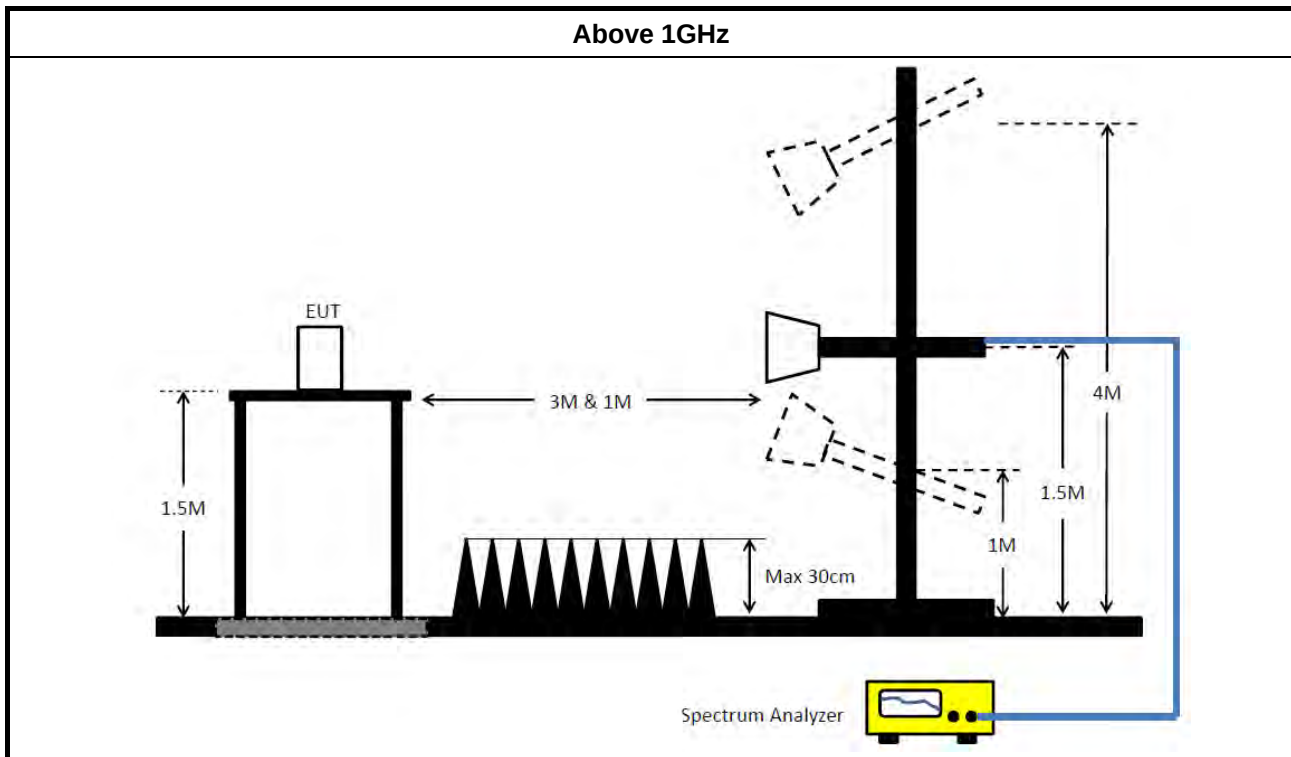

### 3.6.5 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamplifier Factor (if applicable) = Level.

### 3.6.6 Emissions in Restricted Frequency Bands (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.

### 3.6.7 Test Result of Emissions in Restricted Frequency Bands

Refer as Appendix F



## 4 Test Equipment and Calibration Data


| Instrument                         | Manufacturer     | Model No.         | Serial No.      | Characteristics | Calibration Date | Calibration Due Date | Remark                |
|------------------------------------|------------------|-------------------|-----------------|-----------------|------------------|----------------------|-----------------------|
| EMI Receiver                       | Agilent          | N9038A            | My52260123      | 9kHz ~ 8.45GHz  | Feb. 26, 2020    | Feb. 25, 2021        | Conduction (CO01-CB)  |
| LISN                               | F.C.C.           | FCC-LISN-50-16-2  | 04083           | 150kHz ~ 100MHz | Dec. 25, 2019    | Dec. 24, 2020        | Conduction (CO01-CB)  |
| LISN                               | Schwarzbeck      | NSLK 8127         | 8127647         | 9kHz ~ 30MHz    | Feb. 25, 2020    | Feb. 24, 2021        | Conduction (CO01-CB)  |
| COND Cable                         | Woken            | Cable             | Low cable-CO01  | 9kHz ~ 30MHz    | May 20, 2020     | May 19, 2021         | Conduction (CO01-CB)  |
| Software                           | Audix            | E3                | 6.120210n       | -               | N.C.R.           | N.C.R.               | Conduction (CO01-CB)  |
| BILOG ANTENNA with 6 dB attenuator | Schaffner & EMCI | CBL6112B & N-6-06 | 22021&AT-N06 07 | 30MHz ~ 1GHz    | Oct. 12, 2019    | Oct. 11, 2020        | Radiation (03CH04-CB) |
| Pre-Amplifier                      | Agilent          | 310N              | 187291          | 0.1MHz ~ 1GHz   | Mar. 19, 2020    | Mar. 18, 2021        | Radiation (03CH04-CB) |
| Spectrum Analyzer                  | R&S              | FSP40             | 100142          | 9kHz~40GHz      | Dec. 18, 2019    | Dec. 17, 2020        | Radiation (03CH04-CB) |
| EMI Test Receiver                  | R&S              | ESCS              | 826547/017      | 9kHz ~ 2.75GHz  | May 13, 2020     | May 12, 2021         | Radiation (03CH04-CB) |
| RF Cable-low                       | Woken            | RG402             | Low Cable-03+22 | 30MHz ~ 1GHz    | Oct. 07, 2019    | Oct. 06, 2020        | Radiation (03CH04-CB) |
| Loop Antenna                       | Teseq            | HLA 6120          | 24155           | 9kHz - 30 MHz   | Apr. 13, 2020    | Apr. 12, 2021        | Radiation (03CH04-CB) |
| 3m Semi Anechoic Chamber           | TDK              | SAC-3M            | 03CH09-HY       | 1GHz ~ 18GHz    | Jun. 13, 2019    | Jun. 12, 2020        | Radiation (03CH09-HY) |
| Microwave System Premplifier       | Agilent          | 8449B             | 3008A02326      | 1GHz ~ 26.5GHz  | Jul. 15, 2019    | Jul. 14, 2020        | Radiation (03CH09-HY) |
| Amplifier                          | EMC              | EMC9135           | 980232          | 9KHz~1GHz       | Apr. 22, 2019    | Apr. 21, 2020        | Radiation (03CH09-HY) |
| EMI Test Receiver                  | R&S              | ESR3              | 102052          | 9kHz ~ 3.6GHz   | Apr. 09, 2019    | Apr. 08, 2020        | Radiation (03CH09-HY) |
| EXA Signal Analyzer                | KEYSIGHT         | N9010A            | MY54200885      | 10Hz~44GHz      | Aug. 07, 2019    | Aug. 08, 2020        | Radiation (03CH09-HY) |
| Double Ridged Guide Horn Antenna   | SCHWARZBECK      | BBHA 9120 D       | BBHA9120 D 1534 | 1GHz~18GHz      | May 22, 2019     | May 21, 2020         | Radiation (03CH09-HY) |




| Instrument               | Manufacturer | Model No.     | Serial No.           | Characteristics | Calibration Date | Calibration Due Date | Remark                |
|--------------------------|--------------|---------------|----------------------|-----------------|------------------|----------------------|-----------------------|
| Broadband Horn Antenna   | SCHWARZBECK  | BBHA 9170     | BBHA9170614          | 18GHz~40GHz     | May 22, 2019     | May 21, 2020         | Radiation (03CH09-HY) |
| Preamplifier             | MITEQ        | TTA1840-35-HG | 1864481              | 18GHz ~ 40GHz   | Aug. 05, 2019    | Aug. 04, 2020        | Radiation (03CH09-HY) |
| RF Cable-high            | HUBER+SUHNER | SUCOFLEX104   | SN 556626/4 + 556627 | 1GHz ~ 40GHz    | Mar. 13, 2019    | Mar. 12, 2020        | Radiation (03CH09-HY) |
| Spectrum Analyzer        | R&S          | FSV 40        | 101013               | 10Hz~40GHz      | Mar. 13, 2019    | Mar. 12, 2020        | Conducted (TH01-HY)   |
| Power Sensor             | Anritsu      | MA2411B       | 1339407              | 300MHz ~ 40GHz  | Nov. 17, 2018    | Nov. 16, 2019        | Conducted (TH01-HY)   |
| Power Meter              | Anritsu      | ML2495A       | 1517010              | 300MHz ~ 40GHz  | Nov. 17, 2018    | Nov. 16, 2019        | Conducted (TH01-HY)   |
| Cable 0.2m               | HUBER        | MY10710/4     | RF Cable - 01        | 30MHz ~18G      | Mar. 21, 2019    | Mar. 20, 2020        | Conducted (TH01-HY)   |
| Cable 0.2m               | HUBER        | MY10711/4     | RF Cable - 02        | 30MHz ~18G      | Mar. 21, 2019    | Mar. 20, 2020        | Conducted (TH01-HY)   |
| Cable 0.5m               | HUBER        | MY39470/4     | RF Cable - 29        | 30MHz ~18G      | Mar. 21, 2019    | Mar. 20, 2020        | Conducted (TH01-HY)   |
| SMB100A Signal Generator | R&S          | SMB100A03     | 181147               | 100kHz~40GHz    | Nov. 12, 2018    | Nov. 11, 2020        | Conducted (TH01-HY)   |

Note: Calibration Interval of instruments listed above is one year.

NCR means Non-Calibration required.

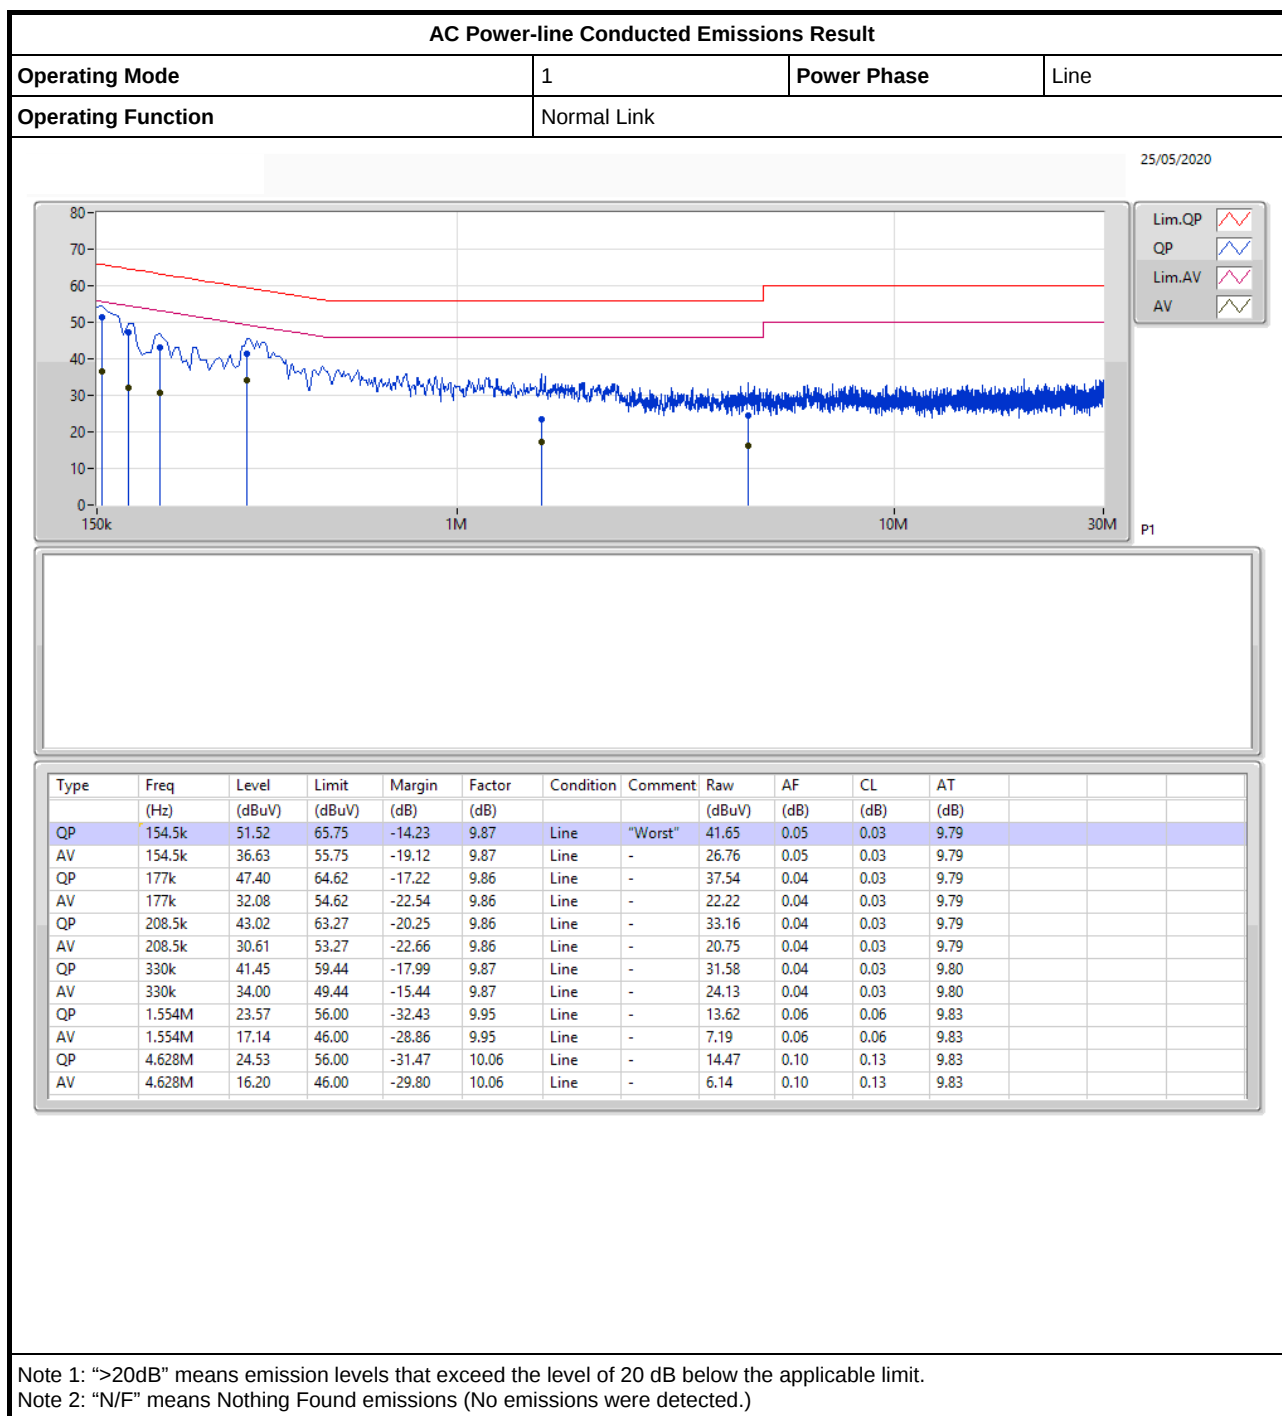

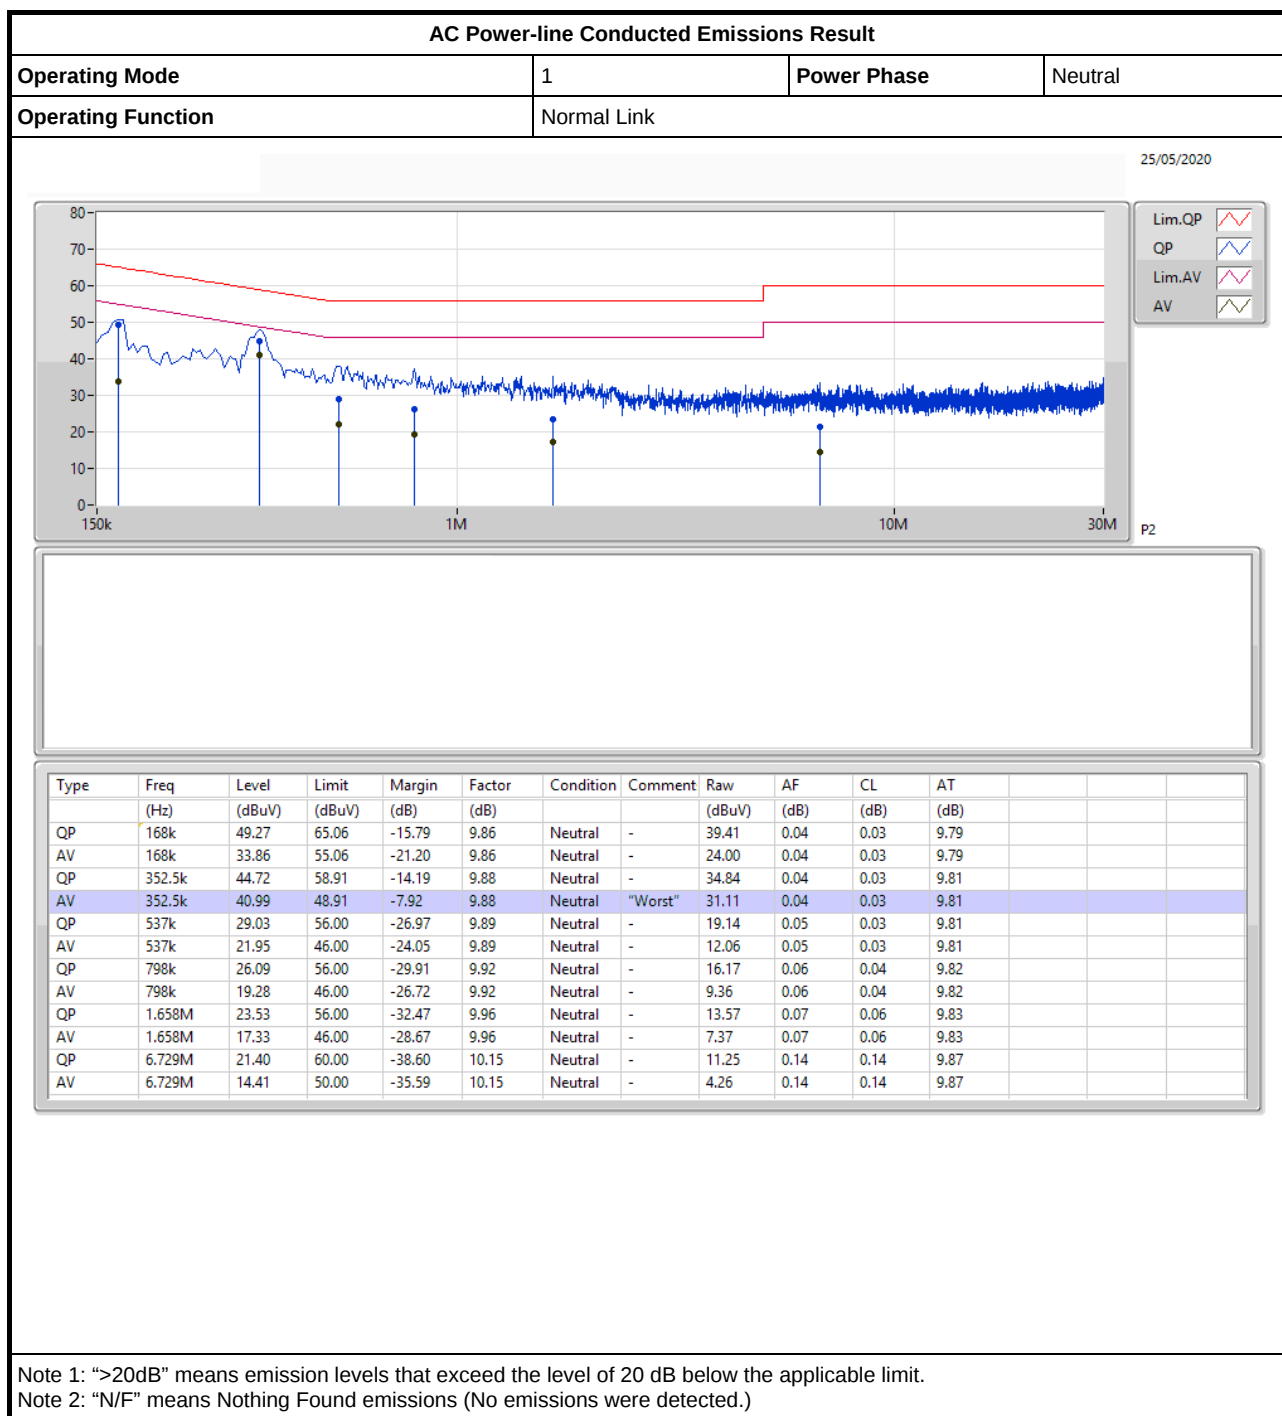

**Summary**

| Mode          | Max-N dB<br>(Hz) | Max-OBW<br>(Hz) | ITU-Code | Min-N dB<br>(Hz) | Min-OBW<br>(Hz) |
|---------------|------------------|-----------------|----------|------------------|-----------------|
| 2.4-2.4835GHz | -                | -               | -        | -                | -               |
| BT-LE(1Mbps)  | 707.5k           | 1.032M          | 1M03F1D  | 702.5k           | 1.022M          |
| BT-LE(2Mbps)  | 1.235M           | 2.049M          | 2M05F1D  | 1.18M            | 2.039M          |

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;

**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;


**Result**

| Mode         | Result | Limit<br>(Hz) | Port 1-N dB<br>(Hz) | Port 1-OBW<br>(Hz) |
|--------------|--------|---------------|---------------------|--------------------|
| BT-LE(1Mbps) | -      | -             | -                   | -                  |
| 2402MHz      | Pass   | 500k          | 702.5k              | 1.026M             |
| 2440MHz      | Pass   | 500k          | 703.75k             | 1.022M             |
| 2480MHz      | Pass   | 500k          | 707.5k              | 1.032M             |
| BT-LE(2Mbps) | -      | -             | -                   | -                  |
| 2402MHz      | Pass   | 500k          | 1.228M              | 2.039M             |
| 2440MHz      | Pass   | 500k          | 1.18M               | 2.041M             |
| 2480MHz      | Pass   | 500k          | 1.235M              | 2.049M             |


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;

**BT-LE(1Mbps)**
**2402MHz**
**EBW**

03/09/2019

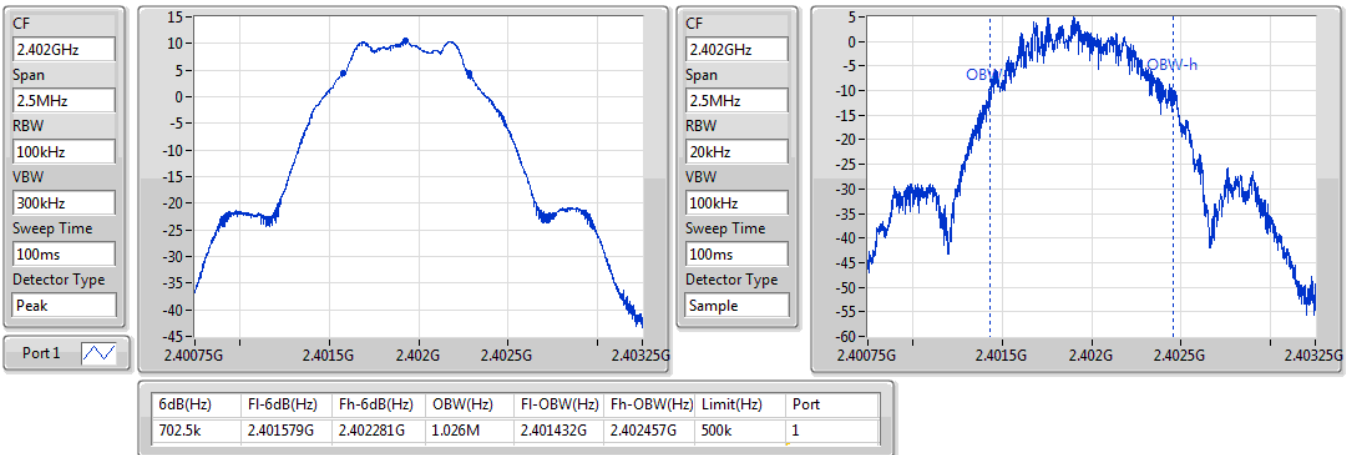

**BT-LE(1Mbps)**
**2440MHz**
**EBW**

05/09/2019

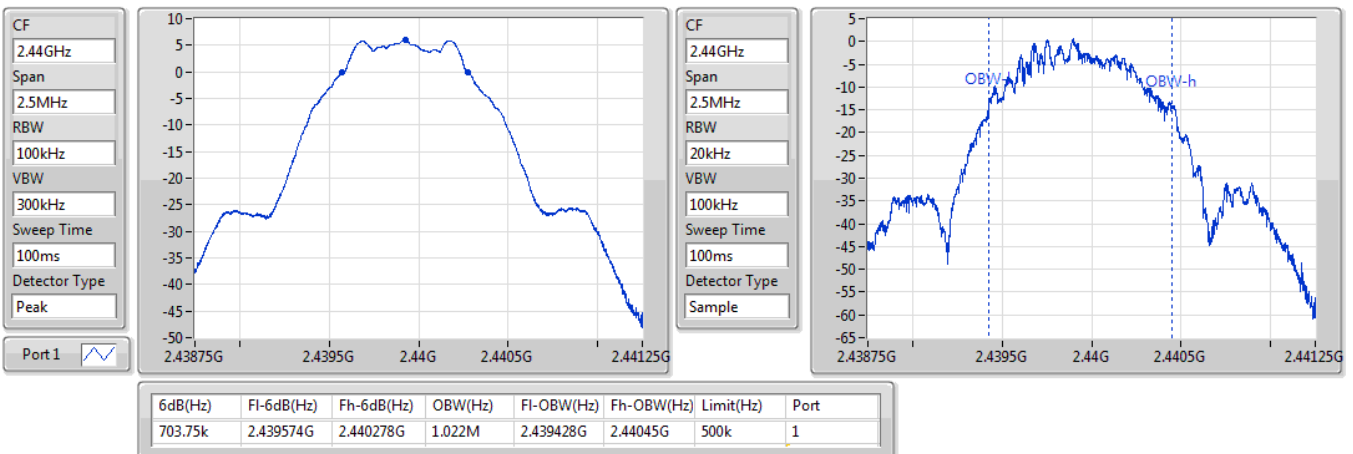


**BT-LE(1Mbps)**
**EBW**
**2480MHz**

03/09/2019

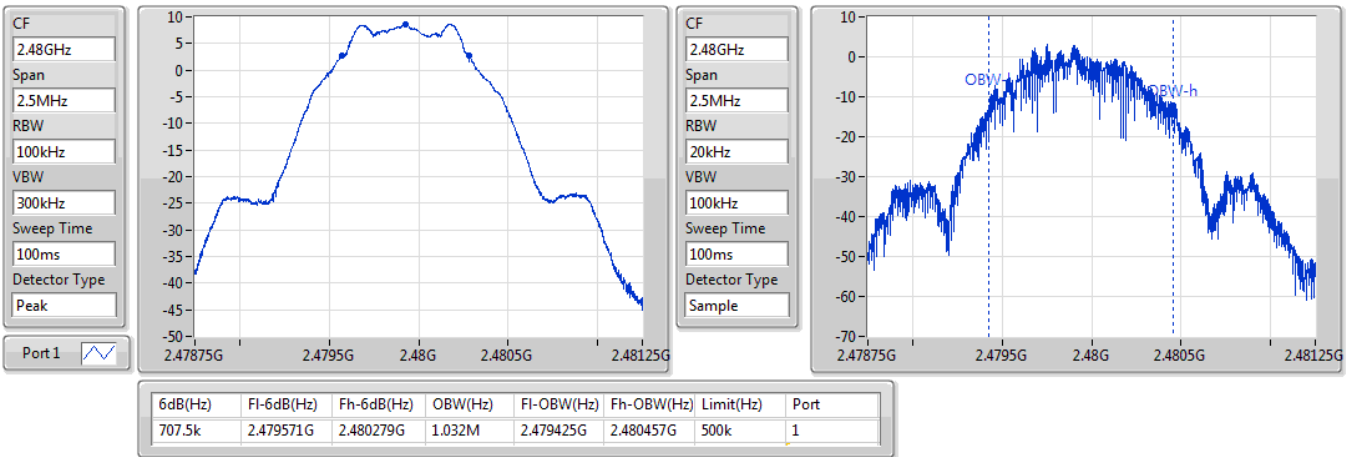

**BT-LE(2Mbps)**
**EBW**
**2402MHz**

03/09/2019

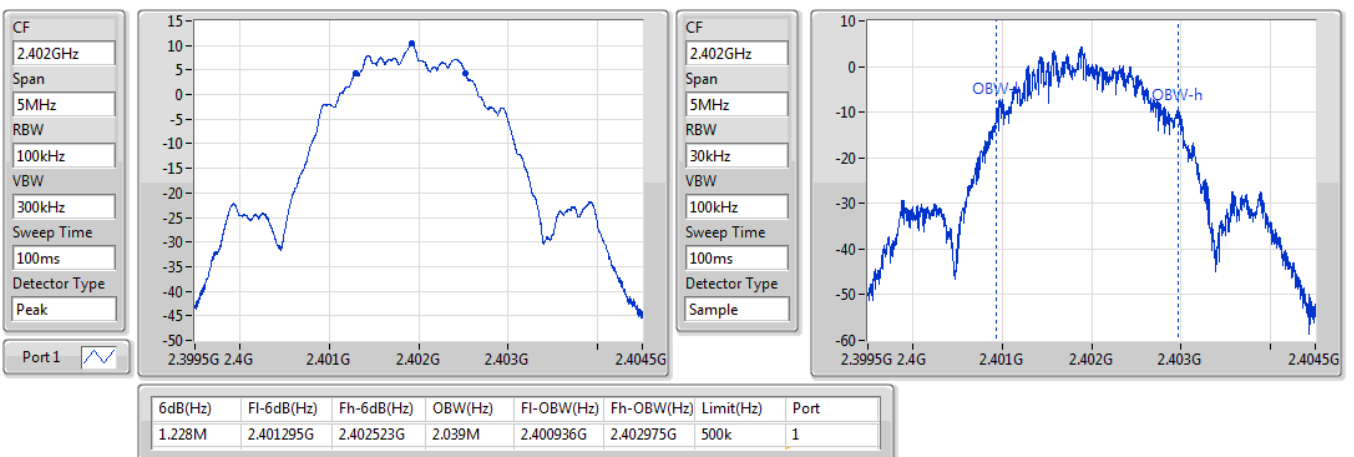


**BT-LE(2Mbps)**
**EBW**
**2440MHz**

05/09/2019

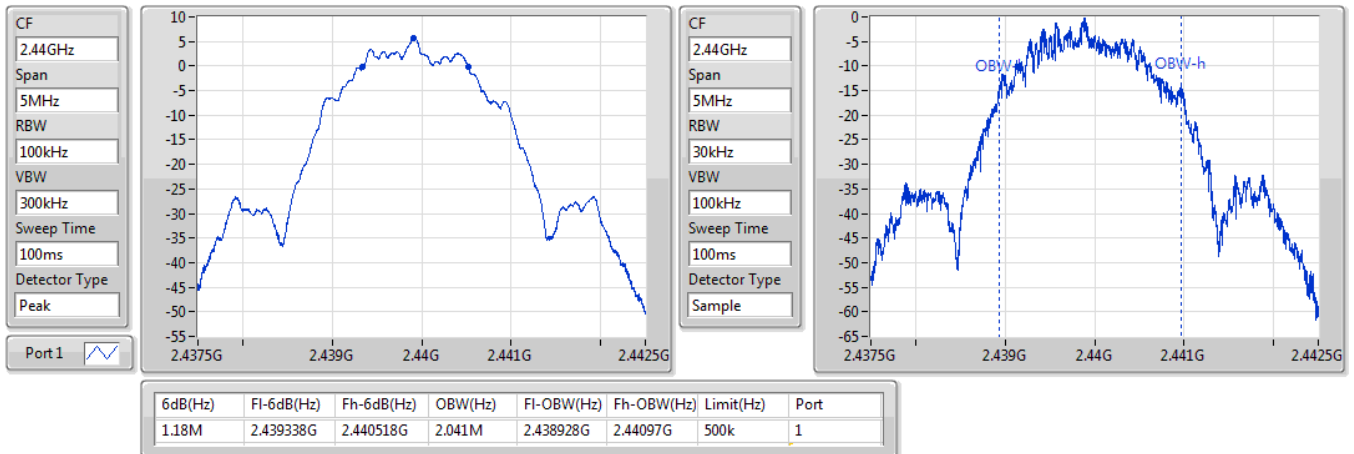
**BT-LE(2Mbps)**
**EBW**
**2480MHz**

03/09/2019

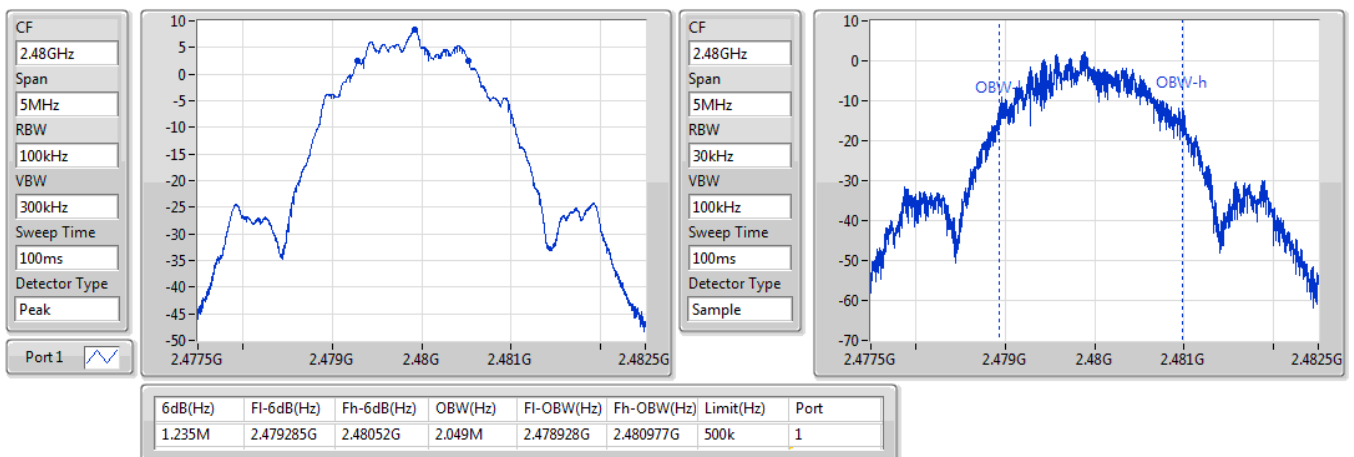



**Summary**

| Mode          | Power<br>(dBm) | Power<br>(W) |
|---------------|----------------|--------------|
| 2.4-2.4835GHz | -              | -            |
| BT-LE(1Mbps)  | 11.23          | 0.01327      |
| BT-LE(2Mbps)  | 11.30          | 0.01349      |



**Result**

| Mode         | Result | Gain<br>(dBi) | Power<br>(dBm) | Power Limit<br>(dBm) |
|--------------|--------|---------------|----------------|----------------------|
| BT-LE(1Mbps) | -      | -             | -              | -                    |
| 2402MHz      | Pass   | 4.00          | 11.23          | 30.00                |
| 2440MHz      | Pass   | 4.00          | 6.64           | 30.00                |
| 2480MHz      | Pass   | 4.00          | 9.43           | 30.00                |
| BT-LE(2Mbps) | -      | -             | -              | -                    |
| 2402MHz      | Pass   | 4.00          | 11.30          | 30.00                |
| 2440MHz      | Pass   | 4.00          | 6.66           | 30.00                |
| 2480MHz      | Pass   | 4.00          | 9.47           | 30.00                |

**DG** = Directional Gain; **Port X** = Port X output power



**Summary**

| Mode          | Power<br>(dBm) | Power<br>(W) |
|---------------|----------------|--------------|
| 2.4-2.4835GHz | -              | -            |
| BT-LE(1Mbps)  | 10.86          | 0.01219      |
| BT-LE(2Mbps)  | 10.87          | 0.01222      |



**Result**

| Mode         | Result | Gain<br>(dBi) | Power<br>(dBm) | Power Limit<br>(dBm) |
|--------------|--------|---------------|----------------|----------------------|
| BT-LE(1Mbps) | -      | -             | -              | -                    |
| 2402MHz      | Pass   | 4.00          | 10.86          | 30.00                |
| 2440MHz      | Pass   | 4.00          | 5.92           | 30.00                |
| 2480MHz      | Pass   | 4.00          | 9.07           | 30.00                |
| BT-LE(2Mbps) | -      | -             | -              | -                    |
| 2402MHz      | Pass   | 4.00          | 10.87          | 30.00                |
| 2440MHz      | Pass   | 4.00          | 5.56           | 30.00                |
| 2480MHz      | Pass   | 4.00          | 9.05           | 30.00                |

**DG** = Directional Gain; **Port X** = Port X output power



**Summary**

| Mode          | PD<br>(dBm/RBW) |
|---------------|-----------------|
| 2.4-2.4835GHz | -               |
| BT-LE(1Mbps)  | -4.55           |
| BT-LE(2Mbps)  | -6.59           |

RBW=3 kHz.

## Result

| Mode         | Result | Gain<br>(dBi) | PD<br>(dBm/RBW) | PD Limit<br>(dBm/RBW) |
|--------------|--------|---------------|-----------------|-----------------------|
| BT-LE(1Mbps) | -      | -             | -               | -                     |
| 2402MHz      | Pass   | 4.00          | -4.55           | 8.00                  |
| 2440MHz      | Pass   | 4.00          | -9.07           | 8.00                  |
| 2480MHz      | Pass   | 4.00          | -6.55           | 8.00                  |
| BT-LE(2Mbps) | -      | -             | -               | -                     |
| 2402MHz      | Pass   | 4.00          | -6.59           | 8.00                  |
| 2440MHz      | Pass   | 4.00          | -11.04          | 8.00                  |
| 2480MHz      | Pass   | 4.00          | -10.12          | 8.00                  |

**DG** = Directional Gain; RBW=3 kHz;


**PD** = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

### BT-LE(1Mbps)

### PSD

2402MHz

03/09/2019

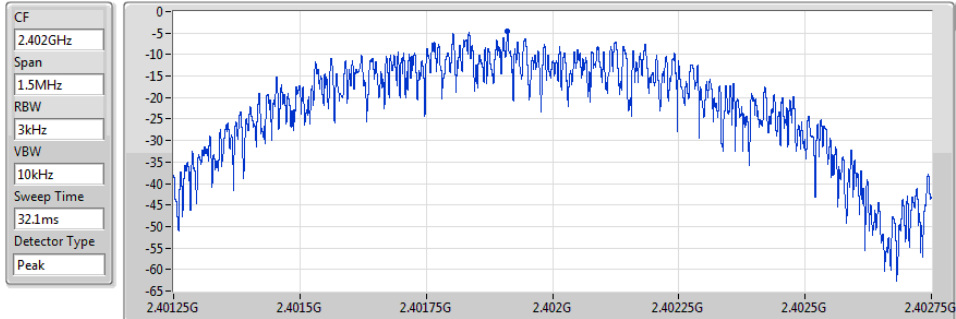


| Sum          | PD           | Port 1       |
|--------------|--------------|--------------|
| (dBm/100kHz) | (dBm/100kHz) | (dBm/100kHz) |
| -4.55        | -4.55        | -4.55        |

### BT-LE(1Mbps)

### PSD

2440MHz

05/09/2019

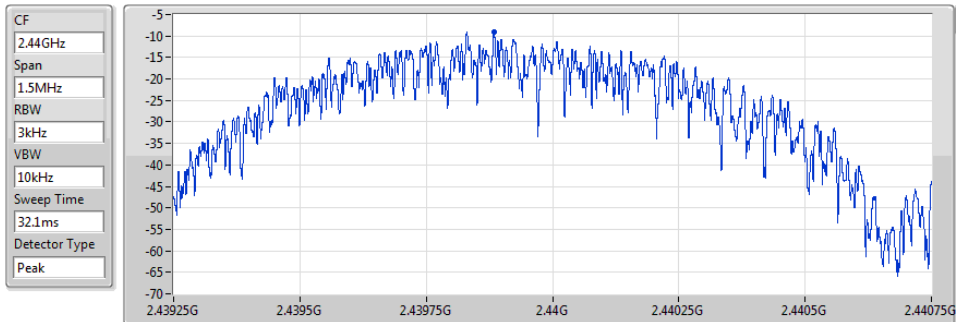


| Sum          | PD           | Port 1       |
|--------------|--------------|--------------|
| (dBm/100kHz) | (dBm/100kHz) | (dBm/100kHz) |
| -9.07        | -9.07        | -9.07        |

### BT-LE(1Mbps)

### PSD

2480MHz

03/09/2019

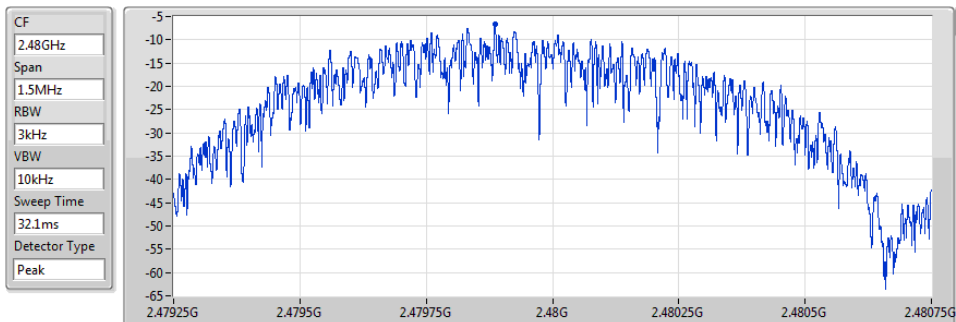


| Sum          | PD           | Port 1       |
|--------------|--------------|--------------|
| (dBm/100kHz) | (dBm/100kHz) | (dBm/100kHz) |
| -6.55        | -6.55        | -6.55        |

### BT-LE(2Mbps)

### PSD

2402MHz

03/09/2019

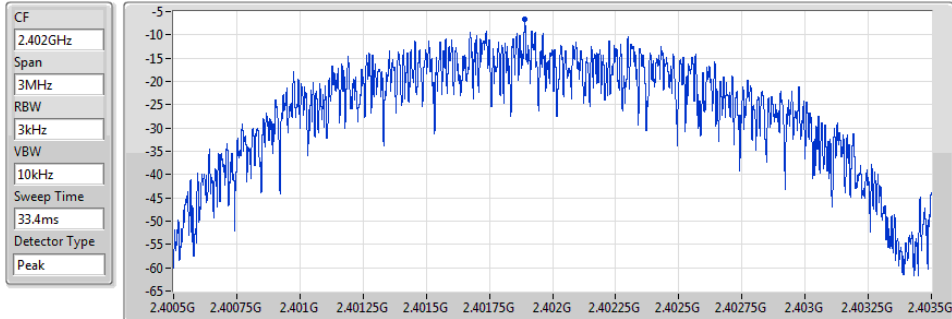


| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -6.59     | -6.59     | -6.59     |

### BT-LE(2Mbps)

### PSD

2440MHz

05/09/2019

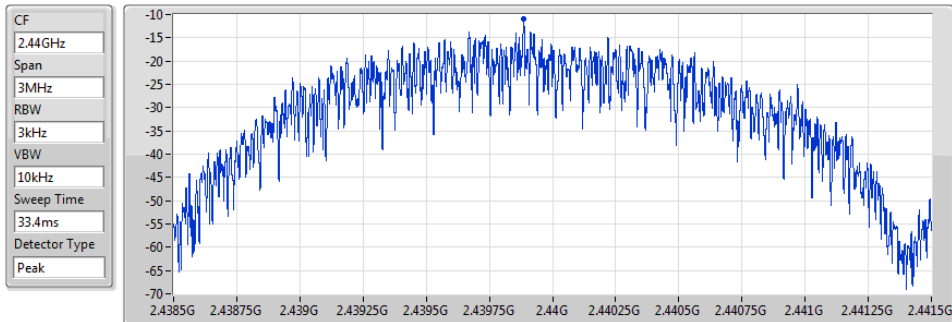


| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -11.04    | -11.04    | -11.04    |

### BT-LE(2Mbps)

### PSD

2480MHz

03/09/2019

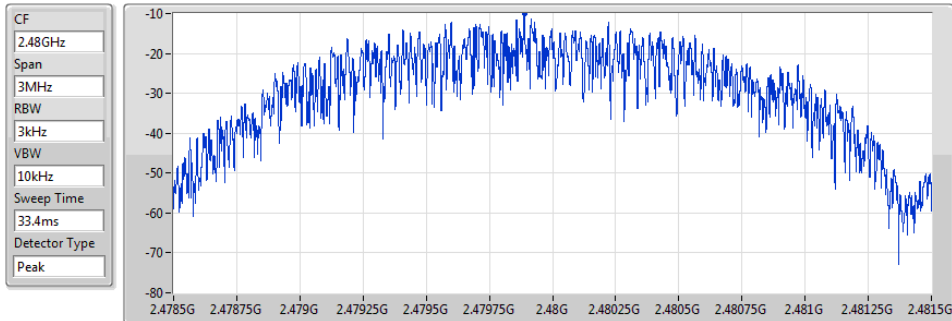

| Sum       | PD        | Port 1    |
|-----------|-----------|-----------|
| (dBm/RBW) | (dBm/RBW) | (dBm/RBW) |
| -10.12    | -10.12    | -10.12    |

**Summary**

| Mode          | Result | Ref<br>(Hz) | Ref<br>(dBm) | Limit<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Port |
|---------------|--------|-------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|------|
| 2.4-2.4835GHz | -      | -           | -            | -              | -            | -              | -            | -              | -            | -              | -            | -              | -    |
| BT-LE(1Mbps)  | Pass   | 2.40192G    | 11.24        | -18.76         | 2.08365G     | -54.36         | 2.39944G     | -52.62         | 2.48356G     | -51.99         | 16.41353G    | -40.78         | 1    |
| BT-LE(2Mbps)  | Pass   | 2.40188G    | 10.90        | -19.10         | 2.00709G     | -54.17         | 2.39993G     | -21.44         | 2.48434G     | -52.40         | 23.4185G     | -40.88         | 1    |

**Result**


| Mode         | Result | Ref<br>(Hz) | Ref<br>(dBm) | Limit<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Freq<br>(Hz) | Level<br>(dBm) | Port |
|--------------|--------|-------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|------|
| BT-LE(1Mbps) | -      | -           | -            | -              | -            | -              | -            | -              | -            | -              | -            | -              | -    |
| 2402MHz      | Pass   | 2.40192G    | 11.24        | -18.76         | 2.16712G     | -54.84         | 2.39977G     | -47.08         | 2.48488G     | -52.16         | 14.66303G    | -41.12         | 1    |
| 2440MHz      | Pass   | 2.40192G    | 11.24        | -18.76         | 2.08365G     | -54.36         | 2.39944G     | -52.62         | 2.48356G     | -51.99         | 16.41353G    | -40.78         | 1    |
| 2480MHz      | Pass   | 2.40192G    | 11.24        | -18.76         | 1.75953G     | -53.93         | 2.39975G     | -53.03         | 2.48375G     | -50.49         | 24.45965G    | -40.86         | 1    |
| BT-LE(2Mbps) | -      | -           | -            | -              | -            | -              | -            | -              | -            | -              | -            | -              | -    |
| 2402MHz      | Pass   | 2.40188G    | 10.90        | -19.10         | 2.00709G     | -54.17         | 2.39993G     | -21.44         | 2.48434G     | -52.40         | 23.4185G     | -40.88         | 1    |
| 2440MHz      | Pass   | 2.40188G    | 10.90        | -19.10         | 2.11859G     | -53.97         | 2.3991G      | -52.11         | 2.48499G     | -51.95         | 14.6949G     | -40.35         | 1    |
| 2480MHz      | Pass   | 2.40188G    | 10.90        | -19.10         | 1.99644G     | -52.94         | 2.3999G      | -52.62         | 2.48352G     | -49.50         | 21.77508G    | -39.90         | 1    |

BT-LE(1Mbps)


CSE NdB

2402MHz

05/09/2019

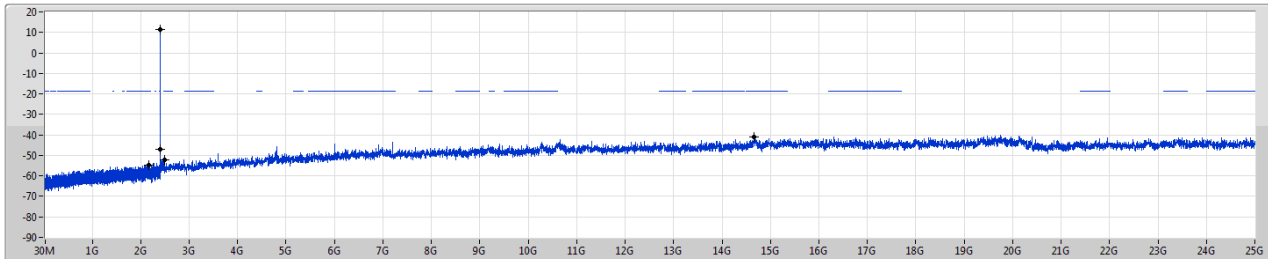

Port 1

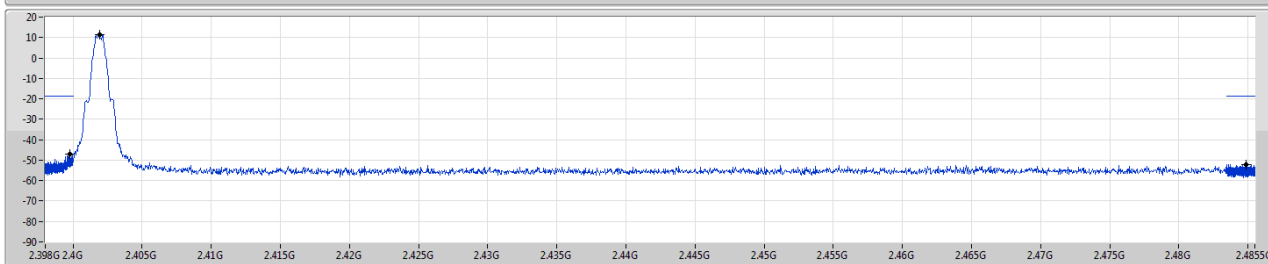

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak


| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz)  | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|-----------|------------|------|
| 2.40192G | 11.24    | -18.76     | 2.16712G | -54.84     | 2.39977G | -47.08     | 2.48488G | -52.16     | 14.66303G | -41.12     | 1    |

BT-LE(1Mbps)


CSE NdB

2440MHz

05/09/2019

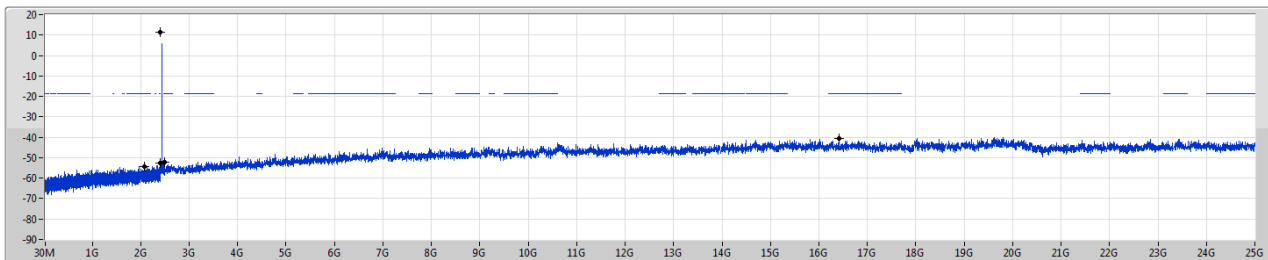

Port 1

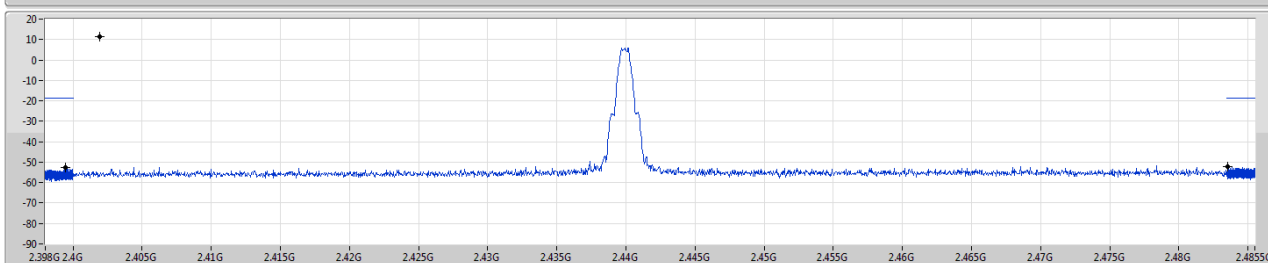

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak

| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz)  | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|-----------|------------|------|
| 2.40192G | 11.24    | -18.76     | 2.08365G | -54.36     | 2.39944G | -52.62     | 2.48356G | -51.99     | 16.41353G | -40.78     | 1    |



## BT-LE(1Mbps)

2480MHz

CSE NdB

05/09/2019

Port1

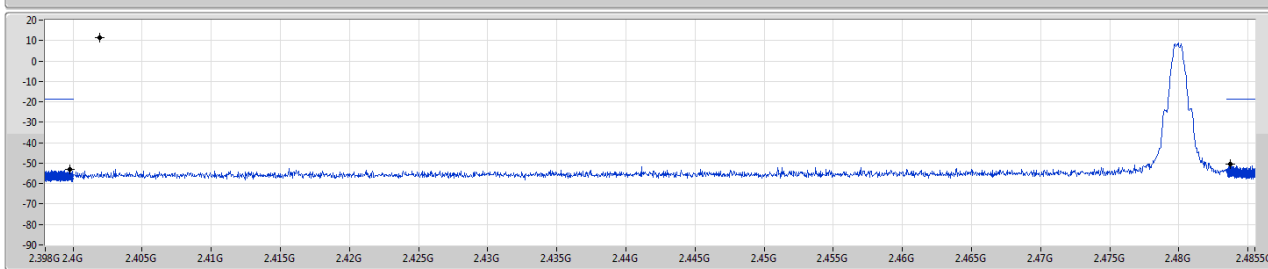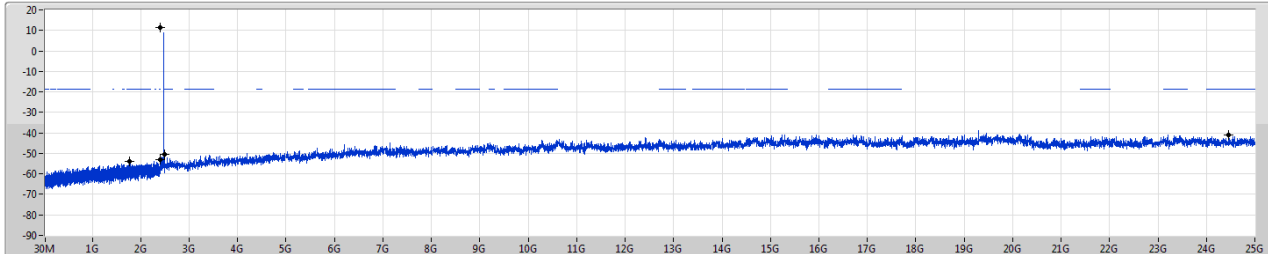

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak

| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|------|
| 2.40192G | 11.24    | -18.76     | 1.75953G | -53.93     | 2.39975G | -53.03     | 2.48375G | -50.49     | 2.45965G | -40.86     | 1    |



## BT-LE(2Mbps)

2402MHz

CSE NdB

05/09/2019

Port1

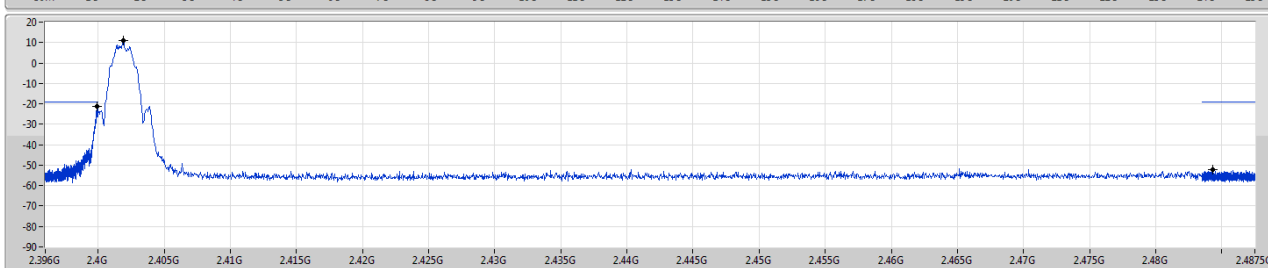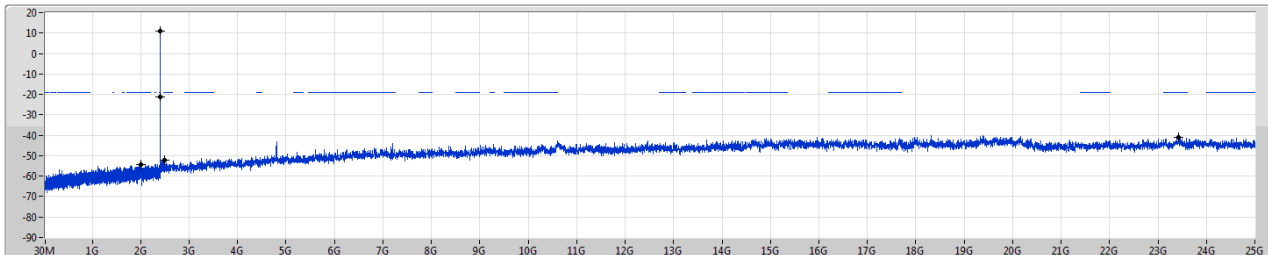

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak


| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|------|
| 2.40188G | 10.90    | -19.10     | 2.00709G | -54.17     | 2.39993G | -21.44     | 2.48434G | -52.40     | 2.4185G  | -40.88     | 1    |

BT-LE(2Mbps)


CSE NdB

2440MHz

05/09/2019

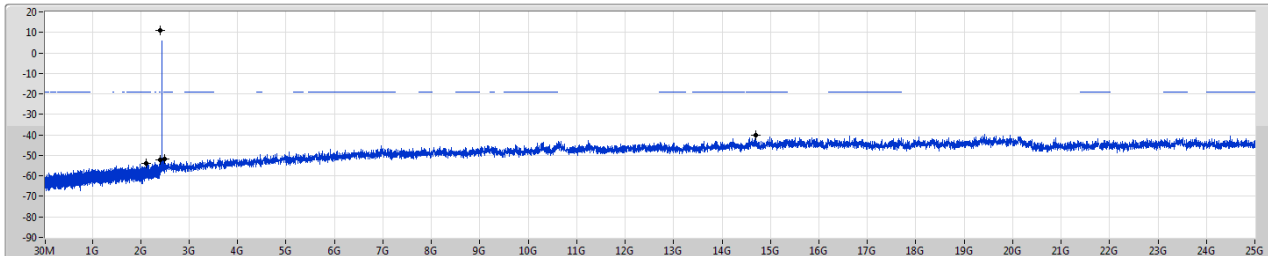

Port1

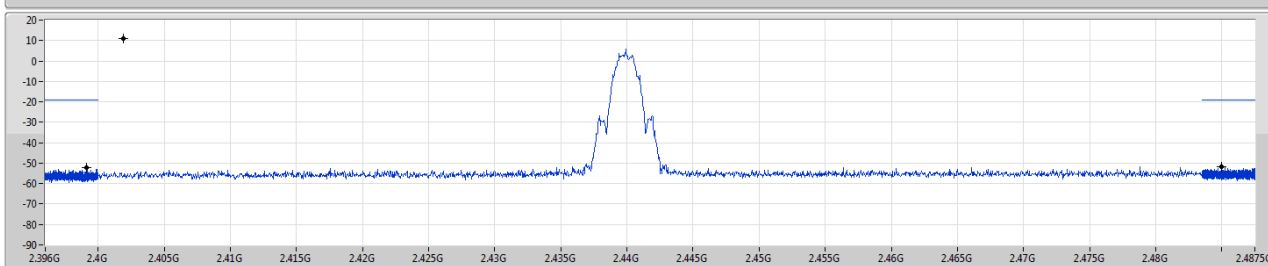

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak


| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|----------|------------|------|
| 2.40188G | 10.90    | -19.10     | 2.11859G | -53.97     | 2.3991G  | -52.11     | 2.48499G | -51.95     | 14.6949G | -40.35     | 1    |

BT-LE(2Mbps)


CSE NdB

2480MHz

05/09/2019

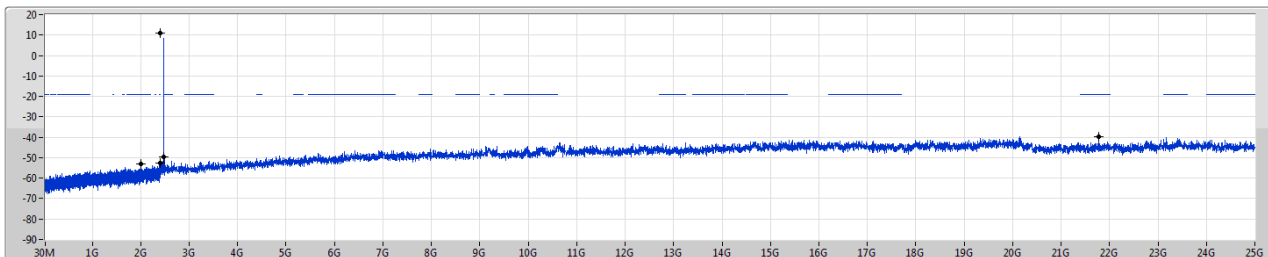



Port1

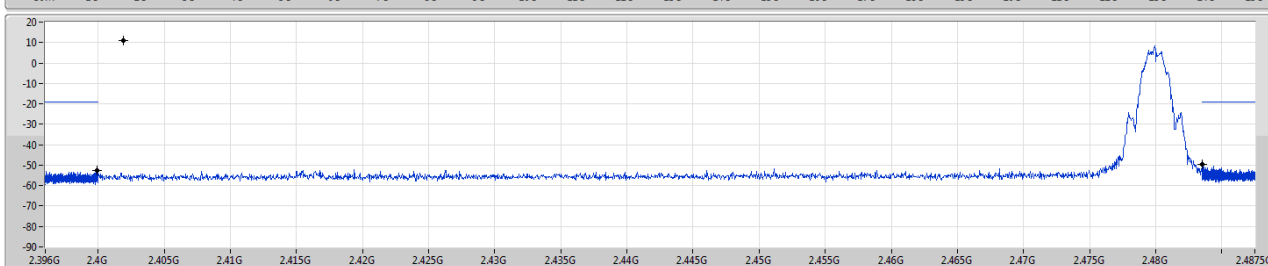

RBW (Hz)  
100k  
VBW (Hz)  
300k  
Detector  
Peak

| Ref(Hz)  | Ref(dBm) | Limit(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz) | Level(dBm) | Freq(Hz)  | Level(dBm) | Port |
|----------|----------|------------|----------|------------|----------|------------|----------|------------|-----------|------------|------|
| 2.40188G | 10.90    | -19.10     | 1.99644G | -52.94     | 2.3999G  | -52.62     | 2.48352G | -49.50     | 21.77508G | -39.90     | 1    |

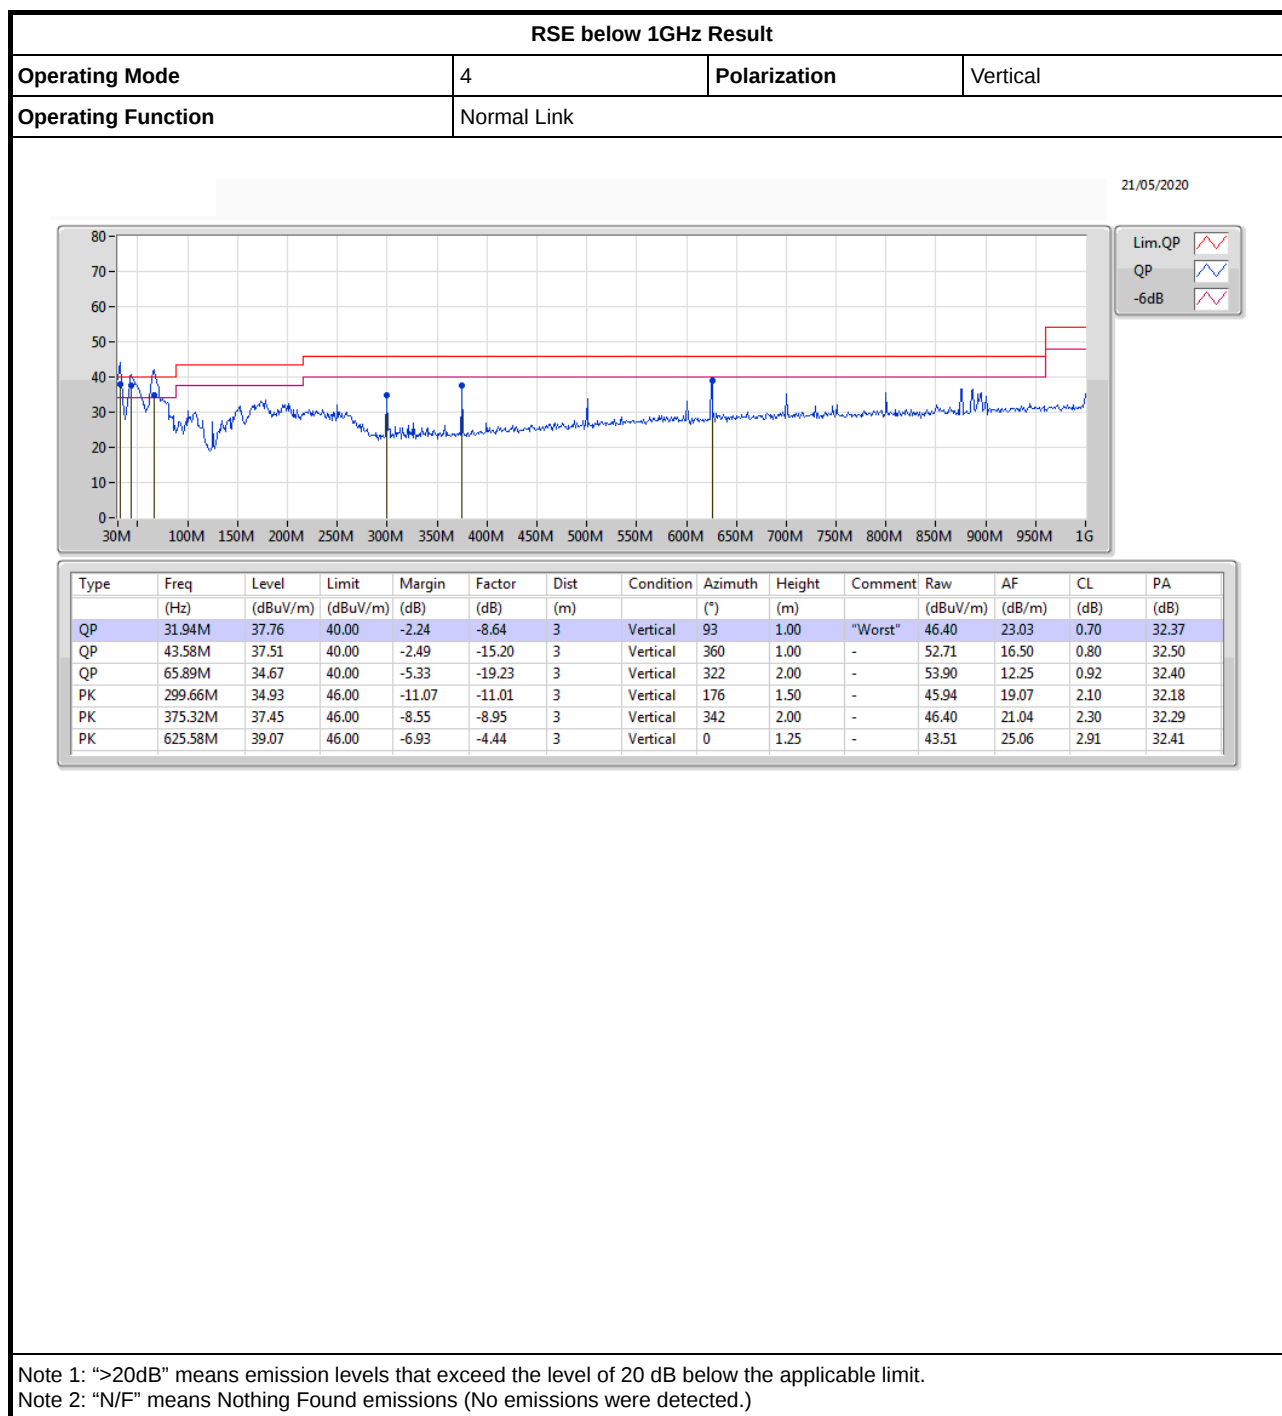

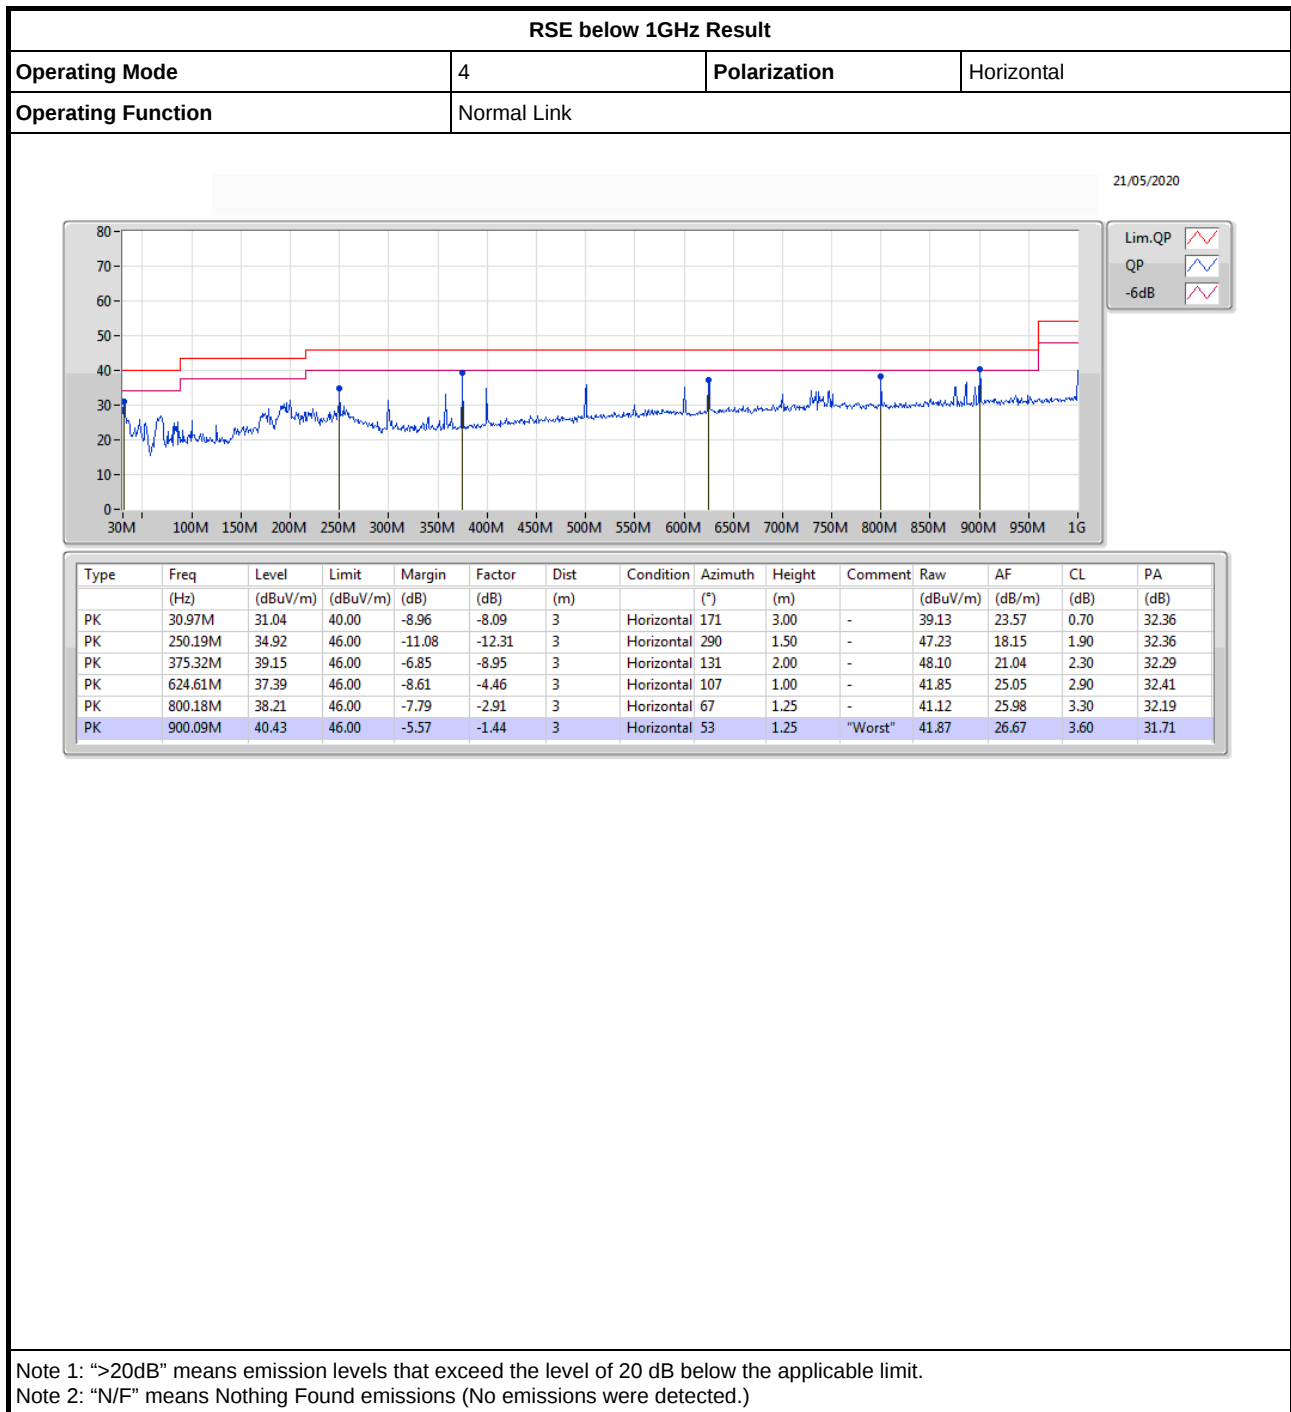

**Summary**

| Mode          | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comments |
|---------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|-----------|----------------|---------------|----------|
| 2.4-2.4835GHz | -      | -    | -            | -                 | -                 | -              | -           | -         | -              | -             | -        |
| BT-LE(1Mbps)  | Pass   | AV   | 4.80387G     | 53.96             | 54.00             | -0.04          | 3           | Vertical  | 26             | 1.05          | -        |
| BT-LE(2Mbps)  | Pass   | AV   | 4.80284G     | 52.42             | 54.00             | -1.58          | 3           | Vertical  | 27             | 1.20          | -        |

**Result**

| Mode         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|------------|----------------|---------------|----------|
| BT-LE(1Mbps) | -      | -    | -            | -                 | -                 | -              | -           | -          | -              | -             | -        |
| 2402MHz_TX   | Pass   | AV   | 2.3714G      | 45.20             | 54.00             | -8.80          | 3           | Vertical   | 183            | 1.00          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.402G       | 103.13            | Inf               | -Inf           | 3           | Vertical   | 183            | 1.00          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.3804G      | 56.39             | 74.00             | -17.61         | 3           | Vertical   | 183            | 1.00          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.4018G      | 104.48            | Inf               | -Inf           | 3           | Vertical   | 183            | 1.00          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.3876G      | 45.29             | 54.00             | -8.71          | 3           | Horizontal | 315            | 1.00          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.402G       | 108.57            | Inf               | -Inf           | 3           | Horizontal | 315            | 1.00          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.356G       | 56.70             | 74.00             | -17.30         | 3           | Horizontal | 315            | 1.00          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.4018G      | 109.94            | Inf               | -Inf           | 3           | Horizontal | 315            | 1.00          | -        |
| 2402MHz_TX   | Pass   | AV   | 4.80387G     | 53.96             | 54.00             | -0.04          | 3           | Vertical   | 26             | 1.05          | -        |
| 2402MHz_TX   | Pass   | PK   | 4.80435G     | 58.94             | 74.00             | -15.06         | 3           | Vertical   | 26             | 1.05          | -        |
| 2402MHz_TX   | Pass   | AV   | 4.80388G     | 52.60             | 54.00             | -1.40          | 3           | Horizontal | 311            | 1.05          | -        |
| 2402MHz_TX   | Pass   | PK   | 4.8043G      | 57.70             | 74.00             | -16.30         | 3           | Horizontal | 311            | 1.05          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.3556G      | 45.02             | 54.00             | -8.98          | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.44G        | 98.82             | Inf               | -Inf           | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.494G       | 45.68             | 54.00             | -8.32          | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.3656G      | 56.33             | 74.00             | -17.67         | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.44G        | 100.38            | Inf               | -Inf           | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4844G      | 56.34             | 74.00             | -17.66         | 3           | Vertical   | 182            | 1.21          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.3836G      | 45.19             | 54.00             | -8.81          | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.44G        | 105.40            | Inf               | -Inf           | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.4932G      | 45.85             | 54.00             | -8.15          | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.388G       | 56.59             | 74.00             | -17.41         | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4396G      | 106.75            | Inf               | -Inf           | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4972G      | 56.69             | 74.00             | -17.31         | 3           | Horizontal | 324            | 1.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 4.8799G      | 43.10             | 54.00             | -10.90         | 3           | Vertical   | 25             | 1.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 7.3198G      | 45.96             | 54.00             | -8.04          | 3           | Vertical   | 328            | 3.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 4.87942G     | 50.11             | 74.00             | -23.89         | 3           | Vertical   | 25             | 1.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 7.3197G      | 54.27             | 74.00             | -19.73         | 3           | Vertical   | 328            | 3.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 4.87981G     | 43.36             | 54.00             | -10.64         | 3           | Horizontal | 312            | 1.06          | -        |
| 2440MHz_TX   | Pass   | AV   | 7.31978G     | 41.84             | 54.00             | -12.16         | 3           | Horizontal | 359            | 1.31          | -        |
| 2440MHz_TX   | Pass   | PK   | 4.87946G     | 50.17             | 74.00             | -23.83         | 3           | Horizontal | 312            | 1.06          | -        |
| 2440MHz_TX   | Pass   | PK   | 7.31989G     | 51.36             | 74.00             | -22.64         | 3           | Horizontal | 359            | 1.31          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.48G        | 99.76             | Inf               | -Inf           | 3           | Vertical   | 148            | 1.01          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.4835G      | 47.67             | 54.00             | -6.33          | 3           | Vertical   | 148            | 1.01          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4796G      | 101.20            | Inf               | -Inf           | 3           | Vertical   | 148            | 1.01          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.484G       | 57.05             | 74.00             | -16.95         | 3           | Vertical   | 148            | 1.01          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.48G        | 104.21            | Inf               | -Inf           | 3           | Horizontal | 322            | 1.50          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.4835G      | 50.32             | 54.00             | -3.68          | 3           | Horizontal | 322            | 1.50          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4796G      | 105.72            | Inf               | -Inf           | 3           | Horizontal | 322            | 1.50          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4835G      | 57.84             | 74.00             | -16.16         | 3           | Horizontal | 322            | 1.50          | -        |
| 2480MHz_TX   | Pass   | AV   | 4.95972G     | 39.00             | 54.00             | -15.00         | 3           | Vertical   | 193            | 1.50          | -        |
| 2480MHz_TX   | Pass   | AV   | 7.4392G      | 44.38             | 54.00             | -9.62          | 3           | Vertical   | 336            | 1.43          | -        |
| 2480MHz_TX   | Pass   | PK   | 4.96036G     | 47.57             | 74.00             | -26.43         | 3           | Vertical   | 193            | 1.50          | -        |
| 2480MHz_TX   | Pass   | PK   | 7.43924G     | 53.19             | 74.00             | -20.81         | 3           | Vertical   | 336            | 1.43          | -        |
| 2480MHz_TX   | Pass   | AV   | 4.95953G     | 34.76             | 54.00             | -19.24         | 3           | Horizontal | 33             | 1.06          | -        |
| 2480MHz_TX   | Pass   | AV   | 7.43916G     | 41.82             | 54.00             | -12.18         | 3           | Horizontal | 0              | 1.47          | -        |
| 2480MHz_TX   | Pass   | PK   | 4.96033G     | 45.05             | 74.00             | -28.95         | 3           | Horizontal | 33             | 1.06          | -        |

Remark :

Page No. : 2 of 28

Level (dBuV/m) = Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA( Preamp Factor)

SPORTON INTERNATIONAL INC. EMC &amp; Wireless Communications Laboratory.



| Mode         | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comments |
|--------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|------------|----------------|---------------|----------|
| 2480MHz_TX   | Pass   | PK   | 7.43942G     | 51.59             | 74.00             | -22.41         | 3           | Horizontal | 0              | 1.47          | -        |
| BT-LE(2Mbps) | -      | -    | -            | -                 | -                 | -              | -           | -          | -              | -             | -        |
| 2402MHz_TX   | Pass   | AV   | 2.3544G      | 46.54             | 54.00             | -7.46          | 3           | Vertical   | 184            | 1.23          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.402G       | 101.23            | Inf               | -Inf           | 3           | Vertical   | 184            | 1.23          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.3648G      | 56.12             | 74.00             | -17.88         | 3           | Vertical   | 184            | 1.23          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.4024G      | 103.93            | Inf               | -Inf           | 3           | Vertical   | 184            | 1.23          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.3708G      | 46.58             | 54.00             | -7.42          | 3           | Horizontal | 317            | 1.09          | -        |
| 2402MHz_TX   | Pass   | AV   | 2.402G       | 107.10            | Inf               | -Inf           | 3           | Horizontal | 317            | 1.09          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.3722G      | 55.97             | 74.00             | -18.03         | 3           | Horizontal | 317            | 1.09          | -        |
| 2402MHz_TX   | Pass   | PK   | 2.4014G      | 109.78            | Inf               | -Inf           | 3           | Horizontal | 317            | 1.09          | -        |
| 2402MHz_TX   | Pass   | AV   | 4.80284G     | 52.42             | 54.00             | -1.58          | 3           | Vertical   | 27             | 1.20          | -        |
| 2402MHz_TX   | Pass   | PK   | 4.80292G     | 58.35             | 74.00             | -15.65         | 3           | Vertical   | 27             | 1.20          | -        |
| 2402MHz_TX   | Pass   | AV   | 4.80289G     | 50.71             | 54.00             | -3.29          | 3           | Horizontal | 312            | 1.03          | -        |
| 2402MHz_TX   | Pass   | PK   | 4.80284G     | 56.56             | 74.00             | -17.44         | 3           | Horizontal | 312            | 1.03          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.3788G      | 47.25             | 54.00             | -6.75          | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.44G        | 98.17             | Inf               | -Inf           | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.4976G      | 47.15             | 54.00             | -6.85          | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.3504G      | 56.61             | 74.00             | -17.39         | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4396G      | 100.96            | Inf               | -Inf           | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4916G      | 56.92             | 74.00             | -17.08         | 3           | Vertical   | 40             | 1.25          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.3608G      | 46.07             | 54.00             | -7.93          | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.44G        | 103.95            | Inf               | -Inf           | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | AV   | 2.4984G      | 46.37             | 54.00             | -7.63          | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.3544G      | 56.01             | 74.00             | -17.99         | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4404G      | 106.67            | Inf               | -Inf           | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | PK   | 2.4884G      | 56.88             | 74.00             | -17.12         | 3           | Horizontal | 323            | 2.99          | -        |
| 2440MHz_TX   | Pass   | AV   | 4.87891G     | 42.96             | 54.00             | -11.04         | 3           | Vertical   | 26             | 1.45          | -        |
| 2440MHz_TX   | Pass   | AV   | 7.31975G     | 44.80             | 54.00             | -9.20          | 3           | Vertical   | 331            | 3.00          | -        |
| 2440MHz_TX   | Pass   | PK   | 4.88083G     | 49.94             | 74.00             | -24.06         | 3           | Vertical   | 26             | 1.45          | -        |
| 2440MHz_TX   | Pass   | PK   | 7.32001G     | 52.66             | 74.00             | -21.34         | 3           | Vertical   | 331            | 3.00          | -        |
| 2440MHz_TX   | Pass   | AV   | 4.87888G     | 42.72             | 54.00             | -11.28         | 3           | Horizontal | 315            | 1.07          | -        |
| 2440MHz_TX   | Pass   | AV   | 7.31977G     | 42.39             | 54.00             | -11.61         | 3           | Horizontal | 360            | 1.31          | -        |
| 2440MHz_TX   | Pass   | PK   | 4.87881G     | 49.78             | 74.00             | -24.22         | 3           | Horizontal | 315            | 1.07          | -        |
| 2440MHz_TX   | Pass   | PK   | 7.31987G     | 50.86             | 74.00             | -23.14         | 3           | Horizontal | 360            | 1.31          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.48G        | 100.73            | Inf               | -Inf           | 3           | Vertical   | 67             | 2.70          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.4835G      | 50.86             | 54.00             | -3.14          | 3           | Vertical   | 67             | 2.70          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4794G      | 103.55            | Inf               | -Inf           | 3           | Vertical   | 67             | 2.70          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4835G      | 58.40             | 74.00             | -15.60         | 3           | Vertical   | 67             | 2.70          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.48G        | 102.64            | Inf               | -Inf           | 3           | Horizontal | 320            | 2.89          | -        |
| 2480MHz_TX   | Pass   | AV   | 2.4835G      | 52.21             | 54.00             | -1.79          | 3           | Horizontal | 320            | 2.89          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4794G      | 105.39            | Inf               | -Inf           | 3           | Horizontal | 320            | 2.89          | -        |
| 2480MHz_TX   | Pass   | PK   | 2.4835G      | 60.80             | 74.00             | -13.20         | 3           | Horizontal | 320            | 2.89          | -        |
| 2480MHz_TX   | Pass   | AV   | 4.95881G     | 39.11             | 54.00             | -14.89         | 3           | Vertical   | 208            | 1.31          | -        |
| 2480MHz_TX   | Pass   | AV   | 7.43865G     | 45.85             | 54.00             | -8.15          | 3           | Vertical   | 326            | 3.00          | -        |
| 2480MHz_TX   | Pass   | PK   | 4.95898G     | 47.42             | 74.00             | -26.58         | 3           | Vertical   | 208            | 1.31          | -        |
| 2480MHz_TX   | Pass   | PK   | 7.43822G     | 54.37             | 74.00             | -19.63         | 3           | Vertical   | 326            | 3.00          | -        |
| 2480MHz_TX   | Pass   | AV   | 4.95888G     | 34.78             | 54.00             | -19.22         | 3           | Horizontal | 37             | 1.05          | -        |
| 2480MHz_TX   | Pass   | AV   | 7.4385G      | 41.86             | 54.00             | -12.14         | 3           | Horizontal | 0              | 1.32          | -        |
| 2480MHz_TX   | Pass   | PK   | 4.95882G     | 45.16             | 74.00             | -28.84         | 3           | Horizontal | 37             | 1.05          | -        |

Remark :

Page No. : 3 of 28

Level (dBuV/m) = Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA( Preamp Factor)

SPORTON INTERNATIONAL INC. EMC &amp; Wireless Communications Laboratory.



## RSE TX above 1GHz


## Appendix F.2

| Mode       | Result | Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comments |
|------------|--------|------|--------------|-------------------|-------------------|----------------|-------------|------------|----------------|---------------|----------|
| 2480MHz_TX | Pass   | PK   | 7.43919G     | 51.47             | 74.00             | -22.53         | 3           | Horizontal | 0              | 1.32          | -        |

# BT-LE(1Mbps)

## 2402MHz\_TX

05/09/2019

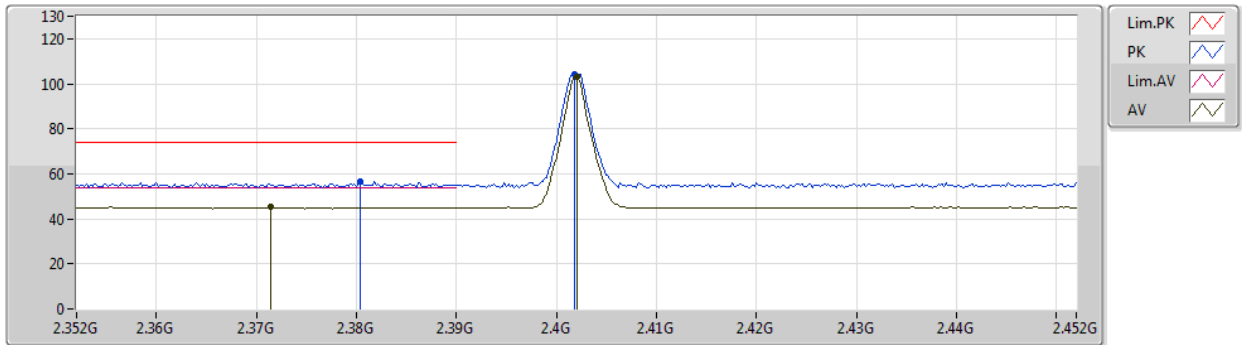


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3714G      | 45.20             | 54.00             | -8.80          | 32.01          | 3           | Vertical  | 183            | 1.00          | -       | 13.19         | 27.31      | 4.70       | -          |
| AV   | 2.402G       | 103.13            | Inf               | -Inf           | 32.14          | 3           | Vertical  | 183            | 1.00          | -       | 70.99         | 27.41      | 4.73       | -          |
| PK   | 2.3804G      | 56.39             | 74.00             | -17.61         | 32.05          | 3           | Vertical  | 183            | 1.00          | -       | 24.34         | 27.34      | 4.71       | -          |
| PK   | 2.4018G      | 104.48            | Inf               | -Inf           | 32.14          | 3           | Vertical  | 183            | 1.00          | -       | 72.34         | 27.41      | 4.73       | -          |

# BT-LE(1Mbps)

## 2402MHz\_TX

05/09/2019

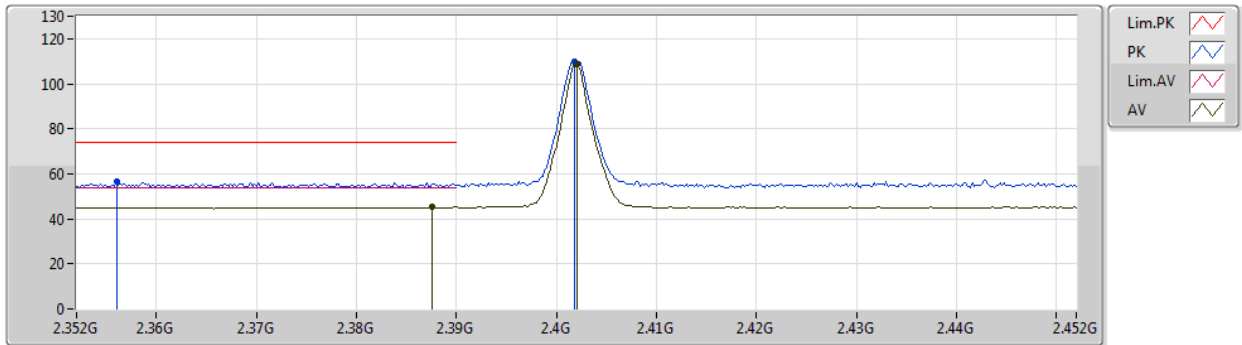


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3876G      | 45.29             | 54.00             | -8.71          | 32.08          | 3           | Horizontal | 315            | 1.00          | -       | 13.21         | 27.36      | 4.72       | -          |
| AV   | 2.402G       | 108.57            | Inf               | -Inf           | 32.14          | 3           | Horizontal | 315            | 1.00          | -       | 76.43         | 27.41      | 4.73       | -          |
| PK   | 2.356G       | 56.70             | 74.00             | -17.30         | 31.95          | 3           | Horizontal | 315            | 1.00          | -       | 24.75         | 27.27      | 4.68       | -          |
| PK   | 2.4018G      | 109.94            | Inf               | -Inf           | 32.14          | 3           | Horizontal | 315            | 1.00          | -       | 77.80         | 27.41      | 4.73       | -          |

# BT-LE(1Mbps)

05/09/2019

## 2402MHz\_TX

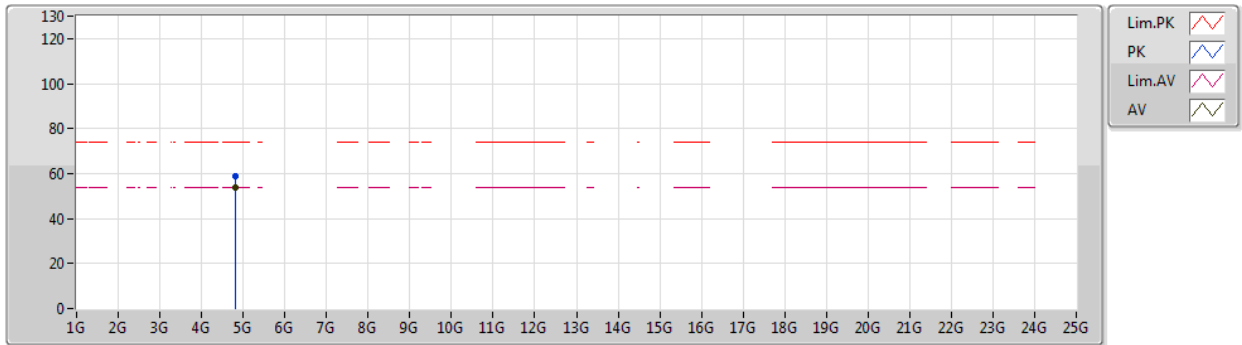


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.80387G     | 53.96             | 54.00             | -0.04          | 3.64           | 3           | Vertical  | 26             | 1.05          | -       | 50.32         | 31.35      | 6.78       | 34.49      |
| PK   | 4.80435G     | 58.94             | 74.00             | -15.06         | 3.64           | 3           | Vertical  | 26             | 1.05          | -       | 55.30         | 31.35      | 6.78       | 34.49      |

# BT-LE(1Mbps)

05/09/2019

## 2402MHz\_TX

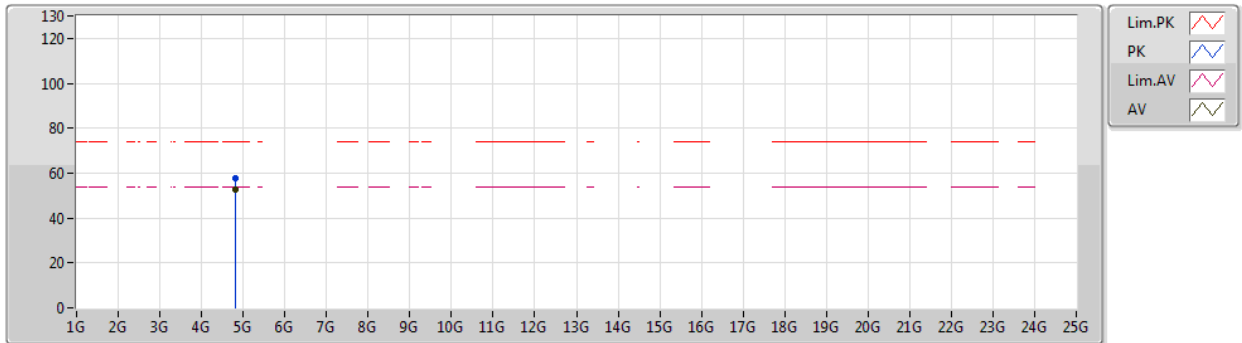


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.80388G     | 52.60             | 54.00             | -1.40          | 3.64           | 3           | Horizontal | 311            | 1.05          | -       | 48.96         | 31.35      | 6.78       | 34.49      |
| PK   | 4.8043G      | 57.70             | 74.00             | -16.30         | 3.64           | 3           | Horizontal | 311            | 1.05          | -       | 54.06         | 31.35      | 6.78       | 34.49      |

# BT-LE(1Mbps)

## 2440MHz\_TX

05/09/2019

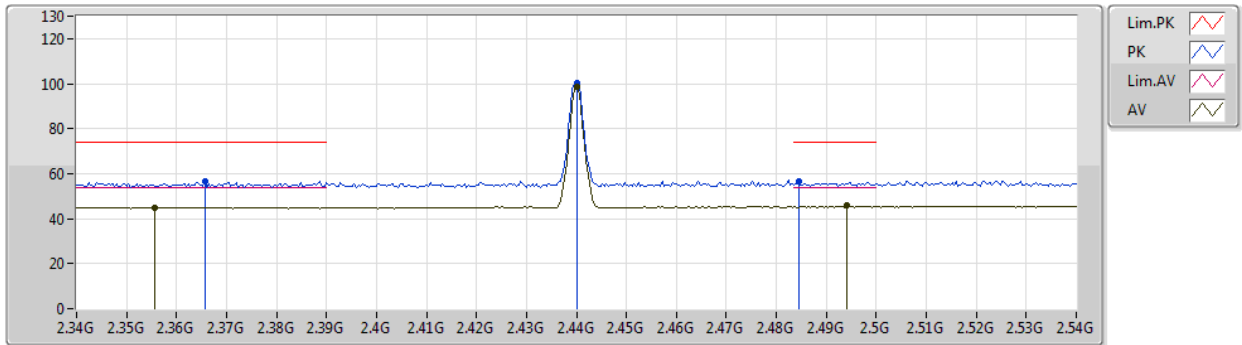


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3556G      | 45.02             | 54.00             | -8.98          | 31.95          | 3           | Vertical  | 182            | 1.21          | -       | 13.07         | 27.27      | 4.68       | -          |
| AV   | 2.44G        | 98.82             | Inf               | -Inf           | 32.30          | 3           | Vertical  | 182            | 1.21          | -       | 66.52         | 27.52      | 4.78       | -          |
| AV   | 2.494G       | 45.68             | 54.00             | -8.32          | 32.52          | 3           | Vertical  | 182            | 1.21          | -       | 13.16         | 27.68      | 4.84       | -          |
| PK   | 2.3656G      | 56.33             | 74.00             | -17.67         | 31.99          | 3           | Vertical  | 182            | 1.21          | -       | 24.34         | 27.30      | 4.69       | -          |
| PK   | 2.44G        | 100.38            | Inf               | -Inf           | 32.30          | 3           | Vertical  | 182            | 1.21          | -       | 68.08         | 27.52      | 4.78       | -          |
| PK   | 2.4844G      | 56.34             | 74.00             | -17.66         | 32.48          | 3           | Vertical  | 182            | 1.21          | -       | 23.86         | 27.65      | 4.83       | -          |

# BT-LE(1Mbps)

## 2440MHz\_TX

05/09/2019

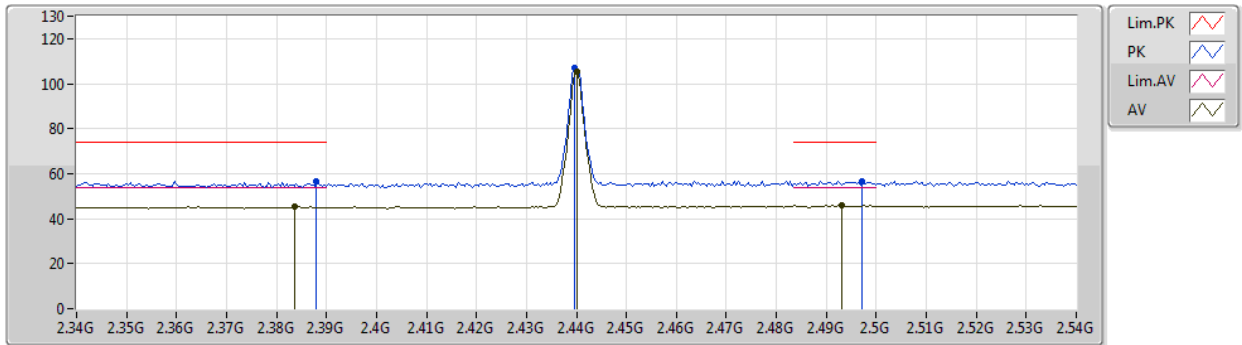


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3836G      | 45.19             | 54.00             | -8.81          | 32.06          | 3           | Horizontal | 324            | 1.00          | -       | 13.13         | 27.35      | 4.71       | -          |
| AV   | 2.44G        | 105.40            | Inf               | -Inf           | 32.30          | 3           | Horizontal | 324            | 1.00          | -       | 73.10         | 27.52      | 4.78       | -          |
| AV   | 2.4932G      | 45.85             | 54.00             | -8.15          | 32.52          | 3           | Horizontal | 324            | 1.00          | -       | 13.33         | 27.68      | 4.84       | -          |
| PK   | 2.388G       | 56.59             | 74.00             | -17.41         | 32.08          | 3           | Horizontal | 324            | 1.00          | -       | 24.51         | 27.36      | 4.72       | -          |
| PK   | 2.4396G      | 106.75            | Inf               | -Inf           | 32.30          | 3           | Horizontal | 324            | 1.00          | -       | 74.45         | 27.52      | 4.78       | -          |
| PK   | 2.4972G      | 56.69             | 74.00             | -17.31         | 32.53          | 3           | Horizontal | 324            | 1.00          | -       | 24.16         | 27.69      | 4.84       | -          |

# BT-LE(1Mbps)

05/09/2019

## 2440MHz\_TX

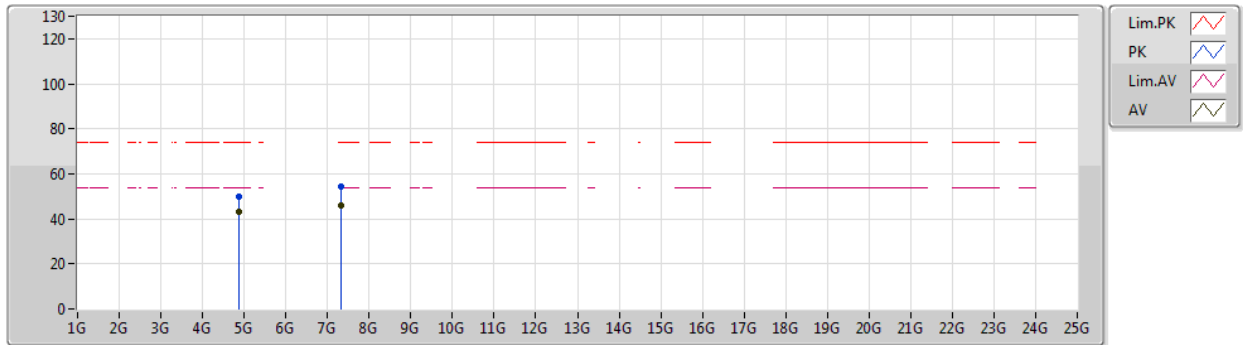


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.8799G      | 43.10             | 54.00             | -10.90         | 3.82           | 3           | Vertical  | 25             | 1.00          | -       | 39.28         | 31.48      | 6.81       | 34.47      |
| AV   | 7.3198G      | 45.96             | 54.00             | -8.04          | 9.90           | 3           | Vertical  | 328            | 3.00          | -       | 36.06         | 36.03      | 8.62       | 34.75      |
| PK   | 4.87942G     | 50.11             | 74.00             | -23.89         | 3.82           | 3           | Vertical  | 25             | 1.00          | -       | 46.29         | 31.48      | 6.81       | 34.47      |
| PK   | 7.3197G      | 54.27             | 74.00             | -19.73         | 9.90           | 3           | Vertical  | 328            | 3.00          | -       | 44.37         | 36.03      | 8.62       | 34.75      |

# BT-LE(1Mbps)

## 2440MHz\_TX

05/09/2019

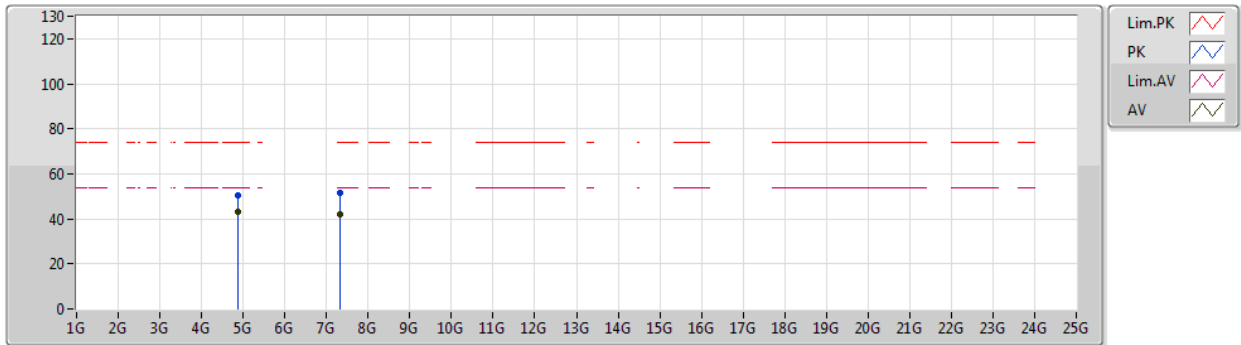


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.87981G     | 43.36             | 54.00             | -10.64         | 3.82           | 3           | Horizontal | 312            | 1.06          | -       | 39.54         | 31.48      | 6.81       | 34.47      |
| AV   | 7.31978G     | 41.84             | 54.00             | -12.16         | 9.90           | 3           | Horizontal | 359            | 1.31          | -       | 31.94         | 36.03      | 8.62       | 34.75      |
| PK   | 4.87946G     | 50.17             | 74.00             | -23.83         | 3.82           | 3           | Horizontal | 312            | 1.06          | -       | 46.35         | 31.48      | 6.81       | 34.47      |
| PK   | 7.31989G     | 51.36             | 74.00             | -22.64         | 9.90           | 3           | Horizontal | 359            | 1.31          | -       | 41.46         | 36.03      | 8.62       | 34.75      |

# BT-LE(1Mbps)

## 2480MHz\_TX

05/09/2019

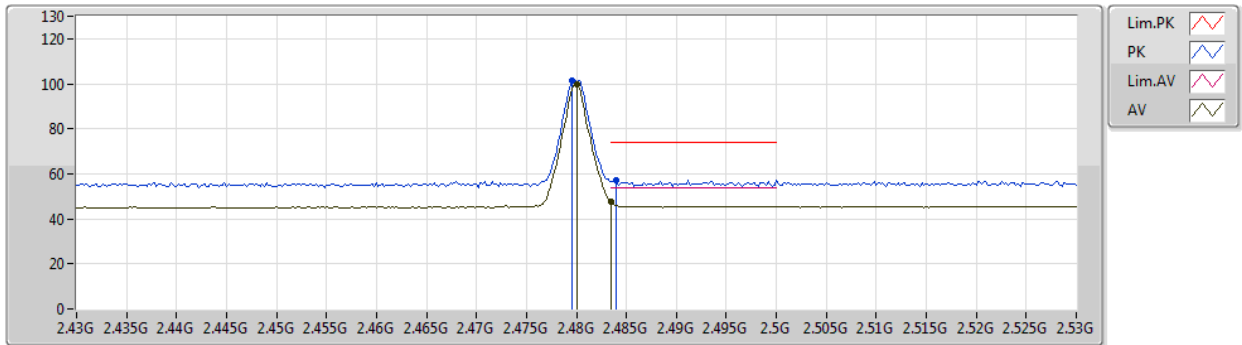


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.48G        | 99.76             | Inf               | -Inf           | 32.46          | 3           | Vertical  | 148            | 1.01          | -       | 67.30         | 27.64      | 4.82       | -          |
| AV   | 2.4835G      | 47.67             | 54.00             | -6.33          | 32.48          | 3           | Vertical  | 148            | 1.01          | -       | 15.19         | 27.65      | 4.83       | -          |
| PK   | 2.4796G      | 101.20            | Inf               | -Inf           | 32.46          | 3           | Vertical  | 148            | 1.01          | -       | 68.74         | 27.64      | 4.82       | -          |
| PK   | 2.484G       | 57.05             | 74.00             | -16.95         | 32.48          | 3           | Vertical  | 148            | 1.01          | -       | 24.57         | 27.65      | 4.83       | -          |

# BT-LE(1Mbps)

## 2480MHz\_TX

05/09/2019

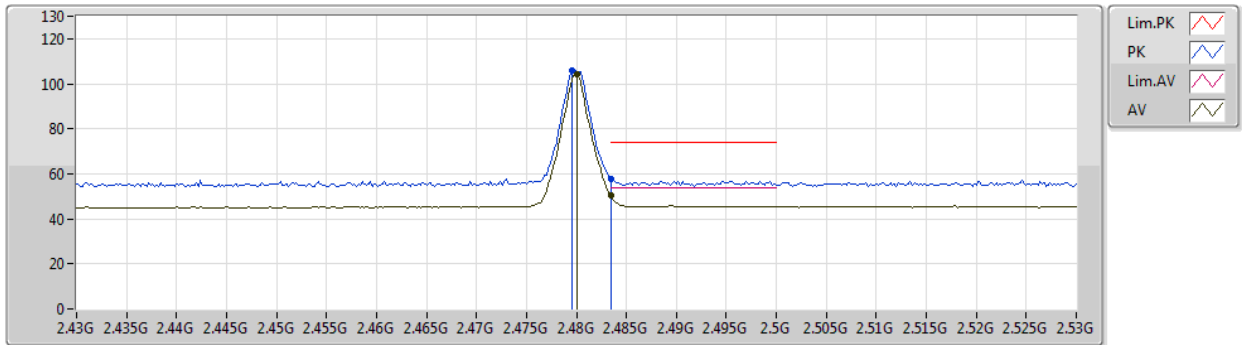


| Type | Freq    | Level    | Limit    | Margin | Factor | Dist | Condition  | Azimuth | Height | Comment | Raw    | AF    | CL   | PA   |
|------|---------|----------|----------|--------|--------|------|------------|---------|--------|---------|--------|-------|------|------|
|      | (Hz)    | (dBuV/m) | (dBuV/m) | (dB)   | (dB)   | (m)  |            | (°)     | (m)    |         | (dBuV) | (dB)  | (dB) | (dB) |
| AV   | 2.48G   | 104.21   | Inf      | -Inf   | 32.46  | 3    | Horizontal | 322     | 1.50   | -       | 71.75  | 27.64 | 4.82 | -    |
| AV   | 2.4835G | 50.32    | 54.00    | -3.68  | 32.48  | 3    | Horizontal | 322     | 1.50   | -       | 17.84  | 27.65 | 4.83 | -    |
| PK   | 2.4796G | 105.72   | Inf      | -Inf   | 32.46  | 3    | Horizontal | 322     | 1.50   | -       | 73.26  | 27.64 | 4.82 | -    |
| PK   | 2.4835G | 57.84    | 74.00    | -16.16 | 32.48  | 3    | Horizontal | 322     | 1.50   | -       | 25.36  | 27.65 | 4.83 | -    |

# BT-LE(1Mbps)

## 2480MHz\_TX

05/09/2019

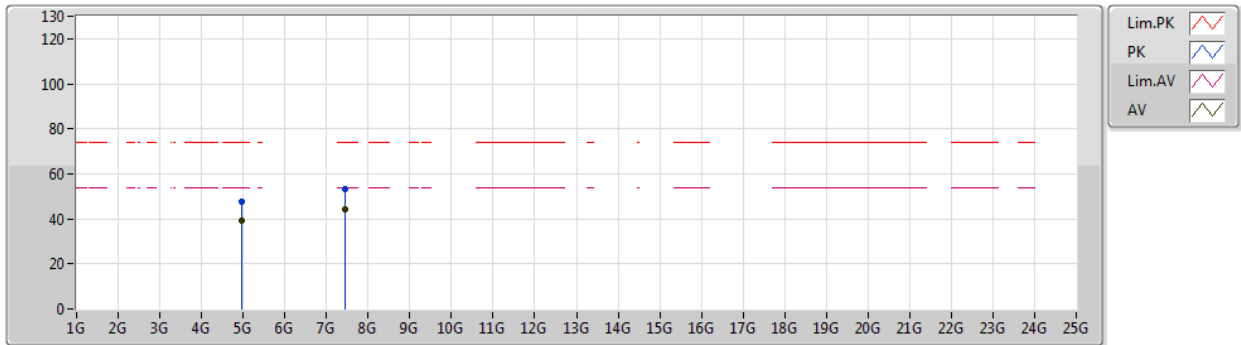


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.95972G     | 39.00             | 54.00             | -15.00         | 4.02           | 3           | Vertical  | 193            | 1.50          | -       | 34.98         | 31.63      | 6.83       | 34.44      |
| AV   | 7.4392G      | 44.38             | 54.00             | -9.62          | 10.24          | 3           | Vertical  | 336            | 1.43          | -       | 34.14         | 36.34      | 8.68       | 34.78      |
| PK   | 4.96036G     | 47.57             | 74.00             | -26.43         | 4.02           | 3           | Vertical  | 193            | 1.50          | -       | 43.55         | 31.63      | 6.83       | 34.44      |
| PK   | 7.43924G     | 53.19             | 74.00             | -20.81         | 10.24          | 3           | Vertical  | 336            | 1.43          | -       | 42.95         | 36.34      | 8.68       | 34.78      |

# BT-LE(1Mbps)

05/09/2019

## 2480MHz\_TX

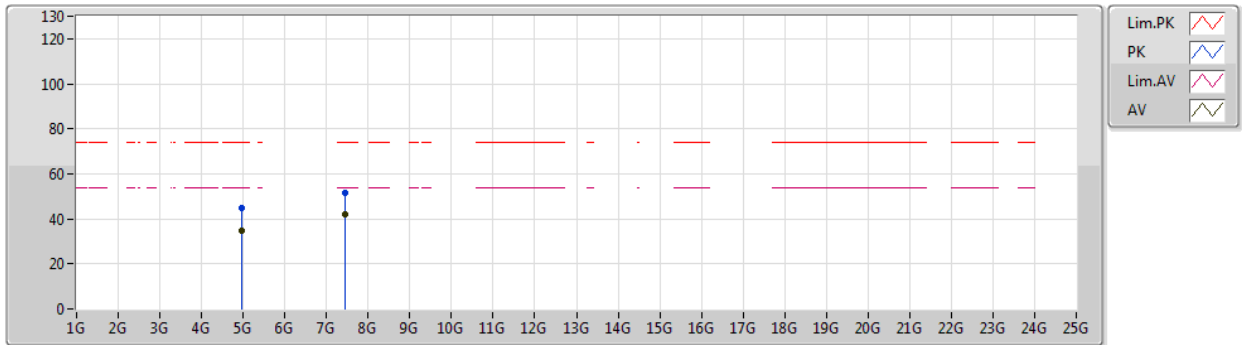


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.95953G     | 34.76             | 54.00             | -19.24         | 4.02           | 3           | Horizontal | 33             | 1.06          | -       | 30.74         | 31.63      | 6.83       | 34.44      |
| AV   | 7.43916G     | 41.82             | 54.00             | -12.18         | 10.24          | 3           | Horizontal | 0              | 1.47          | -       | 31.58         | 36.34      | 8.68       | 34.78      |
| PK   | 4.96033G     | 45.05             | 74.00             | -28.95         | 4.02           | 3           | Horizontal | 33             | 1.06          | -       | 41.03         | 31.63      | 6.83       | 34.44      |
| PK   | 7.43942G     | 51.59             | 74.00             | -22.41         | 10.24          | 3           | Horizontal | 0              | 1.47          | -       | 41.35         | 36.34      | 8.68       | 34.78      |

## BT-LE(2Mbps)

### 2402MHz\_TX

05/09/2019

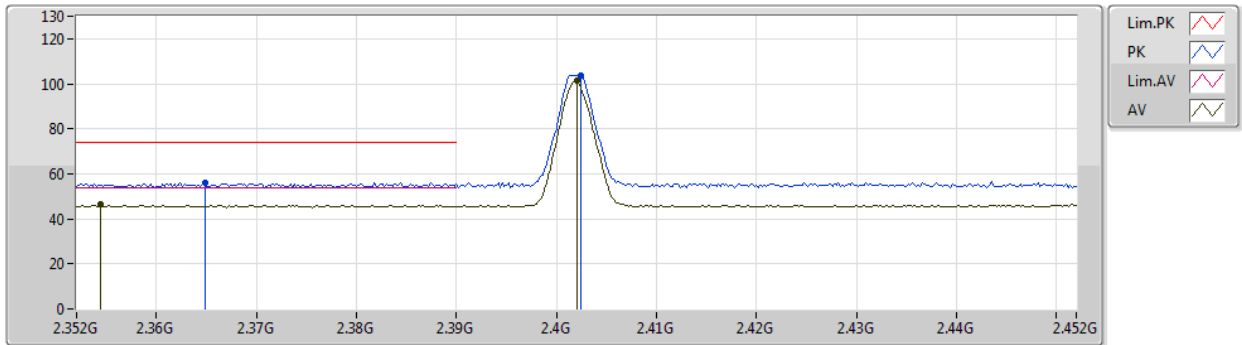


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3544G      | 46.54             | 54.00             | -7.46          | 31.94          | 3           | Vertical  | 184            | 1.23          | -       | 14.60         | 27.26      | 4.68       | -          |
| AV   | 2.402G       | 101.23            | Inf               | -Inf           | 32.14          | 3           | Vertical  | 184            | 1.23          | -       | 69.09         | 27.41      | 4.73       | -          |
| PK   | 2.3648G      | 56.12             | 74.00             | -17.88         | 31.98          | 3           | Vertical  | 184            | 1.23          | -       | 24.14         | 27.29      | 4.69       | -          |
| PK   | 2.4024G      | 103.93            | Inf               | -Inf           | 32.14          | 3           | Vertical  | 184            | 1.23          | -       | 71.79         | 27.41      | 4.73       | -          |

# BT-LE(2Mbps)

## 2402MHz\_TX

05/09/2019

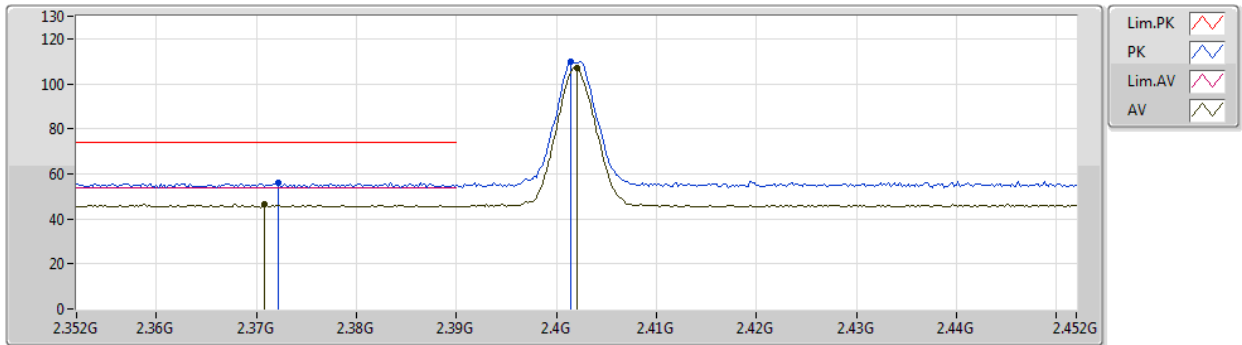


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3708G      | 46.58             | 54.00             | -7.42          | 32.01          | 3           | Horizontal | 317            | 1.09          | -       | 14.57         | 27.31      | 4.70       | -          |
| AV   | 2.402G       | 107.10            | Inf               | -Inf           | 32.14          | 3           | Horizontal | 317            | 1.09          | -       | 74.96         | 27.41      | 4.73       | -          |
| PK   | 2.3722G      | 55.97             | 74.00             | -18.03         | 32.02          | 3           | Horizontal | 317            | 1.09          | -       | 23.95         | 27.32      | 4.70       | -          |
| PK   | 2.4014G      | 109.78            | Inf               | -Inf           | 32.13          | 3           | Horizontal | 317            | 1.09          | -       | 77.65         | 27.40      | 4.73       | -          |

# BT-LE(2Mbps)

## 2402MHz\_TX

05/09/2019

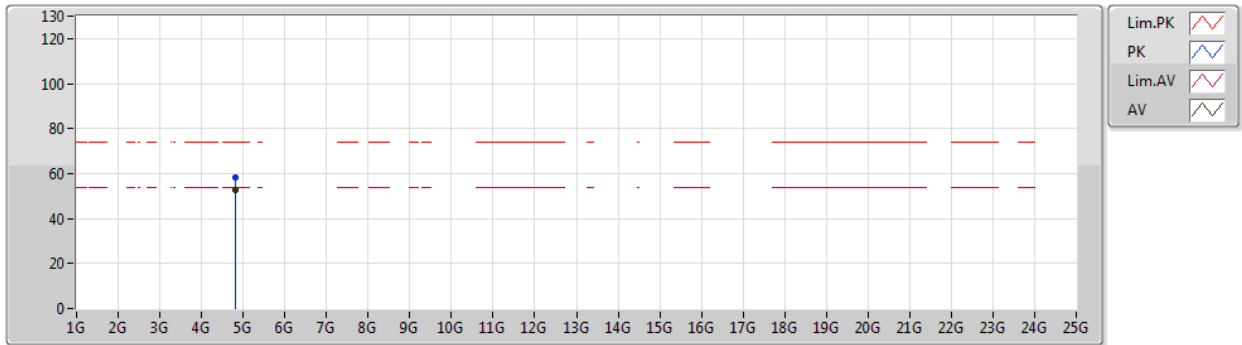


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.80284G     | 52.42             | 54.00             | -1.58          | 3.64           | 3           | Vertical  | 27             | 1.20          | -       | 48.78         | 31.35      | 6.78       | 34.49      |
| PK   | 4.80292G     | 58.35             | 74.00             | -15.65         | 3.64           | 3           | Vertical  | 27             | 1.20          | -       | 54.71         | 31.35      | 6.78       | 34.49      |

# BT-LE(2Mbps)

## 2402MHz\_TX

05/09/2019

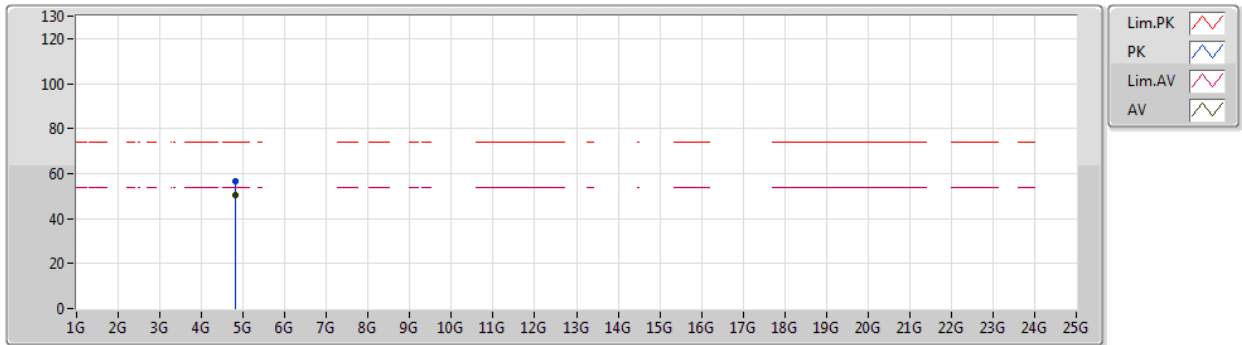


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.80289G     | 50.71             | 54.00             | -3.29          | 3.64           | 3           | Horizontal | 312            | 1.03          | -       | 47.07         | 31.35      | 6.78       | 34.49      |
| PK   | 4.80284G     | 56.56             | 74.00             | -17.44         | 3.64           | 3           | Horizontal | 312            | 1.03          | -       | 52.92         | 31.35      | 6.78       | 34.49      |

# BT-LE(2Mbps)

## 2440MHz\_TX

05/09/2019

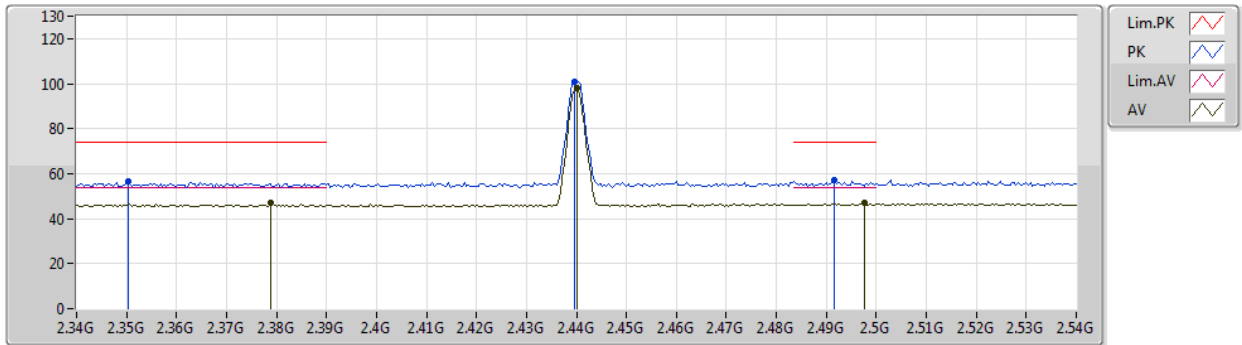


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3788G      | 47.25             | 54.00             | -6.75          | 32.05          | 3           | Vertical  | 40             | 1.25          | -       | 15.20         | 27.34      | 4.71       | -          |
| AV   | 2.44G        | 98.17             | Inf               | -Inf           | 32.30          | 3           | Vertical  | 40             | 1.25          | -       | 65.87         | 27.52      | 4.78       | -          |
| AV   | 2.4976G      | 47.15             | 54.00             | -6.85          | 32.53          | 3           | Vertical  | 40             | 1.25          | -       | 14.62         | 27.69      | 4.84       | -          |
| PK   | 2.3504G      | 56.61             | 74.00             | -17.39         | 31.92          | 3           | Vertical  | 40             | 1.25          | -       | 24.69         | 27.25      | 4.67       | -          |
| PK   | 2.4396G      | 100.96            | Inf               | -Inf           | 32.30          | 3           | Vertical  | 40             | 1.25          | -       | 68.66         | 27.52      | 4.78       | -          |
| PK   | 2.4916G      | 56.92             | 74.00             | -17.08         | 32.51          | 3           | Vertical  | 40             | 1.25          | -       | 24.41         | 27.67      | 4.84       | -          |

## BT-LE(2Mbps)

### 2440MHz\_TX

05/09/2019

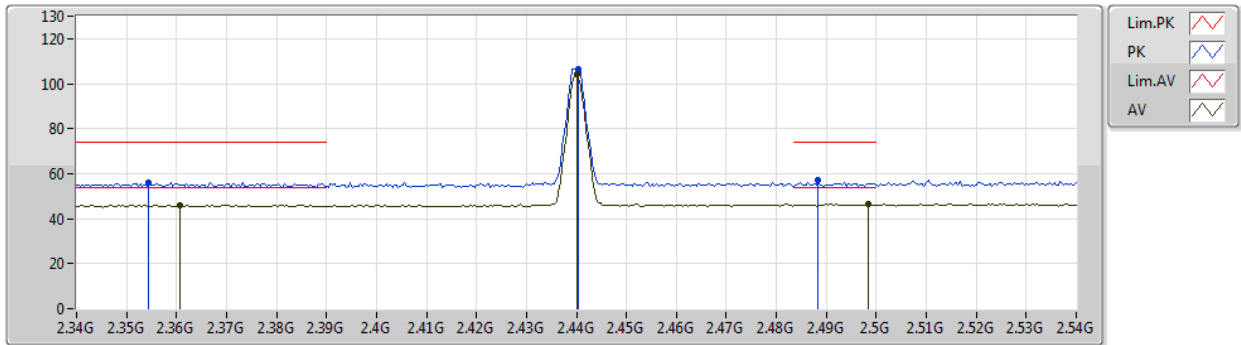


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.3608G      | 46.07             | 54.00             | -7.93          | 31.96          | 3           | Horizontal | 323            | 2.99          | -       | 14.11         | 27.28      | 4.68       | -          |
| AV   | 2.44G        | 103.95            | Inf               | -Inf           | 32.30          | 3           | Horizontal | 323            | 2.99          | -       | 71.65         | 27.52      | 4.78       | -          |
| AV   | 2.4984G      | 46.37             | 54.00             | -7.63          | 32.55          | 3           | Horizontal | 323            | 2.99          | -       | 13.82         | 27.70      | 4.85       | -          |
| PK   | 2.3544G      | 56.01             | 74.00             | -17.99         | 31.94          | 3           | Horizontal | 323            | 2.99          | -       | 24.07         | 27.26      | 4.68       | -          |
| PK   | 2.4404G      | 106.67            | Inf               | -Inf           | 32.30          | 3           | Horizontal | 323            | 2.99          | -       | 74.37         | 27.52      | 4.78       | -          |
| PK   | 2.4884G      | 56.88             | 74.00             | -17.12         | 32.50          | 3           | Horizontal | 323            | 2.99          | -       | 24.38         | 27.67      | 4.83       | -          |

# BT-LE(2Mbps)

## 2440MHz\_TX

05/09/2019

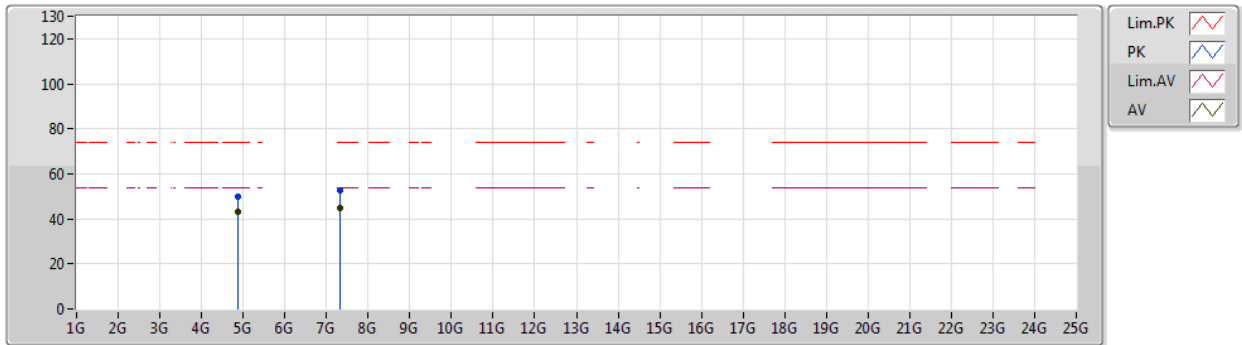


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.87891G     | 42.96             | 54.00             | -11.04         | 3.82           | 3           | Vertical  | 26             | 1.45          | -       | 39.14         | 31.48      | 6.81       | 34.47      |
| AV   | 7.31975G     | 44.80             | 54.00             | -9.20          | 9.90           | 3           | Vertical  | 331            | 3.00          | -       | 34.90         | 36.03      | 8.62       | 34.75      |
| PK   | 4.88083G     | 49.94             | 74.00             | -24.06         | 3.83           | 3           | Vertical  | 26             | 1.45          | -       | 46.11         | 31.49      | 6.81       | 34.47      |
| PK   | 7.32001G     | 52.66             | 74.00             | -21.34         | 9.90           | 3           | Vertical  | 331            | 3.00          | -       | 42.76         | 36.03      | 8.62       | 34.75      |

## BT-LE(2Mbps)

05/09/2019

### 2440MHz\_TX

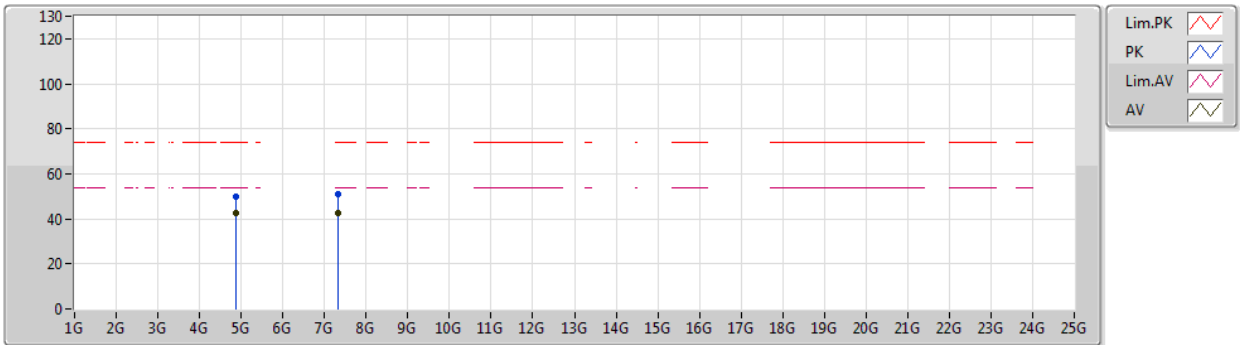


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.87888G     | 42.72             | 54.00             | -11.28         | 3.82           | 3           | Horizontal | 315            | 1.07          | -       | 38.90         | 31.48      | 6.81       | 34.47      |
| AV   | 7.31977G     | 42.39             | 54.00             | -11.61         | 9.90           | 3           | Horizontal | 360            | 1.31          | -       | 32.49         | 36.03      | 8.62       | 34.75      |
| PK   | 4.87881G     | 49.78             | 74.00             | -24.22         | 3.82           | 3           | Horizontal | 315            | 1.07          | -       | 45.96         | 31.48      | 6.81       | 34.47      |
| PK   | 7.31987G     | 50.86             | 74.00             | -23.14         | 9.90           | 3           | Horizontal | 360            | 1.31          | -       | 40.96         | 36.03      | 8.62       | 34.75      |

# BT-LE(2Mbps)

## 2480MHz\_TX

05/09/2019

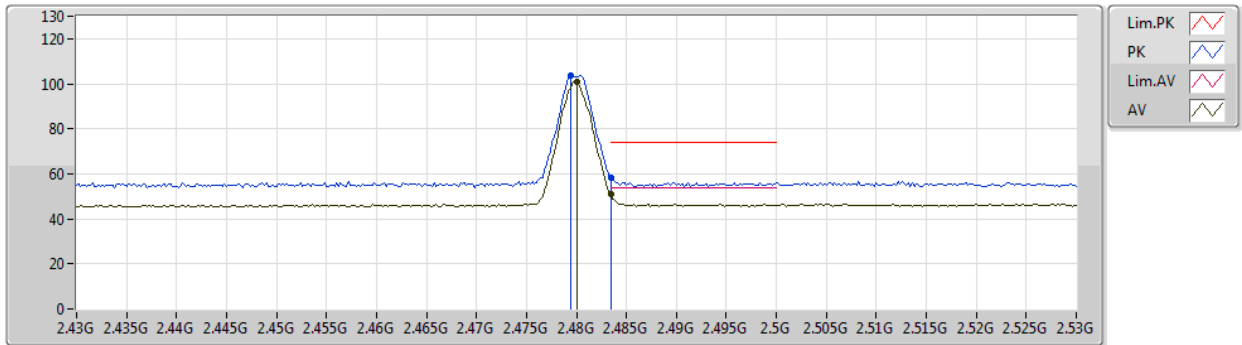


| Type | Freq    | Level    | Limit    | Margin | Factor | Dist | Condition | Azimuth | Height | Comment | Raw    | AF    | CL   | PA   |
|------|---------|----------|----------|--------|--------|------|-----------|---------|--------|---------|--------|-------|------|------|
|      | (Hz)    | (dBuV/m) | (dBuV/m) | (dB)   | (dB)   | (m)  |           | (°)     | (m)    |         | (dBuV) | (dB)  | (dB) | (dB) |
| AV   | 2.48G   | 100.73   | Inf      | -Inf   | 32.46  | 3    | Vertical  | 67      | 2.70   | -       | 68.27  | 27.64 | 4.82 | -    |
| AV   | 2.4835G | 50.86    | 54.00    | -3.14  | 32.48  | 3    | Vertical  | 67      | 2.70   | -       | 18.38  | 27.65 | 4.83 | -    |
| PK   | 2.4794G | 103.55   | Inf      | -Inf   | 32.46  | 3    | Vertical  | 67      | 2.70   | -       | 71.09  | 27.64 | 4.82 | -    |
| PK   | 2.4835G | 58.40    | 74.00    | -15.60 | 32.48  | 3    | Vertical  | 67      | 2.70   | -       | 25.92  | 27.65 | 4.83 | -    |

# BT-LE(2Mbps)

## 2480MHz\_TX

05/09/2019

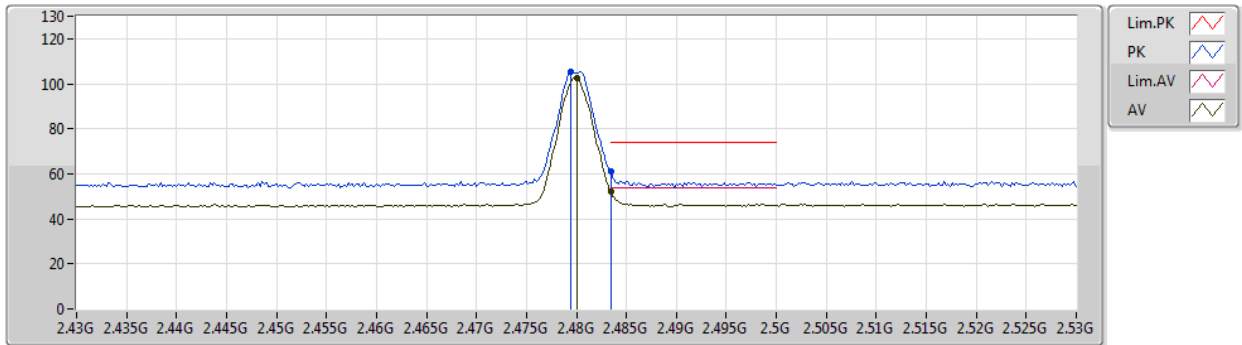


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 2.48G        | 102.64            | Inf               | -Inf           | 32.46          | 3           | Horizontal | 320            | 2.89          | -       | 70.18         | 27.64      | 4.82       | -          |
| AV   | 2.4835G      | 52.21             | 54.00             | -1.79          | 32.48          | 3           | Horizontal | 320            | 2.89          | -       | 19.73         | 27.65      | 4.83       | -          |
| PK   | 2.4794G      | 105.39            | Inf               | -Inf           | 32.46          | 3           | Horizontal | 320            | 2.89          | -       | 72.93         | 27.64      | 4.82       | -          |
| PK   | 2.4835G      | 60.80             | 74.00             | -13.20         | 32.48          | 3           | Horizontal | 320            | 2.89          | -       | 28.32         | 27.65      | 4.83       | -          |

# BT-LE(2Mbps)

## 2480MHz\_TX

05/09/2019

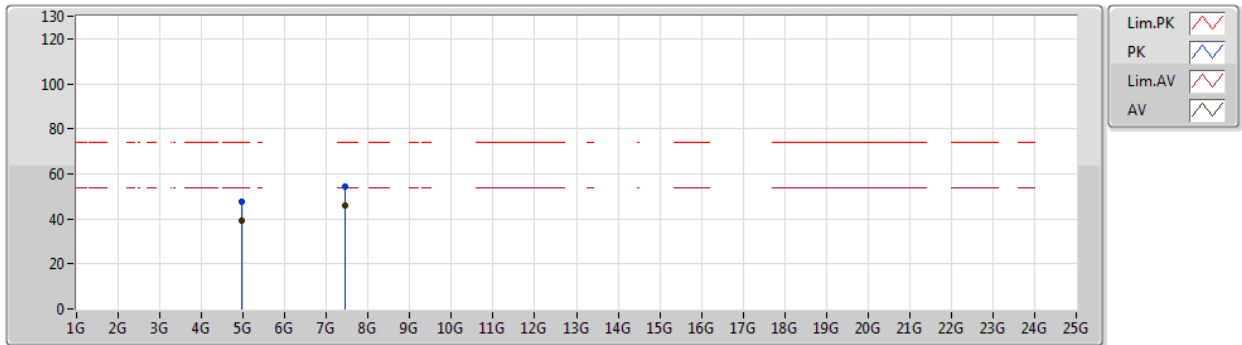


| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|-----------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.95881G     | 39.11             | 54.00             | -14.89         | 4.02           | 3           | Vertical  | 208            | 1.31          | -       | 35.09         | 31.63      | 6.83       | 34.44      |
| AV   | 7.43865G     | 45.85             | 54.00             | -8.15          | 10.24          | 3           | Vertical  | 326            | 3.00          | -       | 35.61         | 36.34      | 8.68       | 34.78      |
| PK   | 4.95898G     | 47.42             | 74.00             | -26.58         | 4.02           | 3           | Vertical  | 208            | 1.31          | -       | 43.40         | 31.63      | 6.83       | 34.44      |
| PK   | 7.43822G     | 54.37             | 74.00             | -19.63         | 10.24          | 3           | Vertical  | 326            | 3.00          | -       | 44.13         | 36.34      | 8.68       | 34.78      |

# BT-LE(2Mbps)

## 2480MHz\_TX

05/09/2019

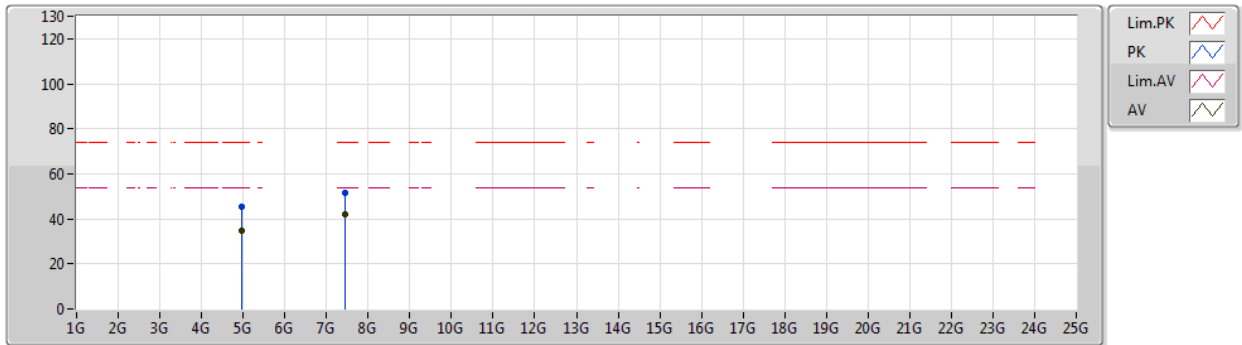

| Type | Freq<br>(Hz) | Level<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Factor<br>(dB) | Dist<br>(m) | Condition  | Azimuth<br>(°) | Height<br>(m) | Comment | Raw<br>(dBuV) | AF<br>(dB) | CL<br>(dB) | PA<br>(dB) |
|------|--------------|-------------------|-------------------|----------------|----------------|-------------|------------|----------------|---------------|---------|---------------|------------|------------|------------|
| AV   | 4.95888G     | 34.78             | 54.00             | -19.22         | 4.02           | 3           | Horizontal | 37             | 1.05          | -       | 30.76         | 31.63      | 6.83       | 34.44      |
| AV   | 7.4385G      | 41.86             | 54.00             | -12.14         | 10.24          | 3           | Horizontal | 0              | 1.32          | -       | 31.62         | 36.34      | 8.68       | 34.78      |
| PK   | 4.95882G     | 45.16             | 74.00             | -28.84         | 4.02           | 3           | Horizontal | 37             | 1.05          | -       | 41.14         | 31.63      | 6.83       | 34.44      |
| PK   | 7.43919G     | 51.47             | 74.00             | -22.53         | 10.24          | 3           | Horizontal | 0              | 1.32          | -       | 41.23         | 36.34      | 8.68       | 34.78      |