



REPORT No.: SZ23010190W03

TEST REPORT

APPLICANT : LogicMark, Inc.

PRODUCT NAME : Connected Personal Emergency
Response System (PERS) device.

MODEL NAME : 60911, 60711

BRAND NAME : LogicMark

FCC ID : TYD-FA60911

STANDARD(S) : 47 CFR Part 15 Subpart C

RECEIPT DATE : 2023-02-02

TEST DATE : 2023-02-07 to 2023-02-19

ISSUE DATE : 2023-07-21



Edited by:

Zeng Xiaoying
Zeng Xiaoying (Rapporteur)

Approved by:

Shen Junsheng
Shen Junsheng (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., Ltd., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB

Shenzhen Morlab Communications Technology Co., Ltd.
FL.1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen, Guangdong Province, P. R. China

Tel: 86-755-36698555

Http://www.morlab.cn

Fax: 86-755-36698525

E-mail: service@morlab.cn





DIRECTORY

1. Summary of Test Result	4
1.1. Testing Applied Standards	5
1.2. Test Equipment List	6
1.3. Measurement Uncertainty	8
1.4. Testing Laboratory	8
2. General Description	9
2.1. Information of Applicant and Manufacturer	9
2.2. Information of EUT	9
2.3. Channel List of EUT	11
2.4. Test Configuration of EUT	12
2.5. Test Conditions	12
2.6. Test Setup Layout Diagram	13
3. Test Results	16
3.1. Antenna Requirement	16
3.2. Duty Cycle of Test Signal	17
3.3. Maximum Peak and Average Conducted Output Power	18
3.4. 6 dB Bandwidth	19
3.5. Conducted Spurious Emissions and Band Edge	20
3.6. Power Spectral Density	21
3.7. Conducted Emission	22
3.8. Restricted Frequency Bands	23
3.9. Radiated Emission	24
Annex A Test Data and Result	26



REPORT No.: SZ23010190W03

Change History		
Version	Date	Reason for change
1.0	2023-07-21	First edition

1. Summary of Test Result

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination /Remark
1	15.203	Antenna Requirement	N/A	N/A	PASS	No deviation
2	N/A	Duty Cycle of Test Signal	Feb. 12, 2023	He Yuyang	PASS	No deviation
3	15.247(b)	Maximum Peak Conducted Output Power	Feb. 12, 2023	He Yuyang	PASS	No deviation
4	15.247(b)	Maximum Average Conducted Output Power	Feb. 12, 2023	He Yuyang	PASS	No deviation
5	15.247(a)	Bandwidth	Feb. 10, 2023	He Yuyang	PASS	No deviation
6	15.247(d)	Conducted Spurious Emission and Band Edge	Feb. 12, 2023	He Yuyang	PASS	No deviation
7	15.247(e)	Power Spectral Density	Feb. 12, 2023	He Yuyang	PASS	No deviation
8	15.207	Conducted Emission	Feb. 19, 2023	Wu Zhaoling	PASS	No deviation
9	15.247(d)	Restricted Frequency Bands	Feb. 18, 2023	Gao Jianrou	PASS	No deviation
10	15.209, 15.247(d)	Radiated Emission	Feb. 18, 2023	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v05r02.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

Note 3: When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



1.1. Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C Radio Frequency Devices



1.2. Test Equipment List

1.2.1 Conducted Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
EXA Signal Analyzer	MY53470836	N9010A	Agilent	2023.02.27	2024.02.26
Power Sensor	MY54180008	U2021XA	Agilent	2022.10.11	2023.10.10
Attenuator	MTJ6004-20	VAT-10+	MTJ Cooperation	N/A	N/A
RF Cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
Coaxial Cable	CB02	RF02	Morlab	N/A	N/A
SMA Connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.2.2 Conducted Emission Test Equipments

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY56400093	N9038A	KEYSIGHT	2023.02.09	2024.02.08
LISN	8127449	NSLK 8127	Schwarzbeck	2023.02.21	2024.02.20
Pulse Limiter (10dB)	VTSD 9561 F-B #206	VTSD 9561-F	Schwarzbeck	2022.07.06	2023.07.05
RF Coaxial Cable (DC-100MHz)	BNC	MRE04	Qualwave	2022.07.08	2023.07.07

1.2.3 List of Software Used

Description	Manufacturer	Software Version
Test System	MaiWei	2.0.0.0
Morlab EMCR V1.2	Morlab	V1.0
TS+ -[JS32-CE]	Tonscend	V2.5.0.0

**1.2.4 Radiated Test Equipments**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Receiver	MY54130016	N9038A	Agilent	2022.07.06	2023.07.05
Test Antenna - Bi-Log	9163-519	VULB 9163	Schwarzbeck	2022.05.25	2025.05.24
Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2022.02.11	2025.02.10
Test Antenna – Horn	01774	BBHA 9120D	Schwarzbeck	2022.07.13	2025.07.12
Test Antenna – Horn	BBHA9170 #773	BBHA9170	Schwarzbeck	2022.07.14	2025.07.13
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2022.07.08	2023.07.07
Preamplifier (18GHz-40GHz)	DS77209	DCLNA0118-40C-S	Decentest	2022.07.23	2023.07.22
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40-K K-0.5	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-40GHz)	22290046	QA360-40-K KF-2	Qualwave	2022.07.08	2023.07.07
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18-N N-5	Qualwave	2022.07.08	2023.07.07
Notch Filter	N/A	WRCG-2400-2483.5-60SS	Wainwright	2022.07.08	2023.07.07
Anechoic Chamber	N/A	9m*6m*6m	CRT	2022.05.10	2025.05.09



1.3. Measurement Uncertainty

Test Items	Uncertainty	Remark
Peak Output Power	$\pm 2.22\text{dB}$	Confidence levels of 95%
Power Spectral Density	$\pm 2.22\text{dB}$	Confidence levels of 95%
Bandwidth	$\pm 5\%$	Confidence levels of 95%
Conducted Spurious Emission	$\pm 2.77\text{dB}$	Confidence levels of 95%
Restricted Frequency Bands	$\pm 5\%$	Confidence levels of 95%
Radiated Emission	$\pm 2.95\text{dB}$	Confidence levels of 95%
Conducted Emission	$\pm 2.44\text{dB}$	Confidence levels of 95%

1.4. Testing Laboratory

Laboratory Name	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone	+86 755 36698555
Facsimile	+86 755 36698525
FCC Designation Number	CN1192
FCC Test Firm Registration Number	226174



2. General Description

2.1. Information of Applicant and Manufacturer

Applicant	LogicMark, Inc.
Applicant Address	2801 Diode Lane, Louisville, KY 40299 United States
Manufacturer	Skymax Electronics Company Limited
Manufacturer Address	Rm. 9, 12/F, Grandtech Centre, 8 On Ping Street, Shatin, N.T., Hong kong

2.2. Information of EUT

Product Name:	Connected Personal Emergency Response System (PERS) device.	
Sample No.:	1#	
Hardware Version:	V1.0	
Software Version:	V1.0	
Modulation Technology:	DSSS, OFDM	
Modulation Type:	Refer to section1.3	
Operating Frequency Range:	802.11b/g/n (HT20): 2412MHz–2462MHz	
Antenna Type:	Dipole Antenna	
Antenna Gain:	2.39dBi	
Accessory Information:	Battery 1	
	Brand Name:	Wifi PERS_SD752540PE
	Model No.:	XDRDG218001
	Serial No.:	N/A
	Capacity:	1070mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
	Manufacturer:	ZHUHAI SUNDA TECHNOLOGY CO.,LTD



Accessory Information:	Battery 2	
	Brand Name:	Great Power
	Model No.:	GSP752540HV
	Serial No.:	N/A
	Capacity:	1000mAh
	Rated Voltage:	3.85V
	Charge Limit:	4.4V
	Manufacturer:	ZHUHAI GREAT POWER ENERGY CO., LTD.
	Adaptor	
	Brand Name:	N/A
	Model No.:	AS0601A-0501000USU
	Serial No.:	N/A
	Rated Output:	5V $\overline{\text{---}}$ 1A
	Rated Input:	100-240V $\sim$ 50/60Hz, 0.2A
	Manufacturer:	SHENZHEN FUSHIGANG TECHNOLOGY CO., LTD.

Note 1: According to the certificate holder, they declared that the models 60911 and 60711, only the models are different, they have the same hardware and software. In addition to the differences described above, the others are the same. No other changes, all RF parameters remain the same as before. The main measuring model is 60911, only the results for 60911 were recorded in this report.

Note 2: We use the dedicated software to control the EUT continuous transmission.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



2.3.Channel List of EUT

Test Mode	Channel	Frequency (MHz)	Channel	Frequency (MHz)
802.11b/g/n (HT20)	1	2412	8	2447
	2	2417	9	2452
	3	2422	10	2457
	4	2427	11	2462
	5	2432		
	6	2437		
	7	2442		

Note 1: The black bold channels were selected for test.

2.4. Test Configuration of EUT

2.4.1. Modulation Type and Data Rate of EUT

Modulation technology	Modulation Type	Data Rate (Mbps) ^{Note1}
DSSS (802.11b)	DBPSK	1
	DQPSK	2
	CCK	5.5/ 11
OFDM (802.11g)	BPSK	6 / 9
	QPSK	12 / 18
	16QAM	24 / 36
	64QAM	48 / 54
OFDM (802.11n (HT20))	BPSK	6.5
	QPSK	13/19.5
	16QAM	26/39
	64QAM	52/58.5/65

Note1: The worst-case mode (bold face) in all data rates has been determined during the pre-scan, only the test data of the worst-case were recorded in this report.

Note2: The RF signal transmission of EUT is controlled by the build-in engineering mode which is provided by the manufacturer. The recorded power setting value is the maximum that the engineering mode has configuration during testing.


2.5. Test Conditions

Temperature (°C)	15-35
Relative Humidity (%)	30-60
Atmospheric Pressure (kPa)	86-106


2.6. Test Setup Layout Diagram

2.6.1. Conducted Measurement


Power item

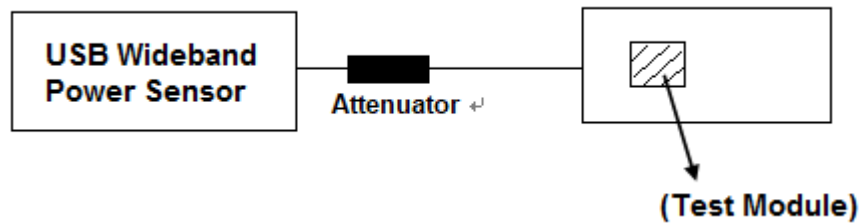

Other items

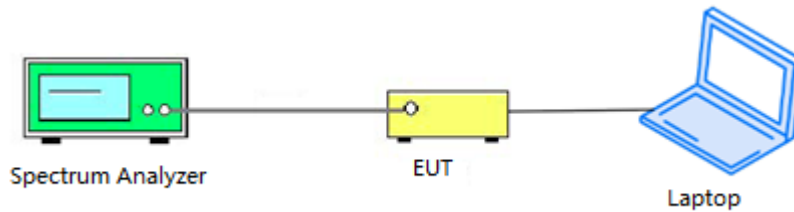


2.6.2. Conducted Emission Measurement

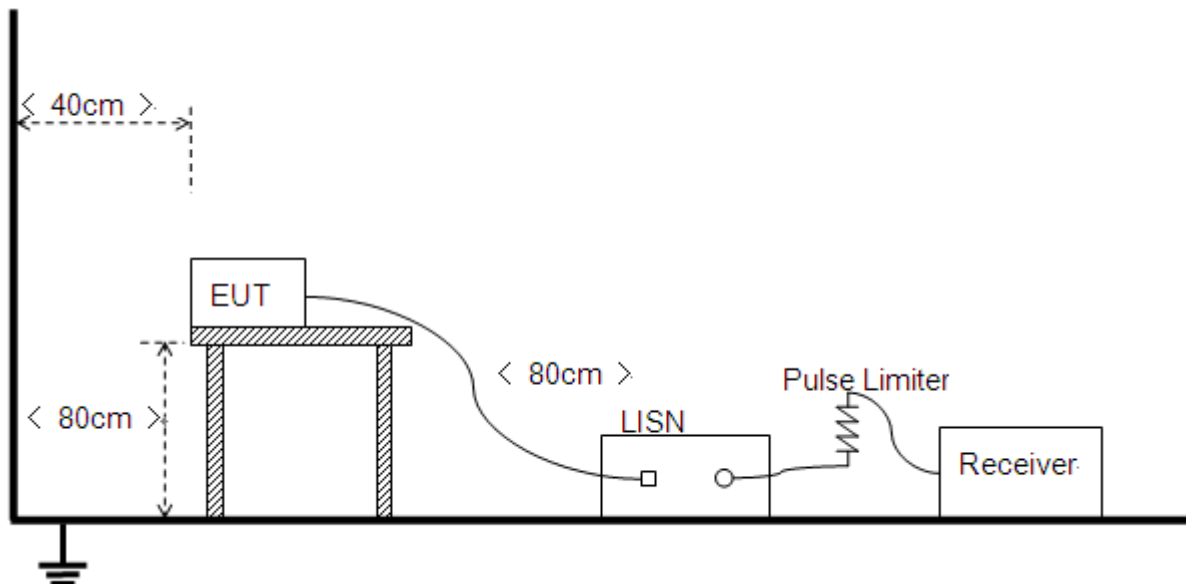


2.6.3.Radiation Measurement


1) For radiated emissions from 9kHz to 30MHz

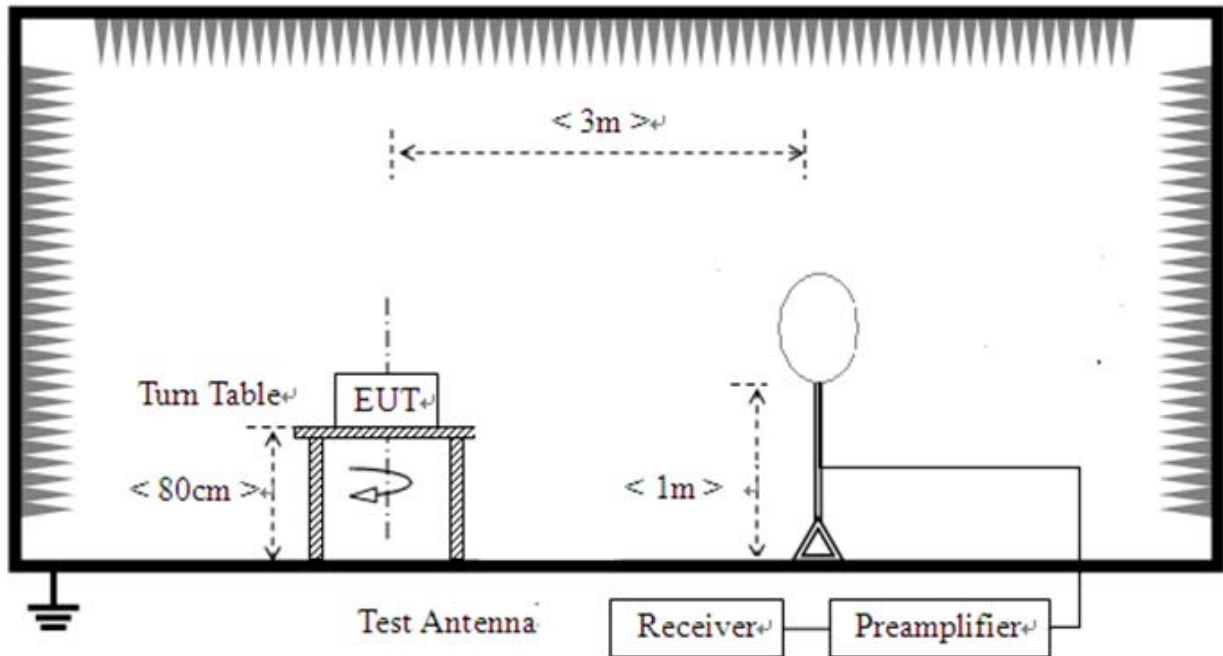

2) For radiated emissions from 30MHz to 1GHz

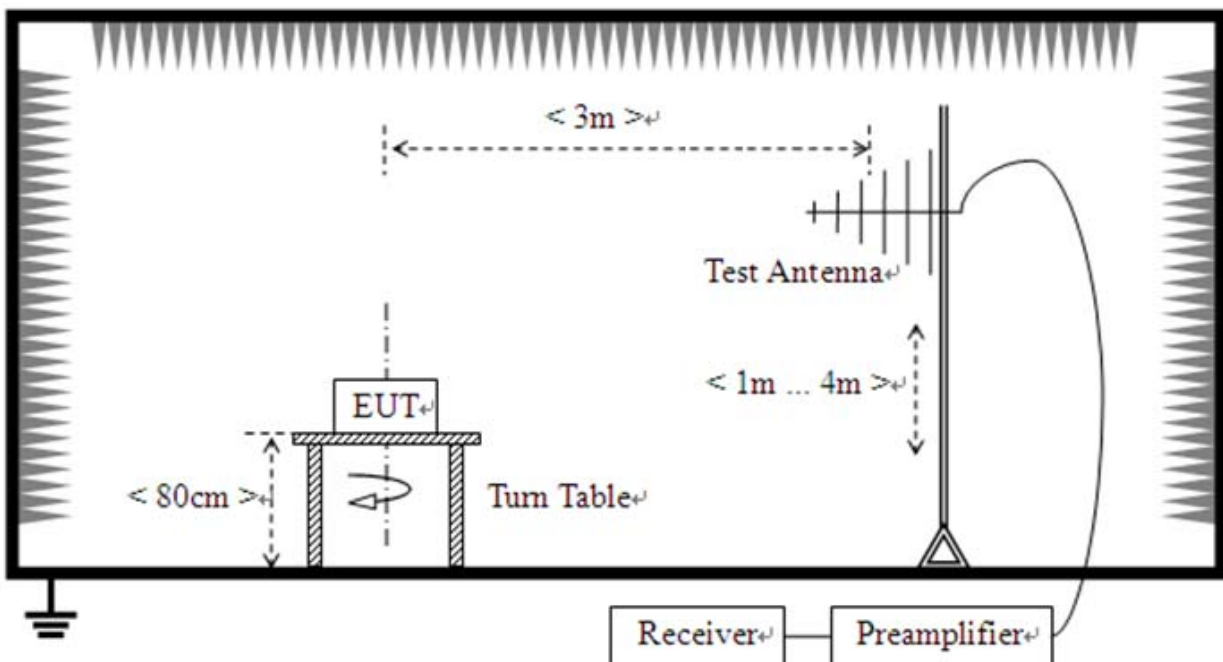

3) For radiated emissions above 1GHz

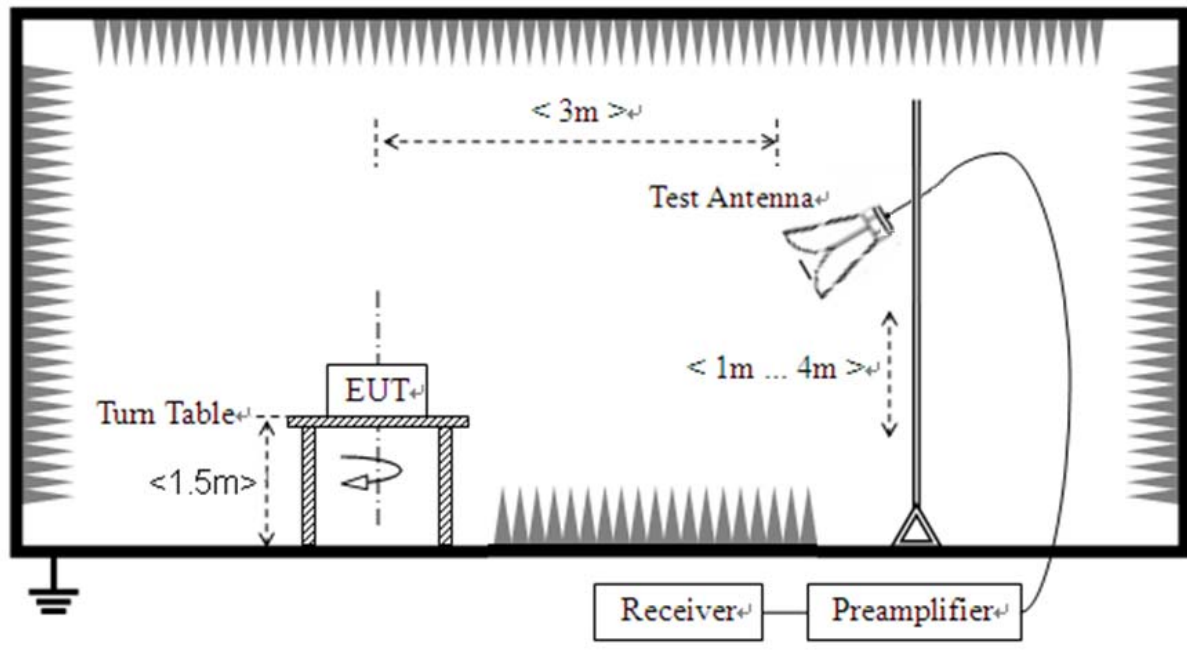



3. Test Results

3.1. Antenna Requirement

3.1.1. Requirement

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.1.2. Test Result

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

3.2. Duty Cycle of Test Signal

3.2.1. Requirement

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be used to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data are being acquired (i.e., no transmitter OFF-time is to be considered).

When continuous transmission cannot be achieved and sweep triggering/signal gating cannot be implemented, alternative procedures are provided that can be used to measure the average power; however, they will require an additional measurement of the transmitter duty cycle (D). Within this sub clause, the duty cycle refers to the fraction of time over which the transmitter is ON and is transmitting at its maximum power control level. The duty cycle is considered to be constant if variations are less than $\pm 2\%$; otherwise, the duty cycle is considered to be non constant.

3.2.2. Test Result

Refer to Annex A.1 in this report.



3.3. Maximum Peak and Average Conducted Output Power

3.3.1. Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum conducted output power of the intentional radiator shall not exceed 1 Watt.

3.3.2. Test Procedures

The EUT (Equipment under the test) which is coupled to the USB Wideband Power Sensor; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

3.3.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.3.4. Test Result

Refer to Annex A.2 and A.3 in this report.



3.4.6 dB Bandwidth

3.4.1.Requirement

According to FCC section 15.247(a) (2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

3.4.1.Test Procedures

KDB 558074 Section 8.2 was used in order to prove compliance.

3.4.2.Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.4.3.Test Result

Refer to Annex A.4 in this report.



3.5. Conducted Spurious Emissions and Band Edge

3.5.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

3.5.2. Test Procedures

KDB 558074 Section 8.5 and 8.7 was used in order to prove compliance.

3.5.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.5.4. Test Result

Refer to Annex A.5 and A.6 in this report.

3.6. Power Spectral Density

3.6.1. Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2. Test Procedures

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency
- b) Set span to 1.5 times DTS
- c) Set RBW to 30kHz
- d) Set VBW to 100kHz
- e) Detector = peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum amplitude level and recorded as PD
- j) Use below formula to calculate the Conducted PSD value that at specified RBW:

Conducted PSD = PD - 10lg(30k/3k)

3.6.3. Test Setup Layout

Refer to chapter 2.6.1 in this report.

3.6.4. Test Result

Refer to Annex A.7 in this report.

3.7. Conducted Emission

3.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.7.2. Test Procedures

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

3.7.3. Test Setup Layout

Refer to chapter 2.6.2 in this report.

3.7.4. Test Result

Refer to Annex A.8 in this report.

3.8. Restricted Frequency Bands

3.8.1. Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

3.8.2. Test Procedures

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 kHz for $f < 1\text{GHz}$

VBW = 3 MHz

Sweep = auto

Detector function = peak/average

Trace = max hold

Allow the trace to stabilize

3.8.3. Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.8.4. Test Result

Refer to Annex A.9 in this report.



3.9. Radiated Emission

3.9.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note1: For above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.

Note2: For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK). In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table).



3.9.2.Test Procedures

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 30MHz, the emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9kHz-90 kHz, 110kHz-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1GHz the resolution bandwidth is set to 1MHz, the video band width is set to 3MHz for peak measurements and as applicable for average measurements.

The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions. For measurements above 1 GHz, keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

3.9.3.Test Setup Layout

Refer to chapter 2.6.3 in this report.

3.9.4.Test Result

Refer to Annex A.10 in this report.



Annex A Test Data and Result


A.1. Duty Cycle of Test Signal

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	b	2412	Ant1	97.86	0.09	0.12
NVNT	b	2437	Ant1	97.51	0.11	0.12
NVNT	b	2462	Ant1	97.51	0.11	0.12
NVNT	g	2412	Ant1	87.18	0.6	0.74
NVNT	g	2437	Ant1	87.82	0.56	0.73
NVNT	g	2462	Ant1	87.18	0.60	0.74
NVNT	n20	2412	Ant1	87.07	0.60	0.78
NVNT	n20	2437	Ant1	86.39	0.64	0.79
NVNT	n20	2462	Ant1	87.07	0.60	0.78




Test Graphs

Duty Cycle NVNT b 2412MHz Ant1

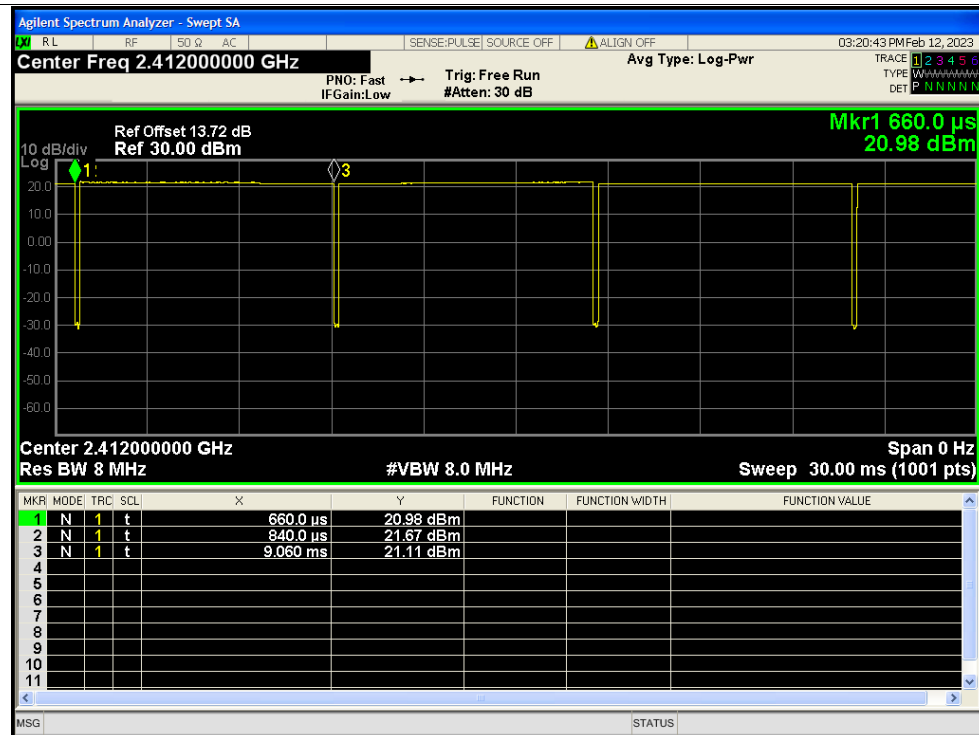


Duty Cycle NVNT b 2437MHz Ant1

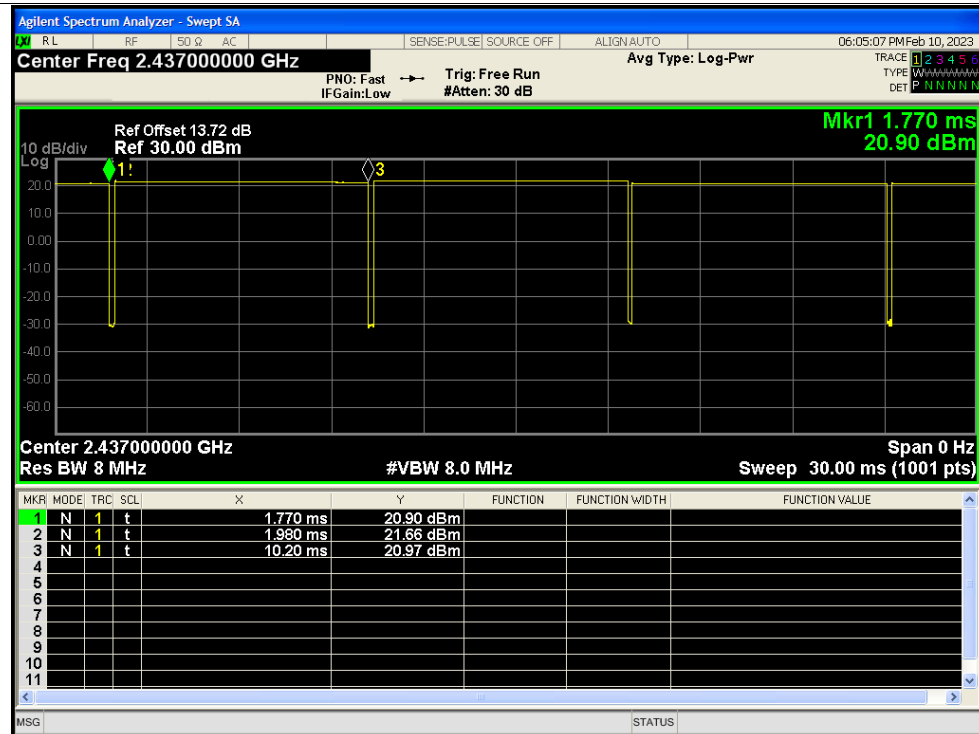




Duty Cycle NVNT b 2462MHz Ant1

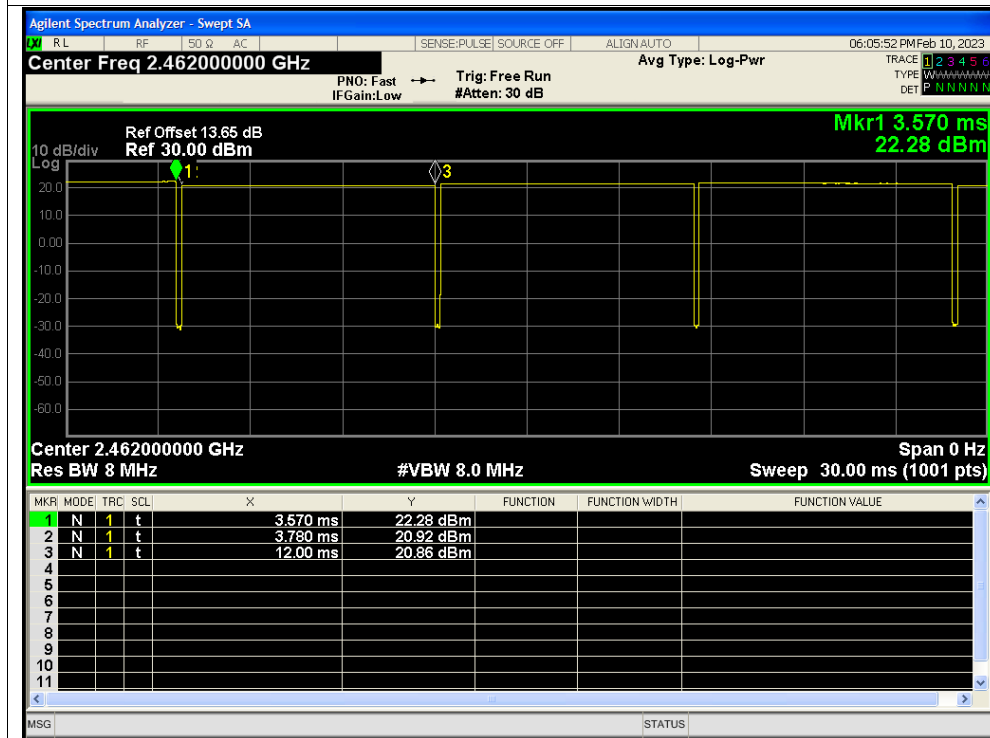


Duty Cycle NVNT g 2412MHz Ant1

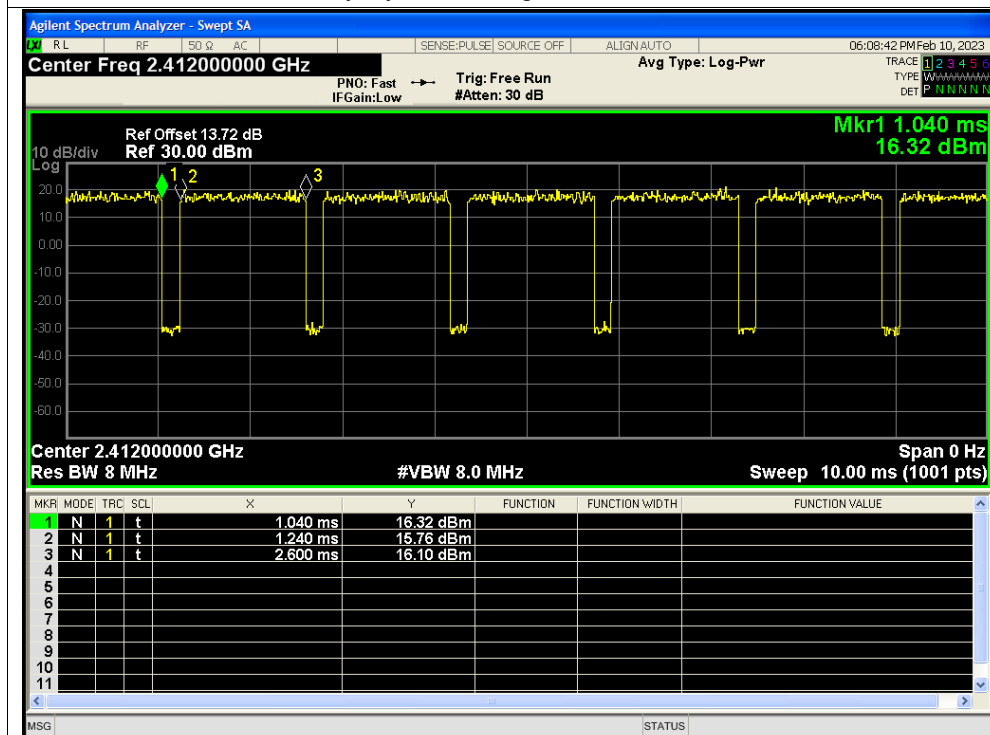




Duty Cycle NVNT g 2437MHz Ant1

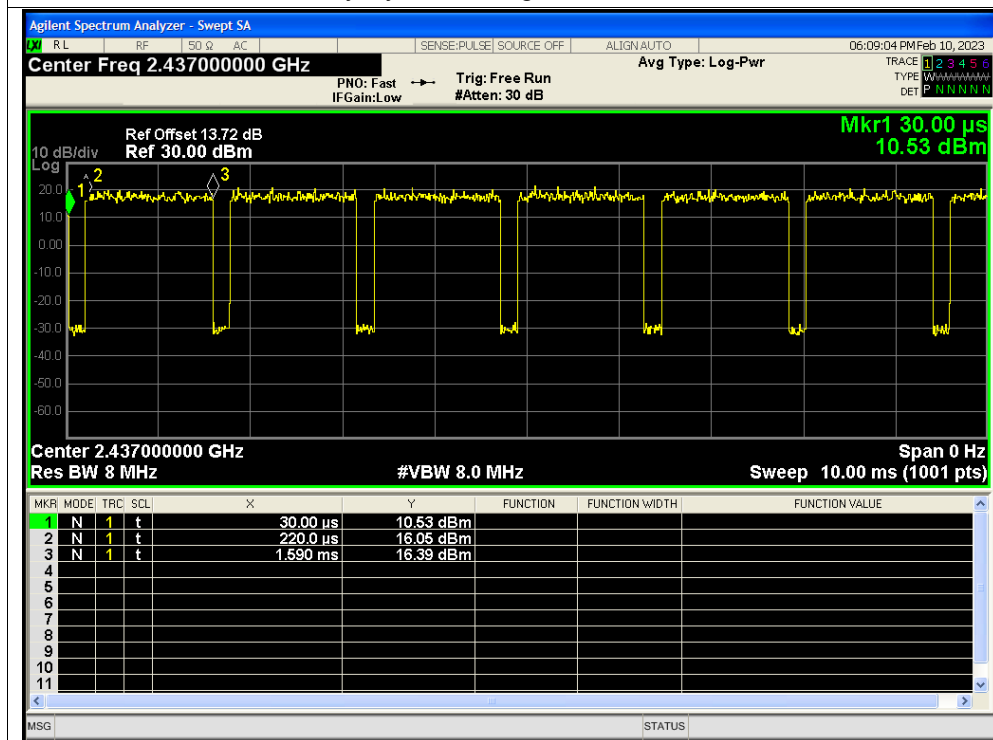


Duty Cycle NVNT g 2462MHz Ant1

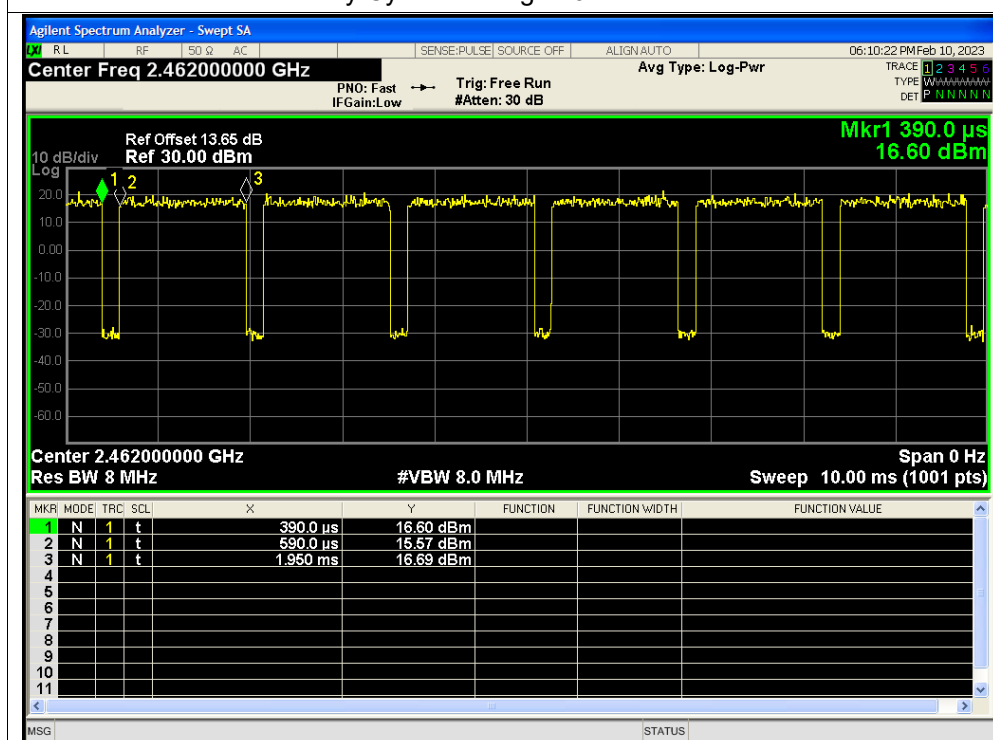





Duty Cycle NVNT n20 2412MHz Ant1

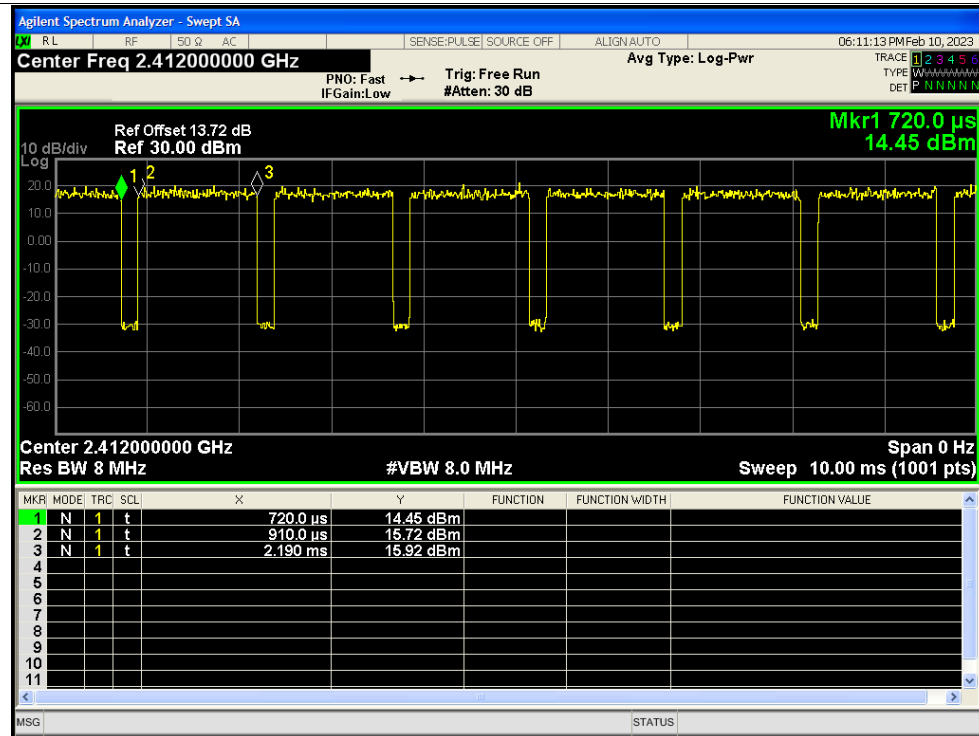

Duty Cycle NVNT n20 2437MHz Ant1

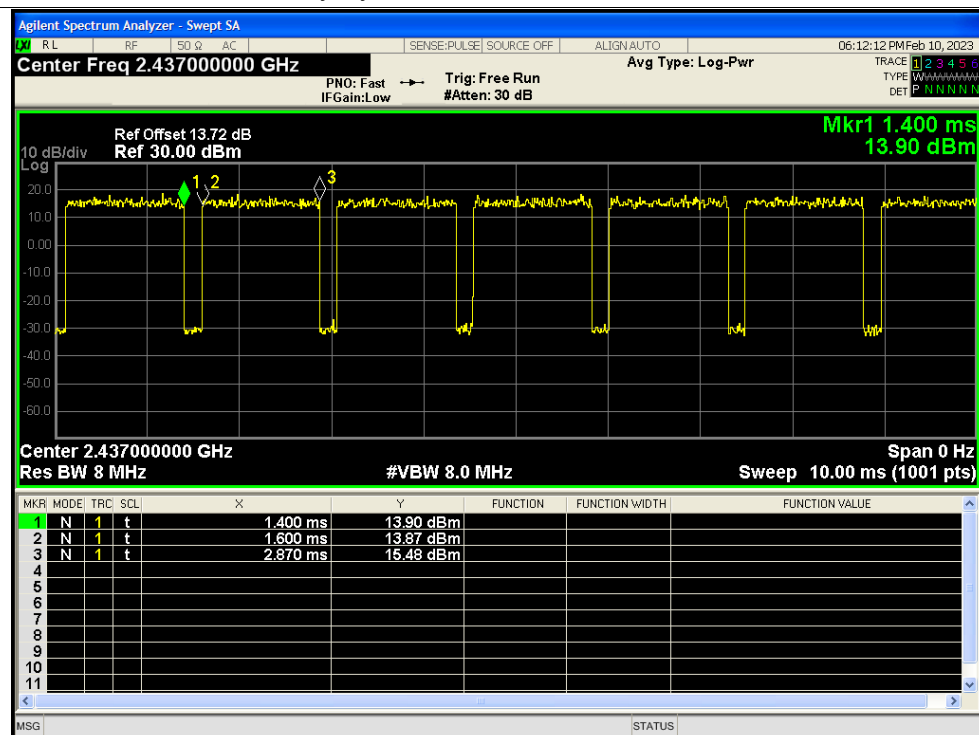

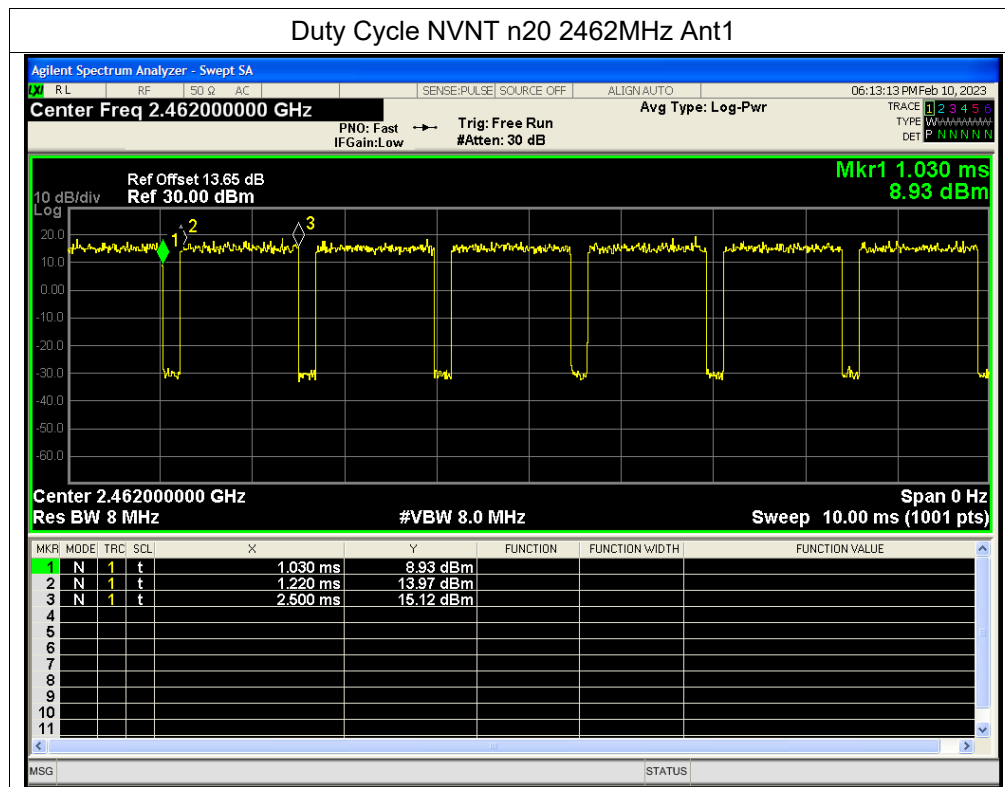


**A.2. Maximum Peak Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	19.38	0	19.38	30	Pass
NVNT	b	2437	Ant1	19.40	0	19.40	30	Pass
NVNT	b	2462	Ant1	19.19	0	19.19	30	Pass
NVNT	g	2412	Ant1	20.93	0	20.93	30	Pass
NVNT	g	2437	Ant1	21.06	0	21.06	30	Pass
NVNT	g	2462	Ant1	21.07	0	21.07	30	Pass
NVNT	n20	2412	Ant1	18.92	0	18.92	30	Pass
NVNT	n20	2437	Ant1	19.37	0	19.37	30	Pass
NVNT	n20	2462	Ant1	19.11	0	19.11	30	Pass




Test Graphs

Peak Power NVNT b 2412MHz Ant1

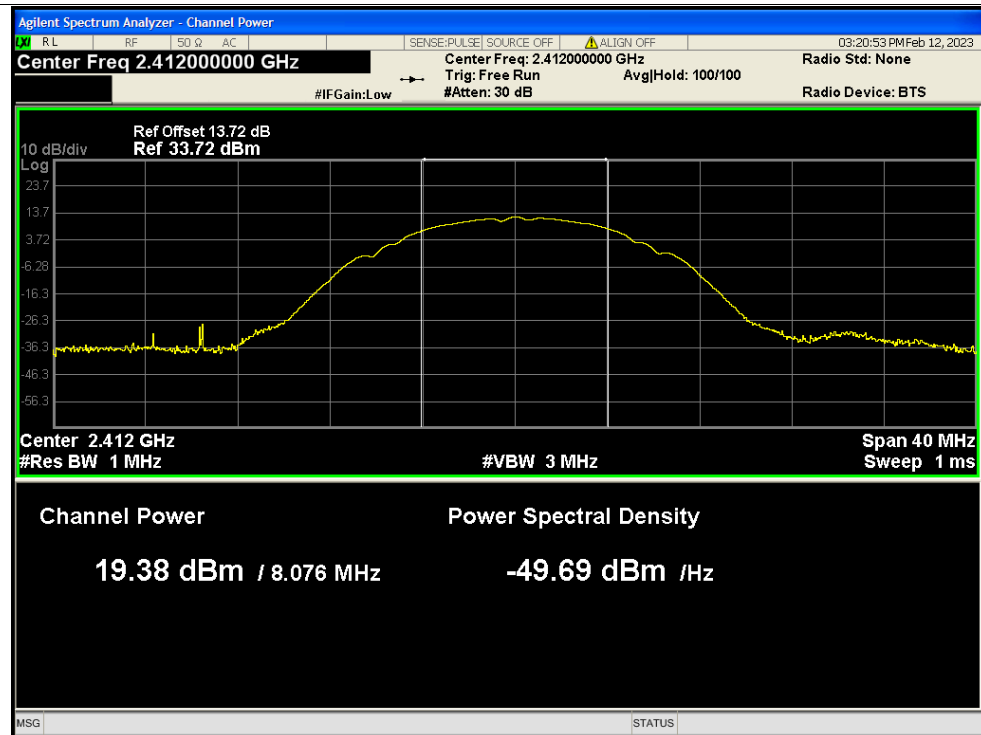


Peak Power NVNT b 2437MHz Ant1

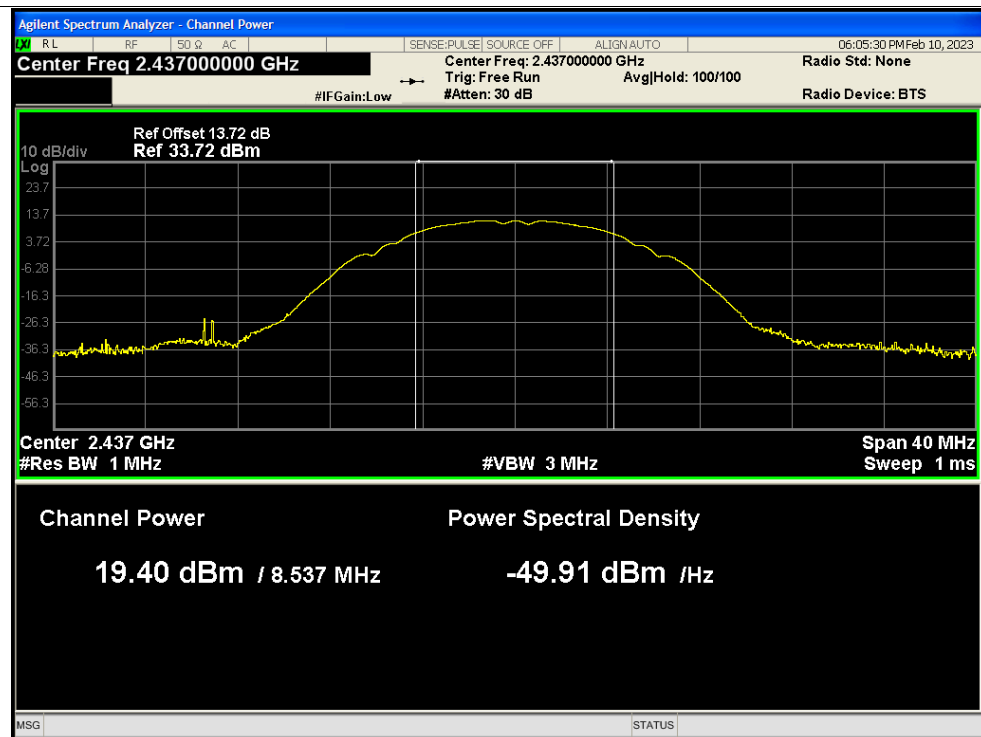




Peak Power NVNT b 2462MHz Ant1

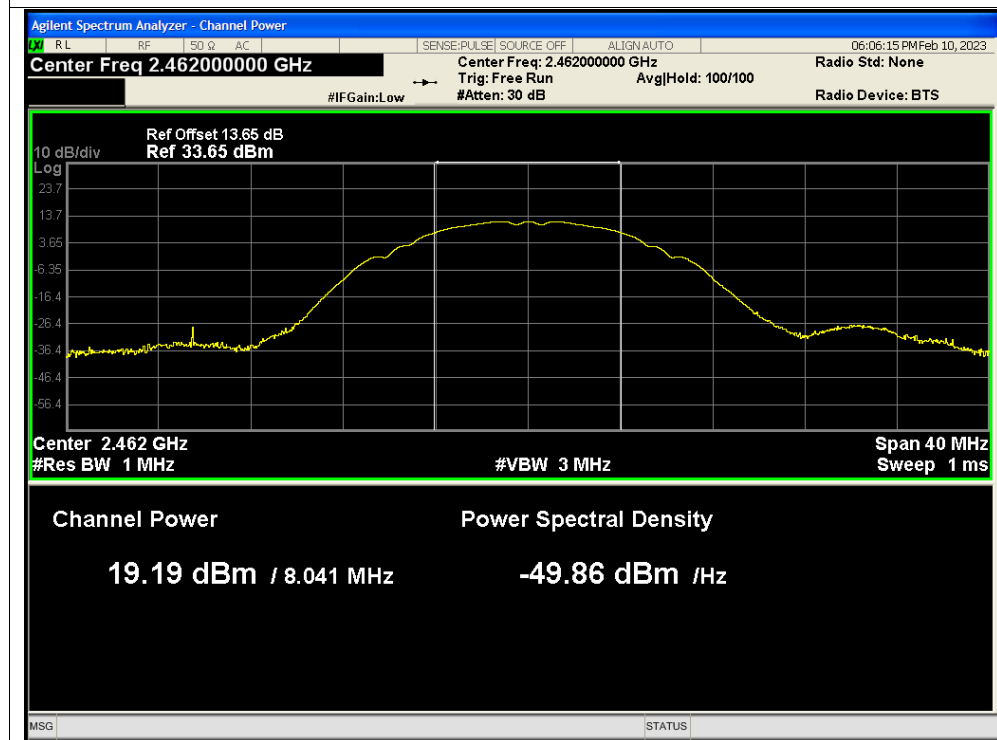


Peak Power NVNT g 2412MHz Ant1

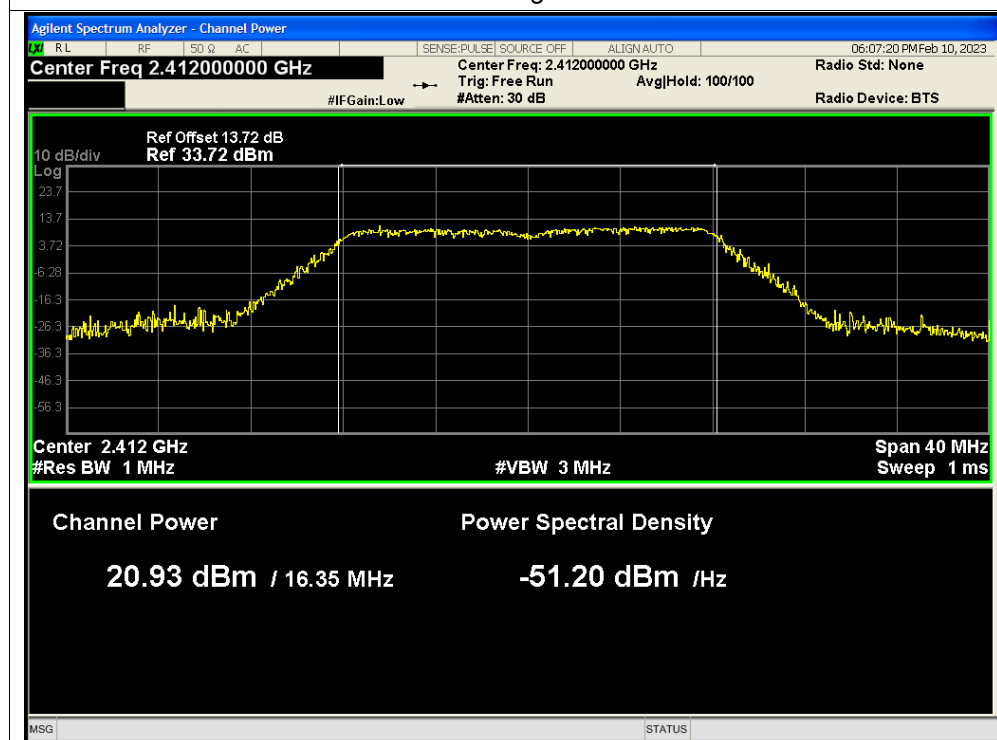




Peak Power NVNT g 2437MHz Ant1

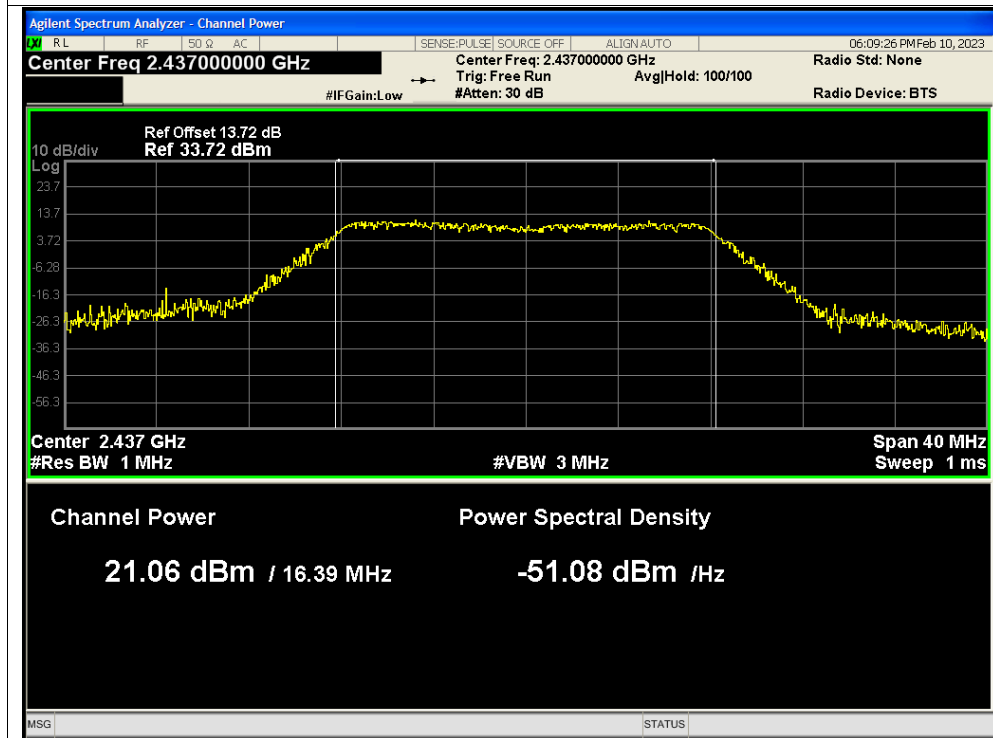


Peak Power NVNT g 2462MHz Ant1

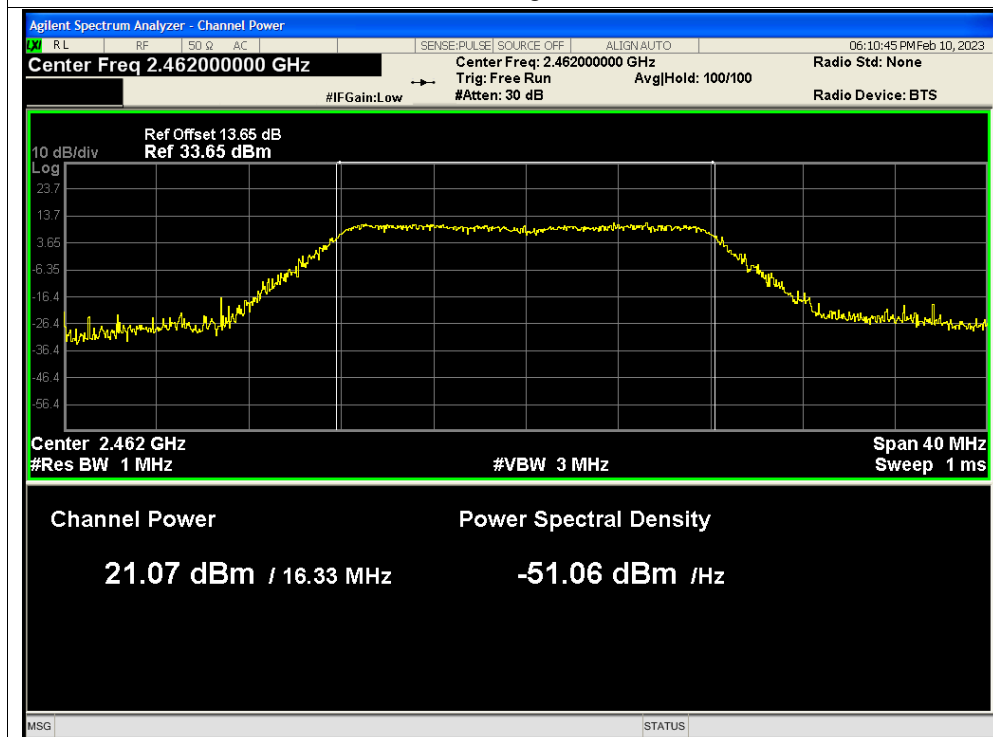





Peak Power NVNT n20 2412MHz Ant1

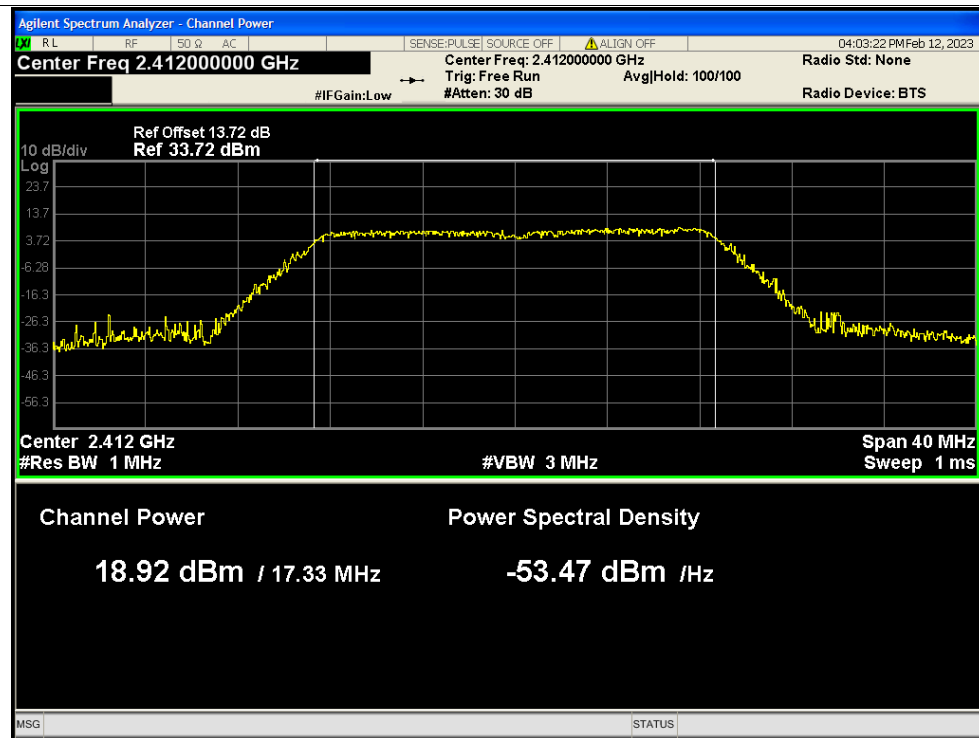

Peak Power NVNT n20 2437MHz Ant1

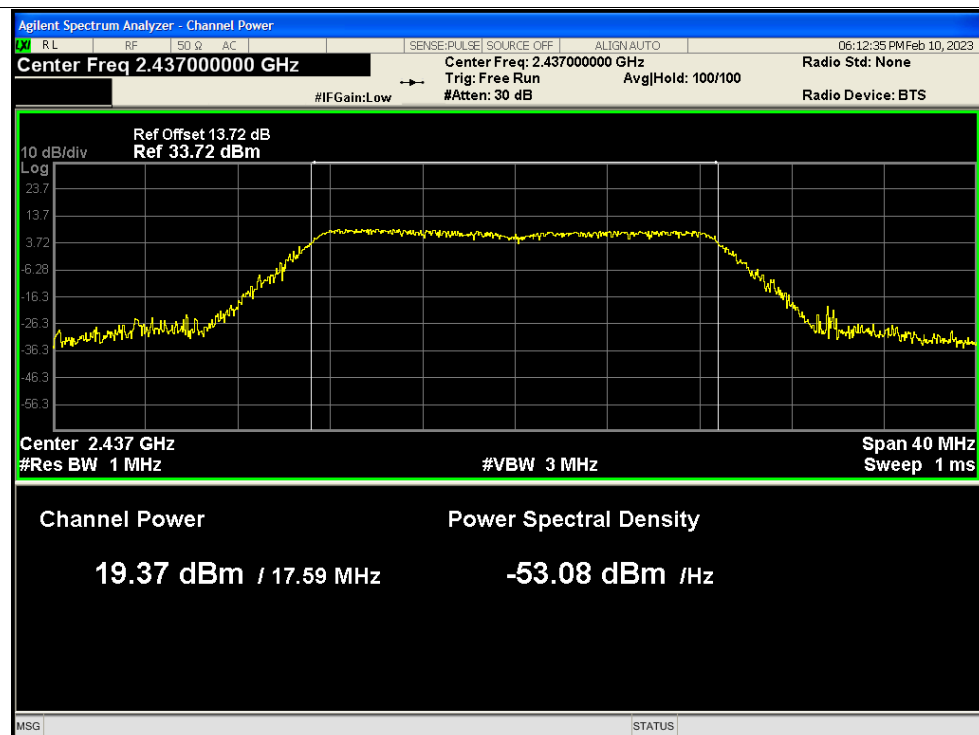

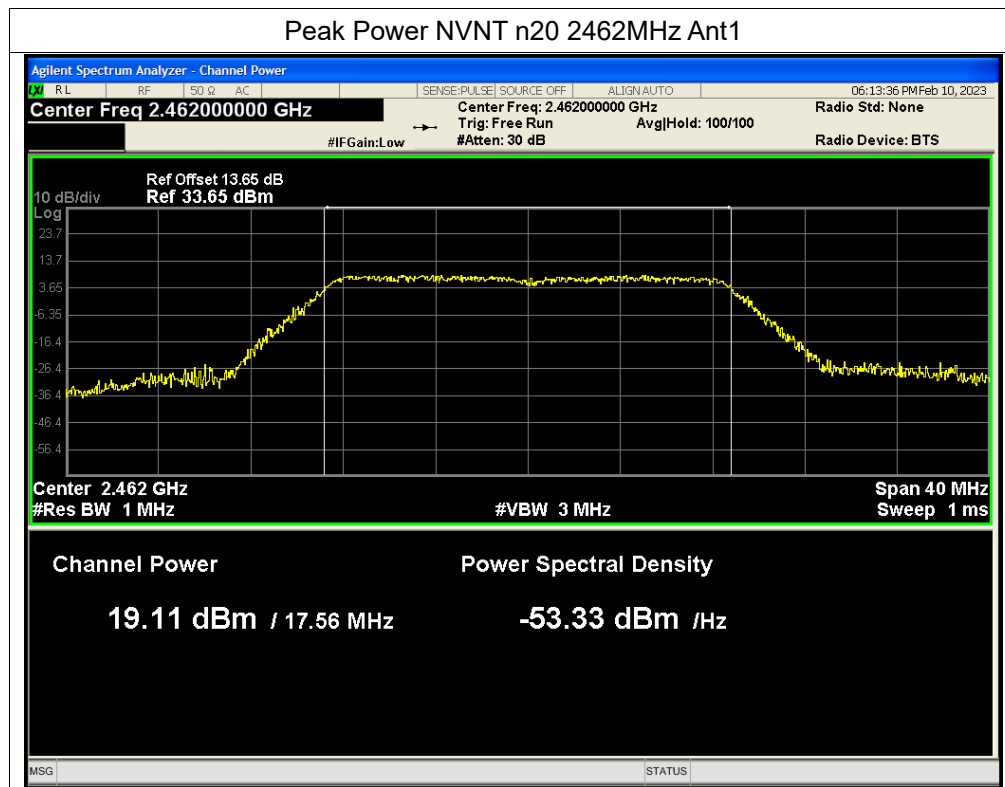


**A.3. Maximum Average Conducted Output Power**

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	b	2412	Ant1	16.90	0.09	16.99	30	Pass
NVNT	b	2437	Ant1	16.87	0.11	16.98	30	Pass
NVNT	b	2462	Ant1	16.78	0.11	16.89	30	Pass
NVNT	g	2412	Ant1	13.18	0.63	13.81	30	Pass
NVNT	g	2437	Ant1	13.35	0.56	13.91	30	Pass
NVNT	g	2462	Ant1	13.21	0.60	13.81	30	Pass
NVNT	n20	2412	Ant1	11.20	0.60	11.80	30	Pass
NVNT	n20	2437	Ant1	11.49	0.64	12.13	30	Pass
NVNT	n20	2462	Ant1	11.25	0.60	11.85	30	Pass




Test Graphs

Average Power NVNT b 2412MHz Ant1

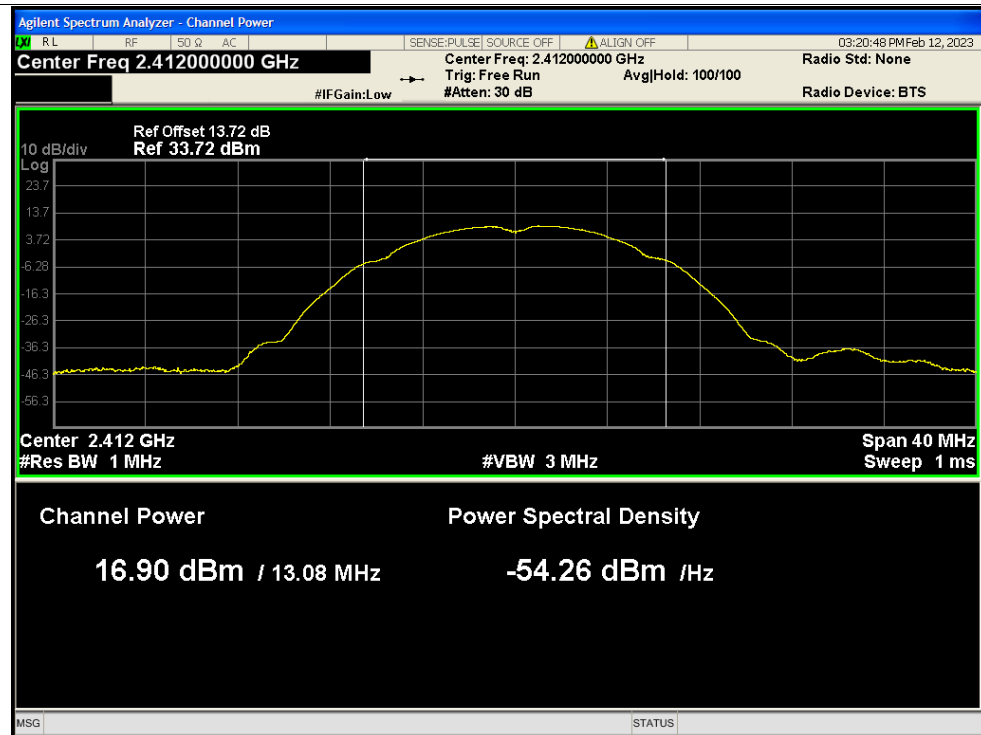


Average Power NVNT b 2437MHz Ant1

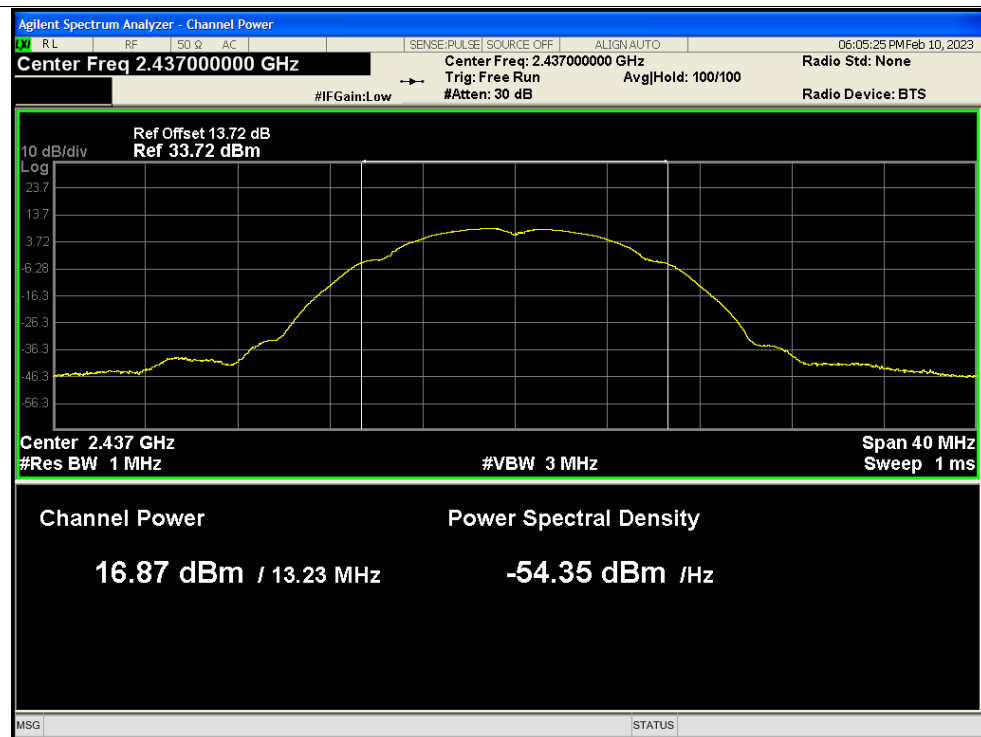




Average Power NVNT b 2462MHz Ant1

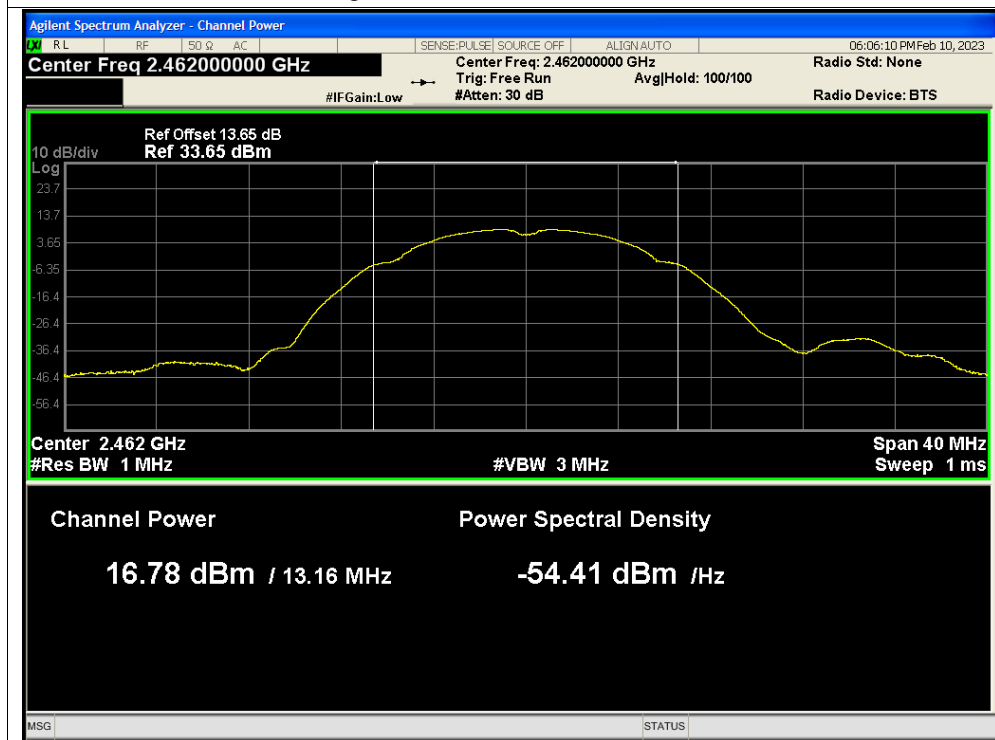


Average Power NVNT g 2412MHz Ant1

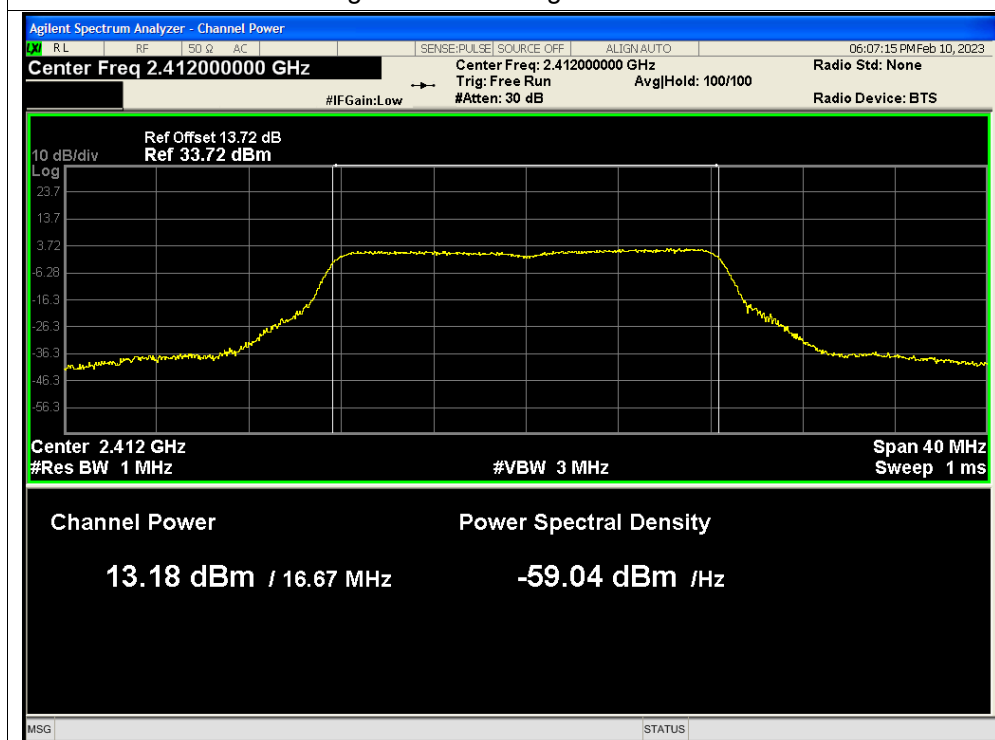




Average Power NVNT g 2437MHz Ant1

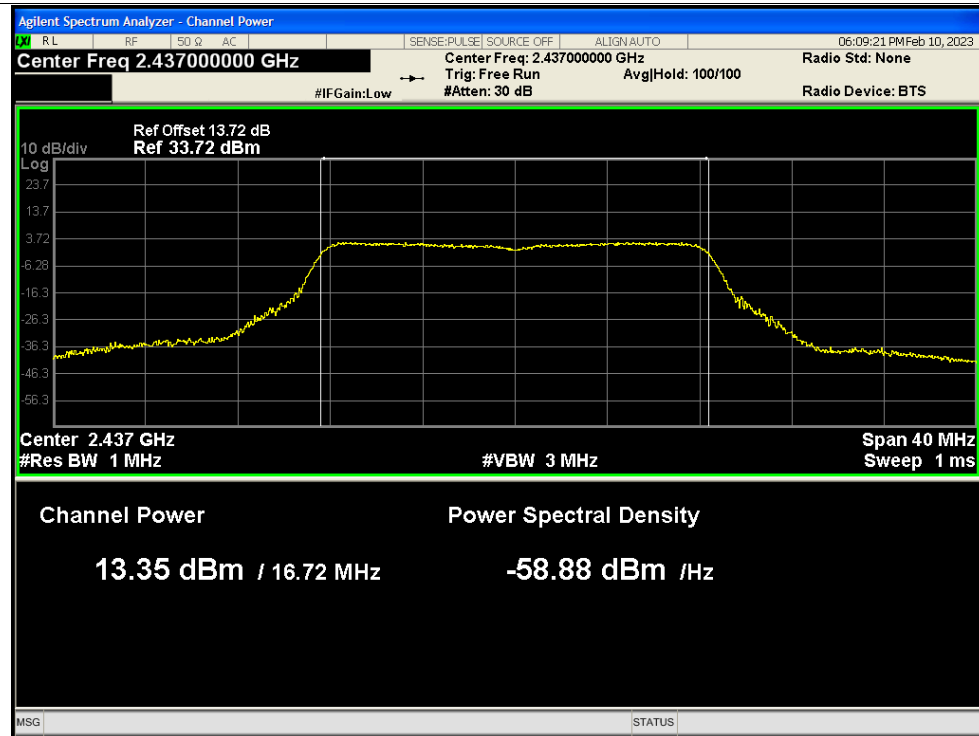


Average Power NVNT g 2462MHz Ant1

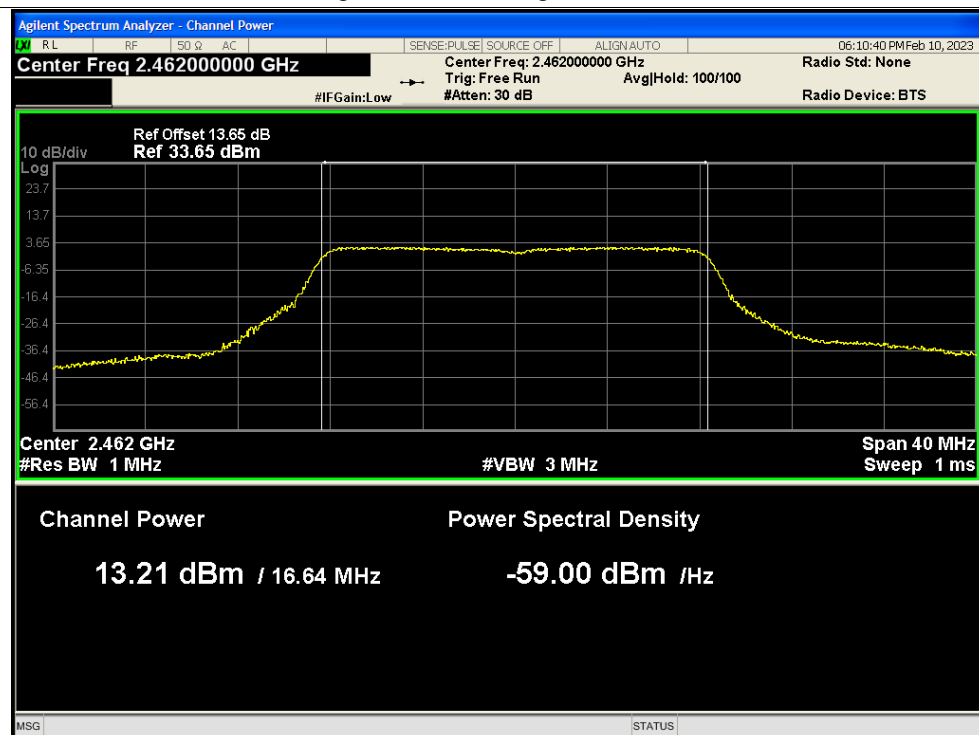





Average Power NVNT n20 2412MHz Ant1

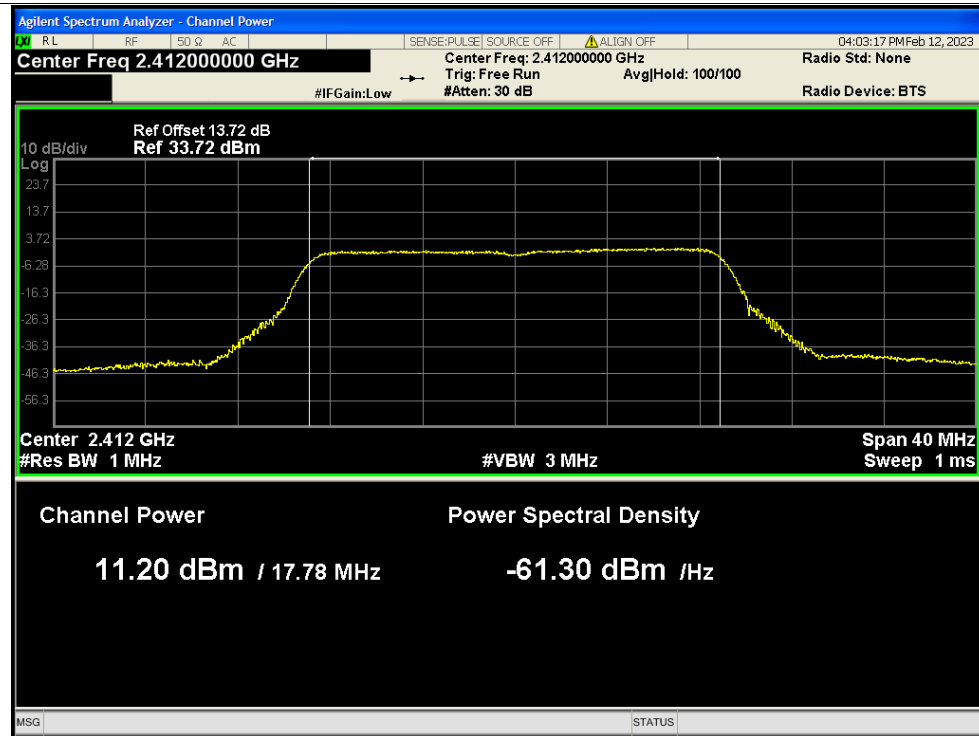

Average Power NVNT n20 2437MHz Ant1

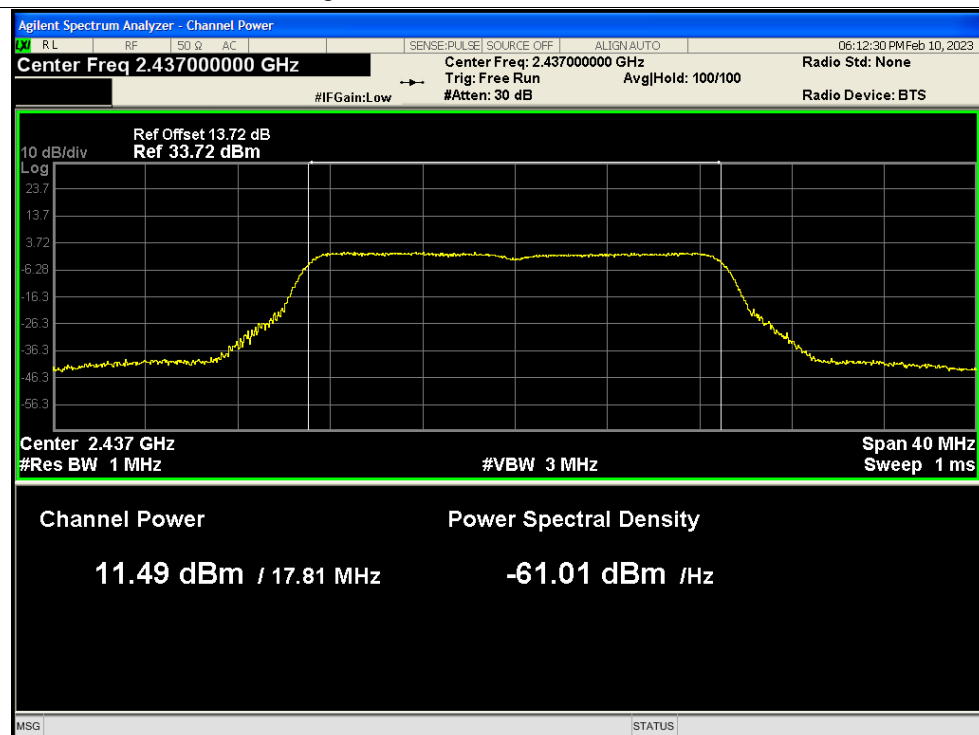

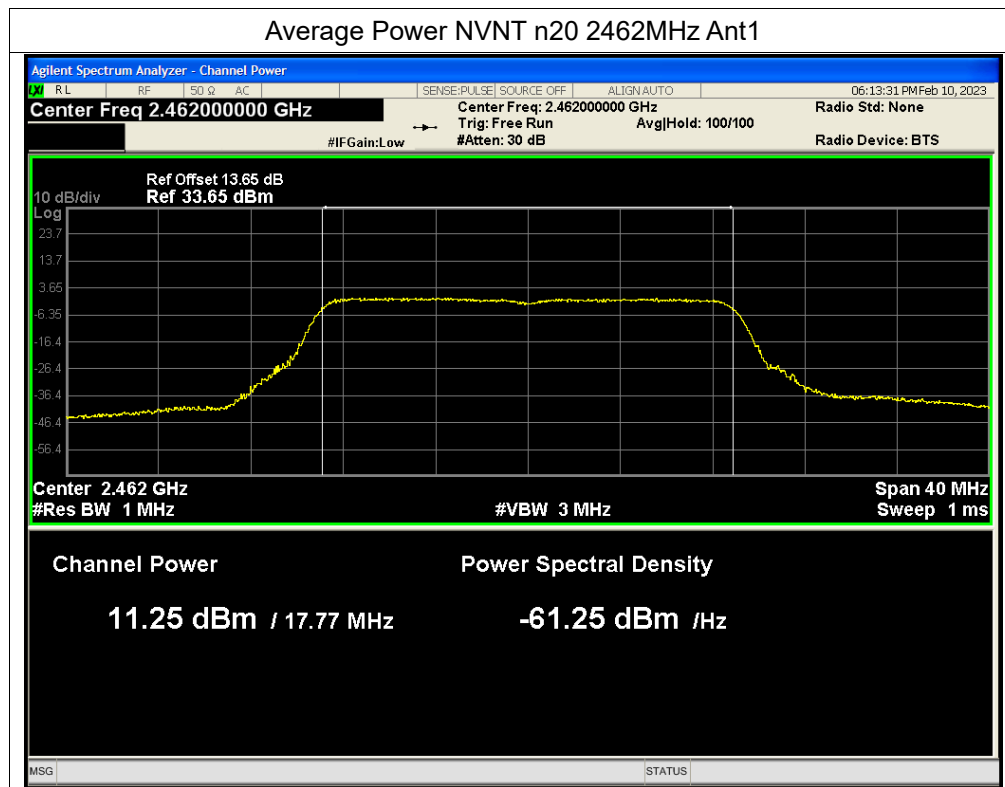


**A.4. 6 dB Bandwidth**

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	b	2412	Ant1	8.076	0.5	Pass
NVNT	b	2437	Ant1	8.537	0.5	Pass
NVNT	b	2462	Ant1	8.041	0.5	Pass
NVNT	g	2412	Ant1	16.347	0.5	Pass
NVNT	g	2437	Ant1	16.389	0.5	Pass
NVNT	g	2462	Ant1	16.327	0.5	Pass
NVNT	n20	2412	Ant1	17.331	0.5	Pass
NVNT	n20	2437	Ant1	17.590	0.5	Pass
NVNT	n20	2462	Ant1	17.557	0.5	Pass



Test Graphs

-6dB Bandwidth NVNT b 2412MHz Ant1

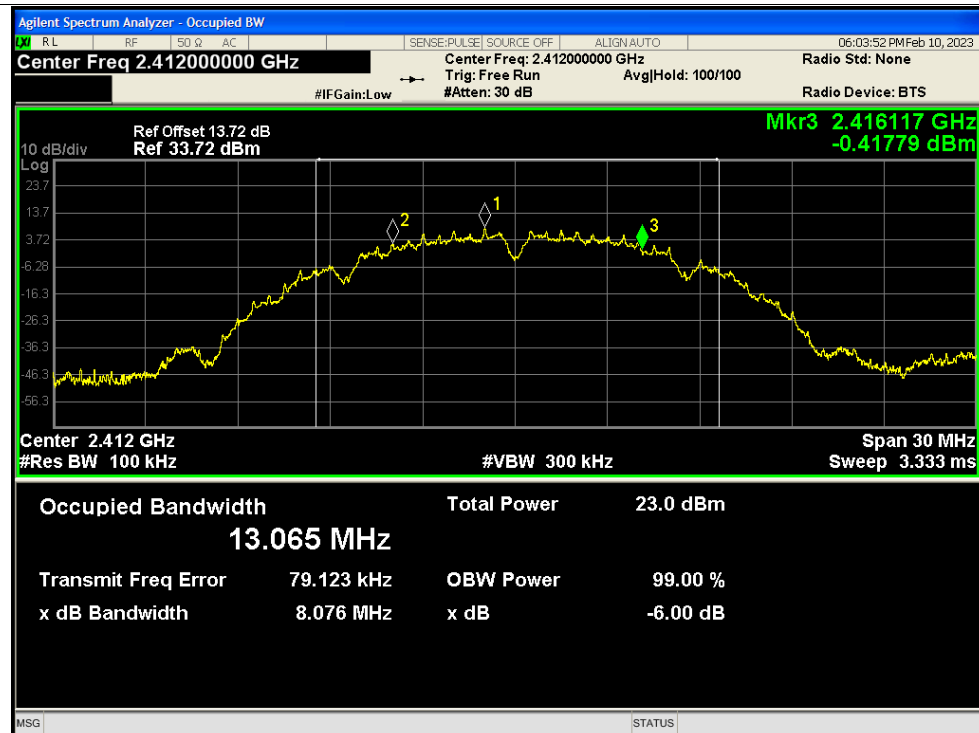


-6dB Bandwidth NVNT b 2437MHz Ant1








-6dB Bandwidth NVNT b 2462MHz Ant1

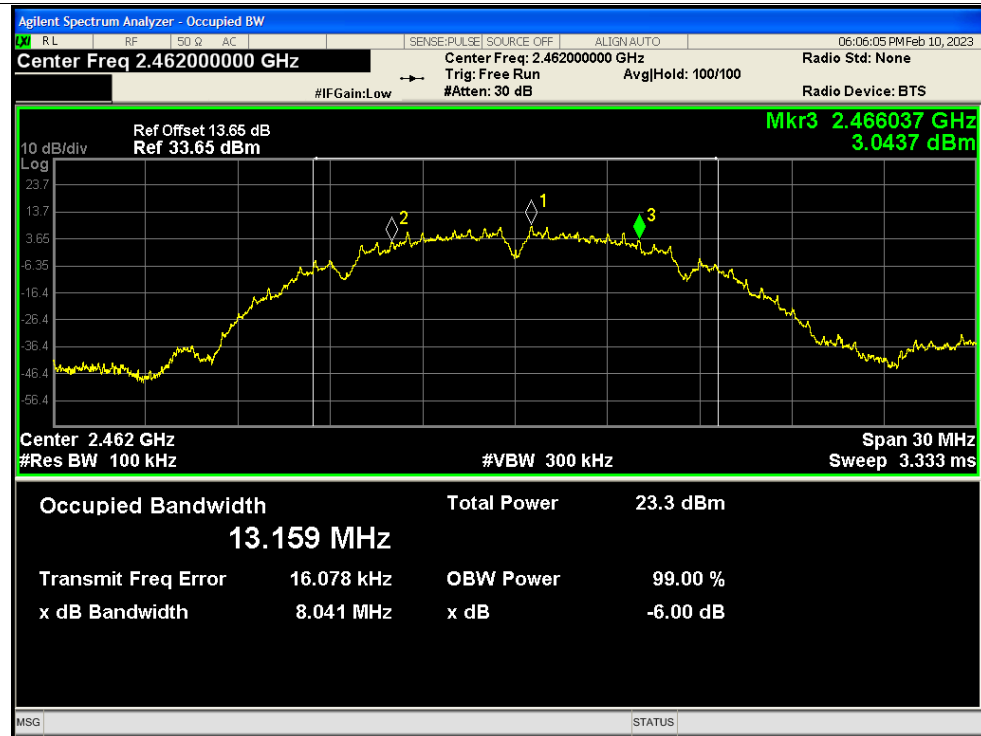


-6dB Bandwidth NVNT g 2412MHz Ant1

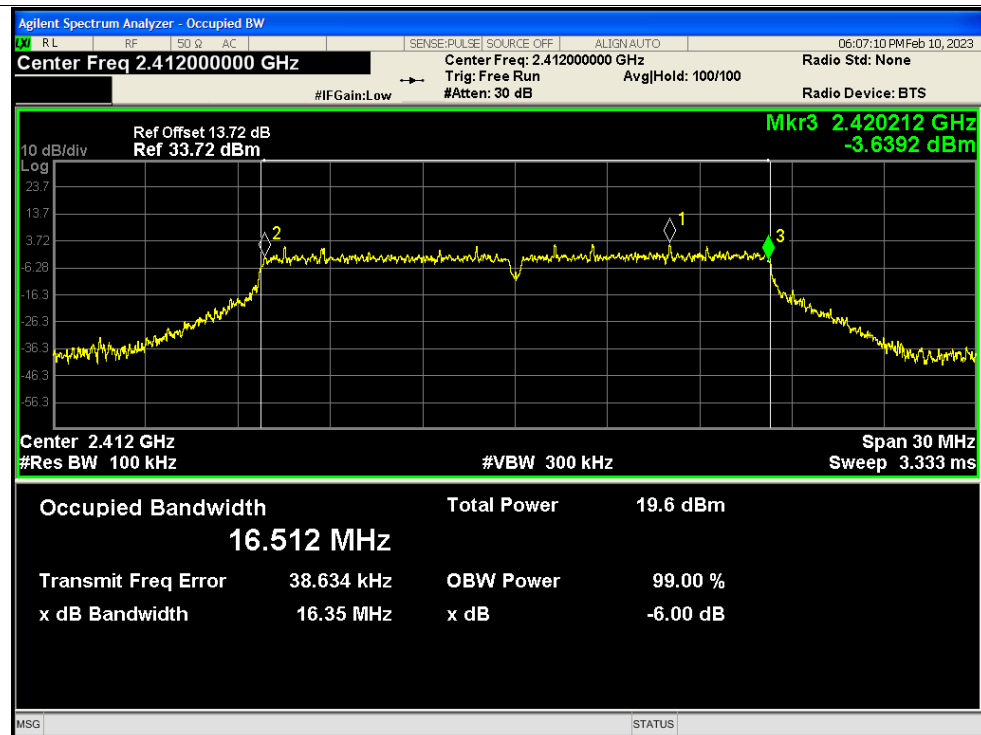

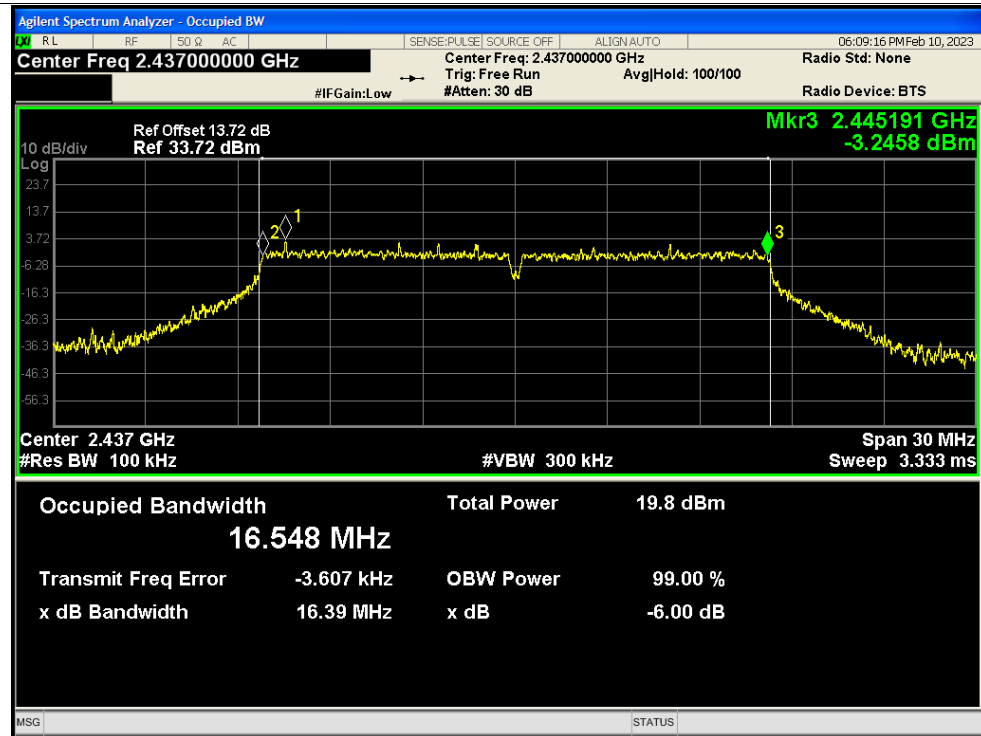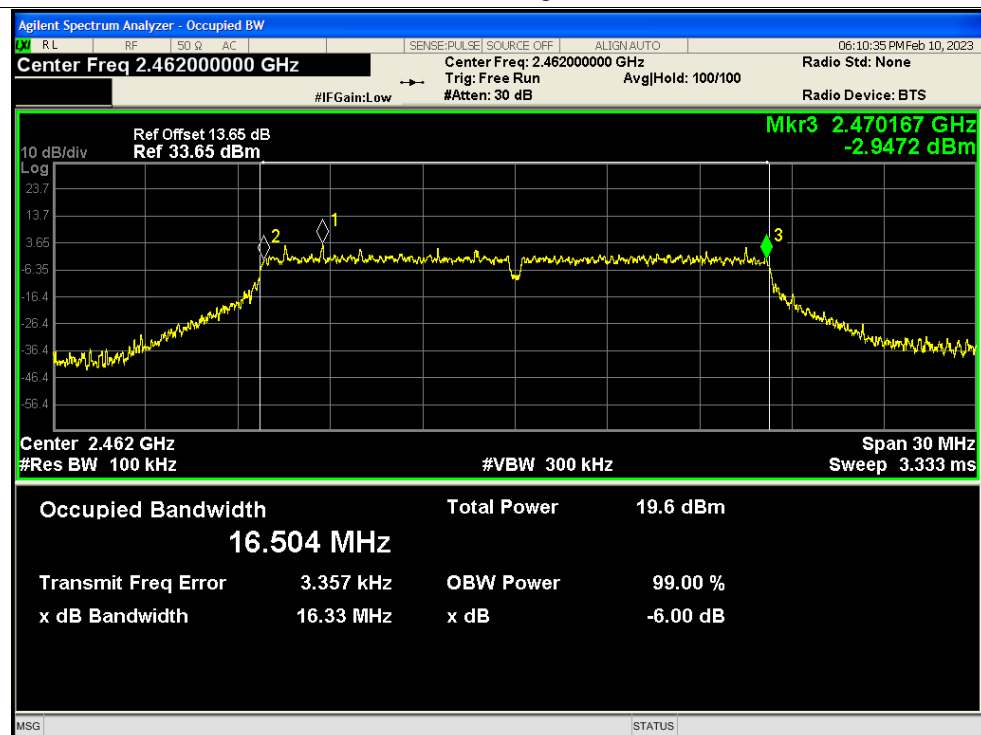
**-6dB Bandwidth NVNT g 2437MHz Ant1****-6dB Bandwidth NVNT g 2462MHz Ant1**




-6dB Bandwidth NVNT n20 2412MHz Ant1

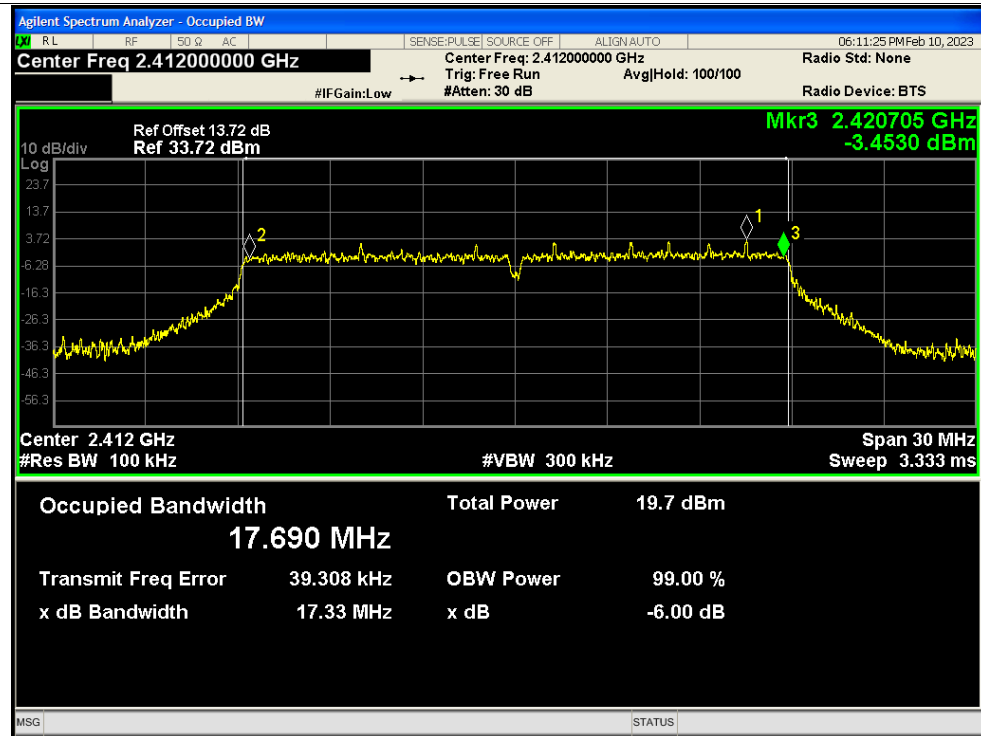

-6dB Bandwidth NVNT n20 2437MHz Ant1

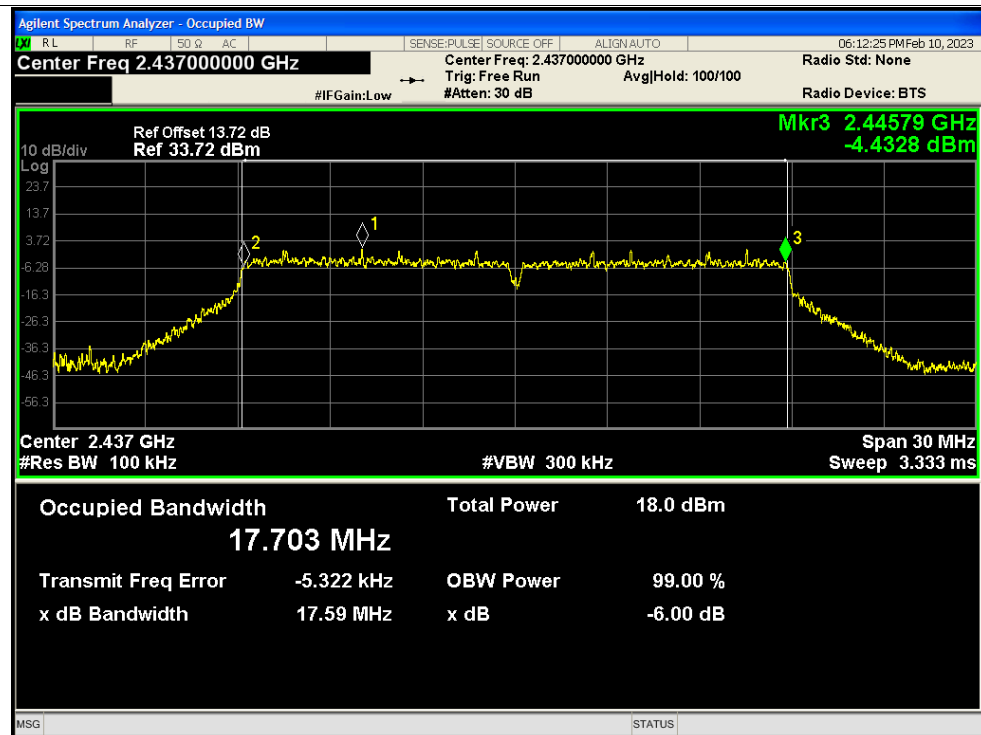

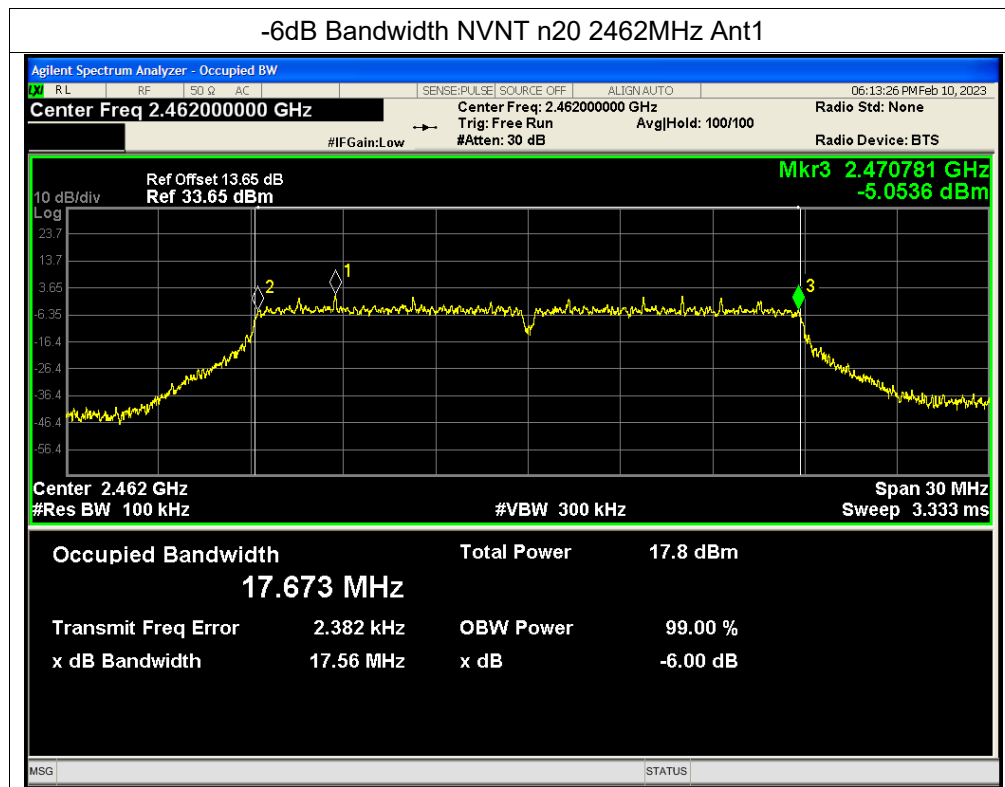


**A.5. Conducted Spurious Emissions**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-35.00	-20	Pass
NVNT	b	2437	Ant1	-36.20	-20	Pass
NVNT	b	2462	Ant1	-36.74	-20	Pass
NVNT	g	2412	Ant1	-30.77	-20	Pass
NVNT	g	2437	Ant1	-31.54	-20	Pass
NVNT	g	2462	Ant1	-30.29	-20	Pass
NVNT	n20	2412	Ant1	-28.04	-20	Pass
NVNT	n20	2437	Ant1	-28.01	-20	Pass
NVNT	n20	2462	Ant1	-27.81	-20	Pass




Test Graphs

Tx. Spurious NVNT b 2412MHz Ant1 Ref

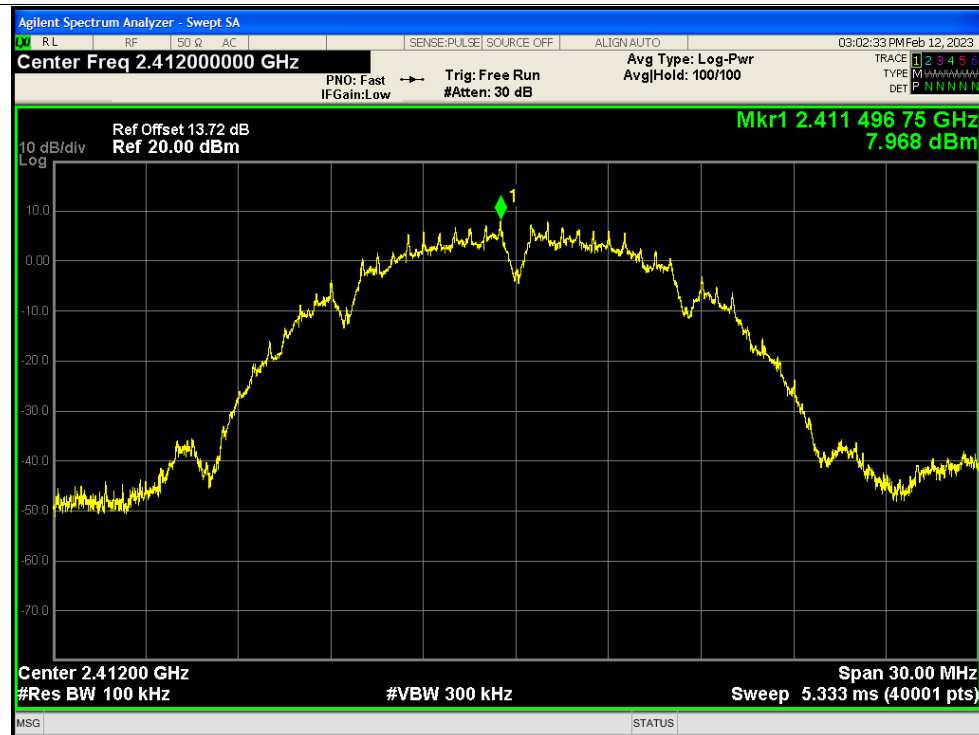


Tx. Spurious NVNT b 2412MHz Ant1 Emission

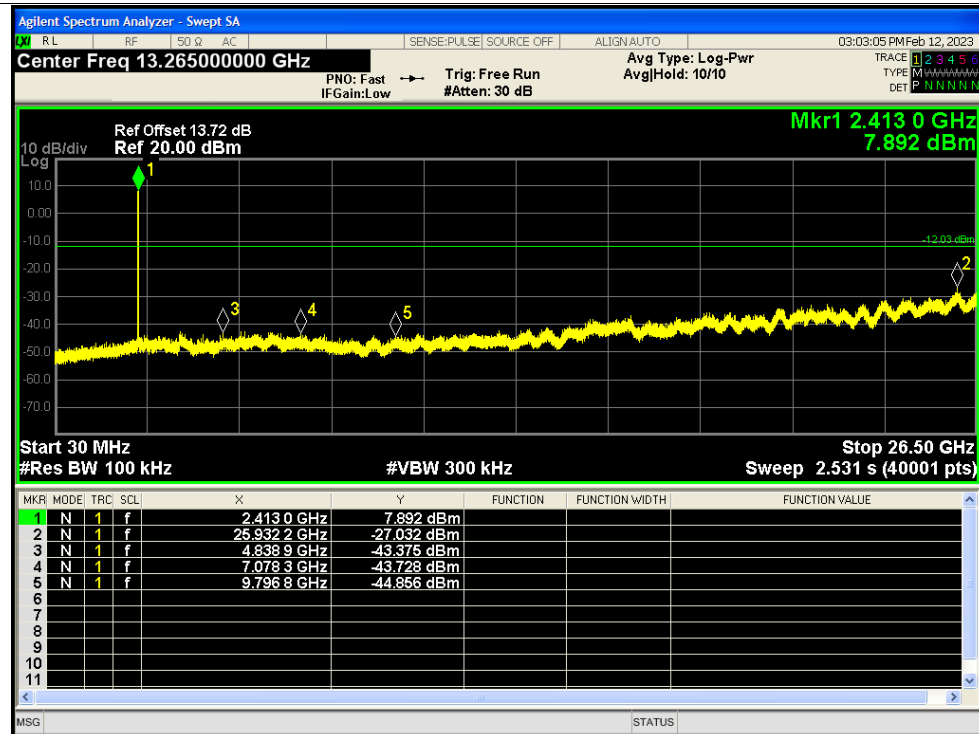




Tx. Spurious NVNT b 2437MHz Ant1 Ref

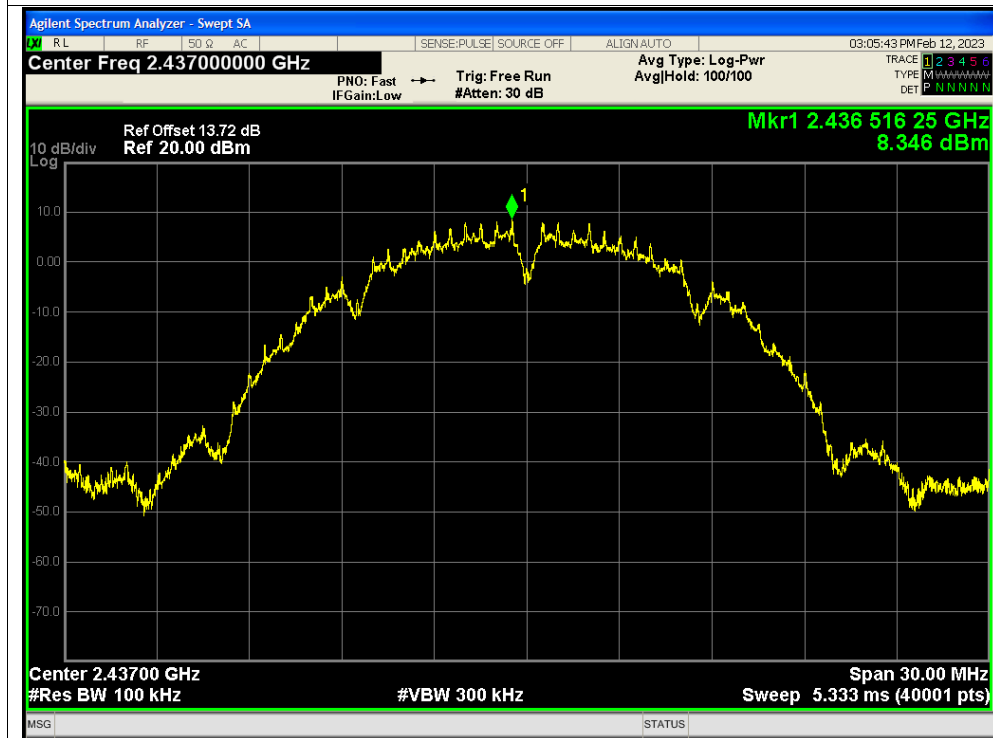

Tx. Spurious NVNT b 2437MHz Ant1 Emission

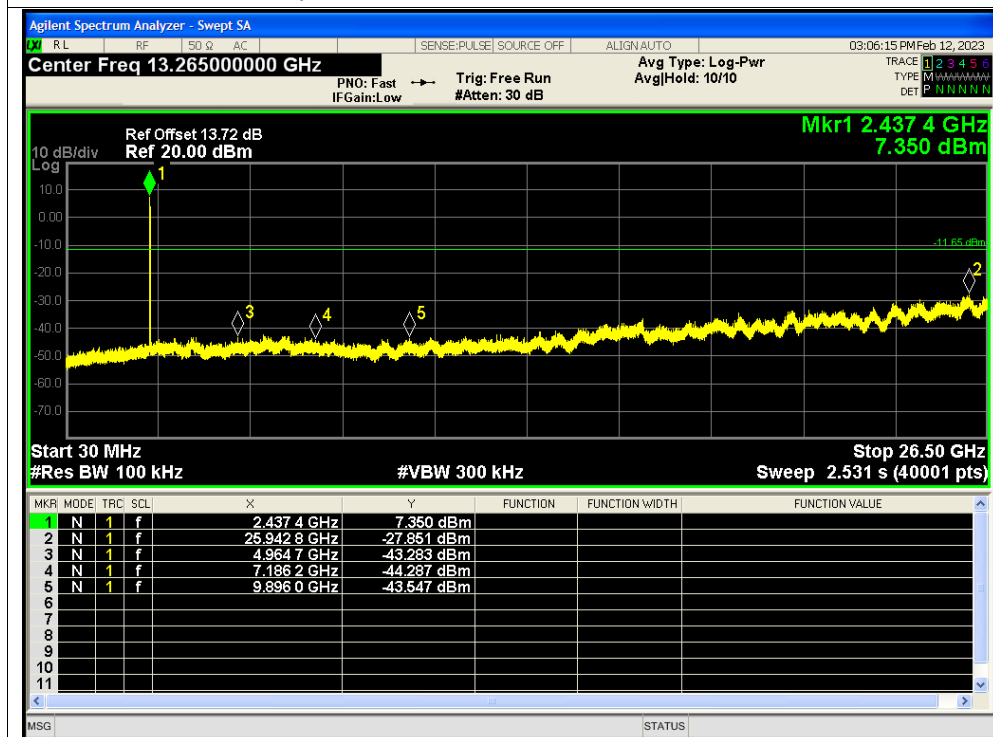




Tx. Spurious NVNT b 2462MHz Ant1 Ref




Tx. Spurious NVNT b 2462MHz Ant1 Emission

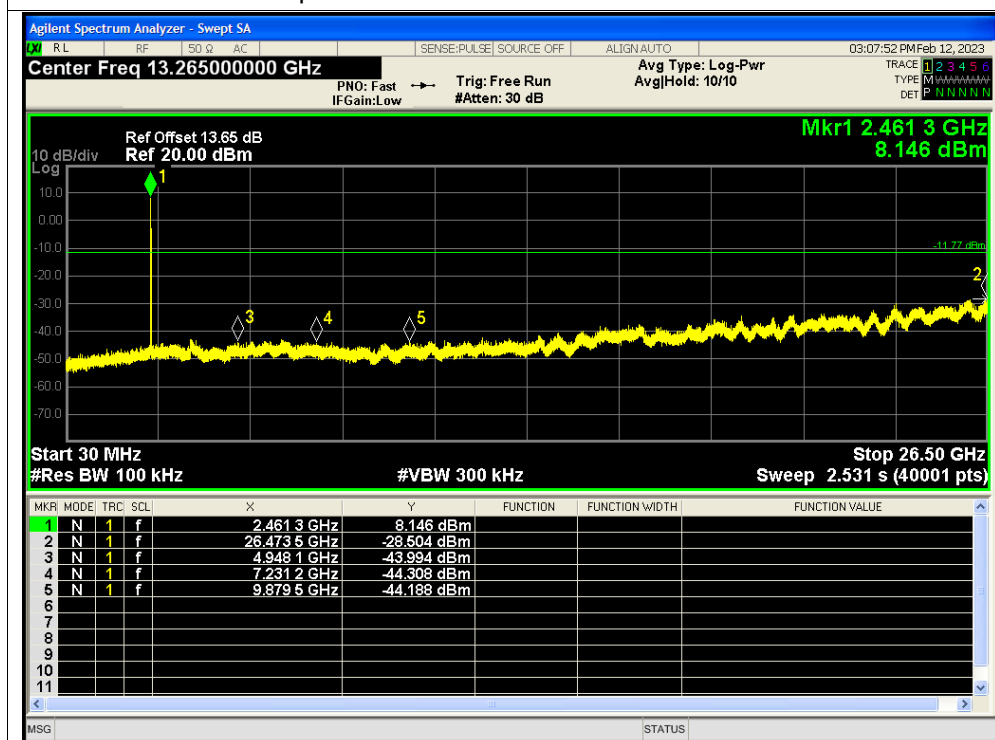




Tx. Spurious NVNT g 2412MHz Ant1 Ref

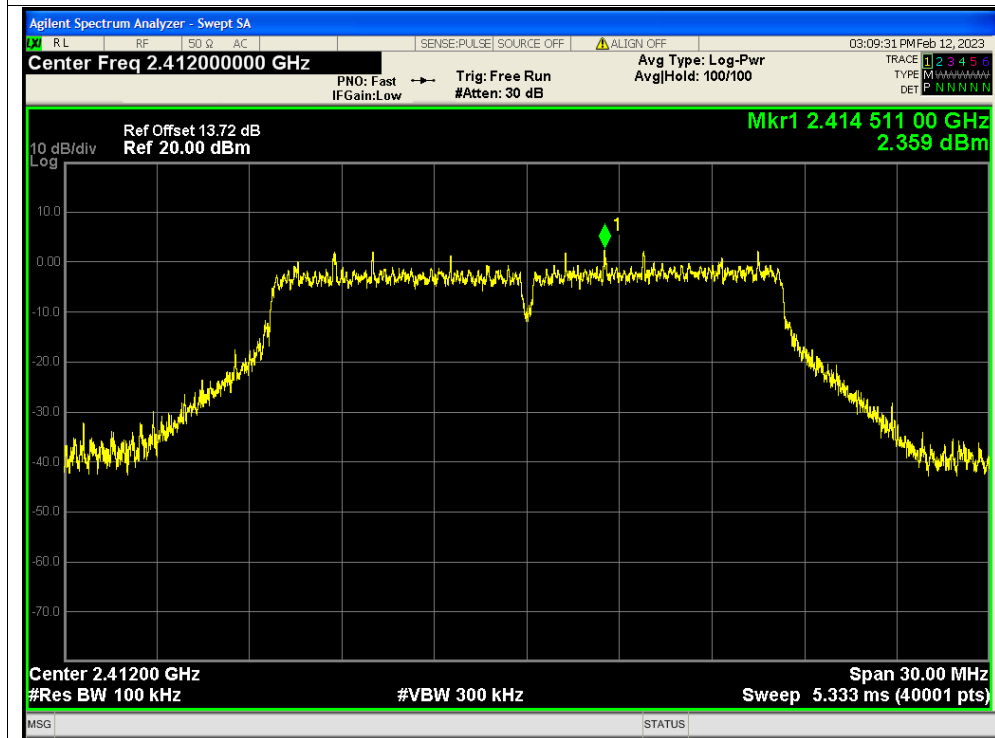


Tx. Spurious NVNT g 2412MHz Ant1 Emission

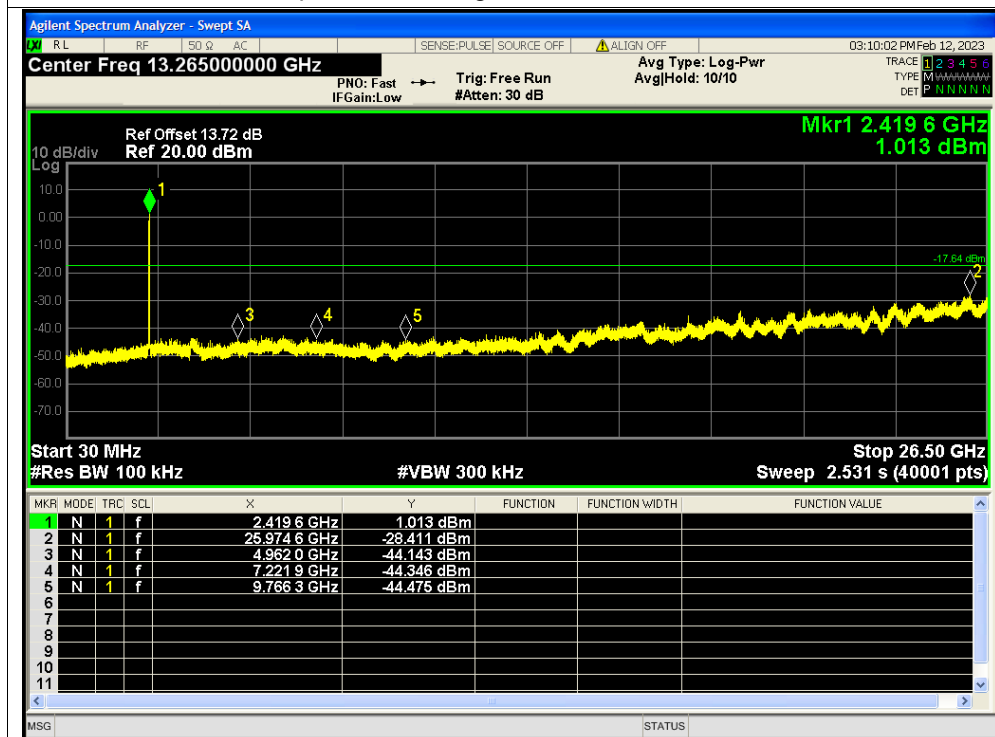




Tx. Spurious NVNT g 2437MHz Ant1 Ref

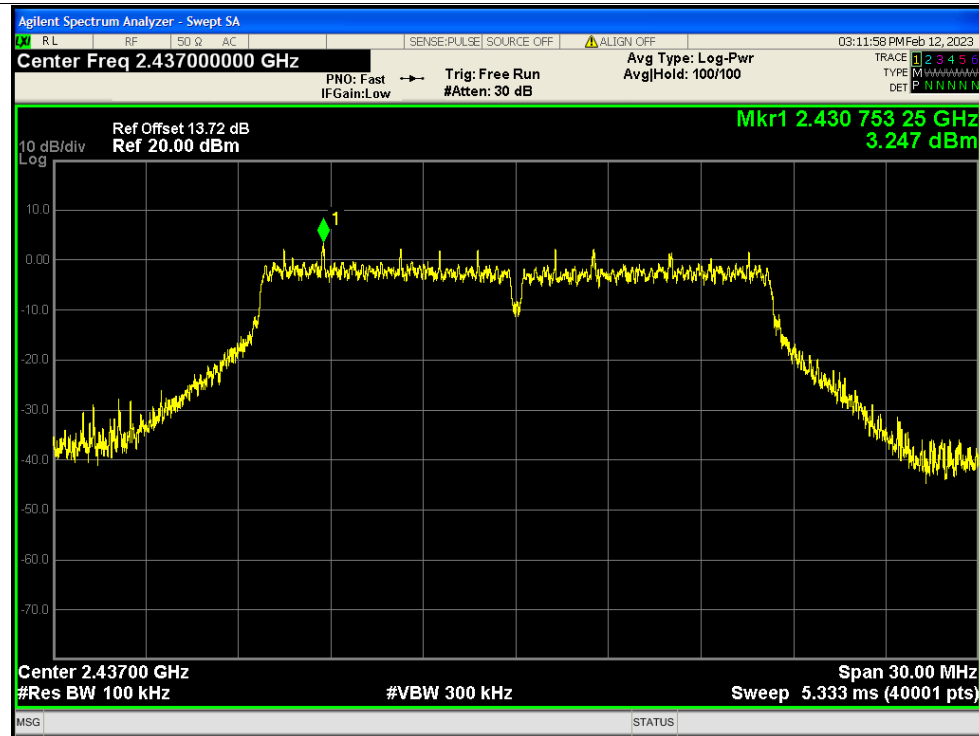


Tx. Spurious NVNT g 2437MHz Ant1 Emission

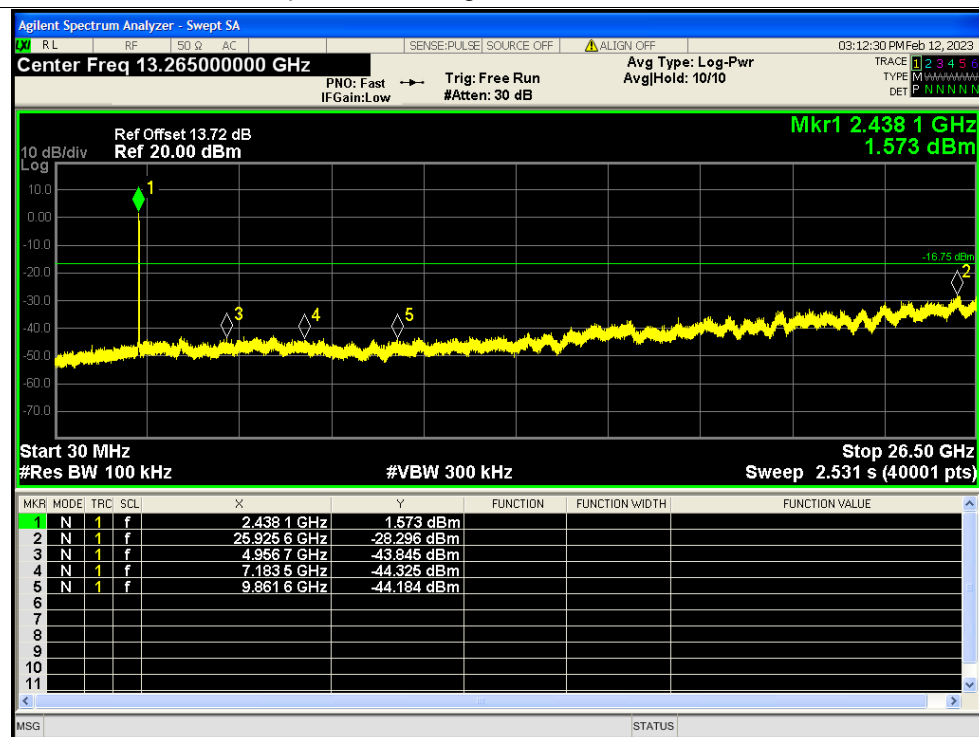




Tx. Spurious NVNT g 2462MHz Ant1 Ref

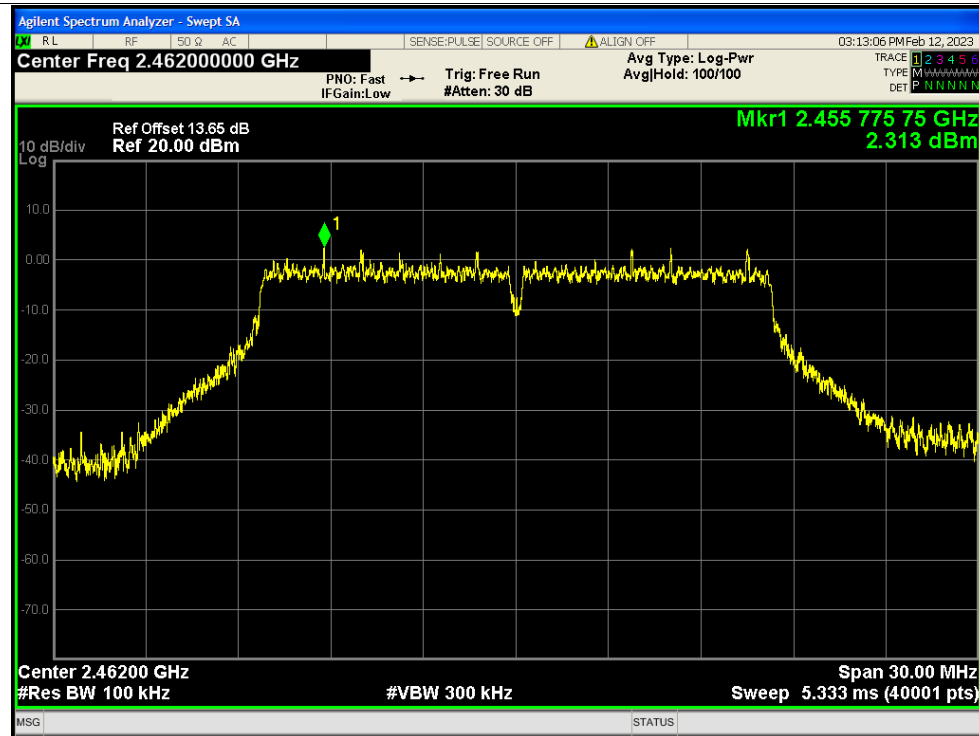


Tx. Spurious NVNT g 2462MHz Ant1 Emission

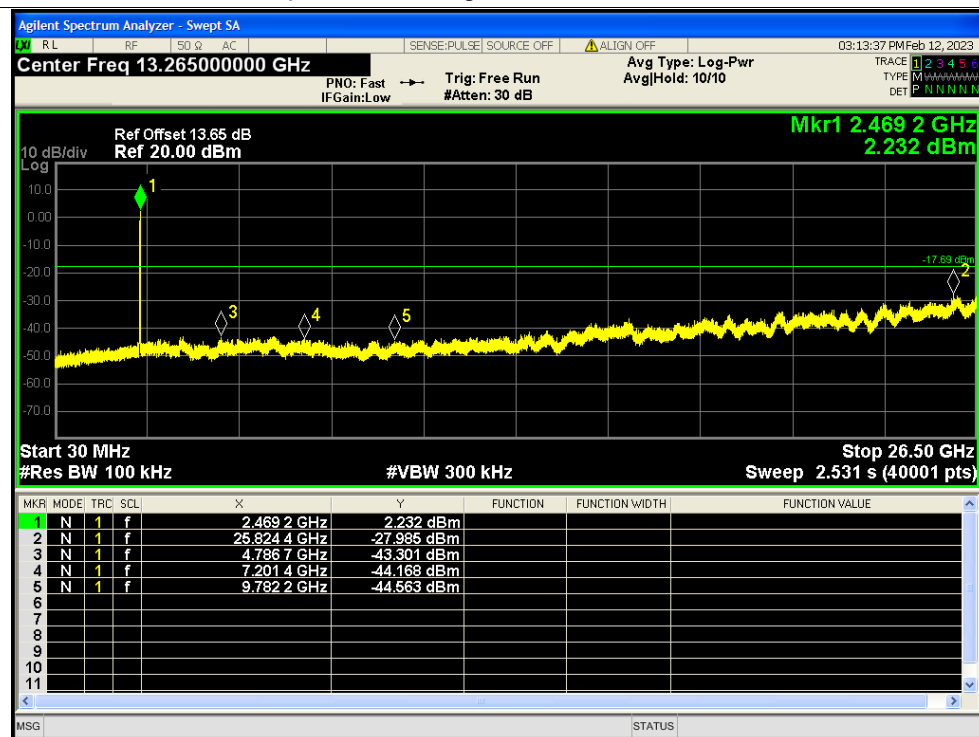




Tx. Spurious NVNT n20 2412MHz Ant1 Ref

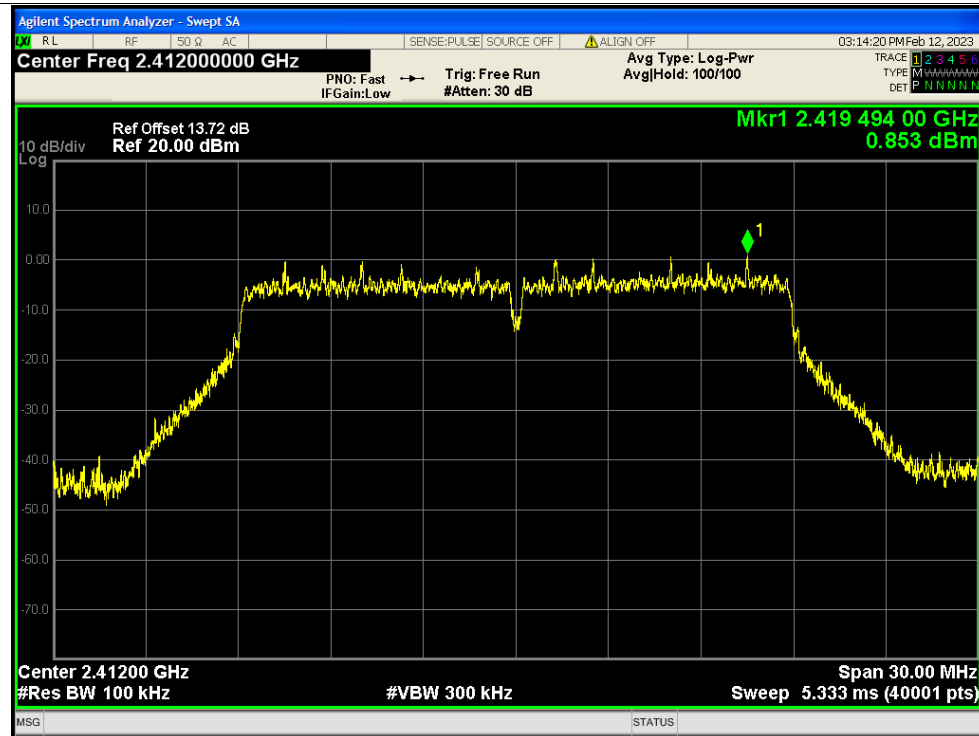


Tx. Spurious NVNT n20 2412MHz Ant1 Emission

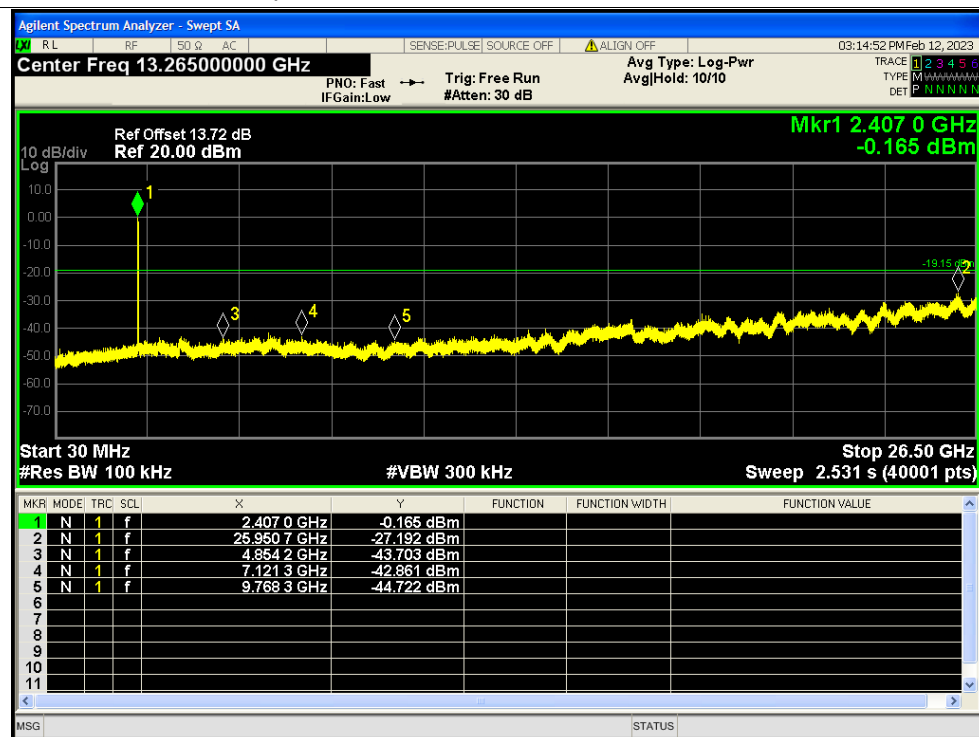




Tx. Spurious NVNT n20 2437MHz Ant1 Ref

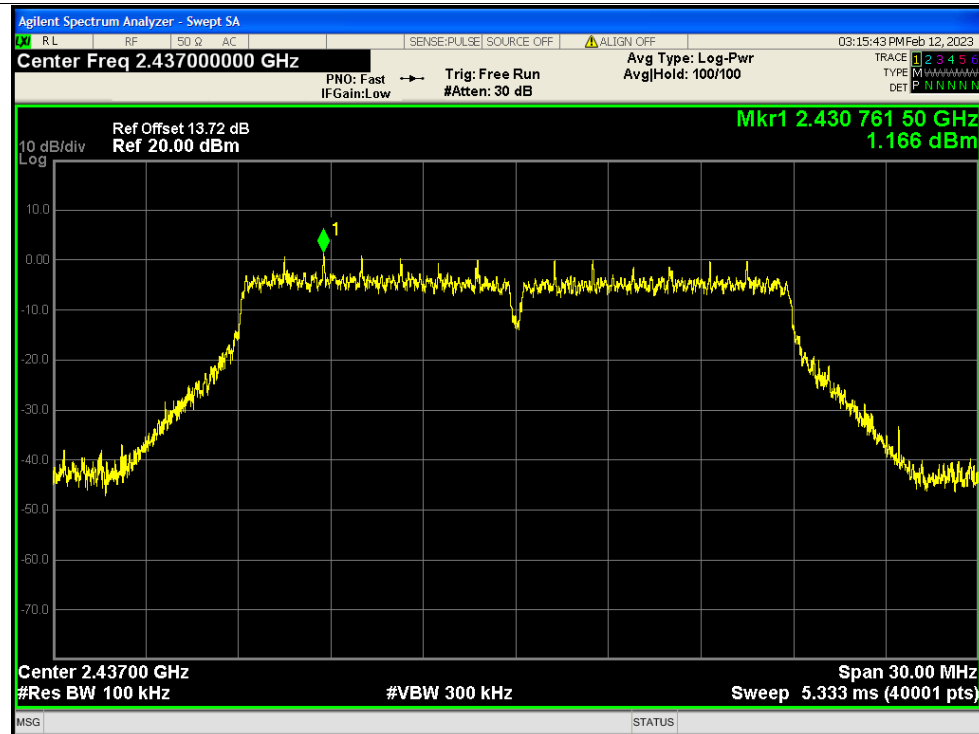


Tx. Spurious NVNT n20 2437MHz Ant1 Emission

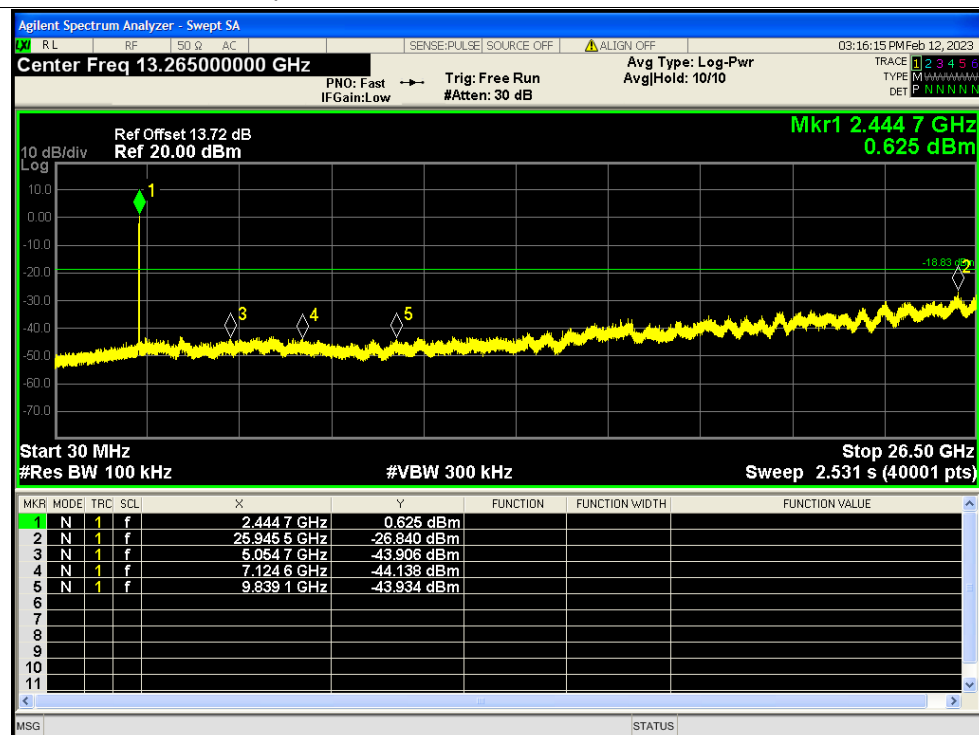




Tx. Spurious NVNT n20 2462MHz Ant1 Ref

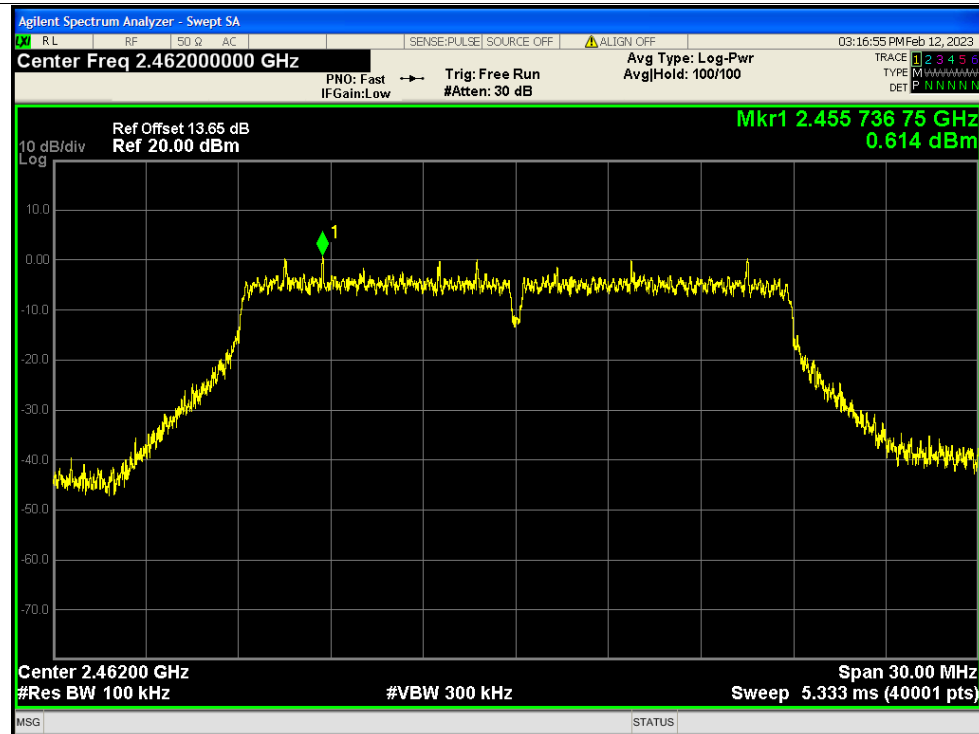

Tx. Spurious NVNT n20 2462MHz Ant1 Emission

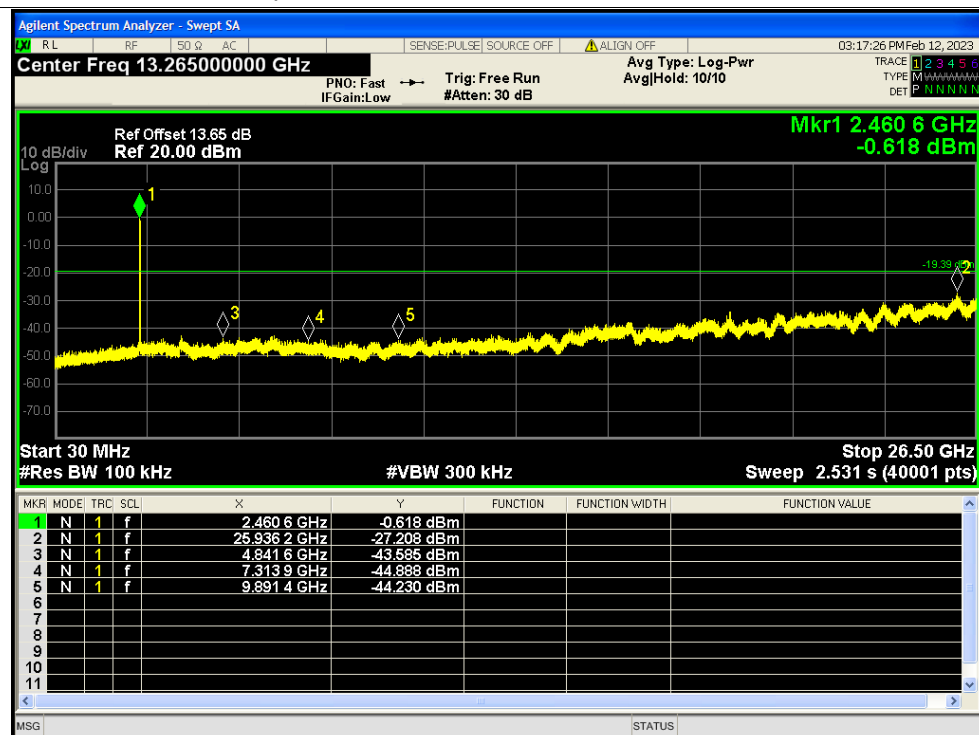

**A.6. Band Edge**

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	Ant1	-50.64	-20	Pass
NVNT	b	2462	Ant1	-53.15	-20	Pass
NVNT	g	2412	Ant1	-34.35	-20	Pass
NVNT	g	2462	Ant1	-42.84	-20	Pass
NVNT	n20	2412	Ant1	-37.85	-20	Pass
NVNT	n20	2462	Ant1	-42.86	-20	Pass




Test Graphs

Band Edge NVNT b 2412MHz Ant1 Ref




Band Edge NVNT b 2412MHz Ant1 Emission

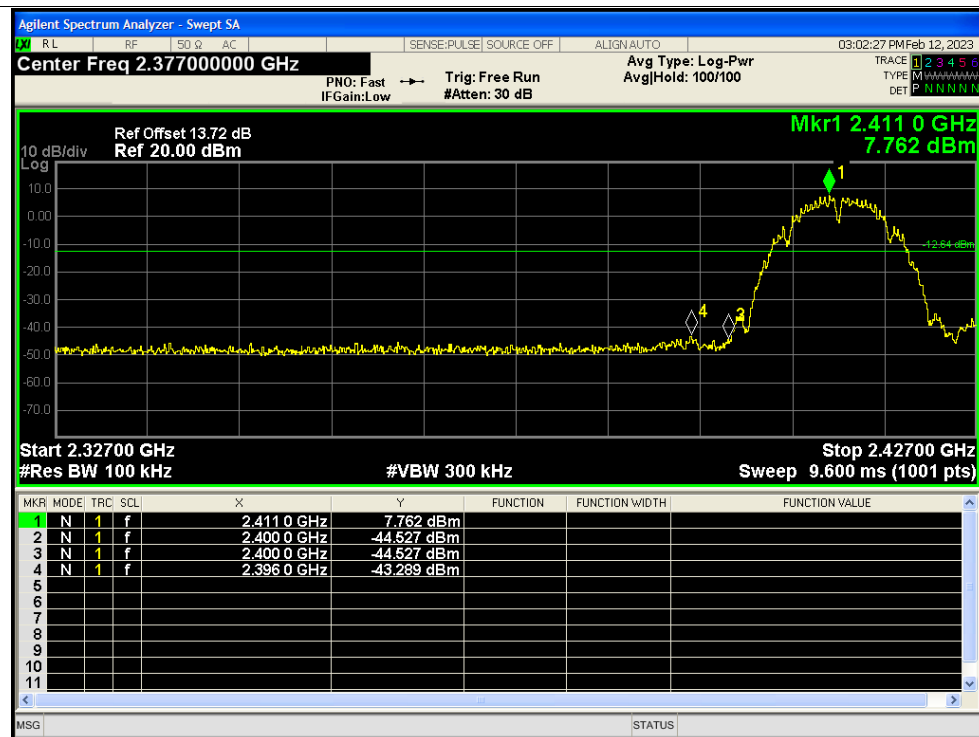




Band Edge NVNT b 2462MHz Ant1 Ref

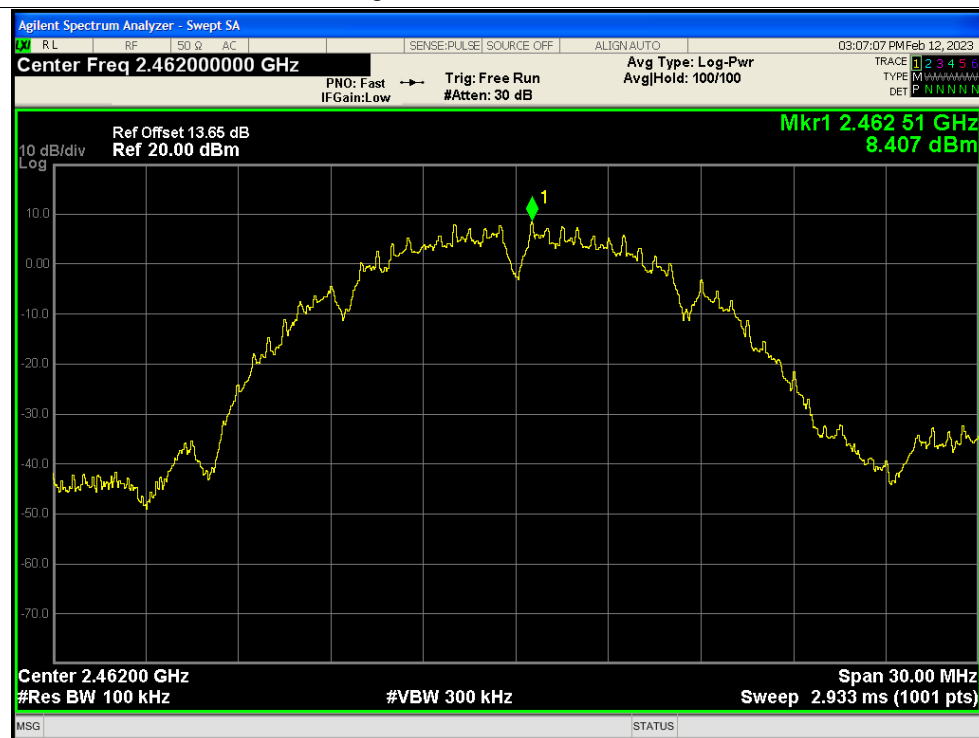


Band Edge NVNT b 2462MHz Ant1 Emission

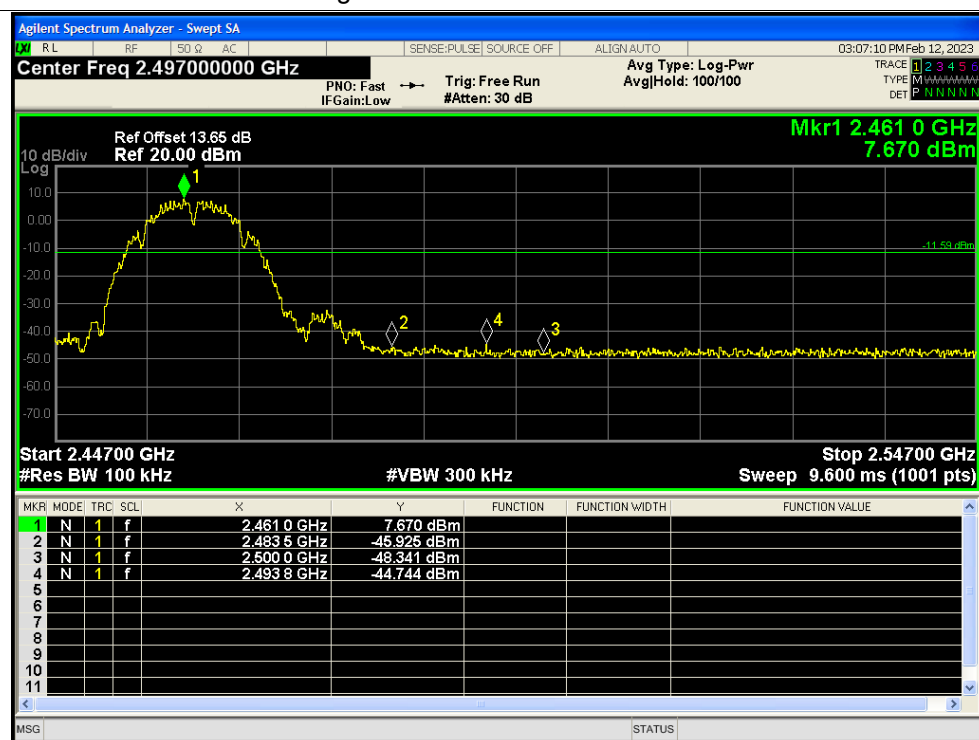




Band Edge NVNT g 2412MHz Ant1 Ref

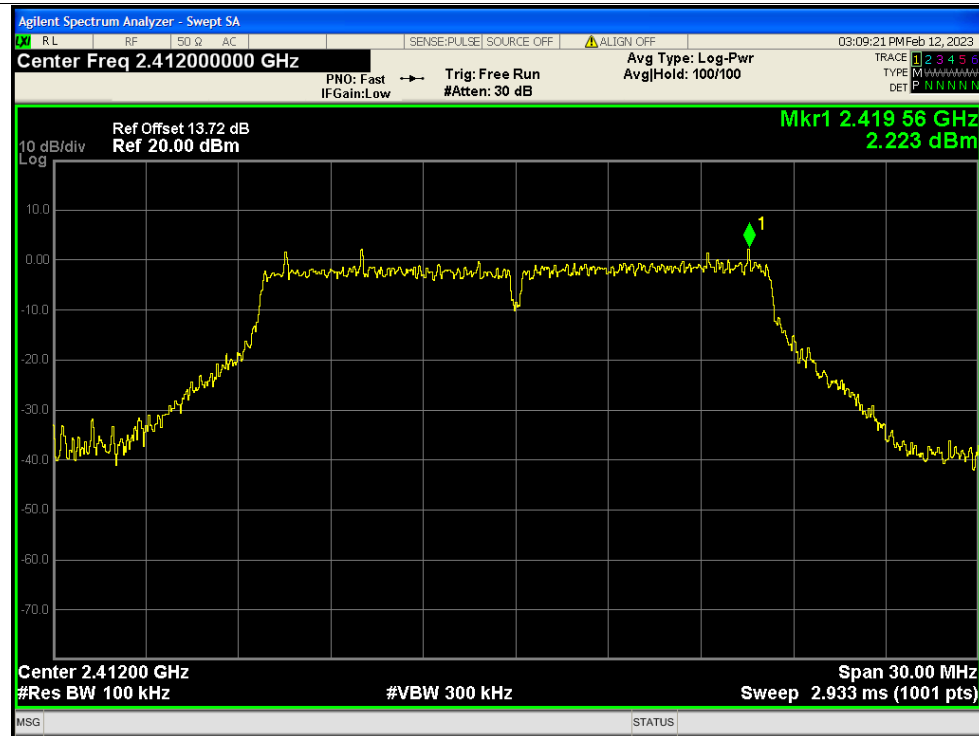


Band Edge NVNT g 2412MHz Ant1 Emission

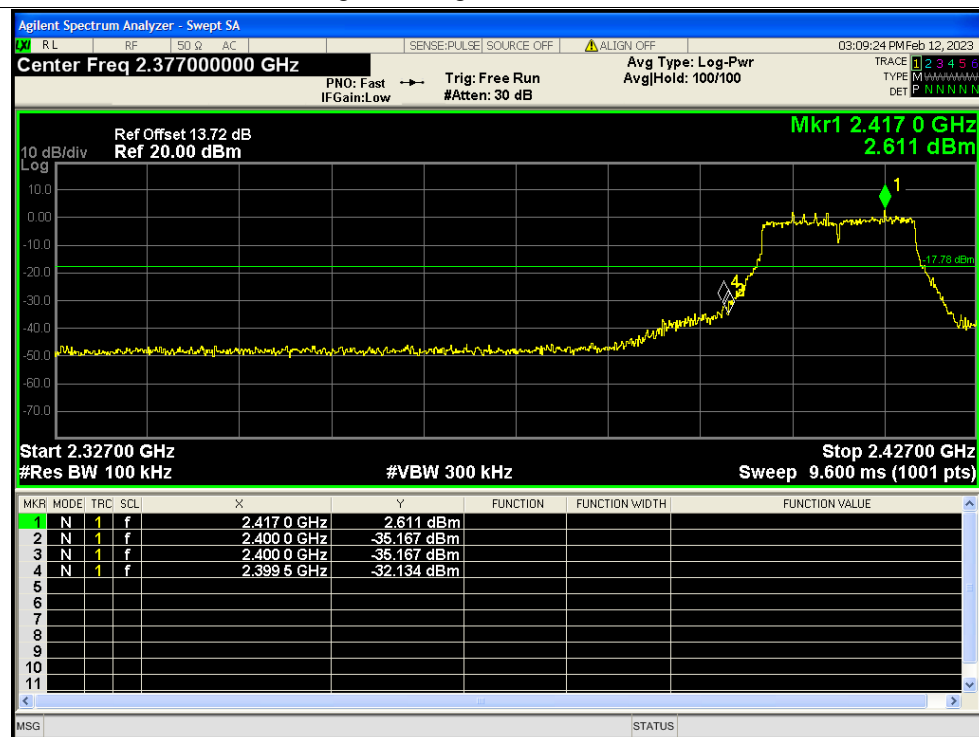




Band Edge NVNT g 2462MHz Ant1 Ref

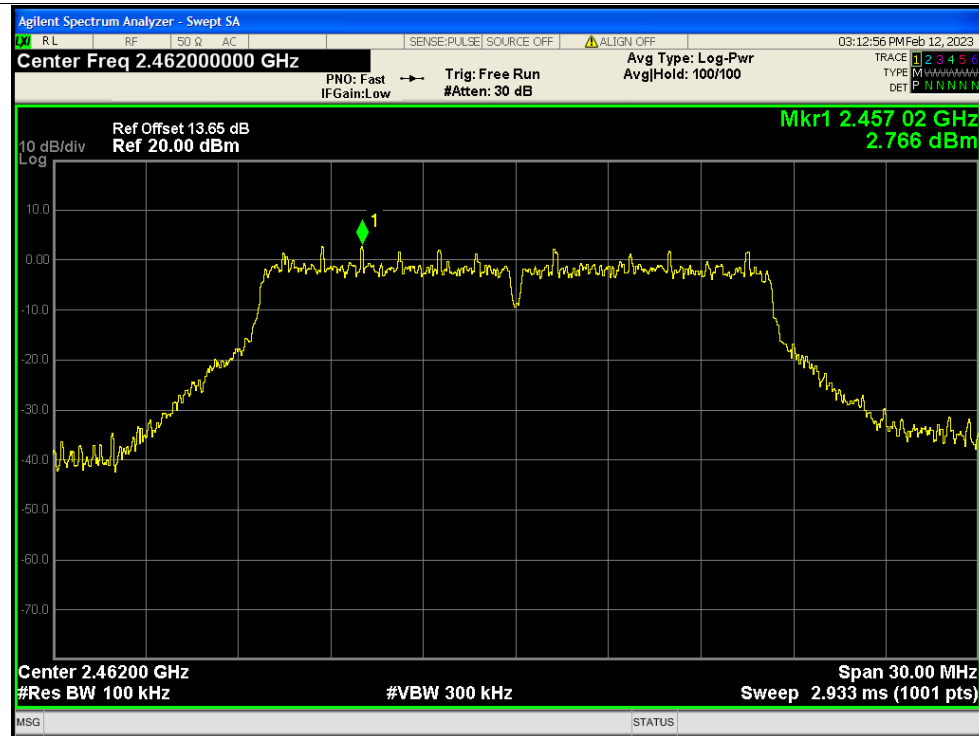


Band Edge NVNT g 2462MHz Ant1 Emission

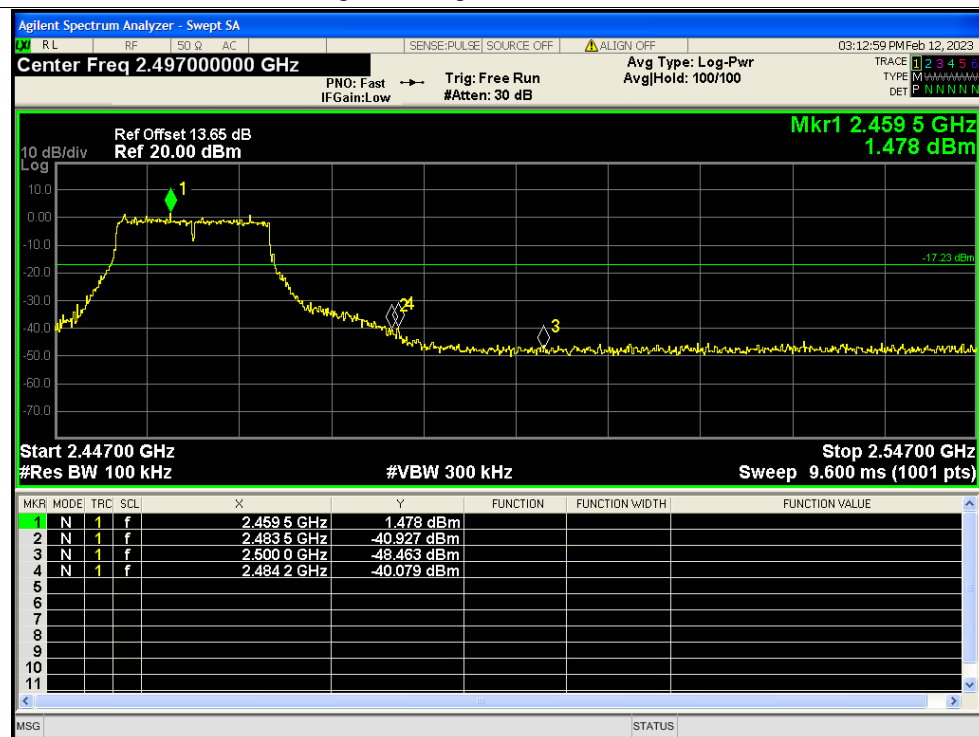




Band Edge NVNT n20 2412MHz Ant1 Ref

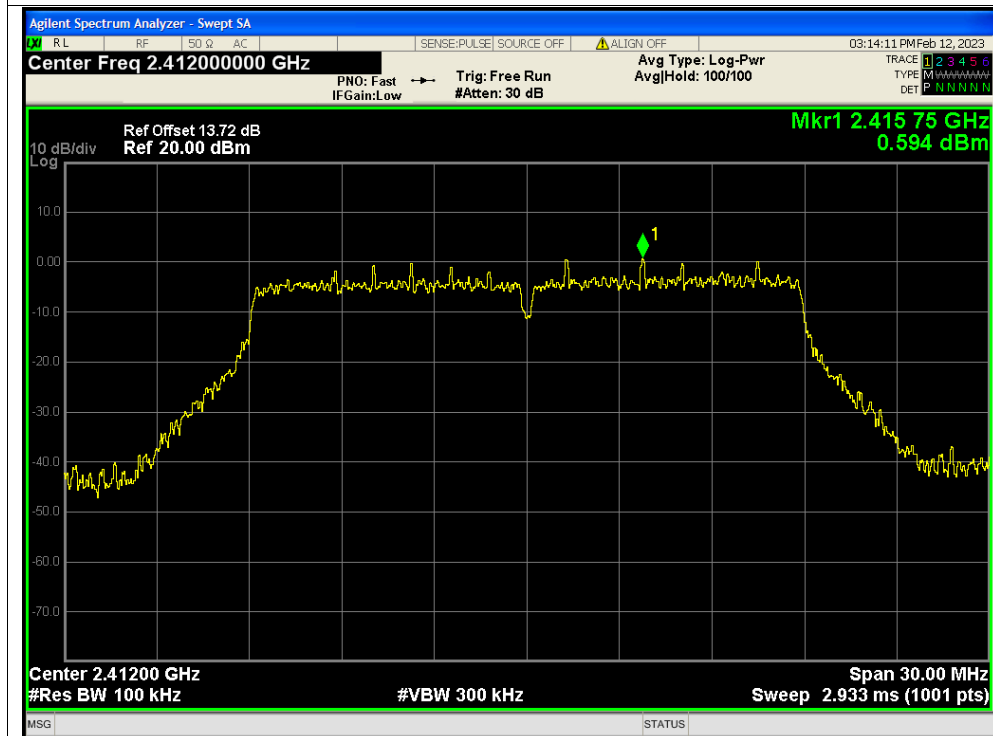


Band Edge NVNT n20 2412MHz Ant1 Emission

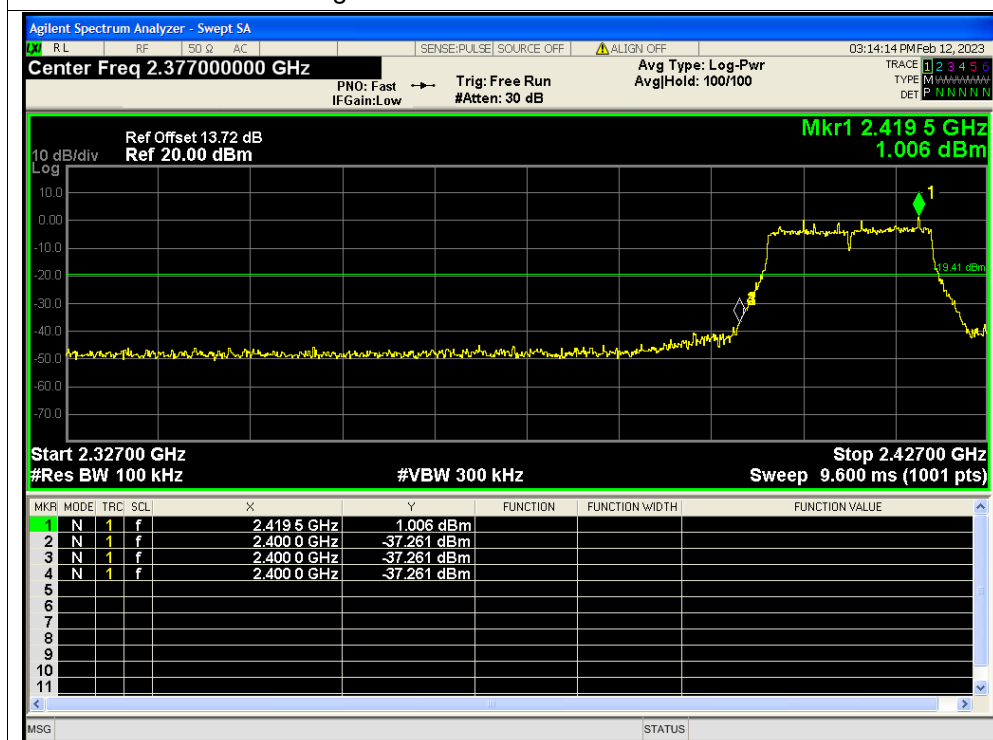




Band Edge NVNT n20 2462MHz Ant1 Ref

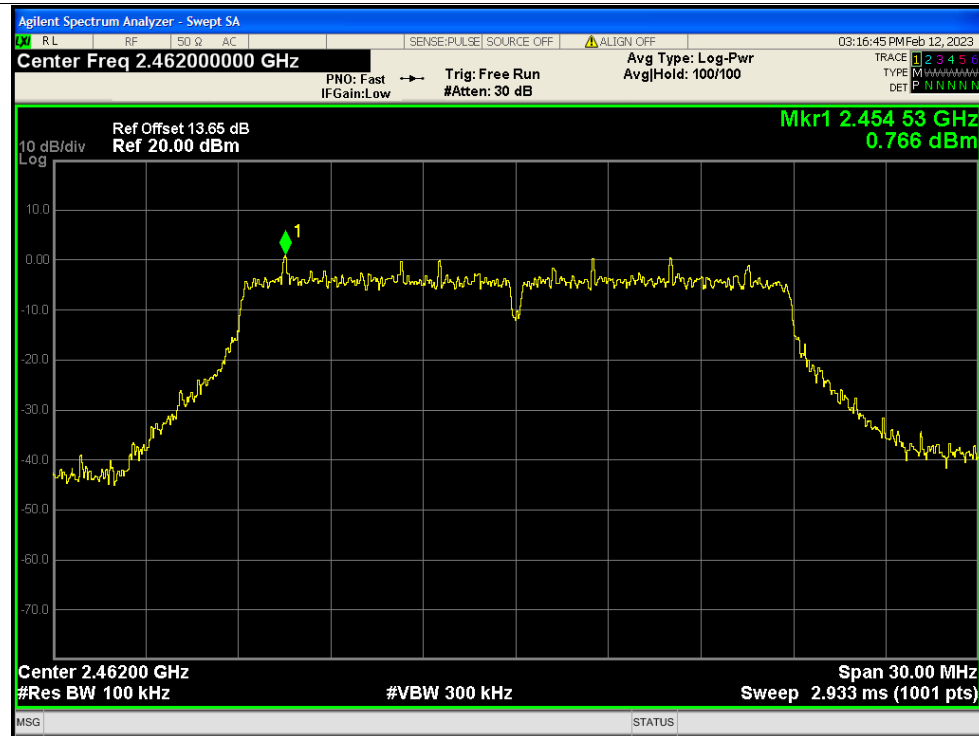

Band Edge NVNT n20 2462MHz Ant1 Emission

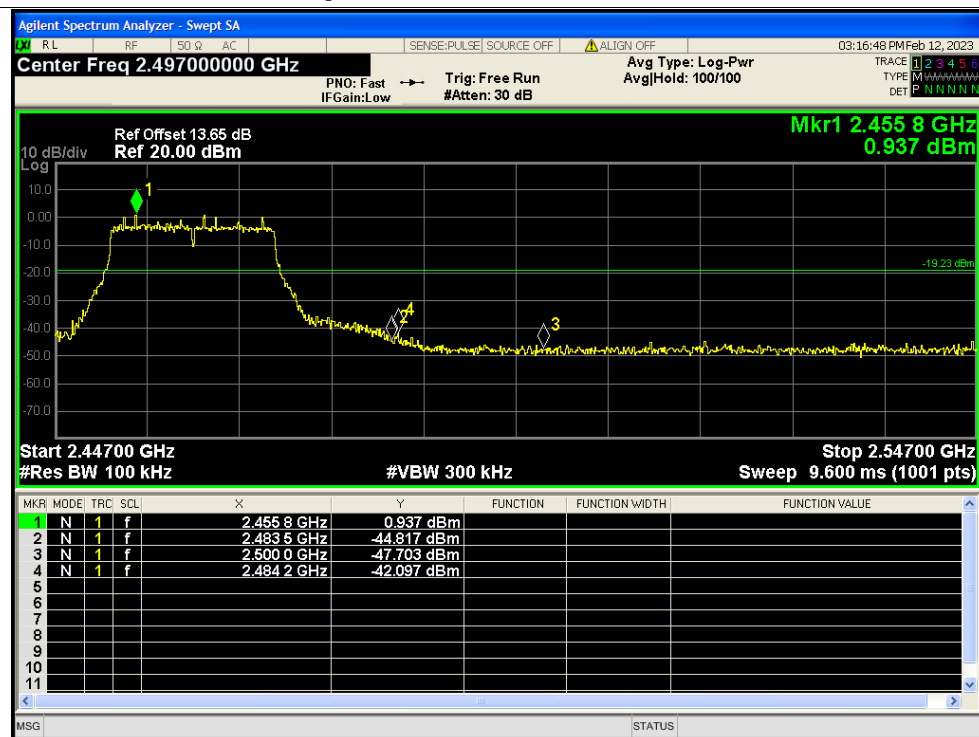


**A.7. Power Spectral Density**

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	b	2412	Ant1	-5.15	0	-5.15	8	Pass
NVNT	b	2437	Ant1	-6.47	0	-6.47	8	Pass
NVNT	b	2462	Ant1	-5.45	0	-5.45	8	Pass
NVNT	g	2412	Ant1	-11.92	0	-11.92	8	Pass
NVNT	g	2437	Ant1	-12.07	0	-12.07	8	Pass
NVNT	g	2462	Ant1	-12.21	0	-12.21	8	Pass
NVNT	n20	2412	Ant1	-14.56	0	-14.56	8	Pass
NVNT	n20	2437	Ant1	-13.92	0	-13.92	8	Pass
NVNT	n20	2462	Ant1	-14.31	0	-14.31	8	Pass




Test Graphs

PSD NVNT b 2412MHz Ant1

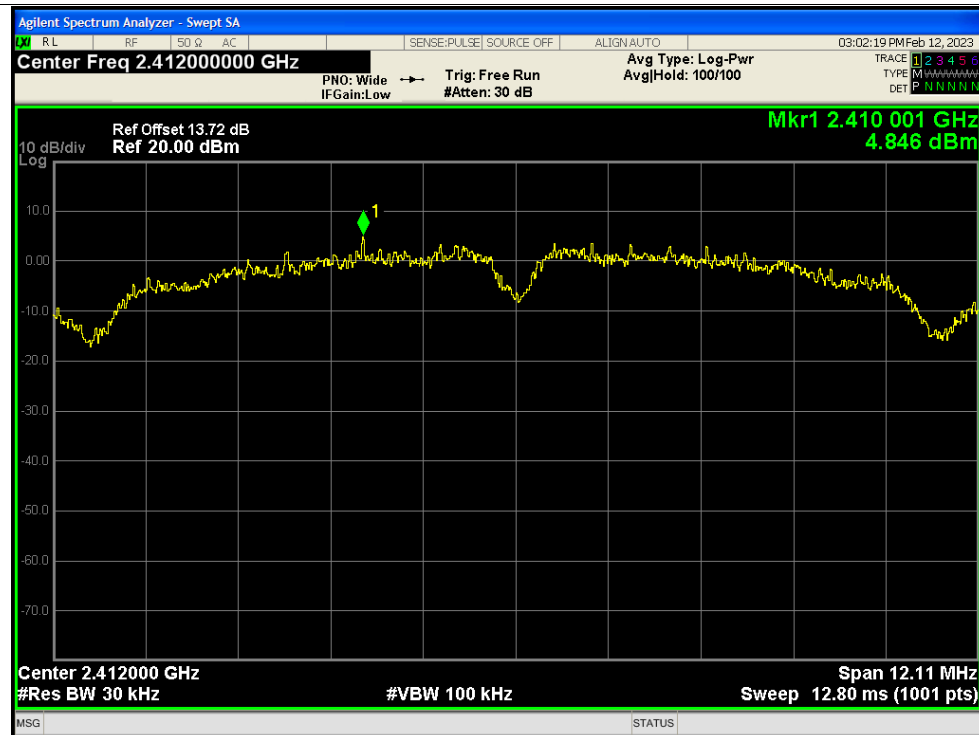


PSD NVNT b 2437MHz Ant1

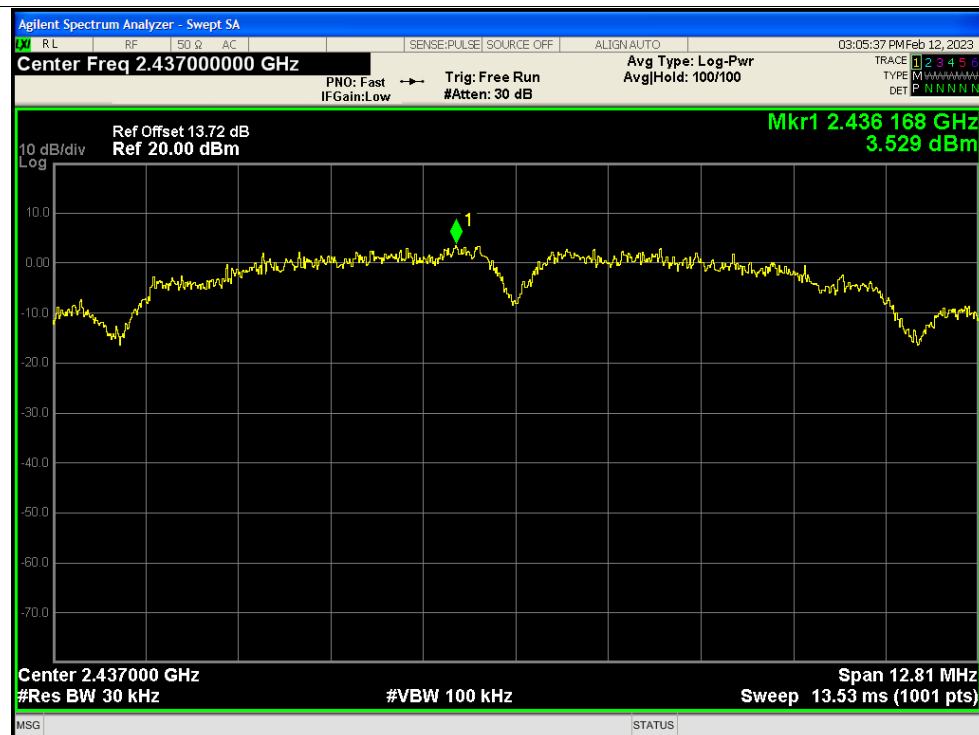




PSD NVNT b 2462MHz Ant1

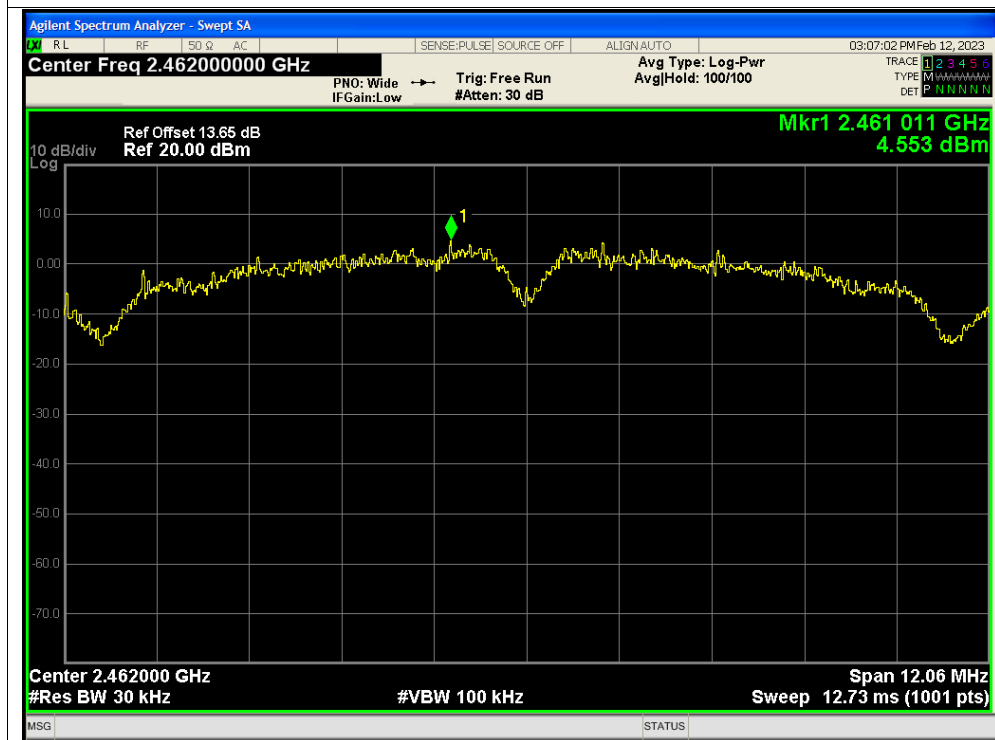


PSD NVNT g 2412MHz Ant1

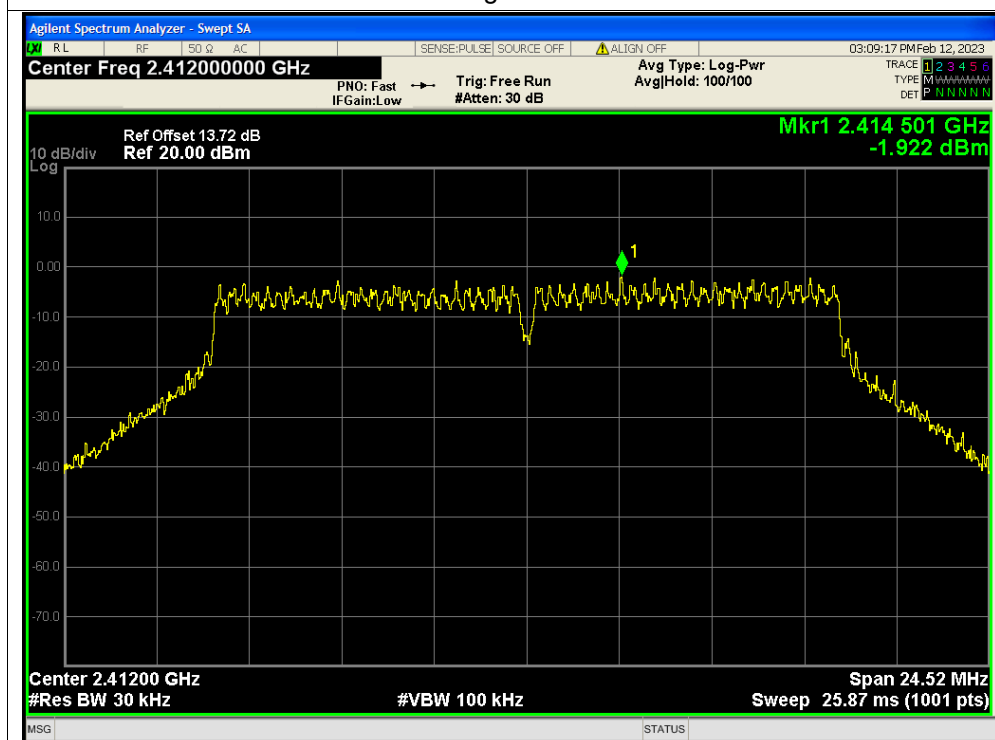




PSD NVNT g 2437MHz Ant1

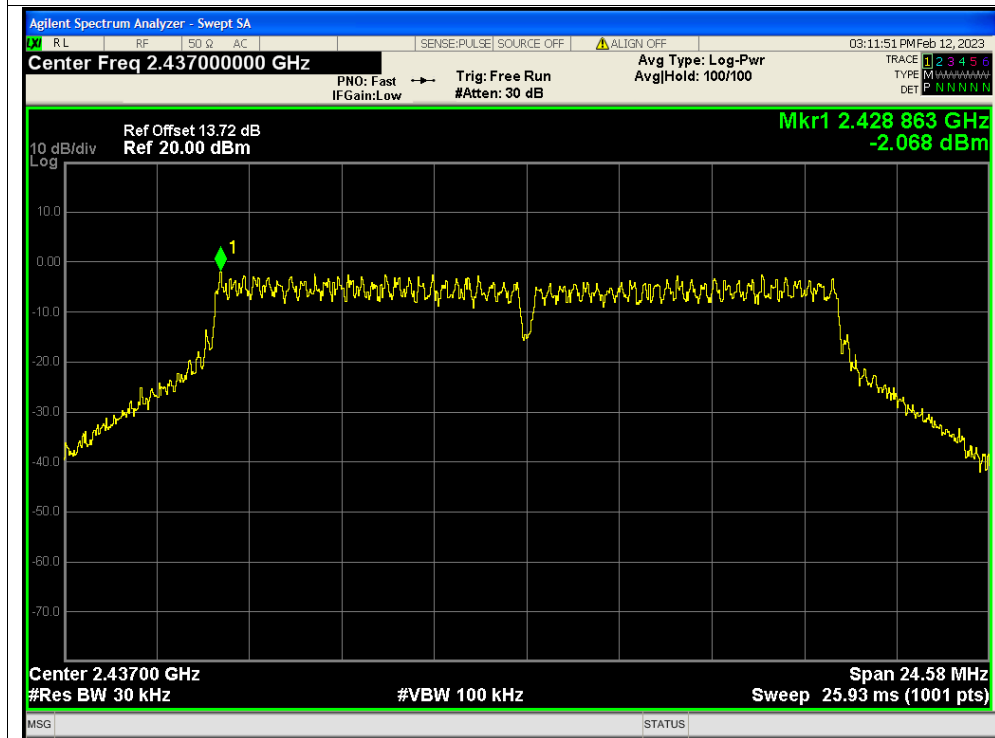


PSD NVNT g 2462MHz Ant1

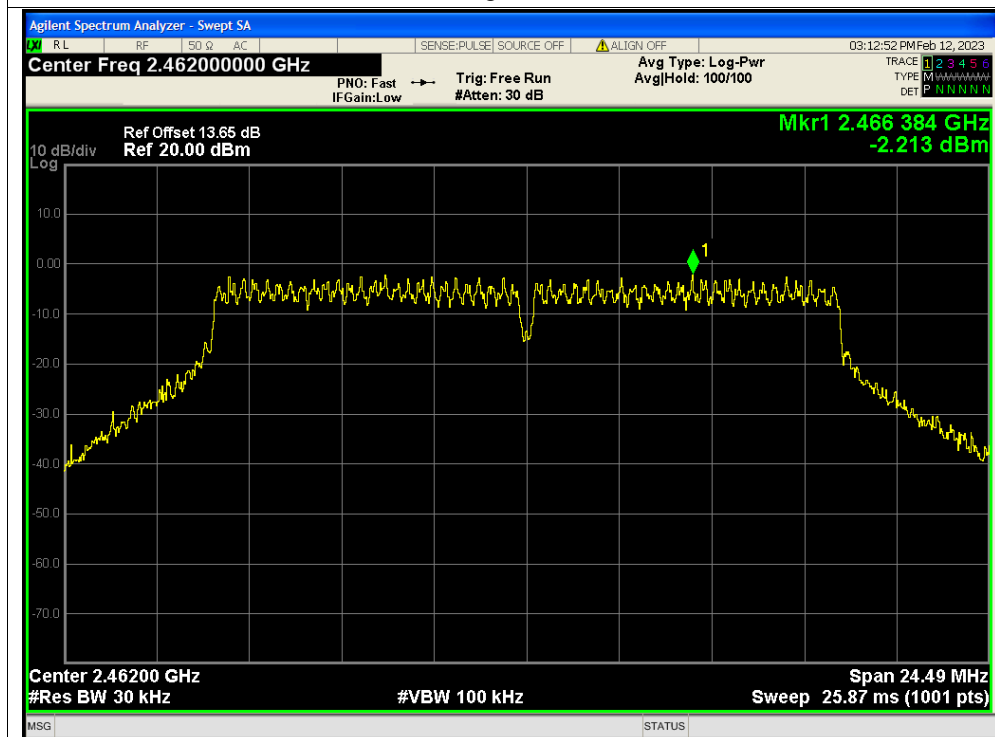





PSD NVNT n20 2412MHz Ant1

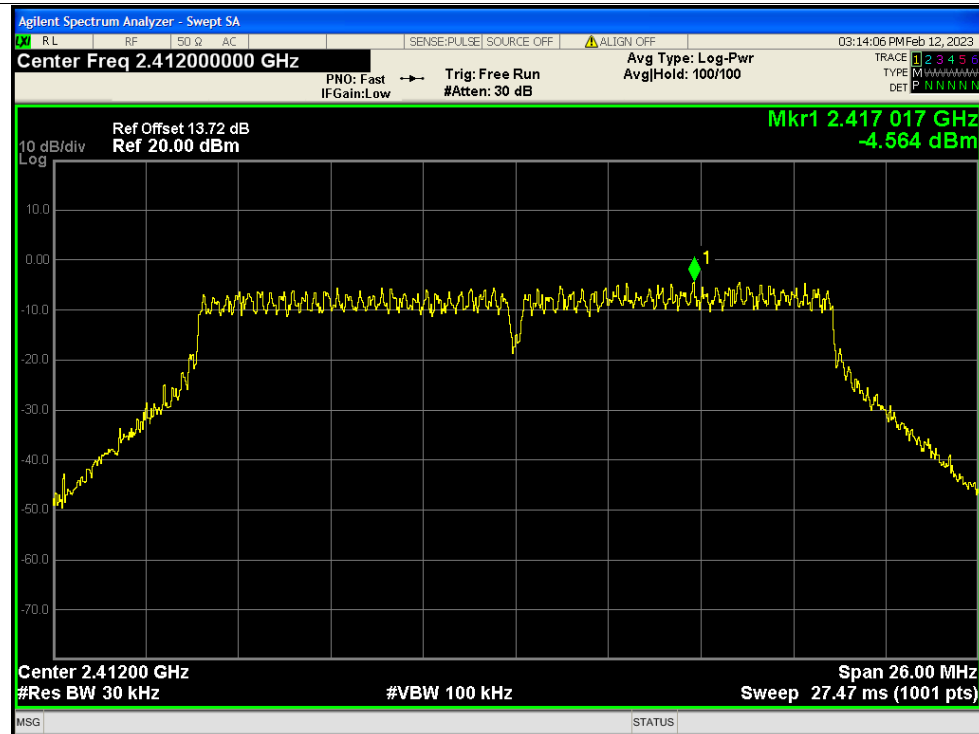

PSD NVNT n20 2437MHz Ant1

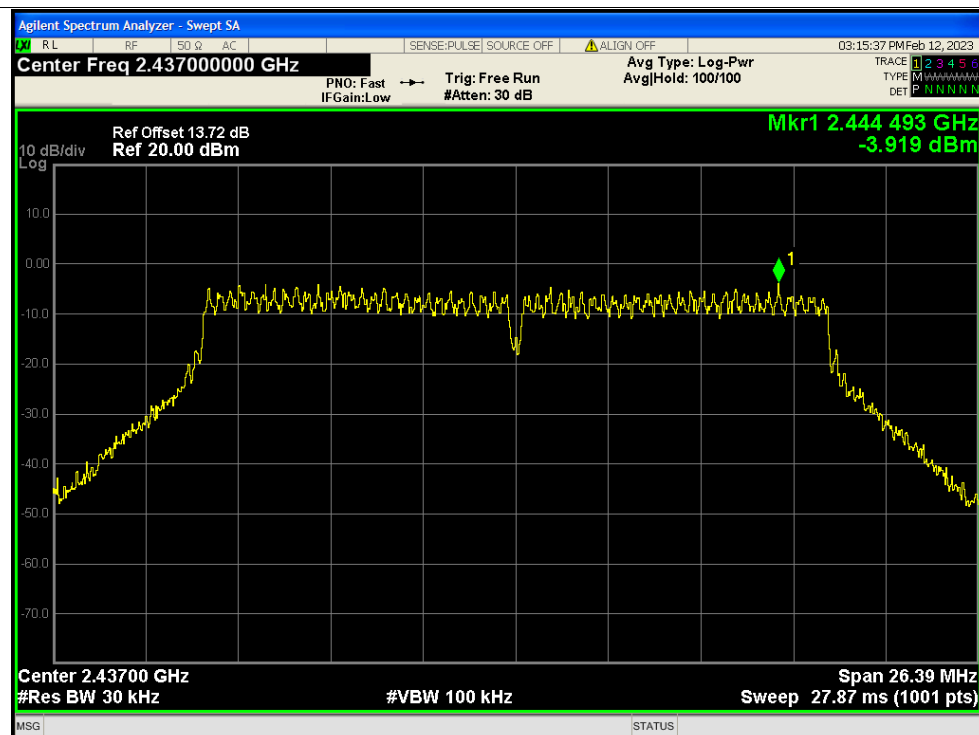

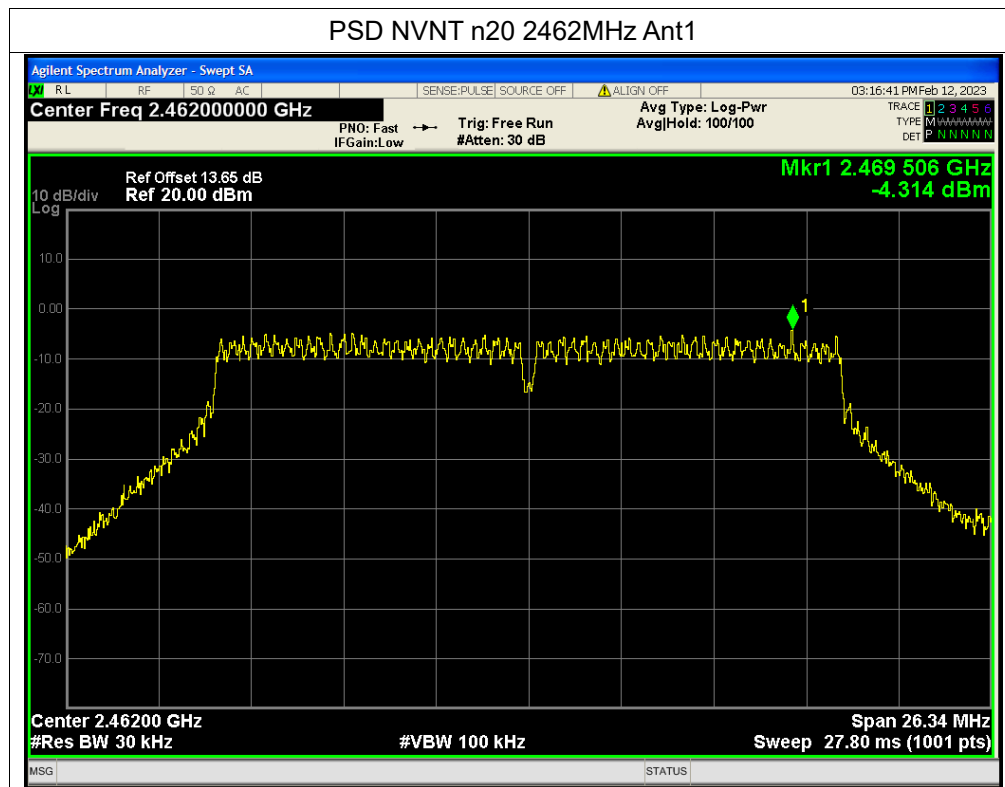



A.8. Conducted Emission

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Set RBW=9kHz, VBW=30kHz. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test Setup:

Test Mode: EUT + Adapter + USB Cable + WIFI TX

Test voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plot:

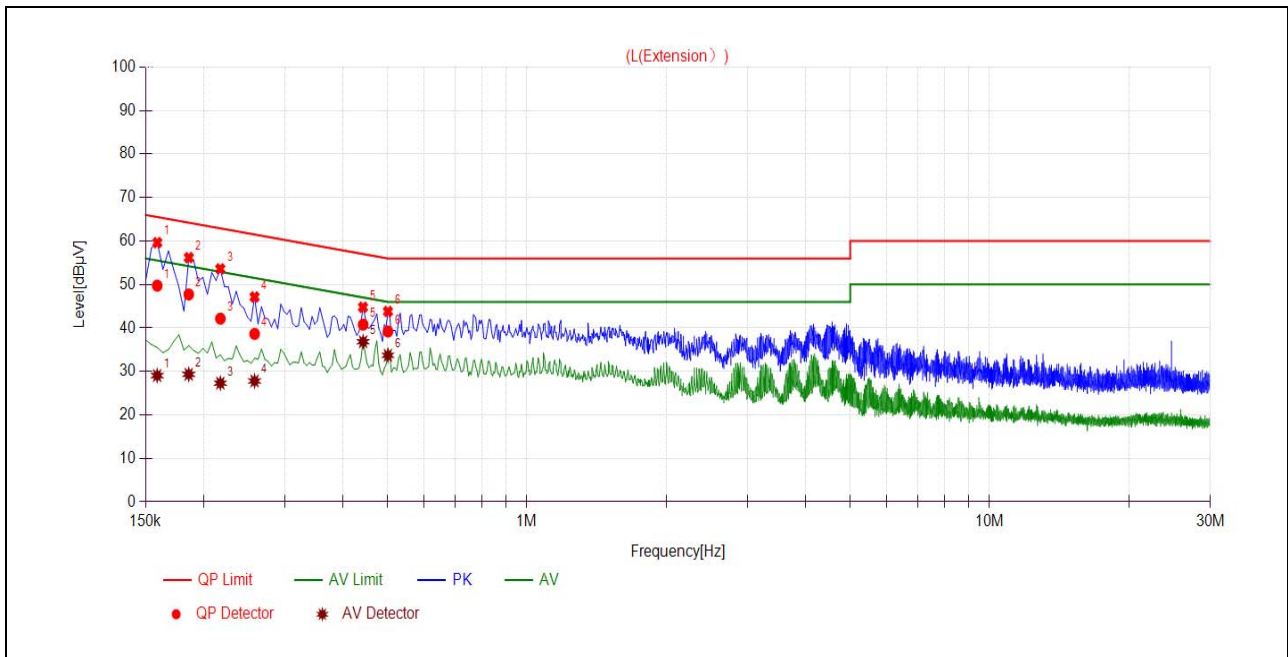

(L Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1589	49.74	29.05	65.52	55.52	Line	PASS
2	0.1859	47.72	29.33	64.22	54.22		PASS
3	0.2176	42.15	27.31	62.91	52.91		PASS
4	0.2580	38.64	27.80	61.49	51.49		PASS
5	0.4428	40.78	36.82	57.01	47.01		PASS
6	0.5009	39.19	33.70	56.00	46.00		PASS

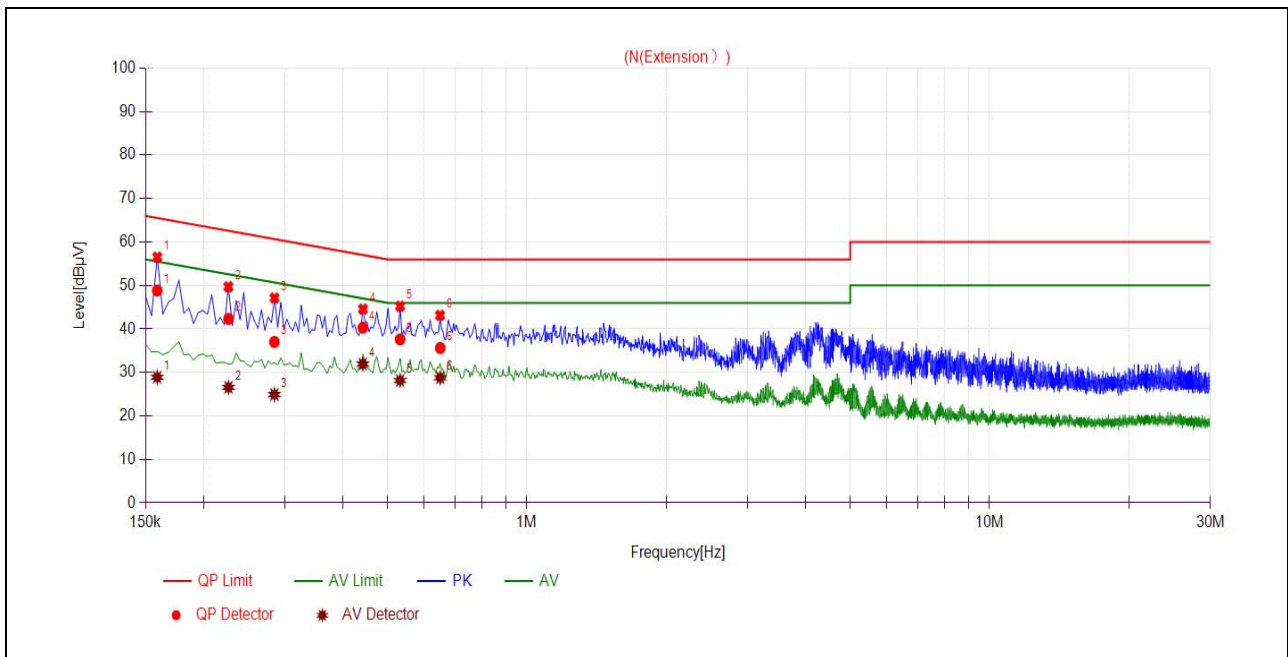

(N Phase)

No.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1589	48.84	28.90	65.52	55.52	Neutral	PASS
2	0.2266	42.33	26.57	62.57	52.57		PASS
3	0.2847	37.01	24.91	60.68	50.68		PASS
4	0.4422	40.30	31.92	57.02	47.02		PASS
5	0.5322	37.61	28.15	56.00	46.00		PASS
6	0.6499	35.62	28.78	56.00	46.00		PASS



A.9. Restricted Frequency Bands

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

802.11b Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dB μ V)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
1	2379.97	PK	22.29	6.74	27.20	56.23	74	PASS
1	2390.00	AV	10.07	6.74	27.20	44.01	54	PASS
11	2485.22	PK	21.92	6.74	27.20	55.86	74	PASS
11	2483.50	AV	9.89	6.74	27.20	43.83	54	PASS

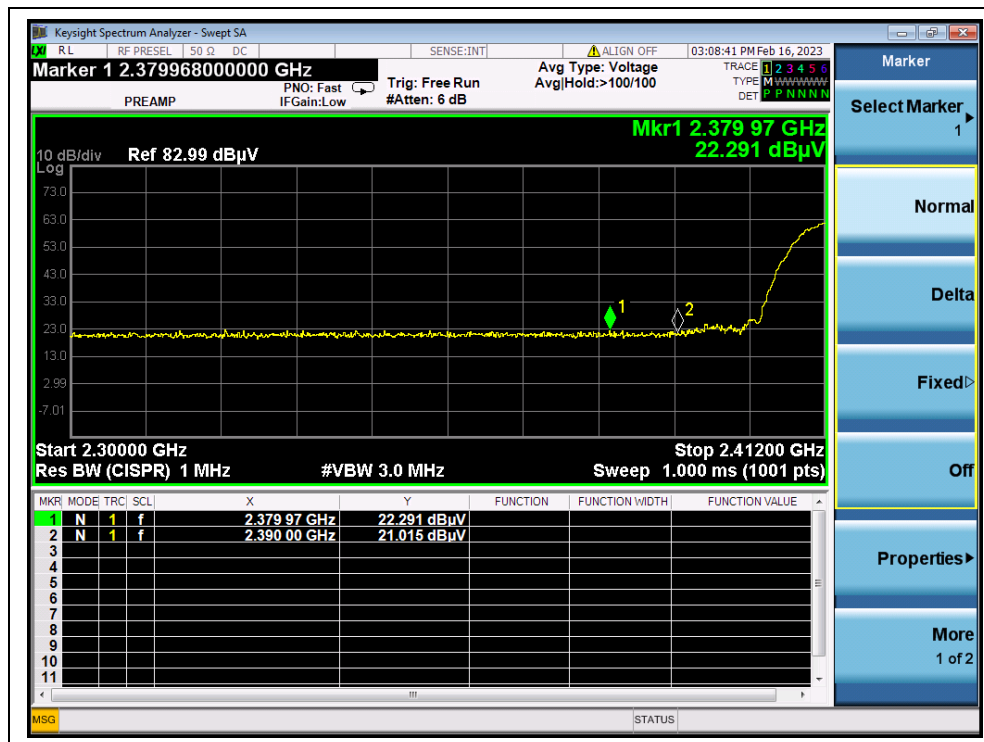


(PEAK, Channel 1, 802.11b)

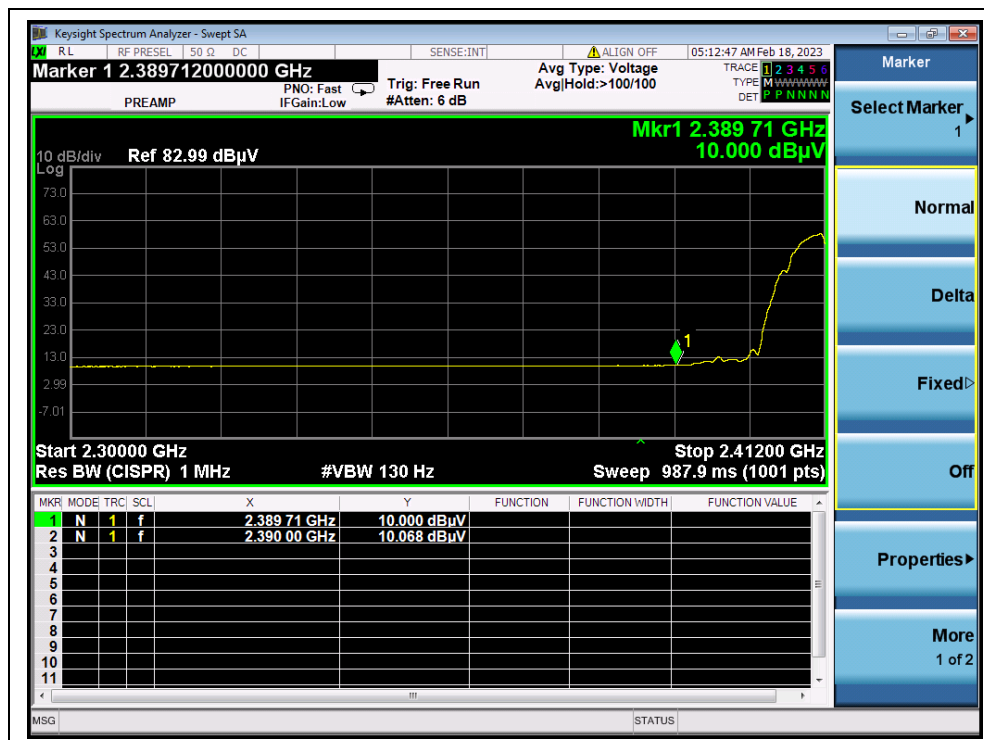

(AVERAGE, Channel 1, 802.11b)

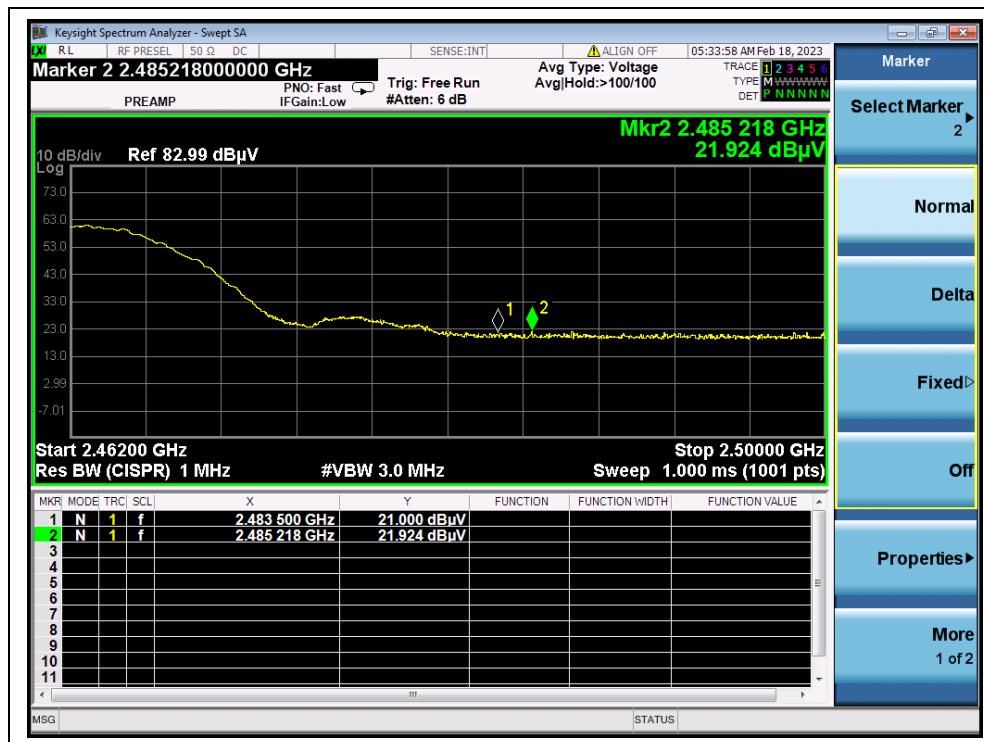

(PEAK, Channel 11, 802.11b)

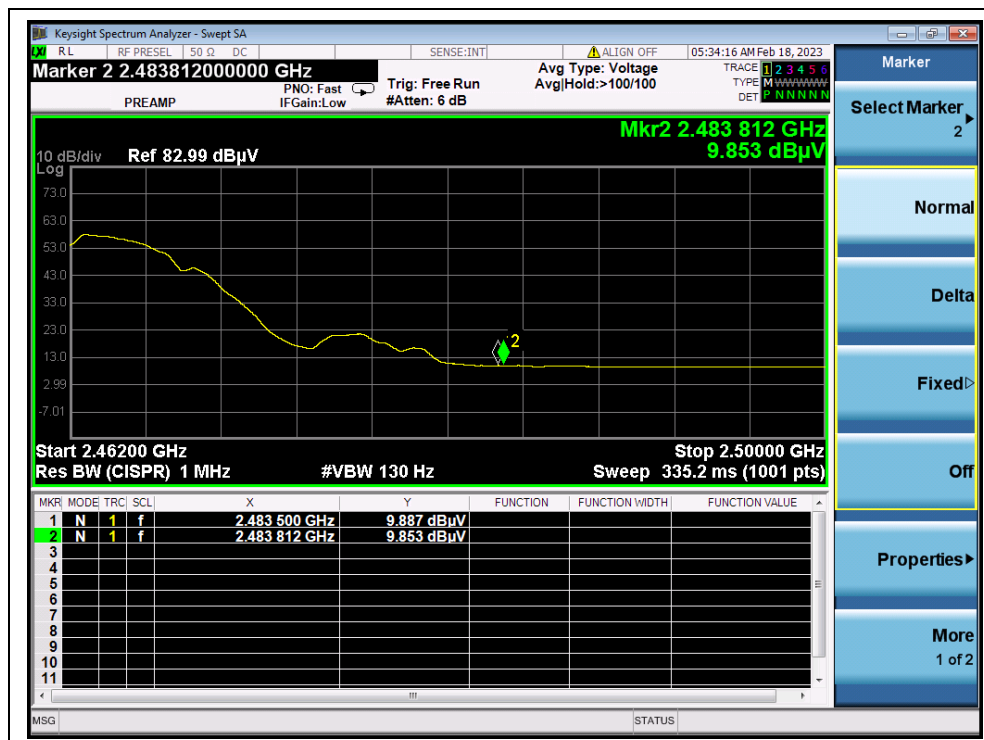


(AVERAGE, Channel 11, 802.11b)




802.11g Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2388.59	PK	21.91	6.74	27.20	55.85	74	PASS
1	2389.71	AV	11.11	6.74	27.20	45.05	54	PASS
11	2484.27	PK	28.04	6.74	27.20	61.98	74	PASS
11	2483.50	AV	13.73	6.74	27.20	47.67	54	PASS

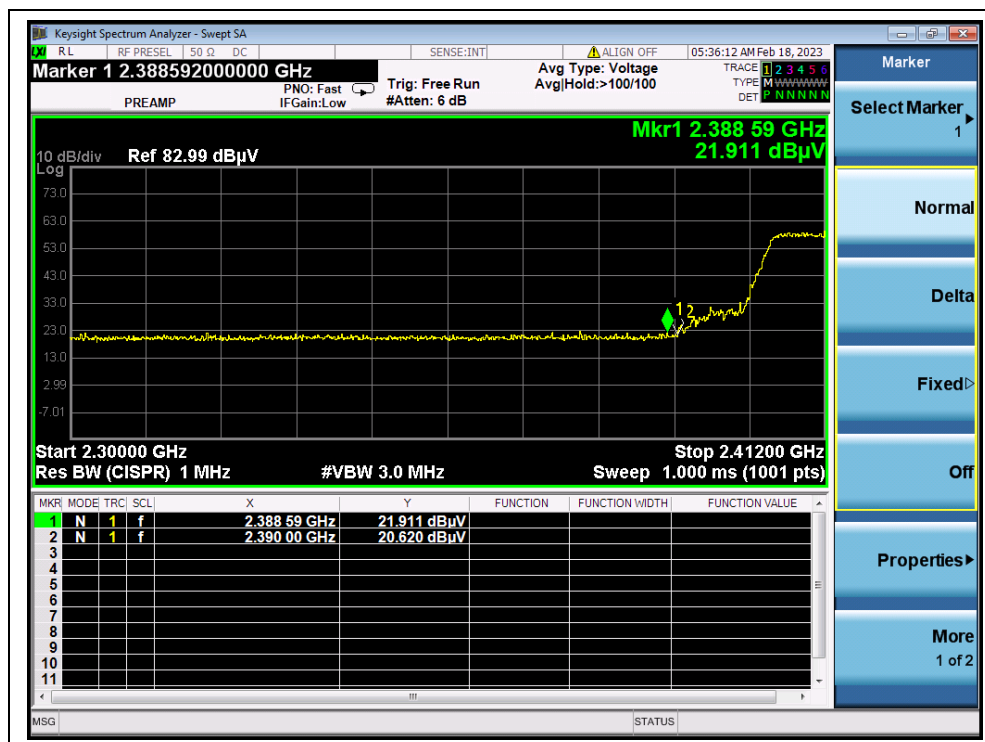


(PEAK, Channel 1, 802.11g)

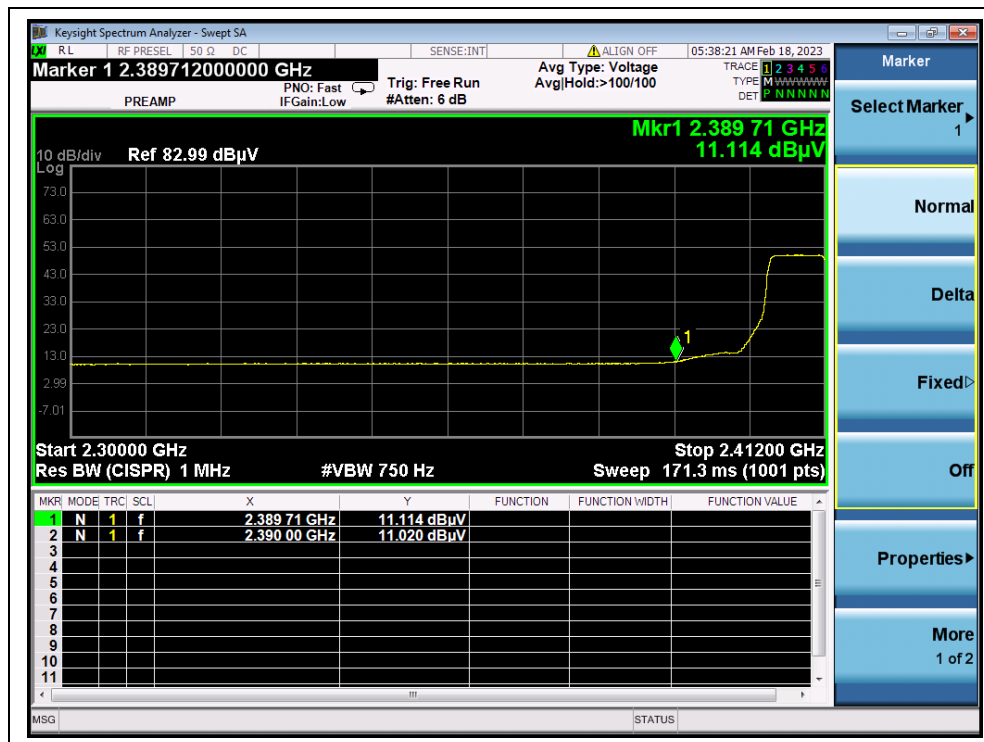

(AVERAGE, Channel 1, 802.11g)

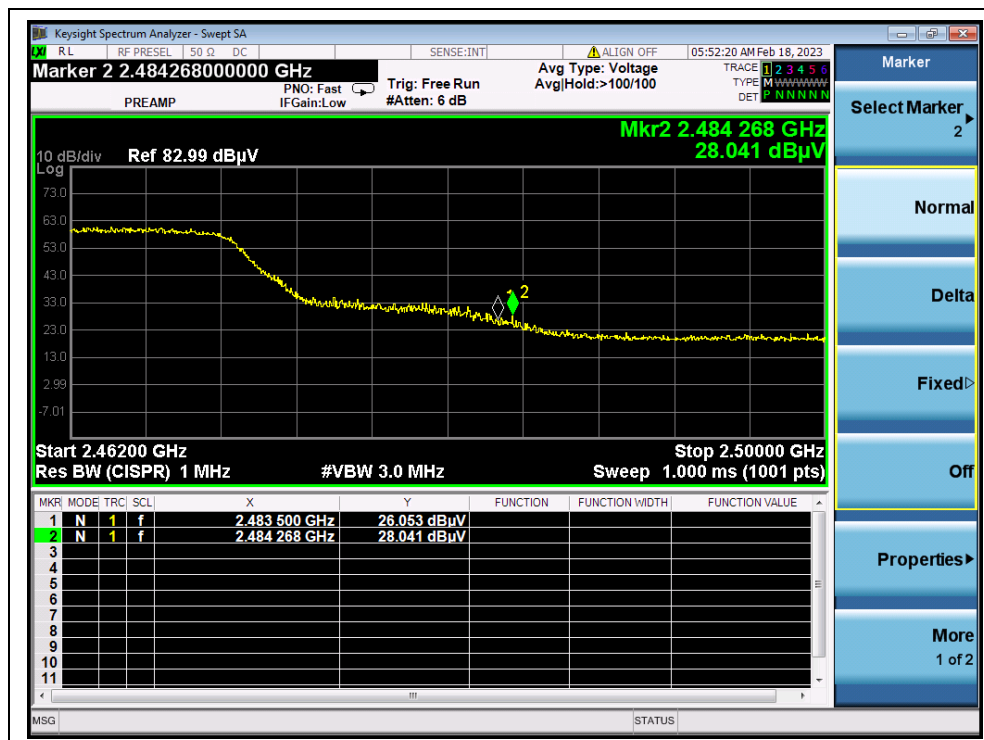

(PEAK, Channel 11, 802.11g)

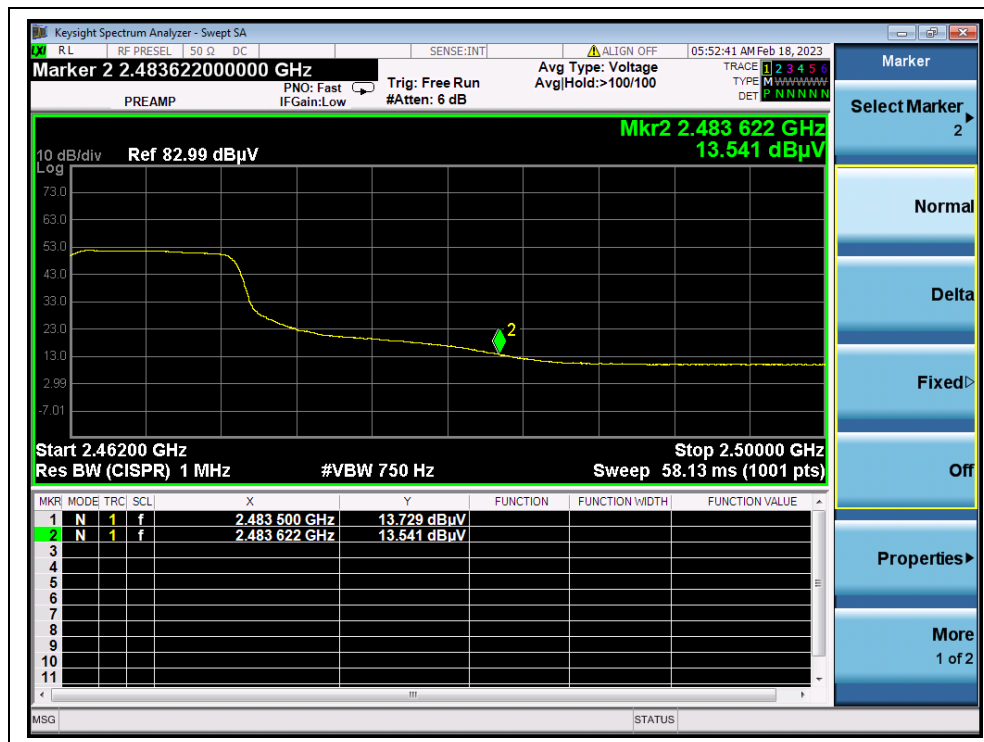


(AVERAGE, Channel 11, 802.11g)




802.11n (HT20) Mode


Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBμV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBμV/m)	Limit (dBμV/m)	Verdict
		PK/ AV						
1	2383.33	PK	21.47	6.74	27.20	55.41	74	PASS
1	2389.60	AV	10.62	6.74	27.20	44.56	54	PASS
11	2483.85	PK	27.32	6.74	27.20	61.26	74	PASS
11	2483.50	AV	12.36	6.74	27.20	46.30	54	PASS

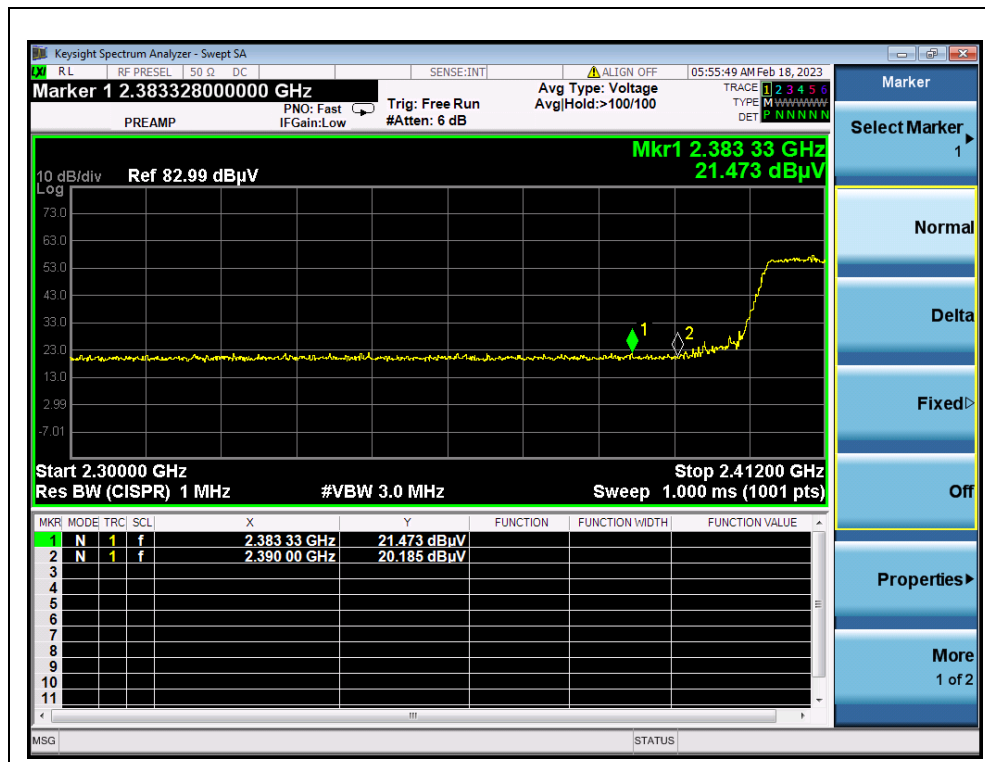


(PEAK, Channel 1, 802.11n (HT20))

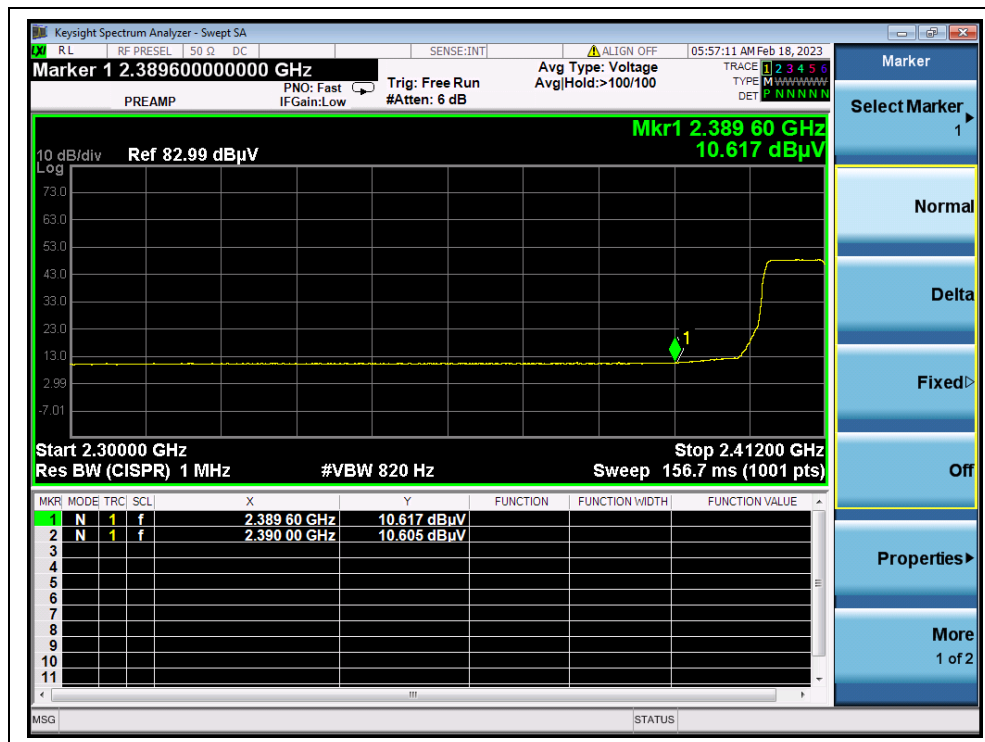

(AVERAGE, Channel 1, 802.11n (HT20))

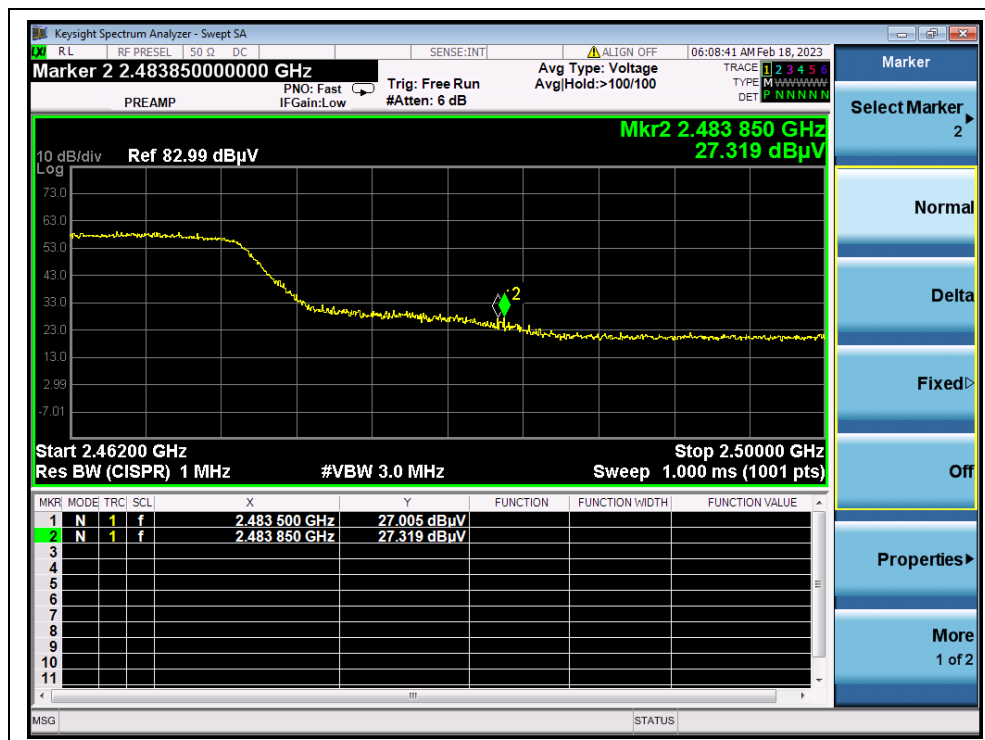

(PEAK, Channel 11, 802.11n (HT20))

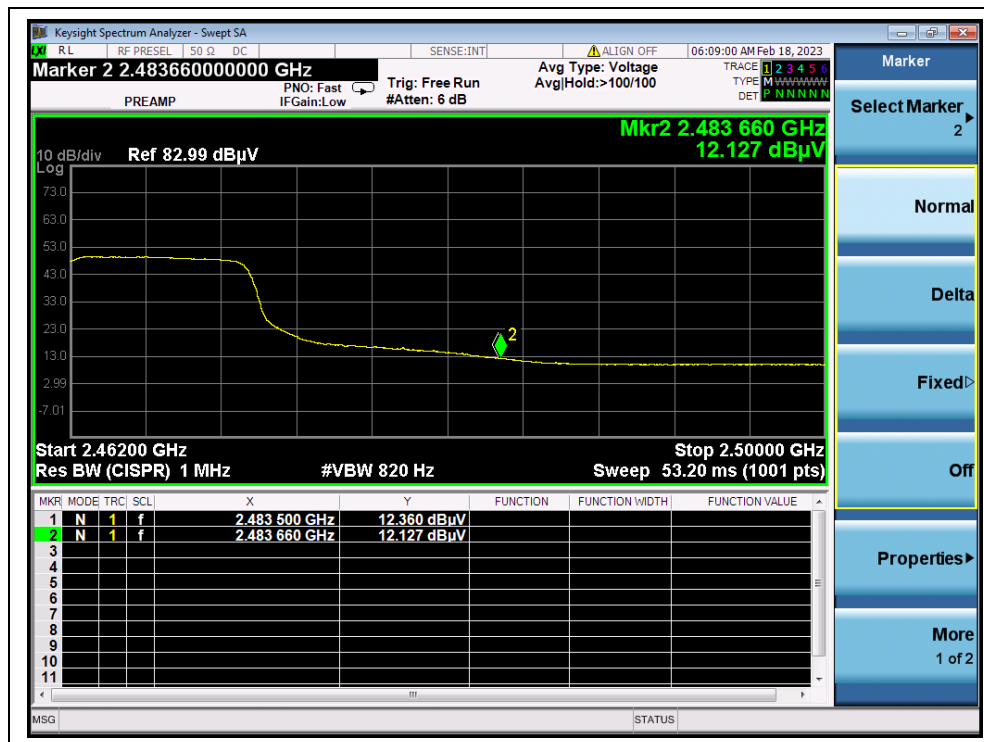

(AVERAGE, Channel 11, 802.11n (HT20))



A.10. Radiated Emission

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak (or average) limit, it is unnecessary to perform an quasi-peak measurement (or average).

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note1: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Note2: For the frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit was not recorded.

Note3: For the frequency, which started from 18GHz to 10th harmonic of the highest frequency, was pre-scanned and the result which was 20dB lower than the limit was not recorded.


**802.11b Mode**

Plot for Channel 1

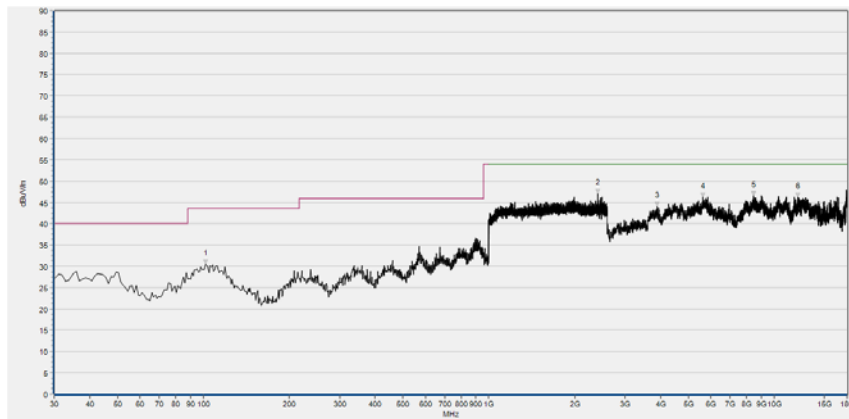

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	30.58	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2408.000	47.02	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3893.600	44.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5612.240	46.26	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8458.160	46.67	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12120.280	46.33	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

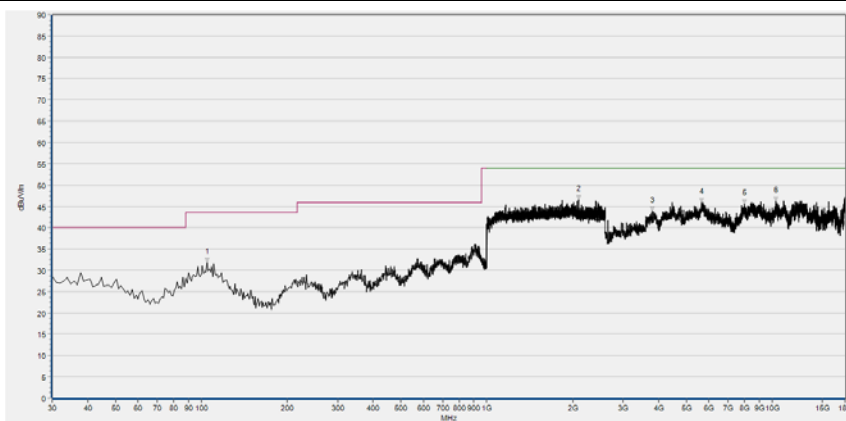


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.690	31.82	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2096.000	46.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3795.040	43.92	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5652.280	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
7980.760	45.51	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10287.680	46.23	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

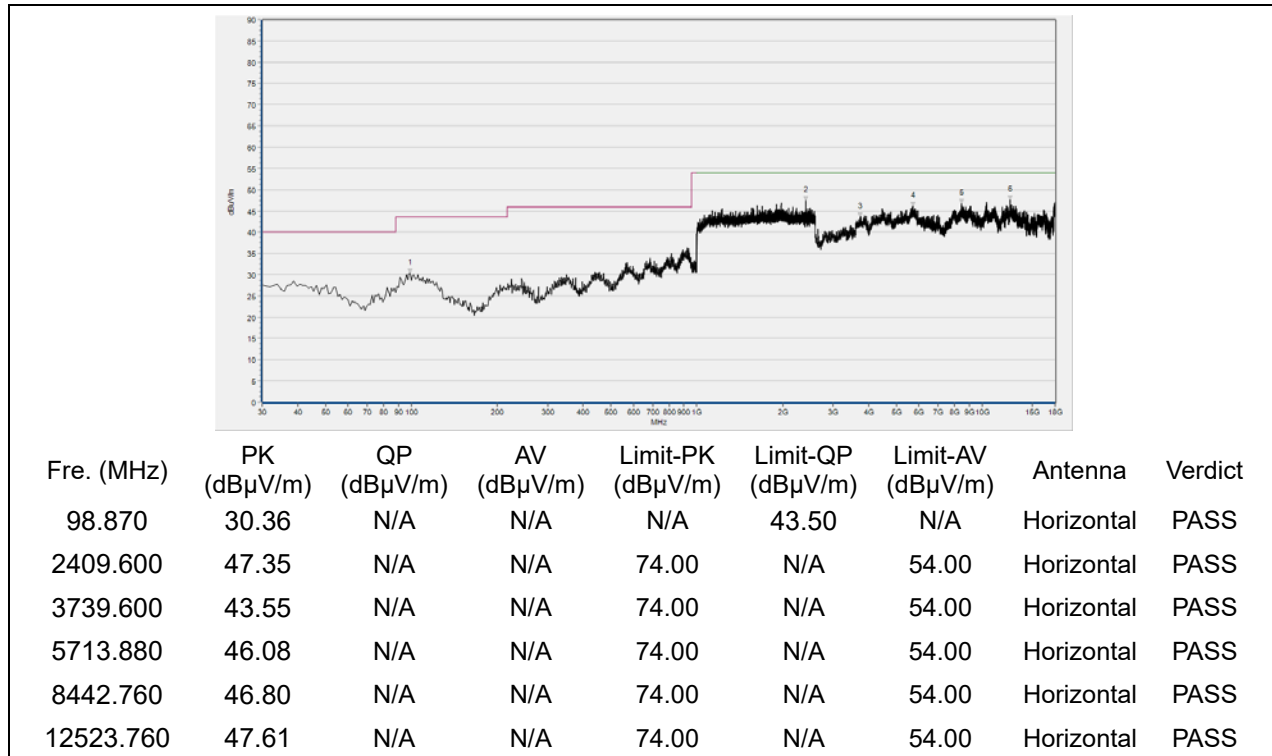


(Antenna Horizontal, 30MHz to 18GHz)

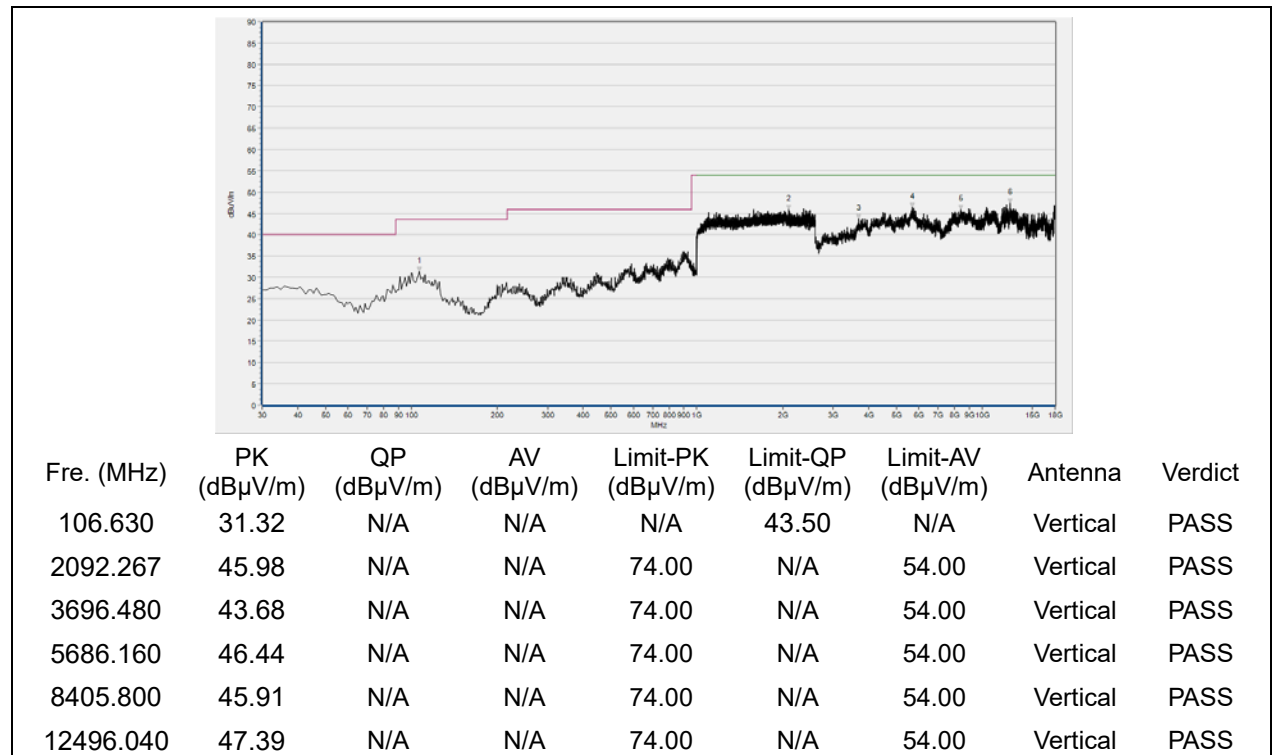


(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 11

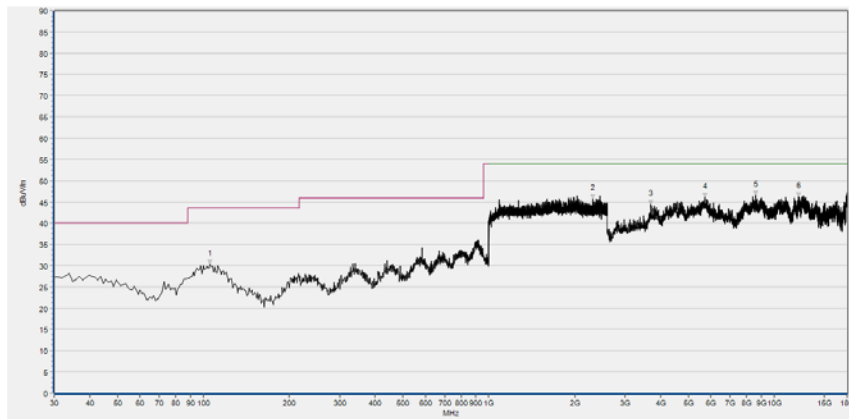

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.660	30.29	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2313.067	45.81	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3699.560	44.40	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5701.560	46.10	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8584.440	46.58	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12169.560	46.28	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

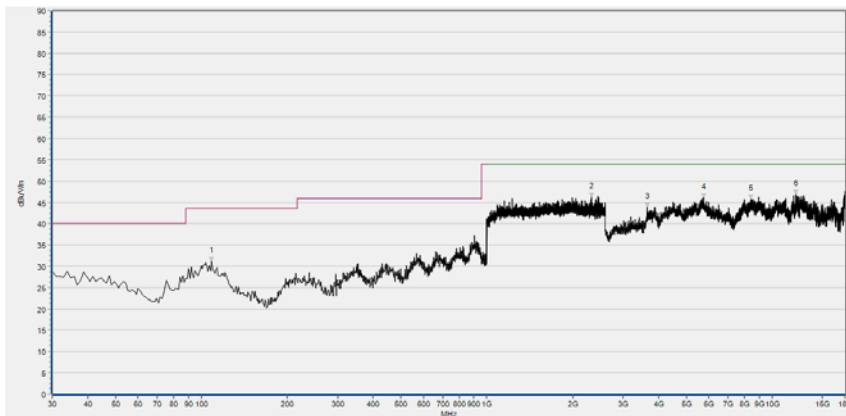


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	31.15	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2323.200	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3653.360	43.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5735.440	46.07	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8399.640	45.73	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12123.360	46.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11g Mode**

Plot for Channel 1

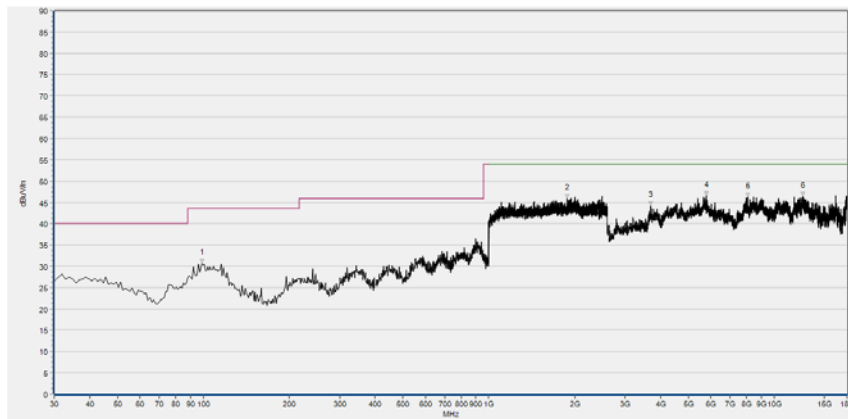

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	30.64	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1878.400	45.89	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3687.240	44.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5769.320	46.56	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8057.760	46.30	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12566.880	46.38	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

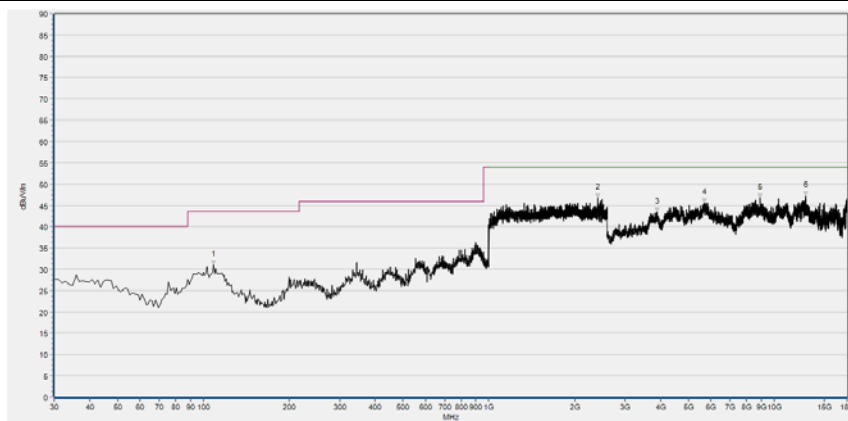


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	31.08	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2410.667	46.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3875.120	43.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5670.760	45.53	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8935.560	46.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12884.120	47.22	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 6

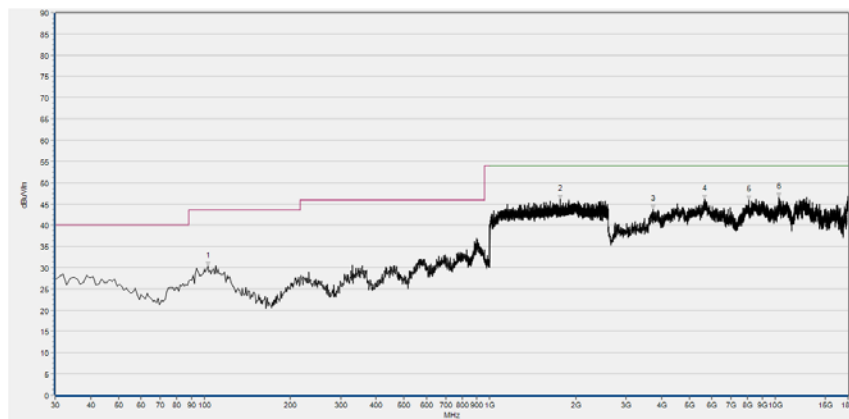

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.750	30.39	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1766.933	46.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3739.600	43.70	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5667.680	46.04	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8100.880	45.90	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
10290.760	46.60	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

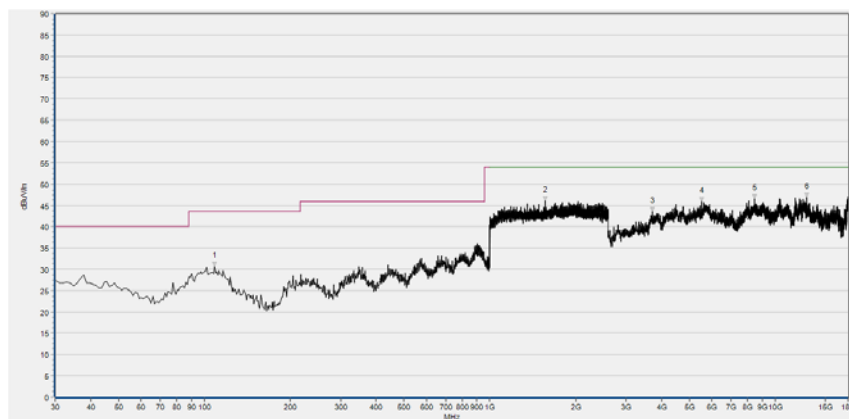


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
108.570	30.64	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
1564.800	46.04	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3718.040	43.50	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5519.840	45.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8439.680	46.56	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
12884.120	46.86	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)




Plot for Channel 11

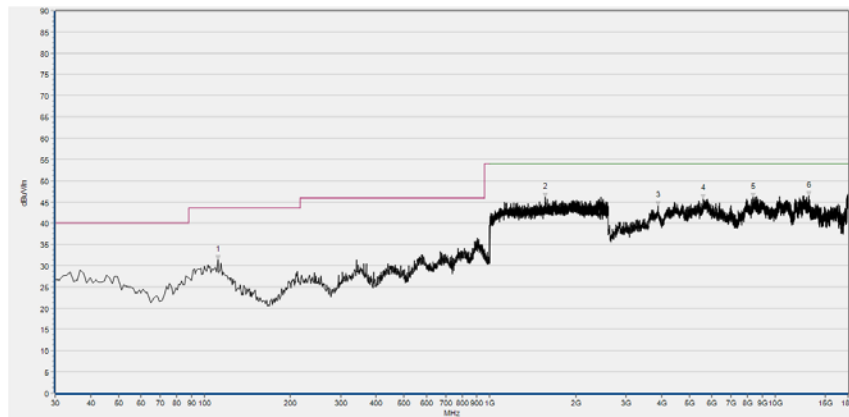

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
111.480	31.35	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1564.267	46.01	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3878.200	44.00	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5603.000	45.82	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8356.520	46.08	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
13075.080	46.35	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)

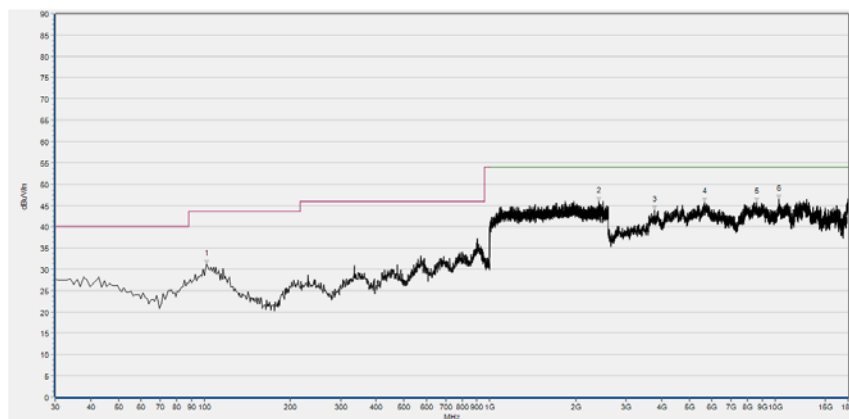


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	30.89	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2415.467	49.87	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3770.400	52.66	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5661.520	54.33	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8624.480	45.88	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10306.160	47.42	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)


**802.11n (HT20) Mode**

Plot for Channel 1

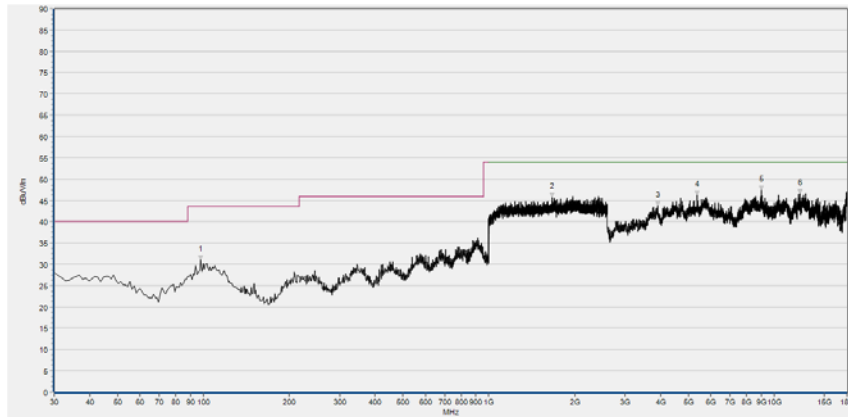

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
97.900	31.04	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1668.267	45.68	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3912.080	43.66	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5372.000	46.21	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
9024.880	47.49	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12286.600	46.54	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS


(Antenna Horizontal, 30MHz to 18GHz)

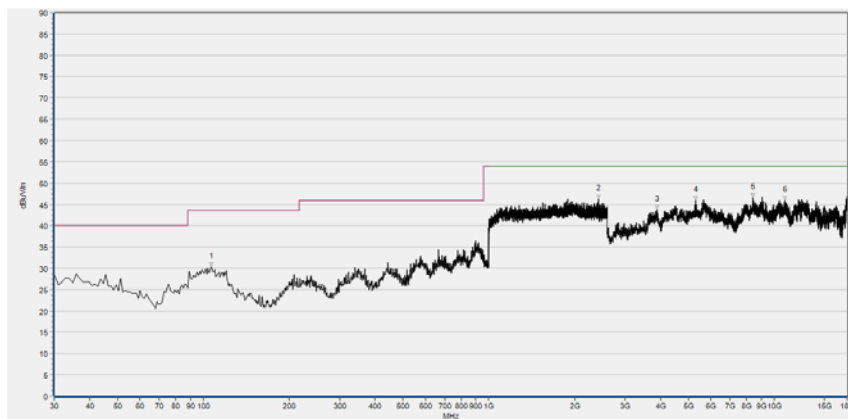


Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
106.630	30.35	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2416.533	46.20	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3881.280	43.79	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5304.240	45.85	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8415.040	46.63	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
10922.160	45.91	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

Plot for Channel 6

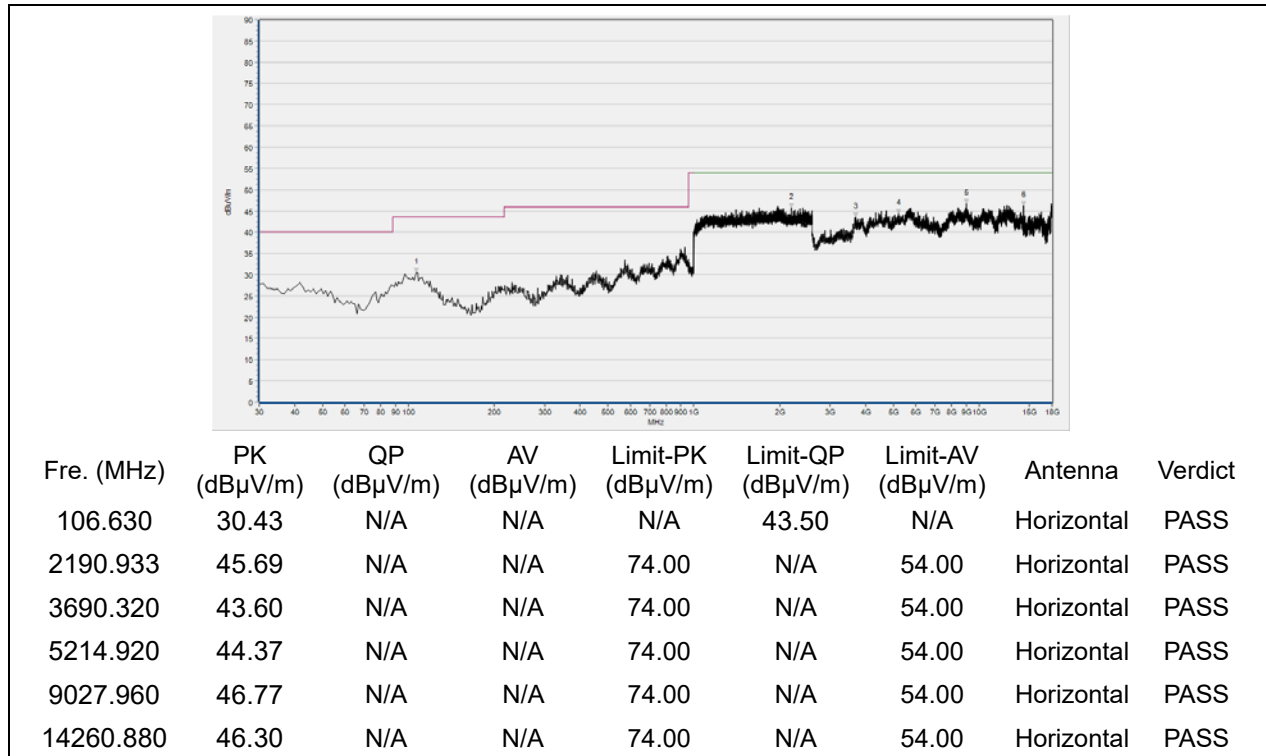


(Antenna Horizontal, 30MHz to 18GHz)

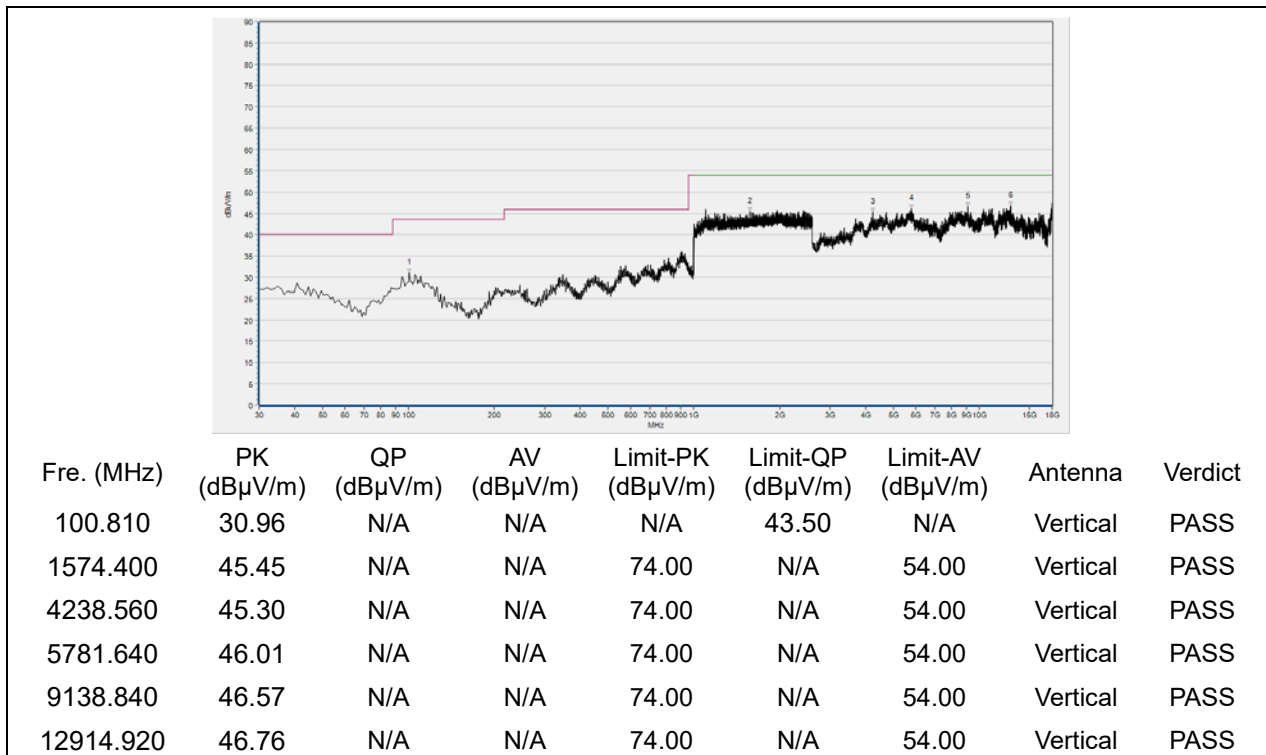

(Antenna Vertical, 30MHz to 18GHz)



Plot for Channel 11

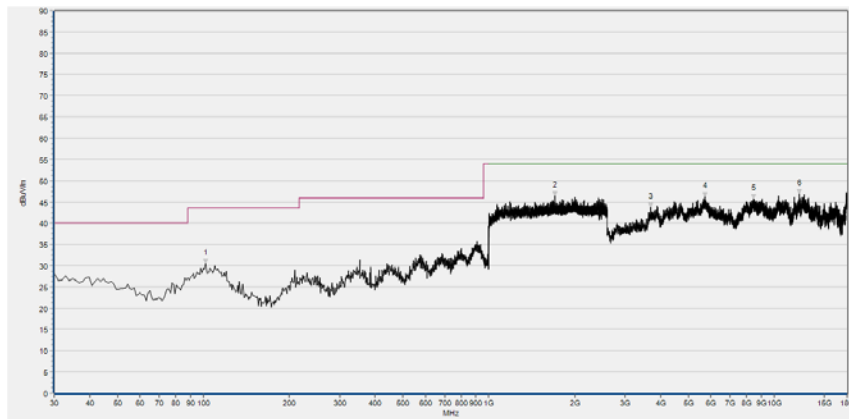

Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.780	30.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1708.267	46.34	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
3684.160	43.75	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
5723.120	46.24	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
8455.080	45.73	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS
12203.440	46.85	N/A	N/A	74.00	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 18GHz)



Fre. (MHz)	PK (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
98.870	30.62	N/A	N/A	N/A	43.50	N/A	Vertical	PASS
2409.067	46.90	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
3859.720	44.43	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
5381.240	45.46	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
8673.760	45.69	N/A	N/A	74.00	N/A	54.00	Vertical	PASS
11116.200	45.64	N/A	N/A	74.00	N/A	54.00	Vertical	PASS

(Antenna Vertical, 30MHz to 18GHz)

END OF REPORT