

FCC PART 15.407

TEST REPORT

For

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Industrial Park, No. 34-1, Shilong Rd., Shiyan Town, Bao'an District, Shenzhen,
P.R.China

FCC ID: V7TW1800R

Report Type: Original Report	Product Type: Wireless AC1750 Dual-band Gigabit Router
Test Engineer:	Leon Chen <i>leon chen</i>
Report Number:	R2DG130130005-00B
Report Date:	2013-03-13
Reviewed By:	Ivan Cao <i>Ivan Cao</i> RF Leader
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	9
APPLICABLE STANDARD	9
FCC §15.203 – ANTENNA REQUIREMENT.....	10
APPLICABLE STANDARD	10
ANTENNA CONNECTOR CONSTRUCTION	10
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	11
APPLICABLE STANDARD	11
MEASUREMENT UNCERTAINTY.....	11
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
TEST RESULTS SUMMARY	13
TEST DATA	13
FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS	16
APPLICABLE STANDARD	16
MEASUREMENT UNCERTAINTY.....	16
EUT SETUP	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	18
CORRECTED AMPLITUDE & MARGIN CALCULATION	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST RESULTS SUMMARY	19
TEST DATA	19
CONDUCTED SPURIOUS EMISSION AT ANTENNA PORT.....	26
TEST DATA	26
FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS	82
APPLICABLE STANDARD	82
TEST PROCEDURE	82
TEST EQUIPMENT LIST AND DETAILS.....	82
TEST DATA	82

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH	101
APPLICABLE STANDARD	101
TEST EQUIPMENT LIST AND DETAILS.....	101
TEST PROCEDURE	101
TEST DATA	101
FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER.....	122
APPLICABLE STANDARD	122
TEST EQUIPMENT LIST AND DETAILS.....	122
TEST PROCEDURE	122
TEST DATA	122
FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY	143
APPLICABLE STANDARD	143
TEST PROCEDURE	143
TEST EQUIPMENT LIST AND DETAILS.....	143
TEST DATA	144
FCC §15.407(a) (6) – PEAK EXCURSION RATIO	164
APPLICABLE STANDARD	164
TEST PROCEDURE	164
TEST EQUIPMENT LIST AND DETAILS.....	164
TEST DATA	164

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The SHENZHEN TENDA TECHNOLOGY CO.,LTD.'s product, model number: W1800R (FCC ID: V7T W1800R) or ("EUT") in this report is a Wireless AC1750 Dual-band Gigabit Router, which was measured approximately: 34.5 cm (L) x22.0 cm (W) x3.5 cm (H), rated input voltage: DC 12V from adapter.

Adapter information: Honor
Model: ADS-40FSG-12 12030GPCU
Input: AC 100-240V, 50/60Hz, Max.1.0A
Output: DC 12V, 2.5A

** All measurement and test data in this report was gathered from production sample serial number: 130130005 (Assigned by BACL, Dongguan). The EUT was received on 2013-01-30.*

Objective

This type approval report is prepared on behalf of SHENZHEN TENDA TECHNOLOGY CO.,LTD. in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: V7TW1800R for 2412-2462MHz band.
FCC Part 15C DTS submissions with FCC ID: V7TW1800R for 5745-5825MHz band.
FCC Part 15B JBP submissions with FCC ID: V7TW1800R.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 02, 2012. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5180~5240MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a , 802.11n ht20 and 802.11ac vht 20, Channel 36, 40 ,44 and 48 was used, we choosed the channel 36,40,48 for tested, for 802.11n ht40 and 802.11ac vht 40, Channel 38, 46 was tested, for 802.11ac vht 80 mode channel 42 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The software 'Broadcom MTool 2.0.0.3' was used for testing, which was provided by manufacturer.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Printer	C3941A	JPTVOB2337
SAST	Modem	AEM-2100	0293
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Laptop	PP11L	N/A
Kinston	Flash Disk	4G	/
DELL	PC	GX620	/

External Cable

Cable Description	Length (m)	From Port	To
Shielded Detachable Printer Cable	1.2	Parallel Port of Laptop	Printer
Shielded Detachable Serial Cable	1.2	Serial Port of Laptop	Modem
Shielded Detachable Keyboard Cable	1.5	Keyboard Port of Laptop	Keyboard
RJ 45 Cable	1.0	Laptop	EUT
RJ45 Cable*4	10	EUT	PC

Block Diagram of Test Setup

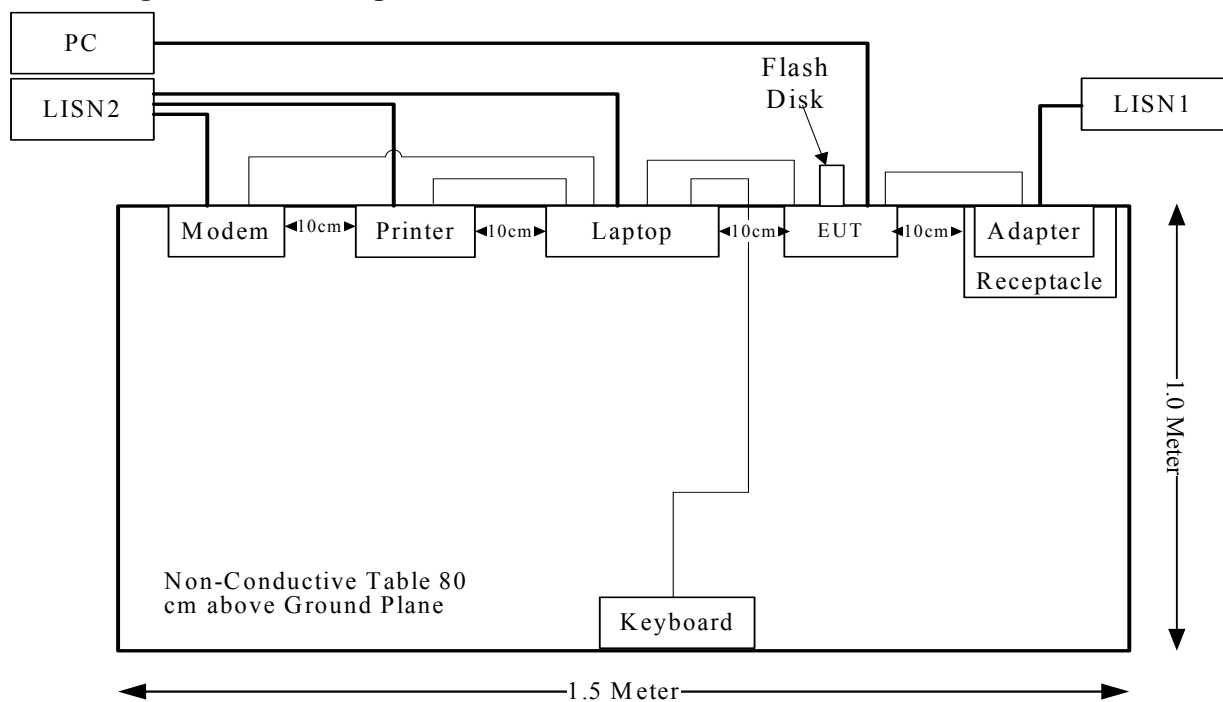

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091	Maximum Permissible Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(2),(3),(4)	Out Of Band Emissions	Compliance
§15.407(a) (1)	26 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance
§15.407(a)(6)	Peak Excursion Ratio	Compliance

FCC §15.247 (i) & §1.1307 (b) (1) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
802.11a	5180	5	3.16	13.62	23.01	20.00	0.01449	1.0
802.11n ht20	5240	5	3.16	13.1	20.42	20.00	0.01285	1.0
802.11n ht40	5190	5	3.16	13.15	20.65	20.00	0.01300	1.0
802.11ac vht20	5200	5	3.16	13.15	20.65	20.00	0.01300	1.0
802.11ac vht40	5230	5	3.16	12.95	19.72	20.00	0.01242	1.0
802.11ac80	5210	5	3.16	12.98	19.86	20.00	0.01250	1.0

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 3 dipole antennas, which were using unique type of connector to attach to the EUT, and the maximum gain is 5.0dBi, please refer to the internal photos.

Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS**Applicable Standard**

FCC §15.207, §15.407(b) (6)

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cisp} of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cisp} of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cisp})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.46 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cisp}

Measurement	U_{cisp}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

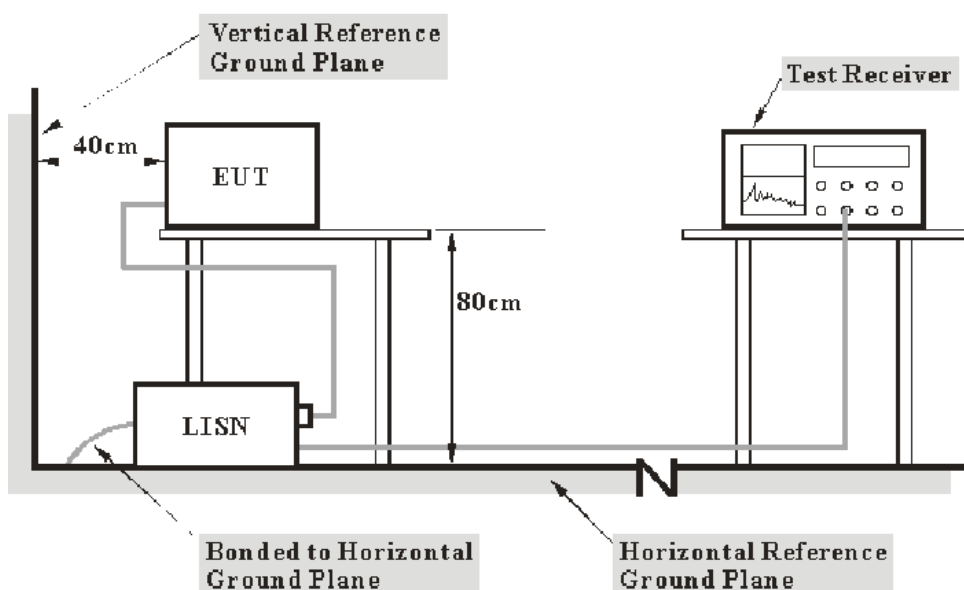

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f: Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2012-11-29	2013-11-28
R&S	LISN1	ESH3-Z5	843331/015	2012-09-17	2013-09-16
R&S	LISN2	ESH3-Z5	100113	2012-11-29	2013-11-28
BACL	Test Software	BACL-EMC	V1.0-2010	N/A	N/A

Test Procedure

During the conducted emission test, the adapter was connected to the LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

13.05 dB at 0.540 MHz in the Line conducted mode

Test Data


Environmental Conditions

Temperature:	24 ° C
Relative Humidity:	62 %
ATM Pressure:	101.3 kPa


The testing was performed by Leon Chen on 2013-02-04.

Test Mode: Operating

120 V, 60 Hz, Line:

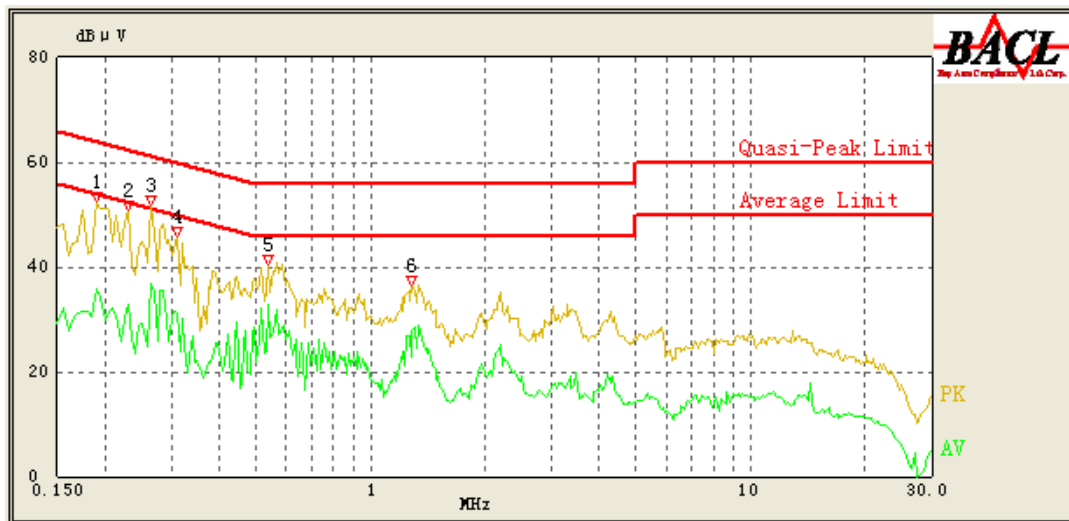

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.190	44.10	0.99	64.86	20.76	QP
0.190	35.74	0.99	54.86	19.12	AV
0.230	42.50	0.93	63.71	21.21	QP
0.230	32.76	0.93	53.71	20.95	AV
0.265	45.61	0.87	62.71	17.10	QP
0.265	36.68	0.87	52.71	16.03	AV
0.310	43.47	0.80	61.43	17.96	QP
0.310	31.17	0.80	51.43	20.26	AV
0.540	37.06	0.51	56.00	18.94	QP
0.540	32.95	0.51	46.00	13.05	AV
1.285	33.19	0.33	56.00	22.81	QP
1.285	27.83	0.33	46.00	18.17	AV

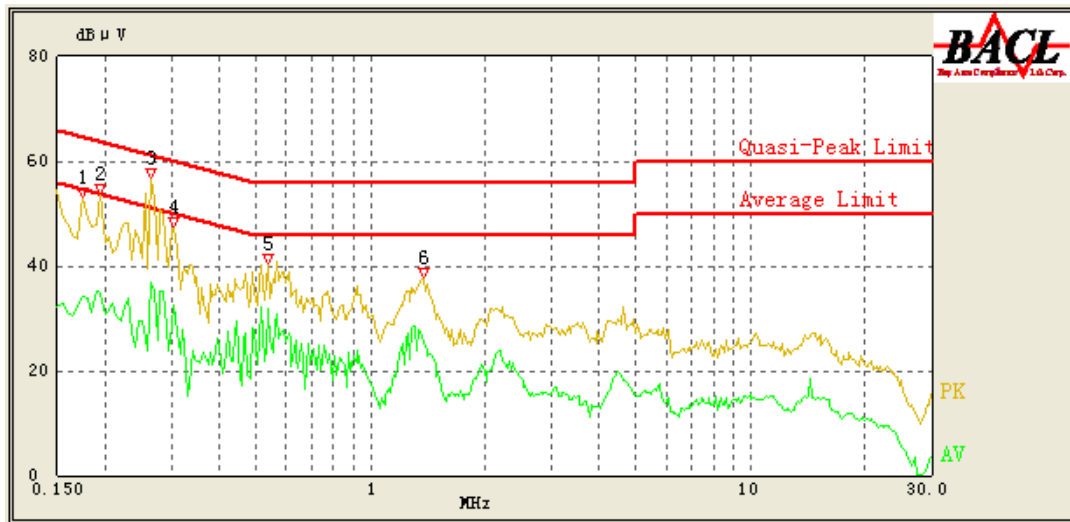120V, 60 Hz, Neutral:

Frequency (MHz)	Cord. Reading (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/AV/QP)
0.175	45.29	1.71	65.29	20.00	QP
0.175	34.11	1.71	55.29	21.18	AV
0.195	44.89	1.61	64.71	19.82	QP
0.195	34.79	1.61	54.71	19.92	AV
0.265	46.17	1.25	62.71	16.54	QP
0.265	36.73	1.25	52.71	15.98	AV
0.305	43.30	1.06	61.57	18.27	QP
0.305	32.44	1.06	51.57	19.13	AV
0.540	36.68	0.52	56.00	19.32	QP
0.540	31.84	0.52	46.00	14.16	AV
1.385	33.31	0.25	56.00	22.69	QP
1.385	25.54	0.25	46.00	20.46	AV

FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) – UNDESIRABLE EMISSION & RESTRICTED BANDS

Applicable Standard

FCC §15.407 (b) (1), (6), (7); §15.209; §15.205;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

According to KDB 789033 D01 General UNII Test Procedures v01, emission shall be computed as:

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$, for $d = 3$ meters.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log(3\text{m}/1.5)$ dB

Limit line = specific limits (dB $\mu\text{V}/\text{m}$) + 6dB

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to $U_{\text{cisp}} of Table 1, then:$

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than $U_{\text{cisp}} of Table 1, then:$

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{\text{lab}} - U_{\text{cisp}})$, exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:

30M~200MHz: 5.0 dB

200M~1GHz: 6.2 dB

1G~6GHz: 4.45 dB


6G~18GHz: 5.23 dB

Table 1 – Values of U_{cisp}


Measurement	U_{cisp}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1 G:

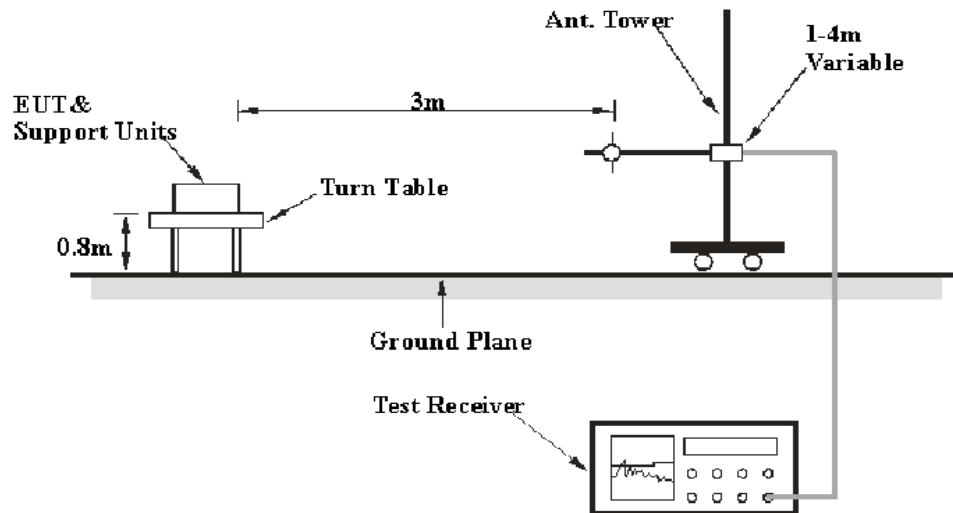

Above 1 G:

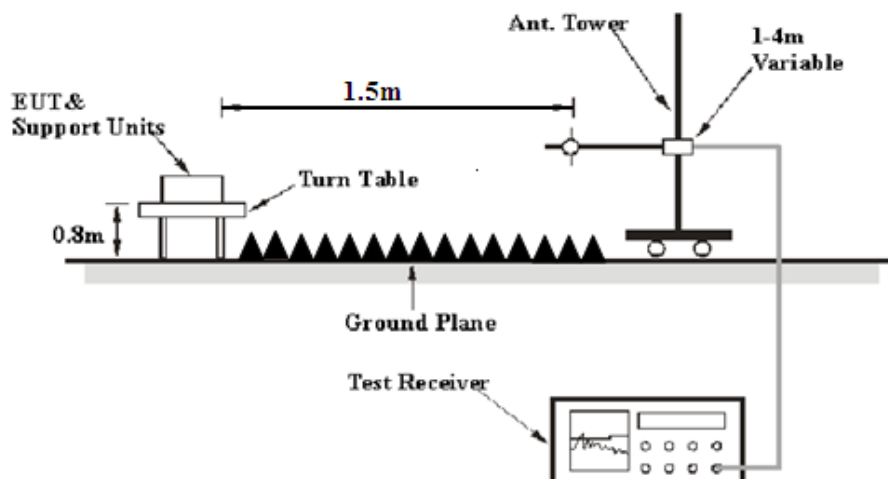

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source,

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 40 GHz	1 MHz	3 MHz	PK
1000 MHz – 40 GHz	1 MHz	10 Hz	Ave.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2012-05-14	2013-05-13
Sunol Sciences	Hybrid Antennas	JB3	A060611-1	2011-09-06	2013-09-05
HP	Pre-amplifier	8447E	2434A02181	2012-10-08	2013-10-07
R&S	Spectrum Analyzer	FSEM 30	DE31388	2012-03-15	2013-03-14
ETS-LINDGREN	Horn Antenna	3115	000 527 35	2012-09-06	2014-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2013-01-30	2014-01-29
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, Section 15.205, 15.209 and 15.407, with the worst margin reading of:

8.74 dB at 5150 MHz in the Vertical polarization for 802.11n40 Mode

Test Data**Environmental Conditions**

Temperature:	21.4° C~24.4° C
Relative Humidity:	59 %~68 %
ATM Pressure:	100.8 kPa~101.9 kPa

The testing was performed by Leon Chen from 2013-02-28 on 2013-03-13.

Mode: Transmitting

802.11a Mode:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.407	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 5180MHz									
5150	28.42	PK	V	31.40	5.45	0.00	65.27	74.20	8.93
5150	14.32	AV	V	31.40	5.45	0.00	51.17	60.00	8.83
10360	34.67	PK	V	36.97	8.34	25.85	54.13	74.20	20.07
15540	33.06	PK	V	37.43	11.42	24.10	57.81	74.20	16.39
15540	19.79	AV	V	37.43	11.42	24.10	44.54	60.00	15.46
357.82	28.62	QP	V	15.51	2.30	21.66	24.77	46.00	21.23
5180	62.92	PK	H	31.46	5.49	0.00	99.87	N/A	N/A
5180	49.11	AV	H	31.46	5.49	0.00	86.06	N/A	N/A
5180	69.53	PK	V	31.46	5.49	0.00	106.48	N/A	N/A
5180	56.25	AV	V	31.46	5.49	0.00	93.20	N/A	N/A
Middle Channel: 5200MHz									
10400	34.51	PK	V	36.98	8.34	25.92	53.91	74.20	20.29
15600	32.87	PK	V	37.32	11.46	24.12	57.53	74.20	16.67
15600	19.67	AV	V	37.32	11.46	24.12	44.33	60.00	15.67
402.11	31.4	QP	V	16.26	2.43	21.78	28.31	46.00	17.69
5200	63.02	PK	H	31.50	5.51	0.00	100.03	N/A	N/A
5200	49.03	AV	H	31.50	5.51	0.00	86.04	N/A	N/A
5200	69.47	PK	V	31.50	5.51	0.00	106.48	N/A	N/A
5200	56.24	AV	V	31.50	5.51	0.00	93.25	N/A	N/A
High Channel: 5240MHz									
5350	28.75	PK	V	31.80	4.58	0.00	65.13	74.20	9.07
5350	14.35	AV	V	31.80	4.58	0.00	50.73	60.00	9.27
10480	34.47	PK	V	37.00	8.34	26.02	53.79	74.20	20.41
15720	33.01	PK	V	37.10	11.54	23.53	58.12	74.20	16.08
15720	19.86	AV	V	37.10	11.54	23.53	44.97	60.00	15.03
379.61	29.83	QP	V	15.77	2.35	21.72	26.23	46.00	19.77
5240	62.73	PK	H	31.58	5.09	0.00	99.40	N/A	N/A
5240	48.97	AV	H	31.58	5.09	0.00	85.64	N/A	N/A
5240	69.38	PK	V	31.58	5.09	0.00	106.05	N/A	N/A
5240	56.11	AV	V	31.58	5.09	0.00	92.78	N/A	N/A

802.11n20 Mode:

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	FCC 15.407	
(MHz)	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)
Low Channel:5180MHz									
5150	27.67	PK	V	31.40	5.45	0.00	64.52	74.20	9.68
5150	14.29	AV	V	31.40	5.45	0.00	51.14	60.00	8.86
10360	32.61	PK	V	36.97	8.34	25.85	52.07	74.20	22.13
15540	32.97	PK	V	37.43	11.42	24.10	57.72	74.20	16.48
15540	19.95	AV	V	37.43	11.42	24.10	44.70	60.00	15.30
357.82	31.07	QP	V	15.51	2.30	21.66	27.22	46.00	18.78
5180	60.71	PK	H	31.46	5.49	0.00	97.66	N/A	N/A
5180	47.85	AV	H	31.46	5.49	0.00	84.80	N/A	N/A
5180	67.7	PK	V	31.46	5.49	0.00	104.65	N/A	N/A
5180	54.61	AV	V	31.46	5.49	0.00	91.56	N/A	N/A
Middle Channel: 5200MHz									
10400	32.57	PK	V	36.98	8.34	25.92	51.97	74.20	22.23
15600	32.85	PK	V	37.32	11.46	24.12	57.51	74.20	16.69
15600	19.88	AV	V	37.32	11.46	24.12	44.54	60.00	15.46
402.11	31.34	QP	V	16.26	2.43	21.78	28.25	46.00	17.75
5200	60.85	PK	H	31.50	5.51	0.00	97.86	N/A	N/A
5200	47.96	AV	H	31.50	5.51	0.00	84.97	N/A	N/A
5200	67.87	PK	V	31.50	5.51	0.00	104.88	N/A	N/A
5200	54.75	AV	V	31.50	5.51	0.00	91.76	N/A	N/A
High Channel: 5240MHz									
5350	28.61	PK	V	31.80	4.58	0.00	64.99	74.20	9.21
5350	14.31	AV	V	31.80	4.58	0.00	50.69	60.00	9.31
10480	32.61	PK	V	37.00	8.34	26.02	51.93	74.20	22.27
15720	33.17	PK	V	37.10	11.54	23.53	58.28	74.20	15.92
15720	19.79	AV	V	37.10	11.54	23.53	44.90	60.00	15.10
379.61	30.09	QP	V	15.77	2.35	21.72	26.49	46.00	19.51
5240	60.82	PK	H	31.58	5.09	0.00	97.49	N/A	N/A
5240	47.92	AV	H	31.58	5.09	0.00	84.59	N/A	N/A
5240	67.84	PK	V	31.58	5.09	0.00	104.51	N/A	N/A
5240	54.72	AV	V	31.58	5.09	0.00	91.39	N/A	N/A

802.11n40 Mode:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.407	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 5190MHz									
5150	28.61	PK	V	31.40	5.45	0.00	65.46	74.20	8.74
5150	14.37	AV	V	31.40	5.45	0.00	51.22	60.00	8.78
10380	32.18	PK	V	36.98	8.34	25.89	51.61	74.20	22.59
15570	32.84	PK	V	37.37	11.44	24.11	57.54	74.20	16.66
15570	20.11	AV	V	37.37	11.44	24.11	44.81	60.00	15.19
357.82	31.06	QP	V	15.51	2.30	21.66	27.21	46.00	18.79
5190	60.18	PK	H	31.48	5.50	0.00	97.16	N/A	N/A
5190	47.25	AV	H	31.48	5.50	0.00	84.23	N/A	N/A
5190	67.46	PK	V	31.48	5.50	0.00	104.44	N/A	N/A
5190	54.41	AV	V	31.48	5.50	0.00	91.39	N/A	N/A
High Channel: 5230MHz									
10460	32.81	PK	V	36.99	8.34	26.00	52.14	74.20	22.06
15690	32.57	PK	V	37.16	11.52	23.67	57.58	74.20	16.62
15690	20.19	AV	V	37.16	11.52	23.67	45.20	60.00	14.80
5350	28.53	PK	V	31.80	4.58	27.23	37.68	74.20	36.52
5350	14.28	AV	V	31.80	4.58	27.23	23.43	60.00	36.57
379.61	30.16	QP	V	15.77	2.35	21.72	26.56	46.00	19.44
5230	60.12	PK	H	31.56	5.20	0.00	96.88	N/A	N/A
5230	47.24	AV	H	31.56	5.20	0.00	84.00	N/A	N/A
5230	67.35	PK	V	31.56	5.20	0.00	104.11	N/A	N/A
5230	54.36	AV	V	31.56	5.20	0.00	91.12	N/A	N/A

802.11 ac20 Mode:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.407	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 5180MHz									
5150.00	27.06	PK	V	31.40	5.45	0.00	63.91	74.20	10.29
5150.00	14.29	AV	V	31.40	5.45	0.00	51.14	60.00	8.86
10360.00	31.27	PK	V	36.97	8.34	25.85	50.73	74.20	23.47
15540.00	31.09	PK	V	37.43	11.42	24.10	55.84	74.20	18.36
15540.00	18.99	AV	V	37.43	11.42	24.10	43.74	60.00	16.26
357.82	30.48	QP	V	15.51	2.30	21.66	26.63	46.00	19.37
5180.00	60.72	PK	H	31.46	5.49	0.00	97.67	N/A	N/A
5180.00	48.11	AV	H	31.46	5.49	0.00	85.06	N/A	N/A
5180.00	67.15	PK	V	31.46	5.49	0.00	104.10	N/A	N/A
5180.00	53.64	AV	V	31.46	5.49	0.00	90.59	N/A	N/A
Middle Channel: 5200MHz									
10400.00	32.04	PK	V	36.98	8.34	25.92	51.44	74.20	22.76
15600.00	31.29	PK	V	37.32	11.46	24.12	55.95	74.20	18.25
15600.00	19.58	AV	V	37.32	11.46	24.12	44.24	60.00	15.76
402.11	30.47	QP	V	16.26	2.43	21.78	27.38	46.00	18.62
5200.00	60.25	PK	H	31.50	5.51	0.00	97.26	N/A	N/A
5200.00	48.11	AV	H	31.50	5.51	0.00	85.12	N/A	N/A
5200.00	67.21	PK	V	31.50	5.51	0.00	104.22	N/A	N/A
5200.00	54.27	AV	V	31.50	5.51	0.00	91.28	N/A	N/A
High Channel: 5240MHz									
5350.00	29.01	PK	V	31.80	4.58	0.00	65.39	74.20	8.81
5350.00	15.06	AV	V	31.80	4.58	0.00	51.44	60.00	8.56
10480.00	31.44	PK	V	37.00	8.34	26.02	50.76	74.20	23.44
15720.00	32.52	PK	V	37.10	11.54	23.53	57.63	74.20	16.57
15720.00	18.97	AV	V	37.10	11.54	23.53	44.08	60.00	15.92
379.61	30.29	QP	V	15.77	2.35	21.72	26.69	46.00	19.31
5240.00	60.41	PK	H	31.58	5.09	0.00	97.08	N/A	N/A
5240.00	48.12	AV	H	31.58	5.09	0.00	84.79	N/A	N/A
5240.00	66.23	PK	V	31.58	5.09	0.00	102.90	N/A	N/A
5240.00	54.28	AV	V	31.58	5.09	0.00	90.95	N/A	N/A

802.11ac40 Mode:

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.407	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Low Channel: 5190MHz									
5150.00	29.05	PK	V	31.40	5.45	0.00	65.90	74.20	8.30
5150.00	14.99	AV	V	31.40	5.45	0.00	51.84	60.00	8.16
10380.00	31.26	PK	V	36.98	8.34	25.89	50.69	74.20	23.51
15570.00	32.05	PK	V	37.37	11.44	24.11	56.75	74.20	17.45
15570.00	19.58	AV	V	37.37	11.44	24.11	44.28	60.00	15.72
357.82	30.59	QP	V	15.51	2.30	21.66	26.74	46.00	19.26
5190.00	60.11	PK	H	31.48	5.50	0.00	97.09	N/A	N/A
5190.00	47.85	AV	H	31.48	5.50	0.00	84.83	N/A	N/A
5190.00	67.14	PK	V	31.48	5.50	0.00	104.12	N/A	N/A
5190.00	53.69	AV	V	31.48	5.50	0.00	90.67	N/A	N/A
High Channel: 5230MHz									
10460.00	32.58	PK	V	36.99	8.34	26.00	51.91	74.20	22.29
15690.00	31.44	PK	V	37.16	11.52	23.67	56.45	74.20	17.75
15690.00	19.58	AV	V	37.16	11.52	23.67	44.59	60.00	15.41
5350.00	27.98	PK	V	31.80	4.58	27.23	37.13	74.20	37.07
5350.00	14.76	AV	V	31.80	4.58	27.23	23.91	60.00	36.09
379.61	30.59	QP	V	15.77	2.35	21.72	26.99	46.00	19.01
5230.00	60.18	PK	H	31.56	5.20	0.00	96.94	N/A	N/A
5230.00	47.88	AV	H	31.56	5.20	0.00	84.64	N/A	N/A
5230.00	66.59	PK	V	31.56	5.20	0.00	103.35	N/A	N/A
5230.00	53.54	AV	V	31.56	5.20	0.00	90.30	N/A	N/A

802.11ac80 Mode:


Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	FCC 15.407	
(MHz)	Reading (dBμV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	Limit (dBμV/m)	Margin (dB)
Channel:5210MHz									
5150	28.57	PK	V	31.40	5.45	0.00	65.42	74.20	8.78
5150	14.33	AV	V	31.40	5.45	0.00	51.18	60.00	8.82
10420	32.11	PK	V	36.98	8.34	25.95	51.48	74.20	22.72
15630	32.85	PK	V	37.27	11.48	23.97	57.63	74.20	16.57
15630	20.07	AV	V	37.27	11.48	23.97	44.85	60.00	15.15
5350	28.54	PK	V	31.80	4.58	0.00	64.92	74.20	9.28
5350	14.31	AV	V	31.80	4.58	0.00	50.69	60.00	9.31
357.82	30.11	QP	V	15.51	2.30	21.66	26.26	46.00	19.74
5210	60.29	PK	H	31.52	5.41	0.00	97.22	N/A	N/A
5210	47.33	AV	H	31.52	5.41	0.00	84.26	N/A	N/A
5210	67.58	PK	V	31.52	5.41	0.00	104.51	N/A	N/A
5210	54.5	AV	V	31.52	5.41	0.00	91.43	N/A	N/A

*Within measurement uncertainty!

Conducted Spurious Emission at Antenna Port

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. The Resolution bandwidth is set to 1MHz, The Video bandwidth is set to ≥ 1 MHz, report the peak value out of the operating band.
3. Repeat above procedures until all frequencies measured were complete.



Test data

Mode: Transmitting


Please refer to the following table and plots.

Frequency (MHz)	Worst Reading Level (dBm)	Limit (dBm)	Result
802.11a			
5180	-34.90	-27	PASS
5200	-34.57	-27	PASS
5240	-34.34	-27	PASS
802.11n20 Chain 0			
5180	-34.71	-27	PASS
5200	-34.04	-27	PASS
5240	-33.95	-27	PASS
802.11n20 Chain 1			
5180	-34.21	-27	PASS
5200	-35.01	-27	PASS
5240	-34.46	-27	PASS
802.11n20 Chain 2			
5180	-34.95	-27	PASS
5200	-34.59	-27	PASS
5240	-34.46	-27	PASS
802.11n20 Total:Chain 0+ Chain 1+ Chain 2			
5180	-29.84	-27	PASS
5200	-29.76	-27	PASS
5240	-29.51	-27	PASS
802.11n40 Chain 0			
5190	-33.85	-27	PASS
5230	-34.72	-27	PASS

802.11n40 Chain 1			
5190	-34.46	-27	PASS
5230	-34.77	-27	PASS
802.11n40 Chain 2			
5190	-33.68	-27	PASS
5230	-34.60	-27	PASS
802.11n40 Total:Chain 0+ Chain 1+ Chain 2			
5190	-29.21	-27	PASS
5230	-29.92	-27	PASS
802.11ac20 Chain 0			
5180	-34.16	-27	PASS
5200	-34.26	-27	PASS
5240	-34.84	-27	PASS
802.11ac20 Chain 1			
5180	-34.29	-27	PASS
5200	-34.19	-27	PASS
5240	-34.50	-27	PASS
802.11ac20 Chain 2			
5180	-33.98	-27	PASS
5200	-34.11	-27	PASS
5240	-33.99	-27	PASS
802.11ac20 Total:Chain 0+ Chain 1+ Chain 2			
5180	-29.37	-27	PASS
5200	-29.42	-27	PASS
5240	-29.66	-27	PASS
802.11ac40 Chain 0			
5190	-34.73	-27	PASS
5230	-34.78	-27	PASS
802.11ac40 Chain 1			
5190	-33.83	-27	PASS
5230	-34.41	-27	PASS
802.11ac40 Chain 2			
5190	-34.33	-27	PASS
5230	-33.98	-27	PASS
802.11ac40 Total:Chain 0+ Chain 1+ Chain 2			
5190	-29.51	-27	PASS
5230	-29.61	-27	PASS
802.11ac80 Chain 0			
5210	-34.72	-27	PASS
802.11ac80 Chain 1			
5210	-34.44	-27	PASS
802.11ac80 Chain 2			
5210	-34.78	-27	PASS
802.11ac80 Total:Chain 0+ Chain 1+ Chain 2			
5210	-29.87	-27	PASS


Please refer to the following plots.

802.11a Low Channel 30M-1G

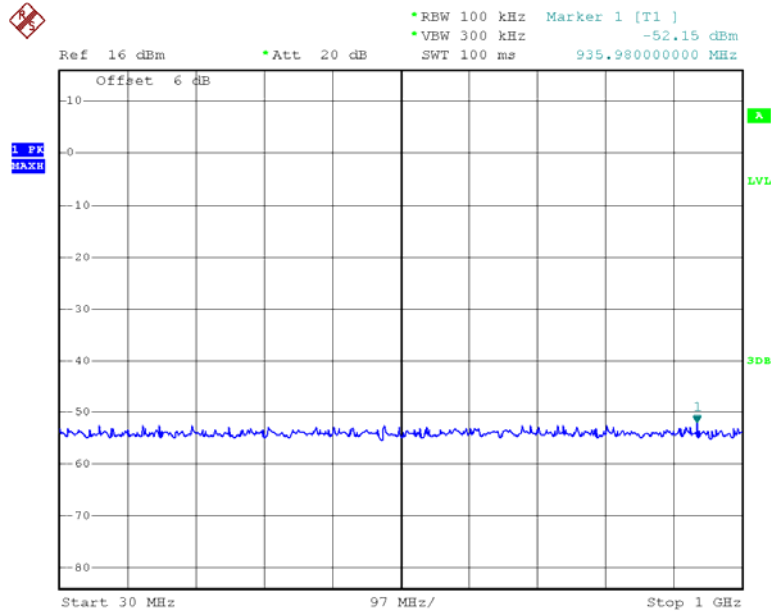


Date: 28.FEB.2013 17:29:29

802.11a Low Channel 1G-26.5G

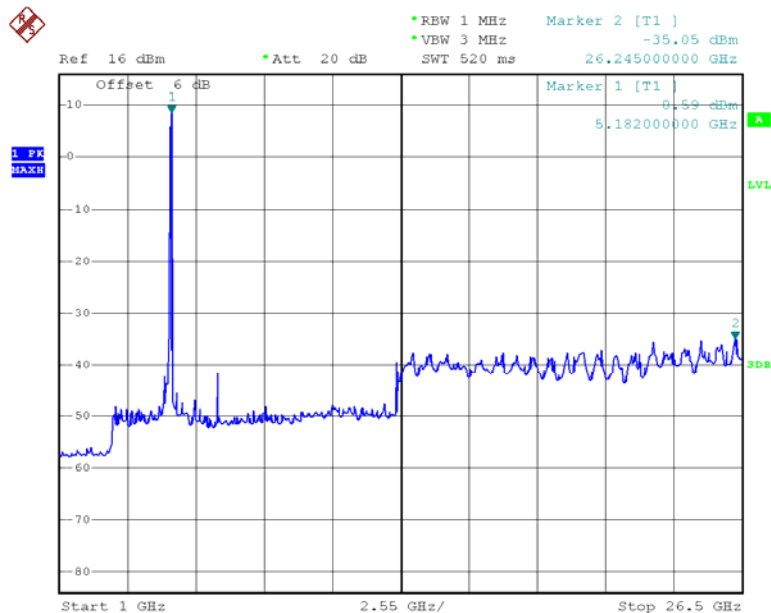


Date: 28.FEB.2013 17:31:45

802.11a Low Channel 26.5-40G

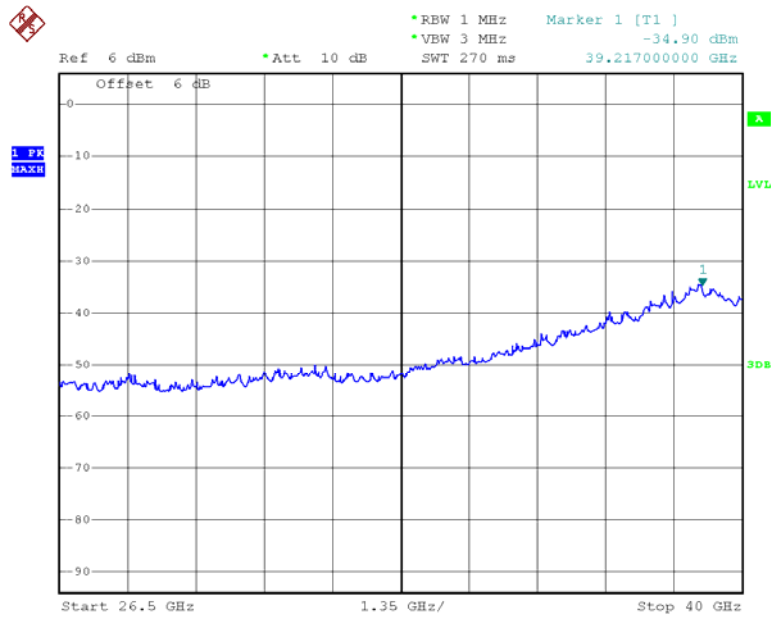


Date: 28.FEB.2013 17:50:02

802.11a Middle Channel 30M-1G

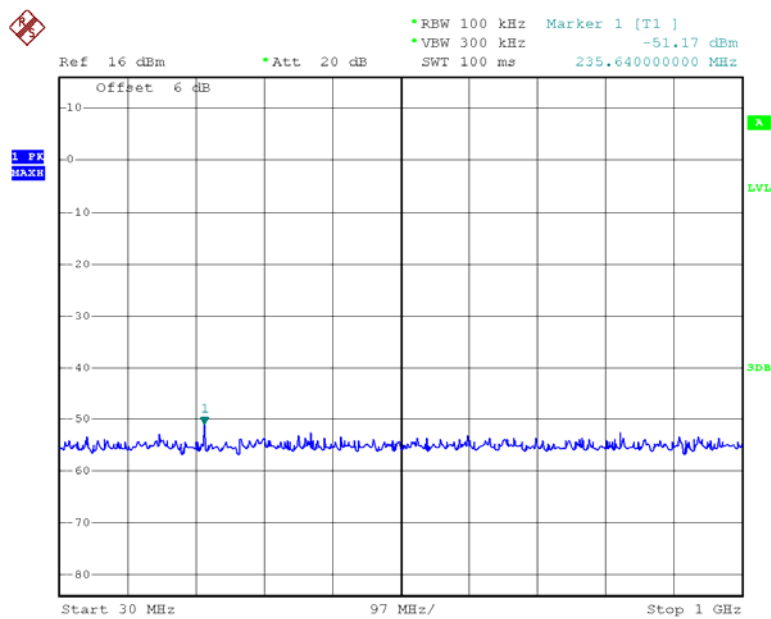


Date: 28.FEB.2013 17:29:39

802.11a Middle Channel 1G -26.5G

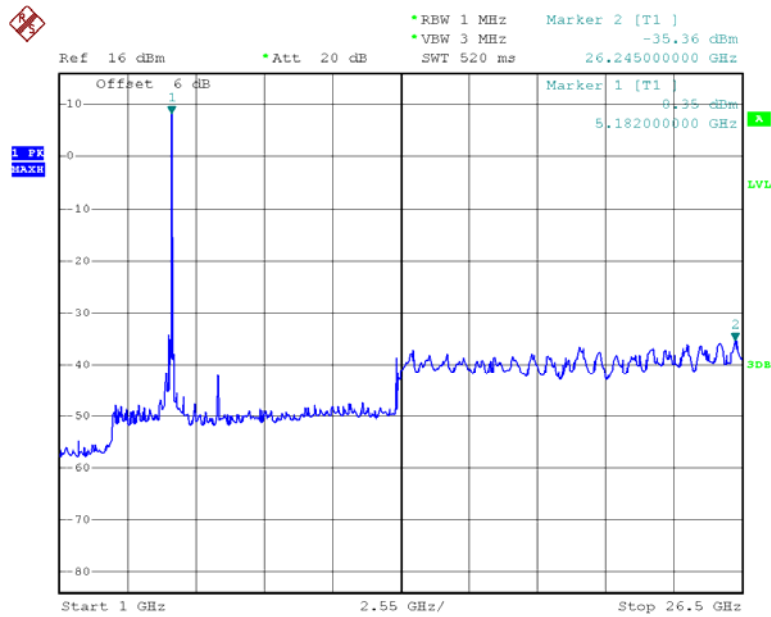


Date: 28.FEB.2013 17:32:54

802.11a Middle Channel 26.5-40G

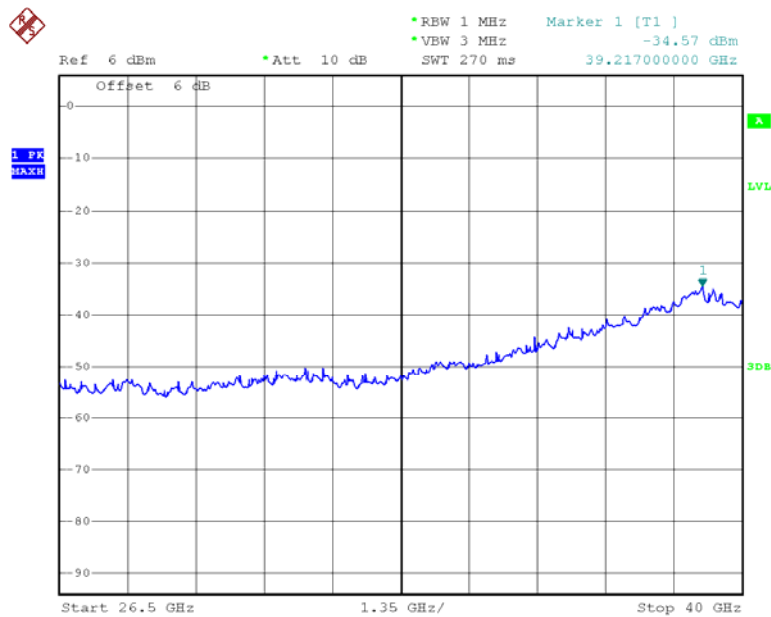


Date: 28.FEB.2013 17:50:13

802.11a High Channel 30M-1G

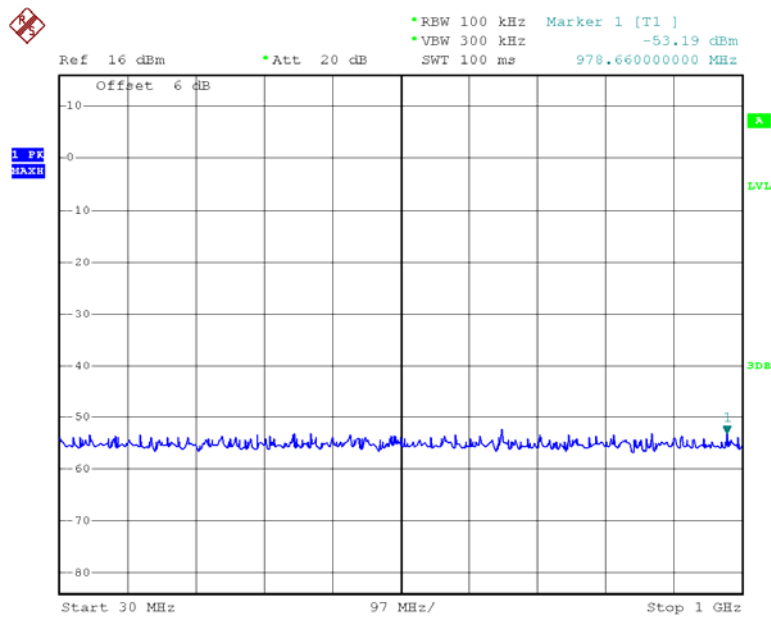


Date: 28.FEB.2013 17:29:48

802.11a High Channel 1G-26.5G

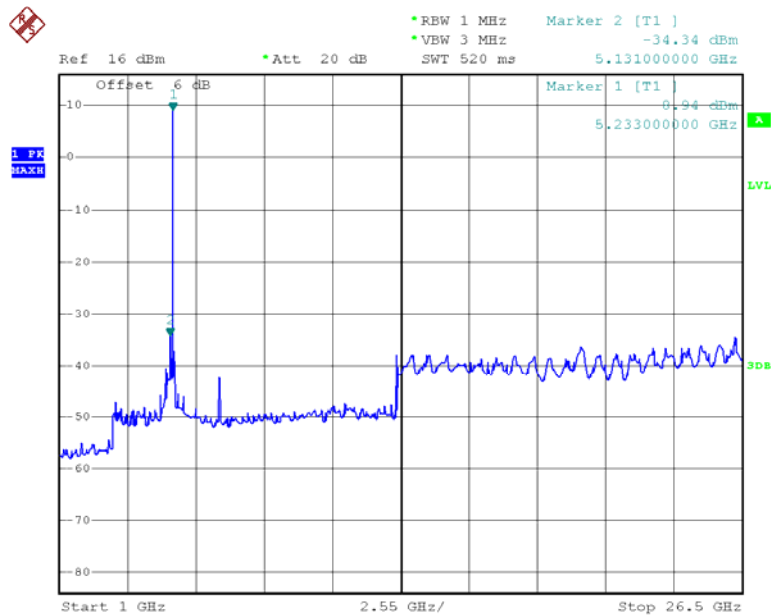


Date: 28.FEB.2013 17:34:13

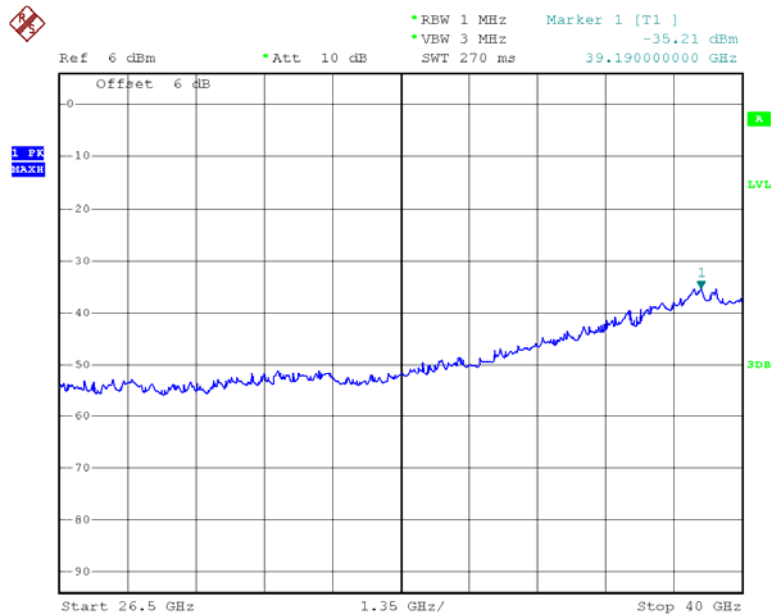802.11a High Channel 26.5-40G


Date: 28.FEB.2013 17:50:21

Chain 0:

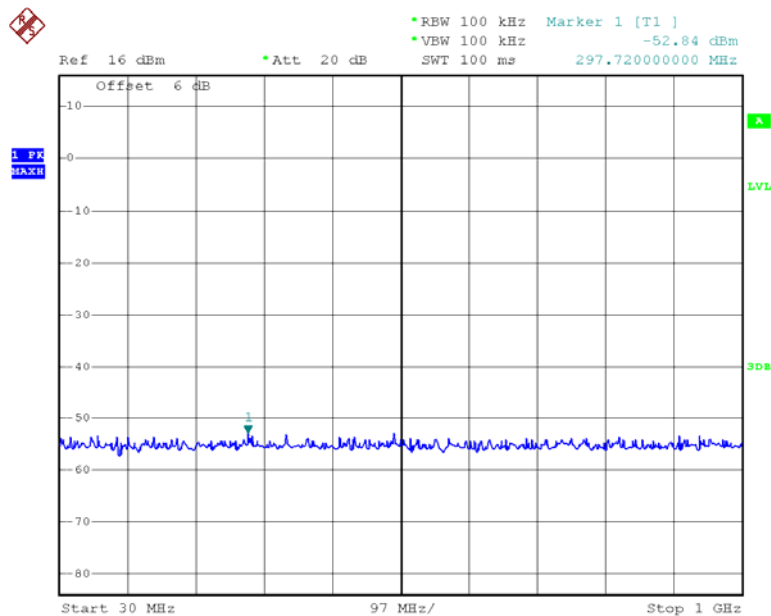802.11n20 Low Channel 30M-1G


Date: 28.FEB.2013 17:36:43

802.11n20 Low Channel 1G-26.5G

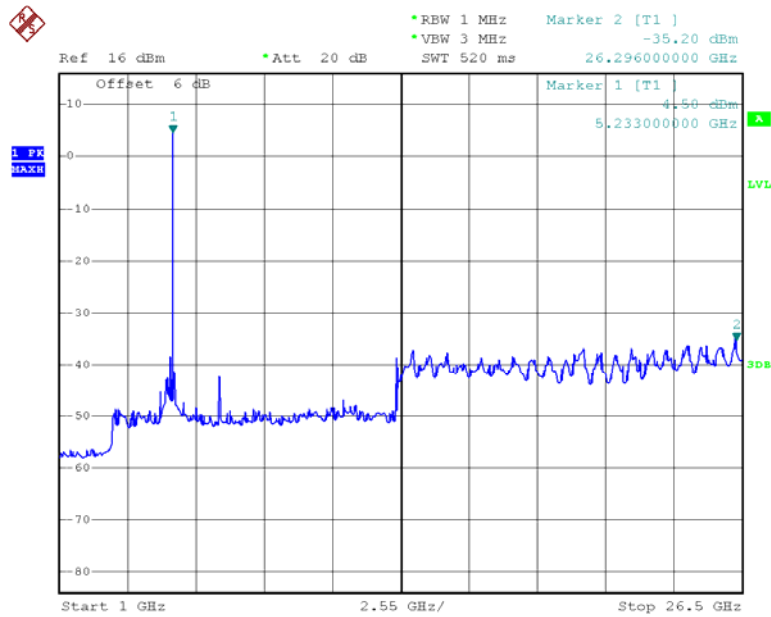


Date: 28.FEB.2013 17:43:21

802.11n20 Low Channel 26.5-40G

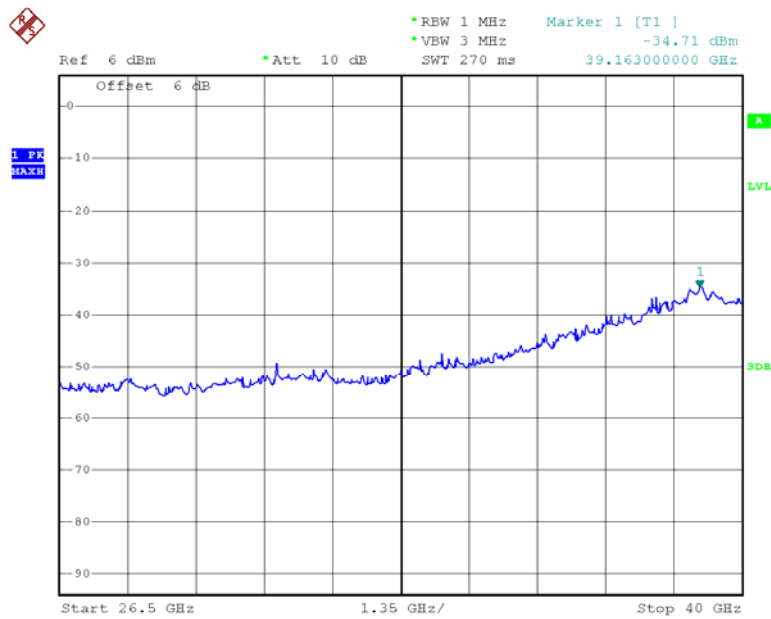


Date: 28.FEB.2013 17:51:31

802.11n20 Middle Channel 30M-1G

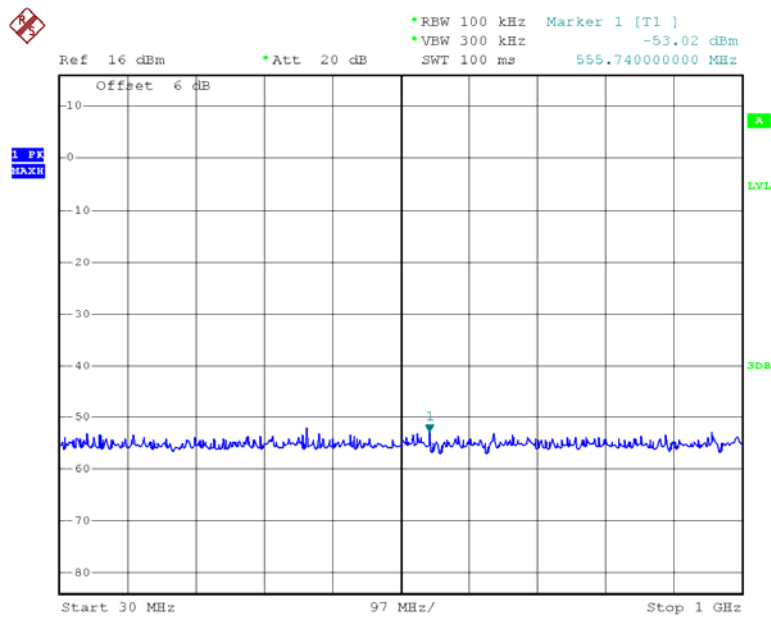


Date: 28.FEB.2013 17:30:26

802.11n20 Middle Channel 1G -26.5G

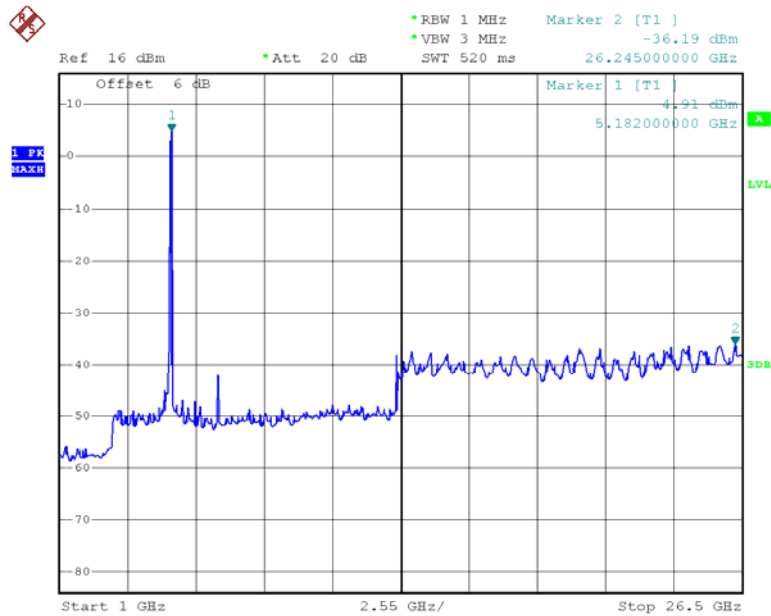


Date: 28.FEB.2013 17:41:56

802.11n20 Middle Channel 26.5-40G

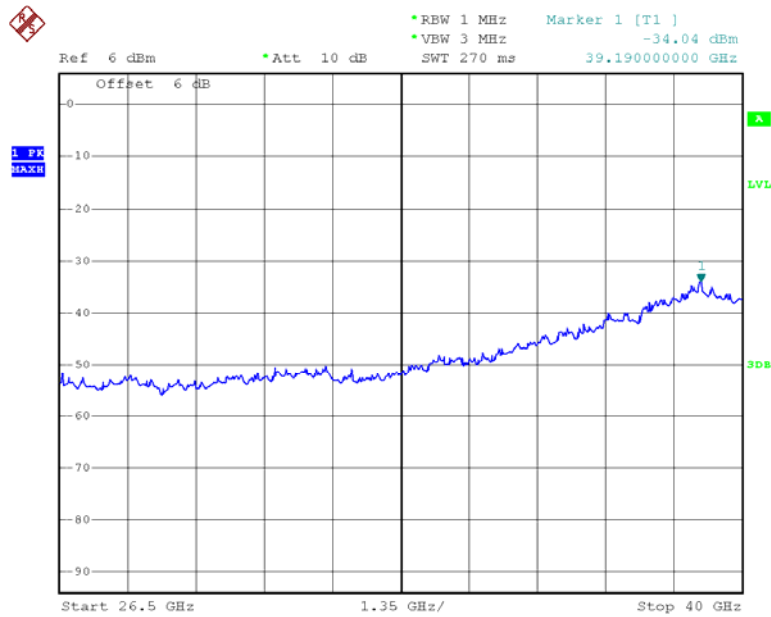


Date: 28.FEB.2013 17:50:43

802.11n20 High Channel 30M-1G

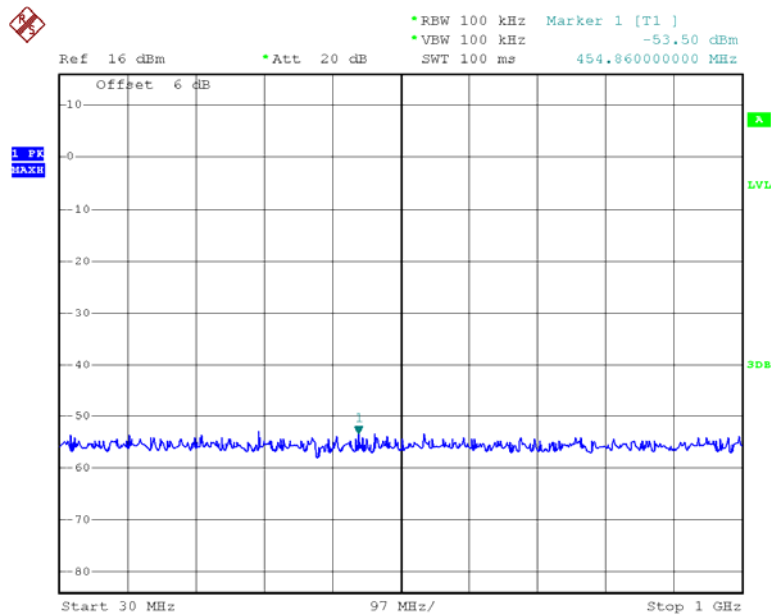


Date: 28.FEB.2013 17:36:51

802.11n20 High Channel 1G-26.5G

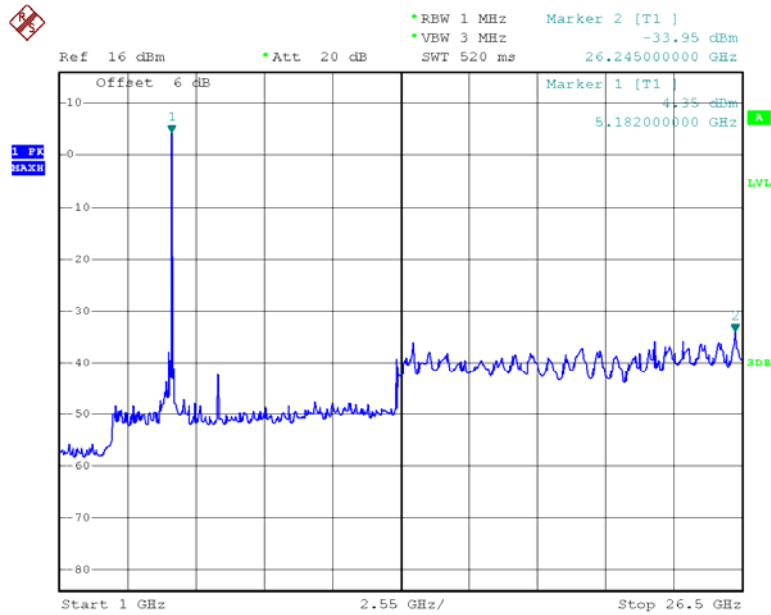


Date: 28.FEB.2013 17:42:52

802.11n20 High Channel 26.5-40G

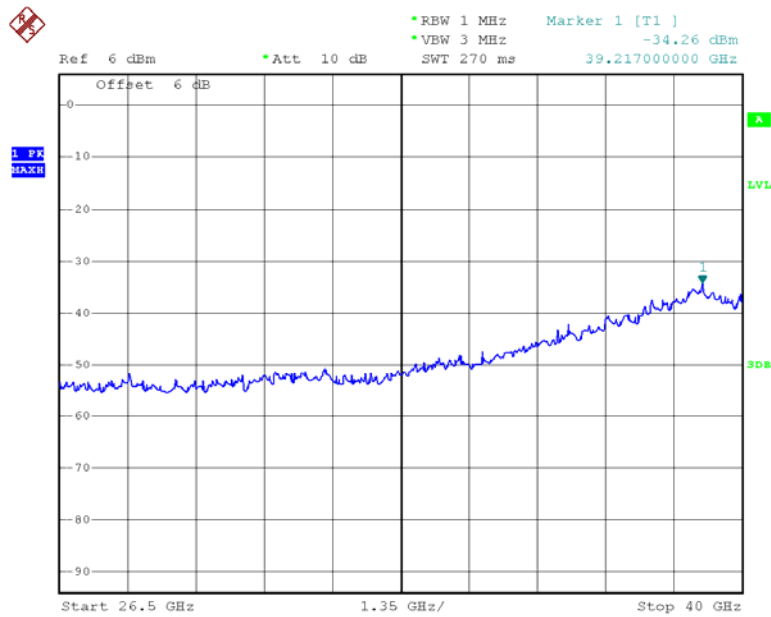


Date: 28.FEB.2013 17:51:14

802.11n40 Low Channel 30M-1G

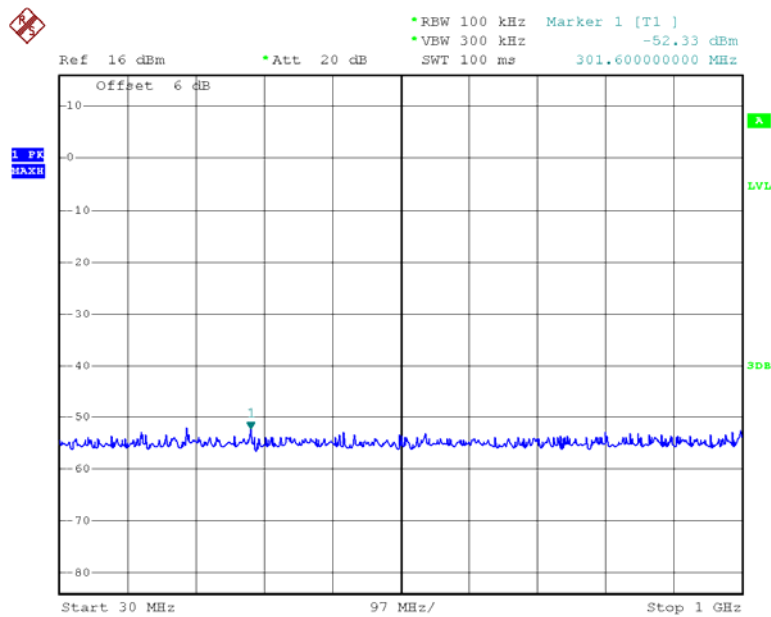


Date: 28.FEB.2013 17:44:31

802.11n40 Low Channel 1G-26.5G

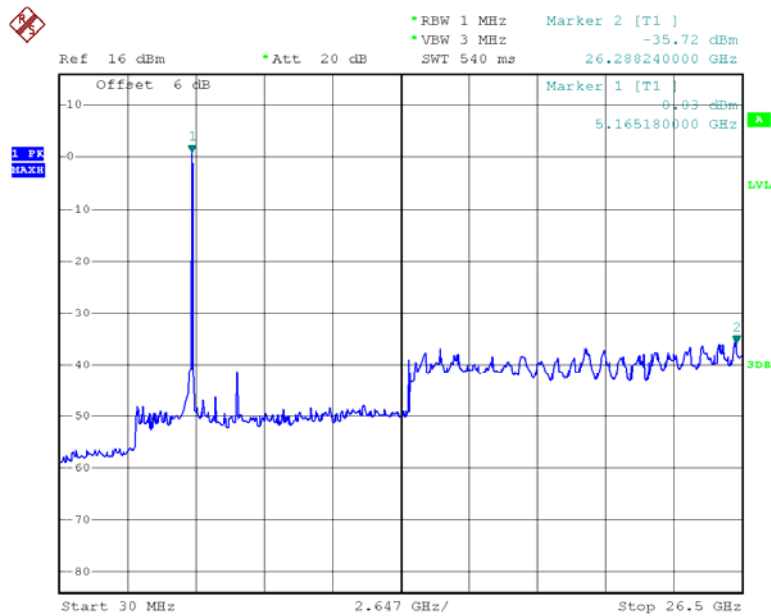


Date: 28.FEB.2013 17:45:49

802.11n40 Low Channel 26.5-40G

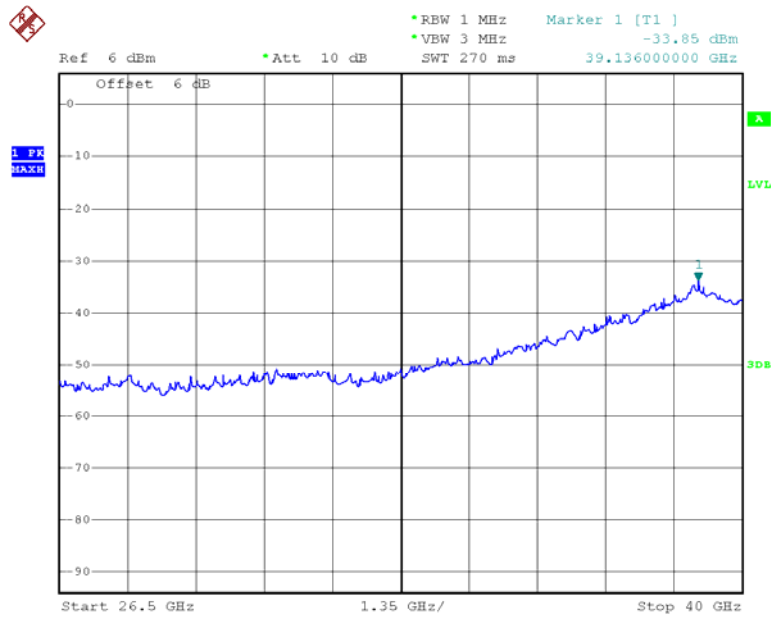


Date: 28.FEB.2013 17:52:18

802.11n40 High Channel 30M-1G

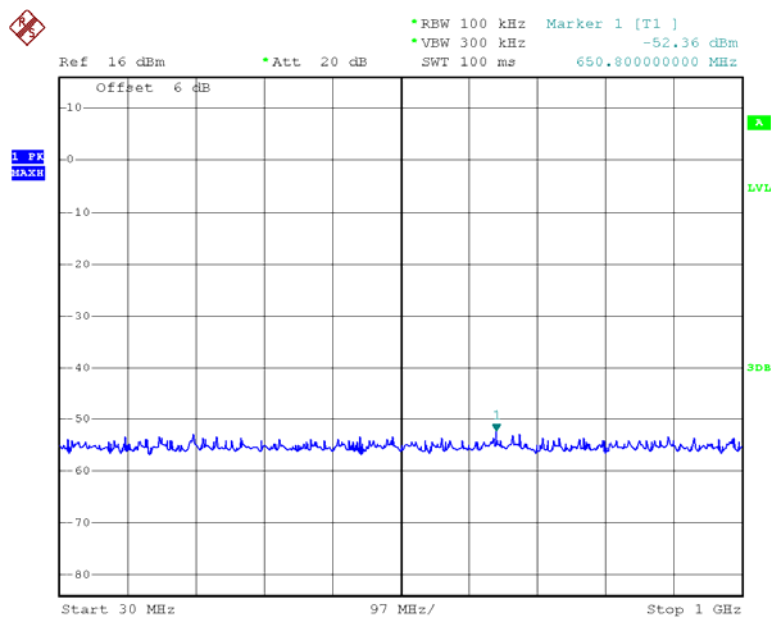


Date: 28.FEB.2013 17:44:53

802.11n40 High Channel 1G-26.5G

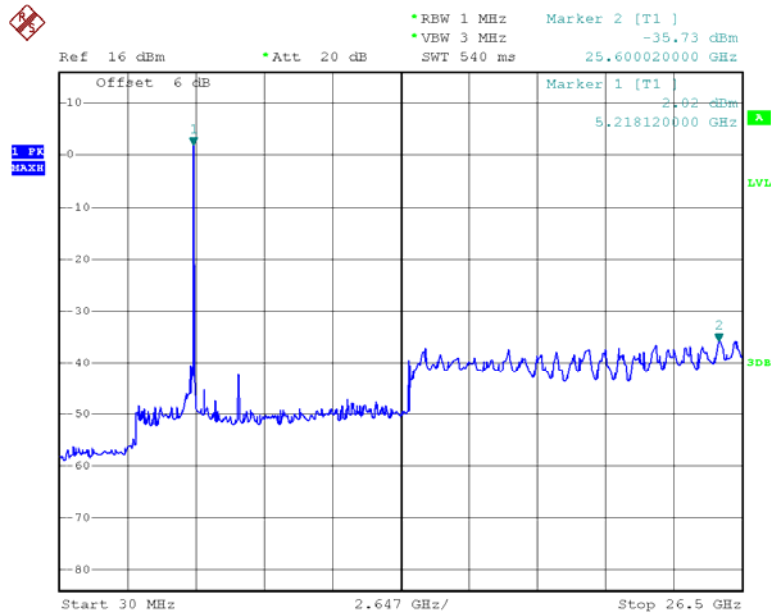


Date: 28.FEB.2013 17:46:41

802.11n40 High Channel 26.5-40G

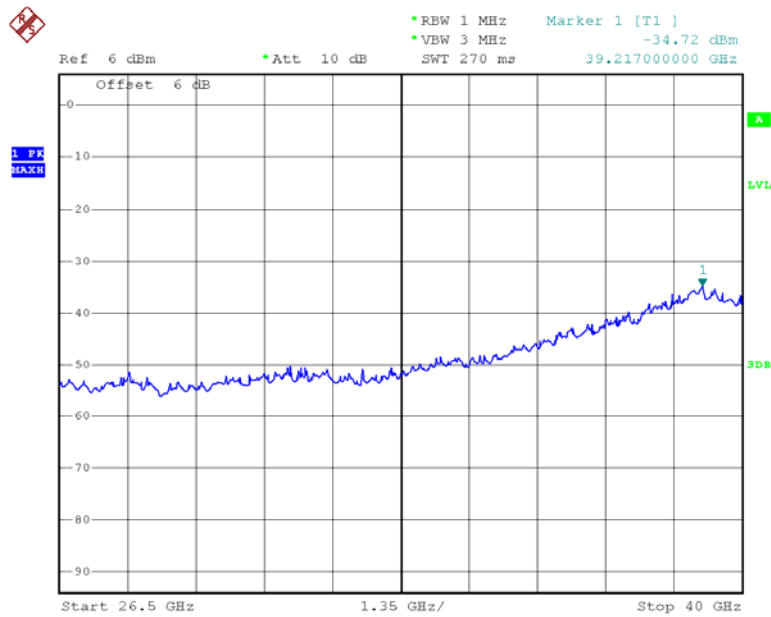


Date: 28.FEB.2013 17:52:56

802.11ac20 Low Channel 30M-1G

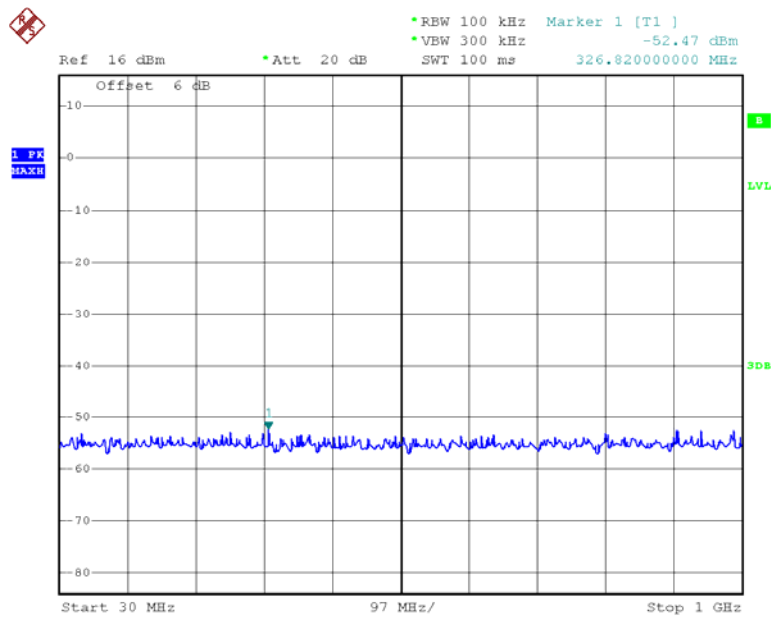


Date: 13.MAR.2013 18:52:09

802.11ac20 Low Channel 1G-26.5G

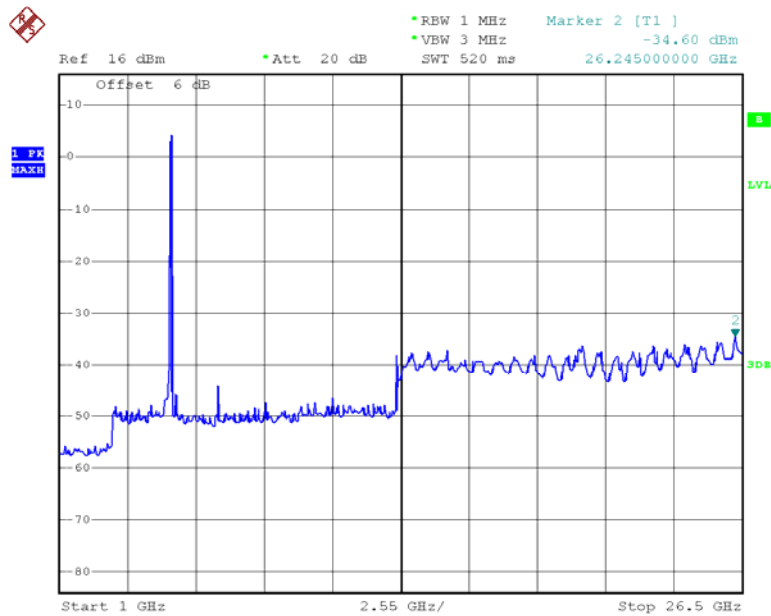


Date: 13.MAR.2013 18:54:04

802.11ac20 Low Channel 26.5-40G

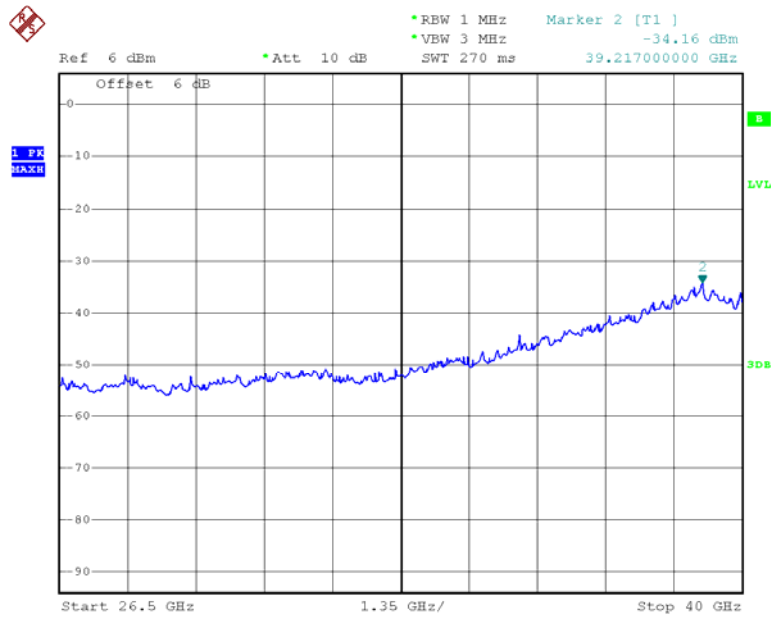


Date: 13.MAR.2013 18:55:01

802.11ac20 Middle Channel 30M-1G

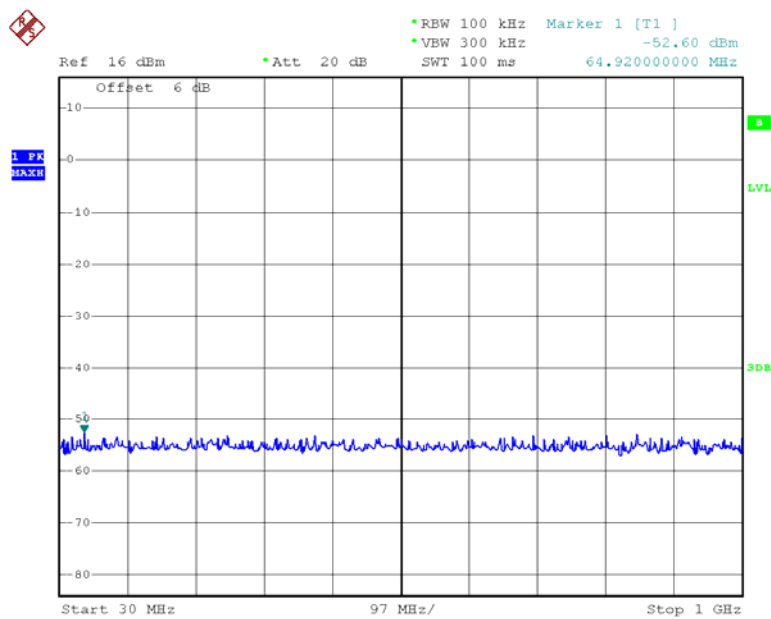


Date: 13.MAR.2013 19:03:17

802.11ac20 Middle Channel 1G -26.5G

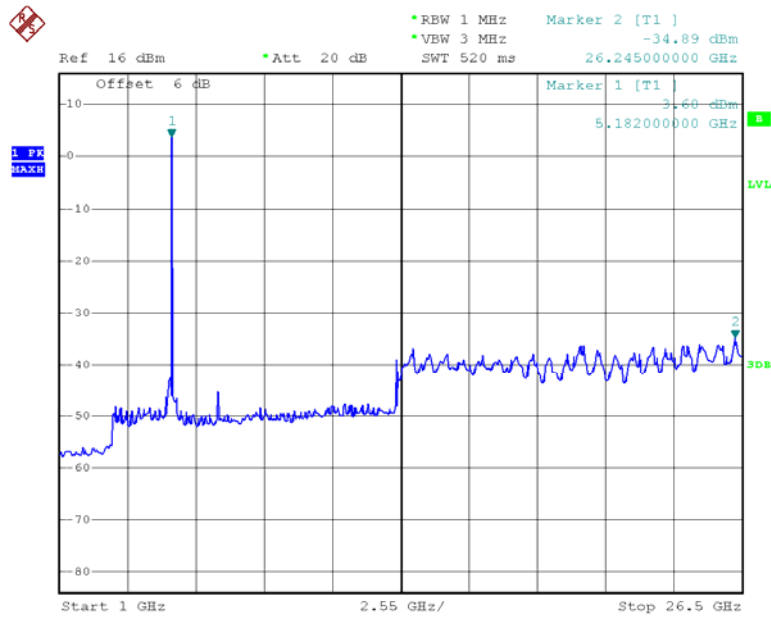


Date: 13.MAR.2013 19:04:14

802.11ac20 Middle Channel 26.5-40G

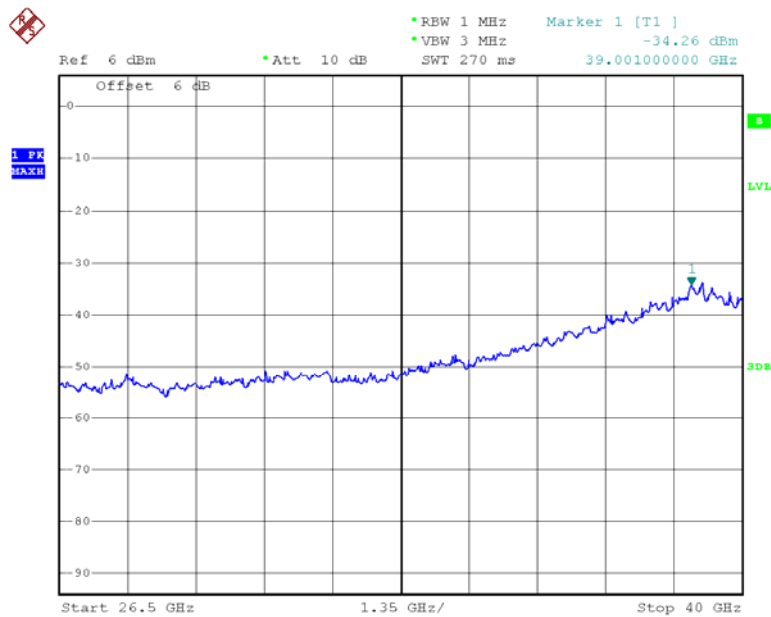


Date: 13.MAR.2013 19:05:21

802.11ac20 High Channel 30M-1G

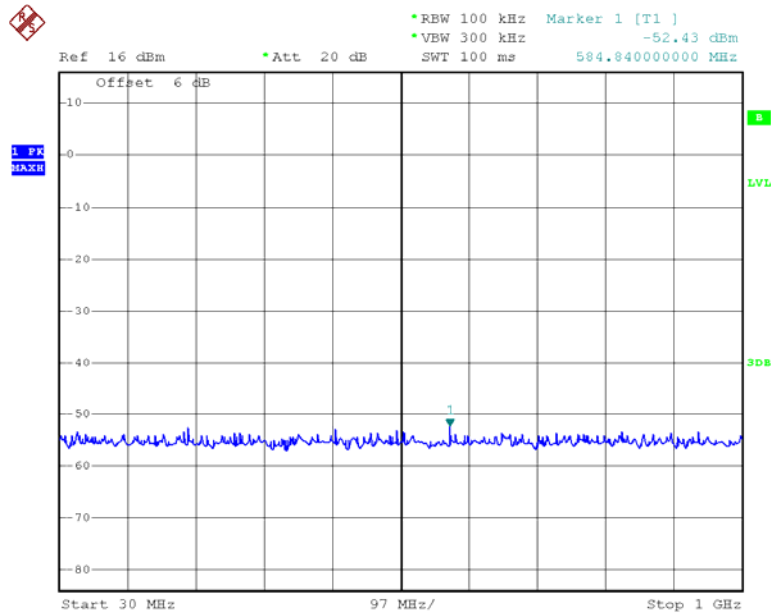


Date: 13.MAR.2013 19:17:50

802.11ac20 High Channel 1G-26.5G

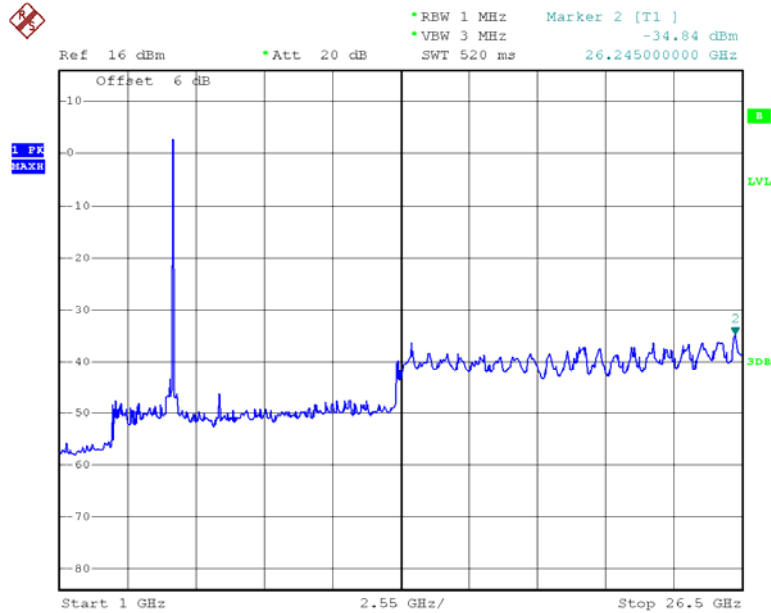


Date: 13.MAR.2013 19:19:07

802.11ac20 High Channel 26.5-40G

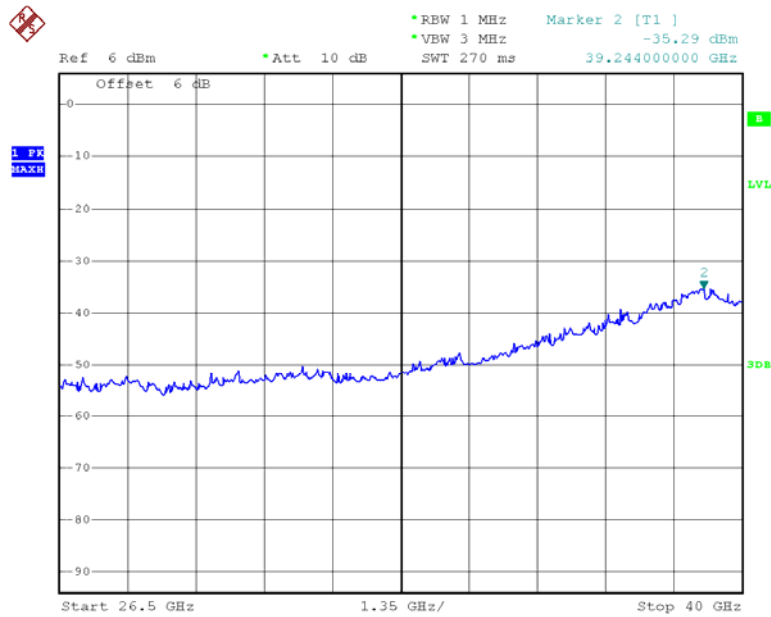


Date: 13.MAR.2013 19:19:58

802.11ac40 Low Channel 30M-1G

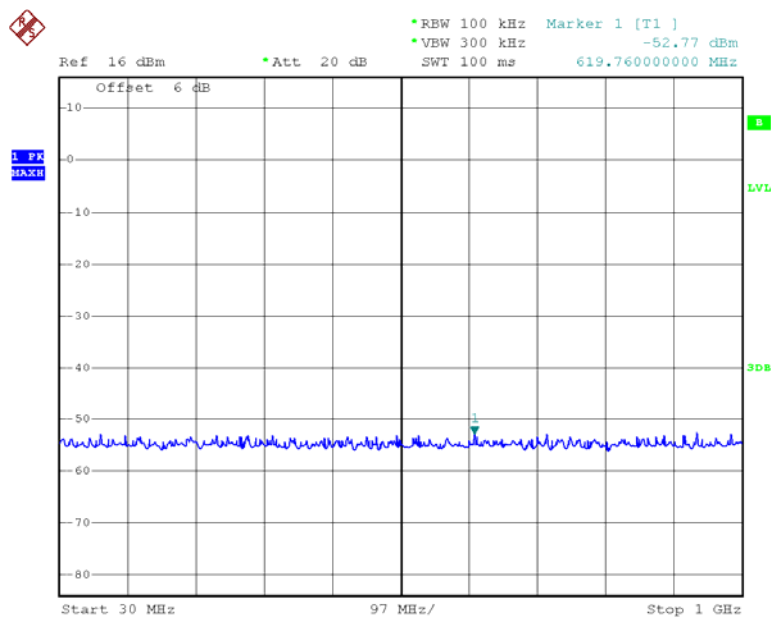


Date: 13.MAR.2013 19:45:25

802.11ac40 Low Channel 1G-26.5G

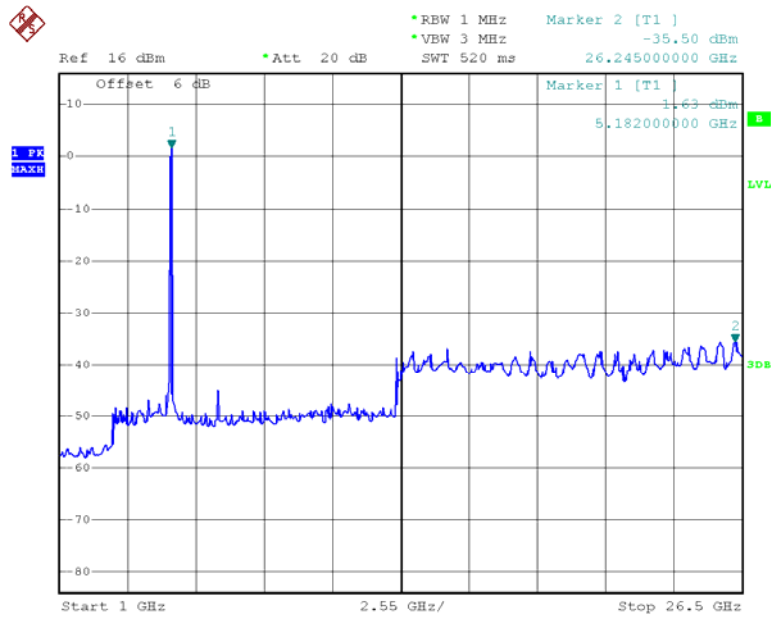


Date: 13.MAR.2013 19:46:08


802.11ac40 Low Channel 26.5-40G

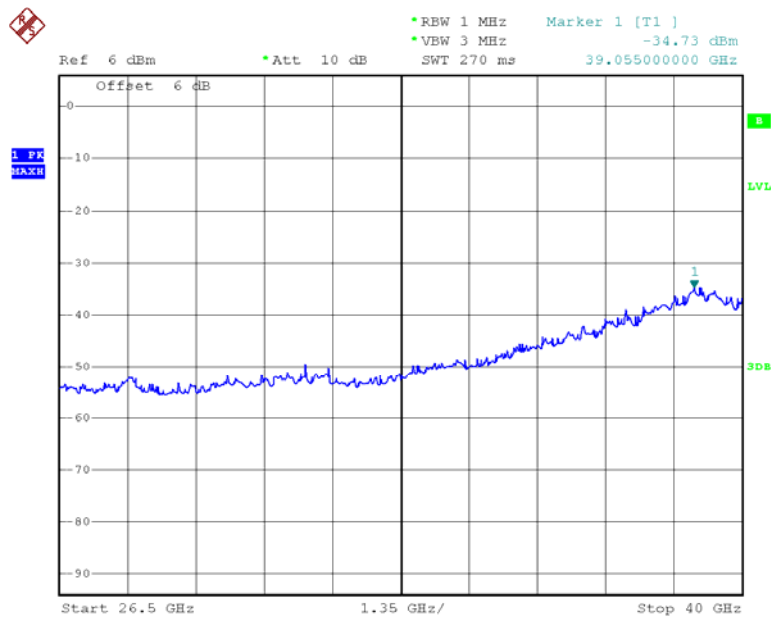

Date: 13.MAR.2013 19:46:57

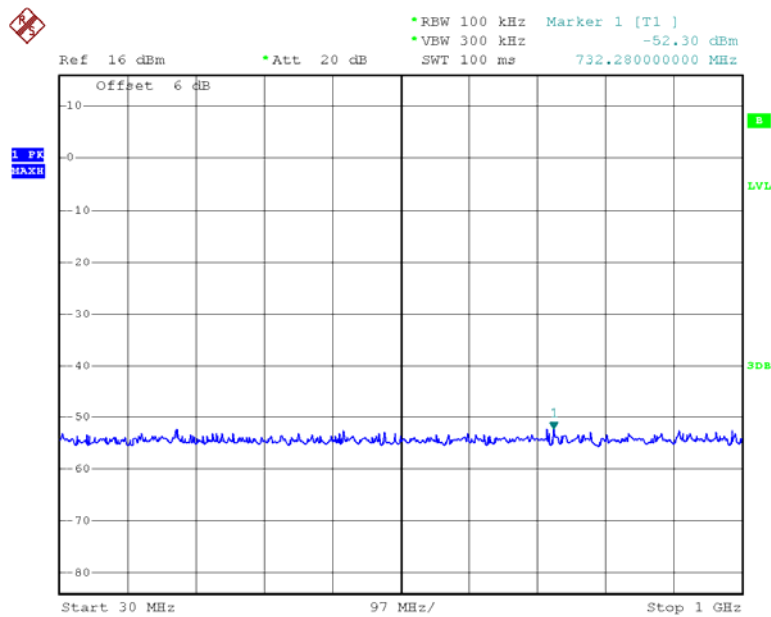
802.11ac40 High Channel 30M-1G

Date: 13.MAR.2013 19:42:01

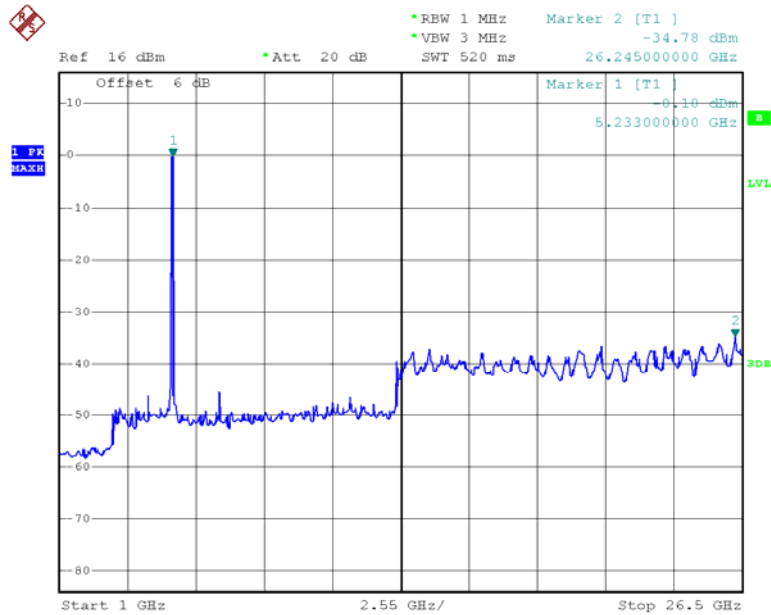802.11ac40 High Channel 1G-26.5G


Date: 13.MAR.2013 19:42:58

802.11ac40 High Channel 26.5-40G

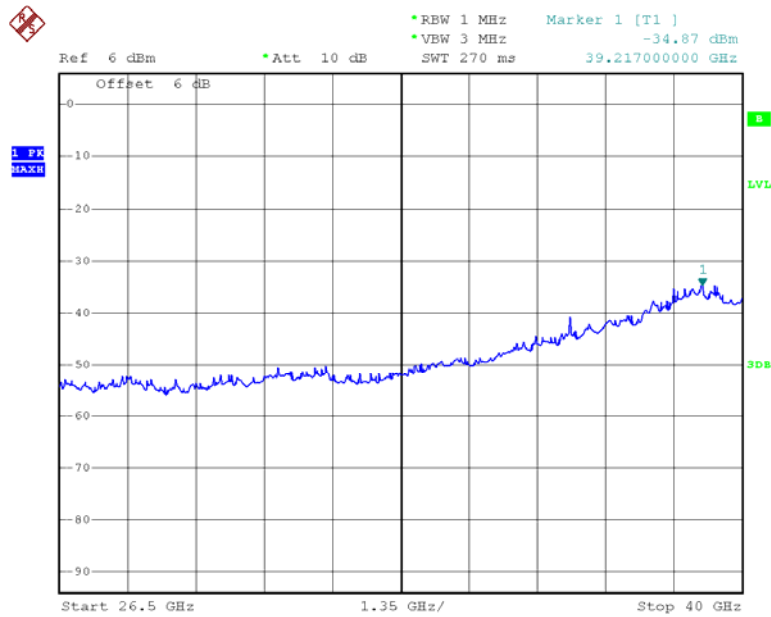


Date: 13.MAR.2013 19:43:50

802.11 ac80 30M-1G

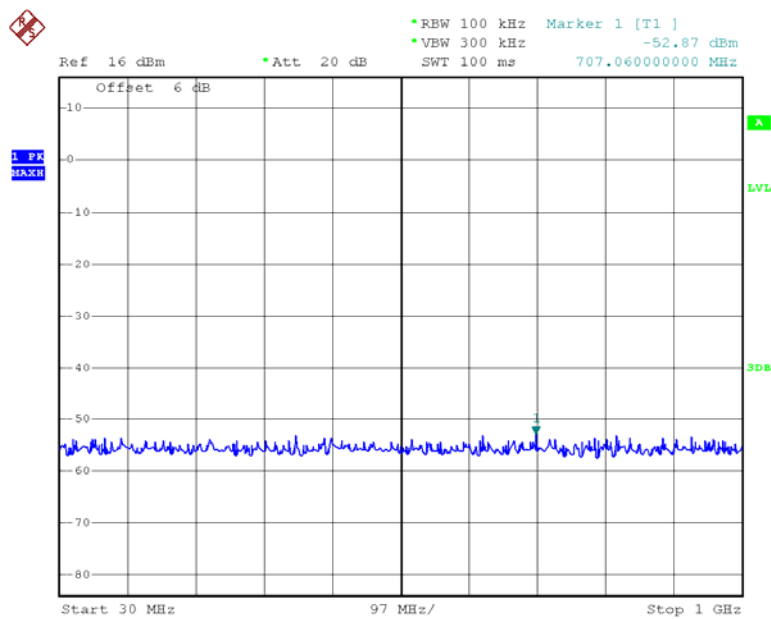


Date: 28.FEB.2013 17:45:09

802.11 ac80 1G-26.5G

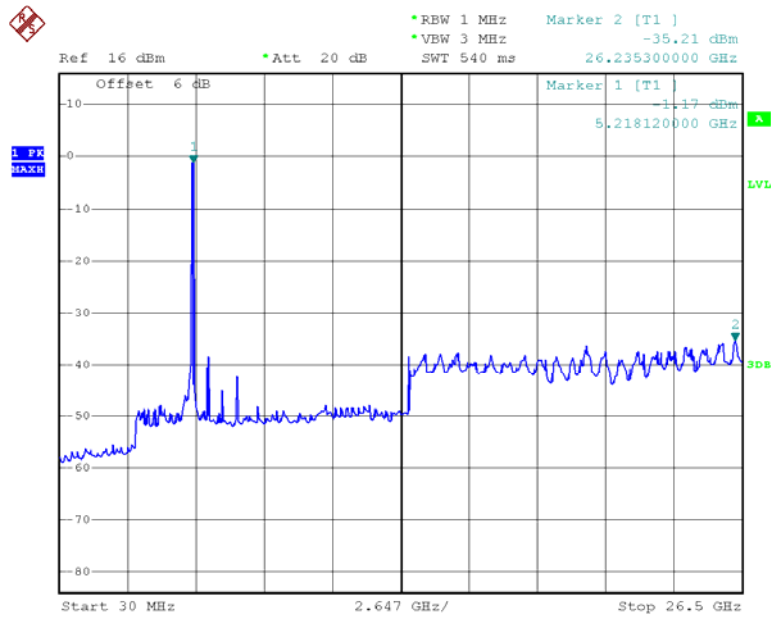


Date: 28.FEB.2013 17:47:37

802.11 ac80 26.5-40G

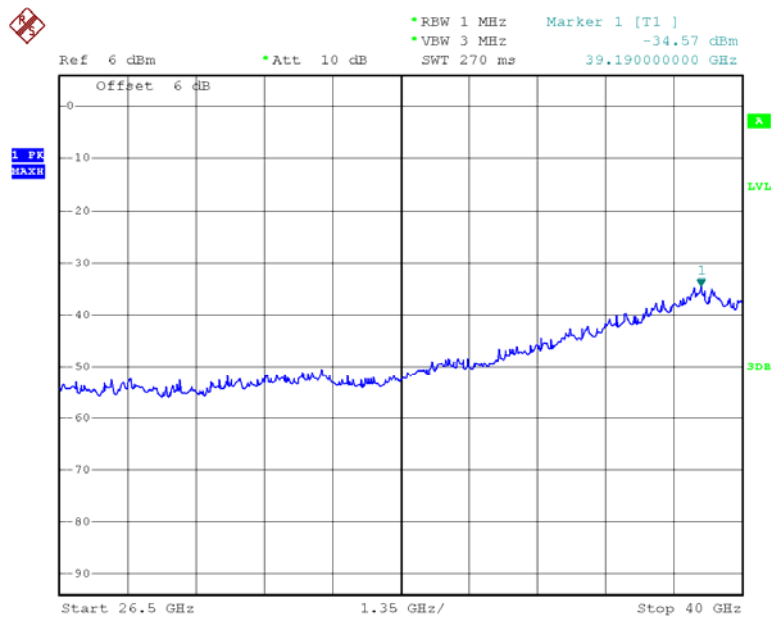


Date: 28.FEB.2013 17:51:54

Chain 1:

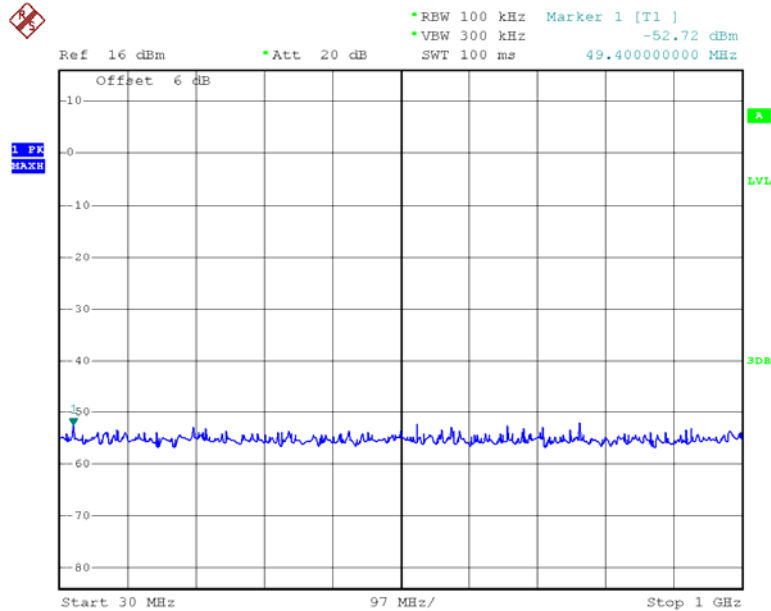
802.11n20 Low Channel 30M-1G

Date: 28.FEB.2013 17:30:16

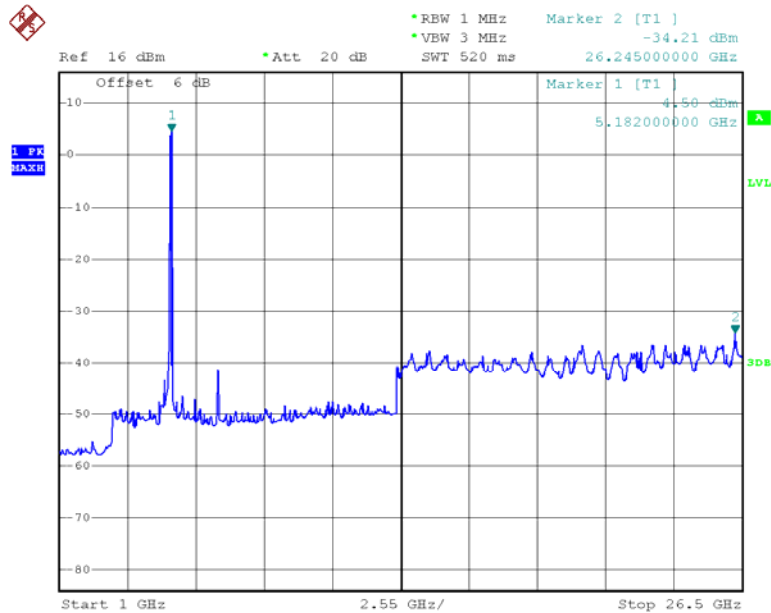802.11n20 Low Channel 1G-26.5G


Date: 28.FEB.2013 17:41:44

802.11n20 Low Channel 26.5-40G

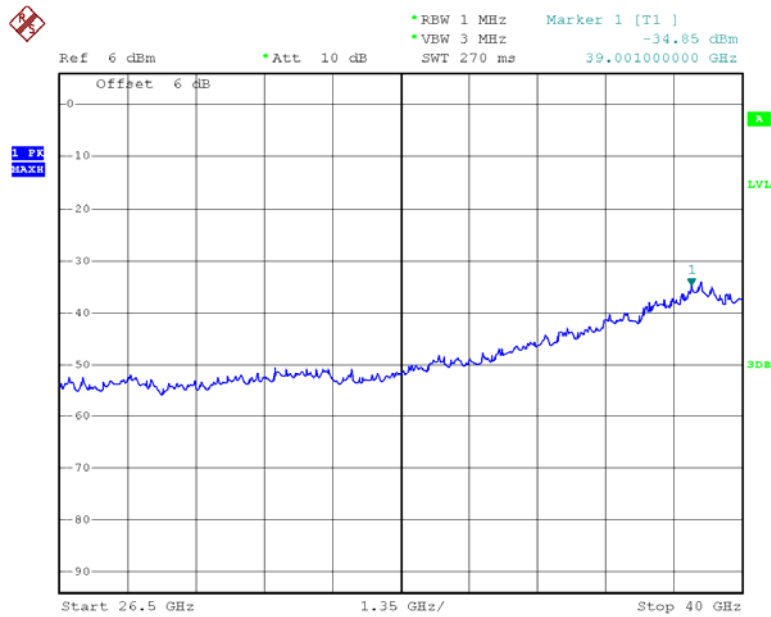


Date: 28.FEB.2013 17:50:38

802.11n20 Middle Channel 30M-1G

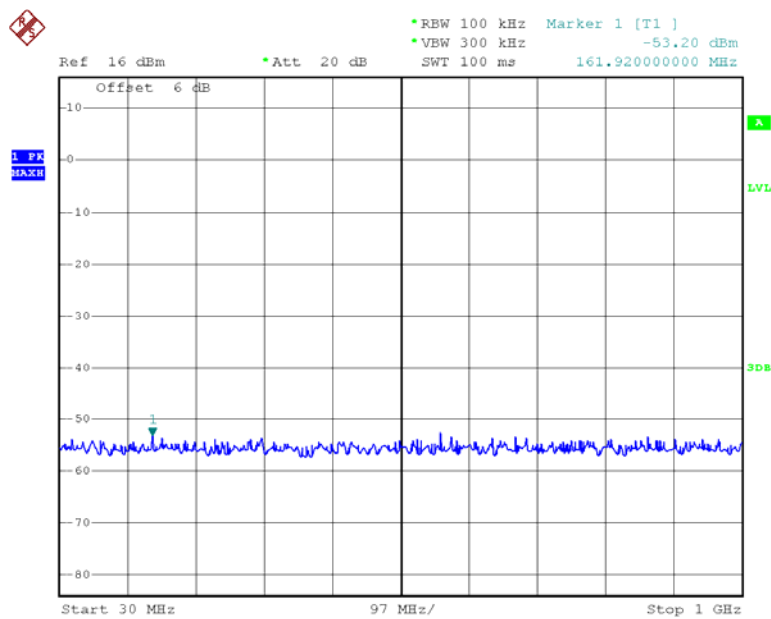


Date: 28.FEB.2013 17:30:50

802.11n20 Middle Channel 1G -26.5G

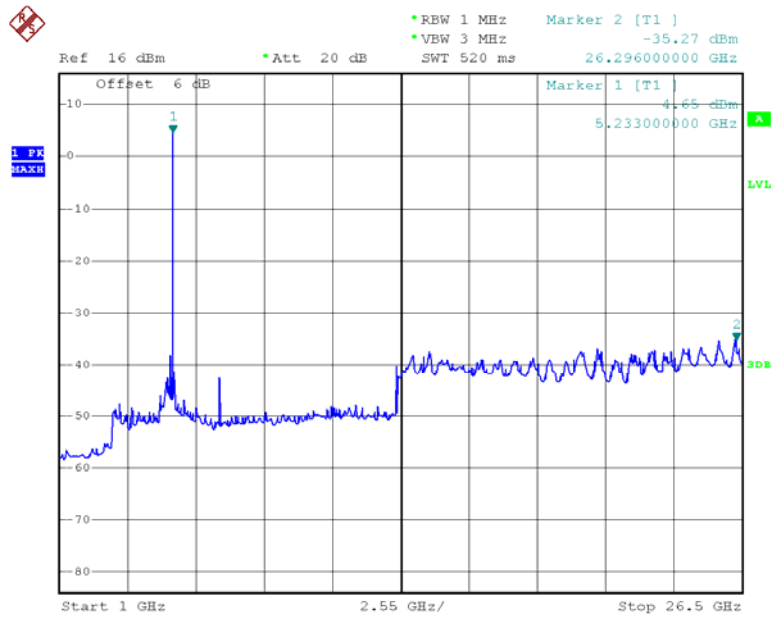


Date: 28.FEB.2013 17:43:32

802.11n20 Middle Channel 26.5-40G

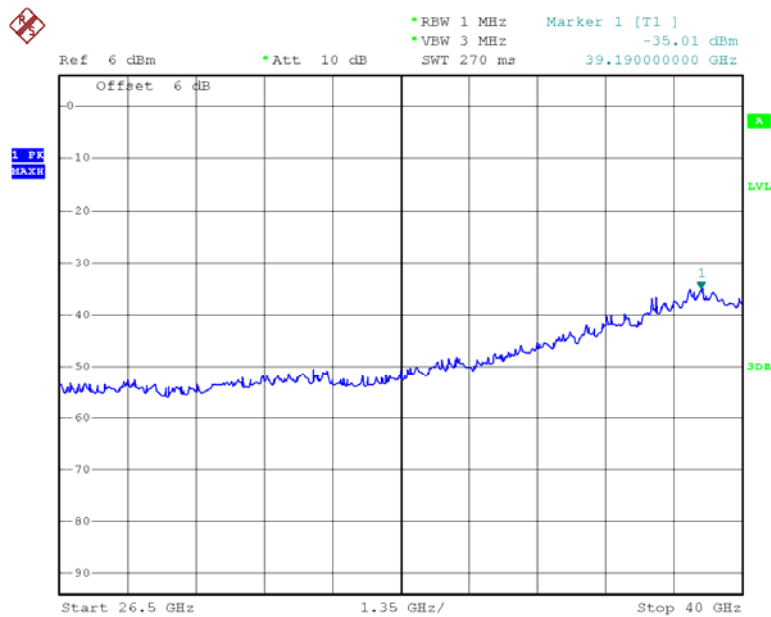


Date: 28.FEB.2013 17:51:26

802.11n20 High Channel 30M-1G

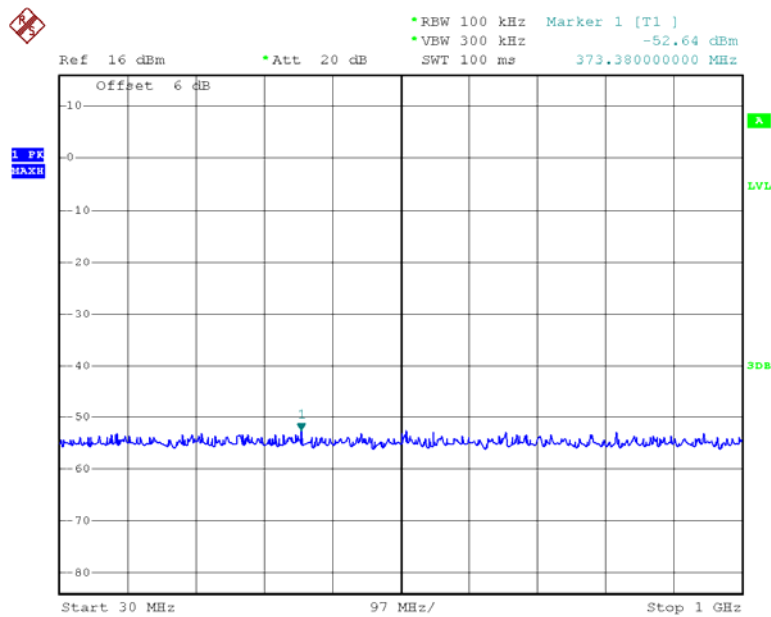


Date: 28.FEB.2013 17:30:43

802.11n20 High Channel 1G-26.5G

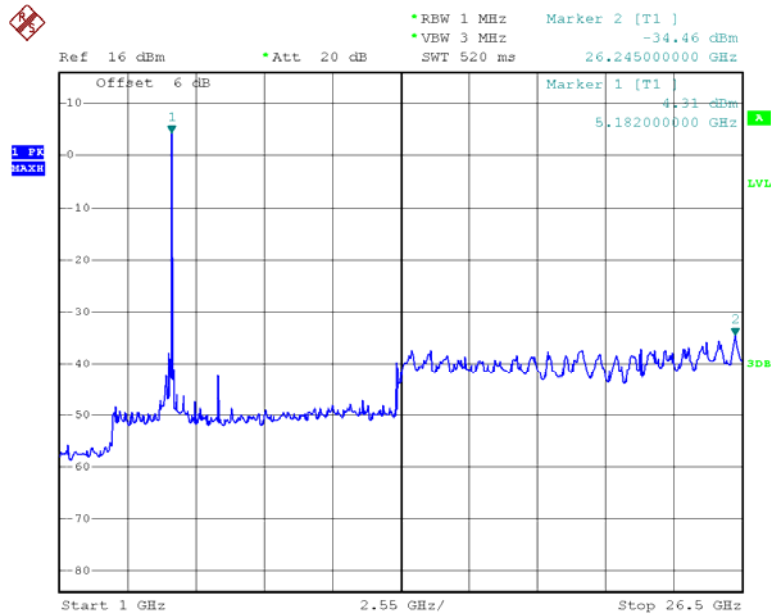


Date: 28.FEB.2013 17:42:40

802.11n20 High Channel 26.5-40G

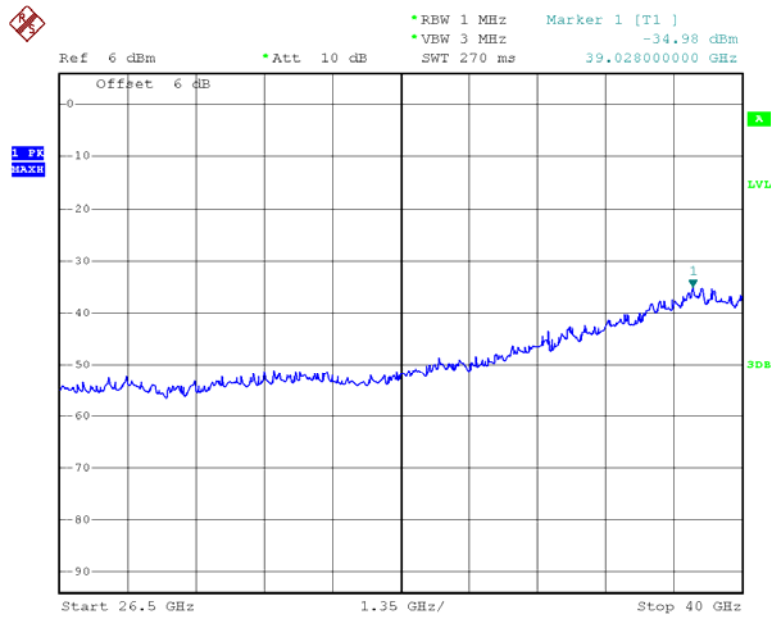


Date: 28.FEB.2013 17:51:46

802.11n40 Low Channel 30M-1G

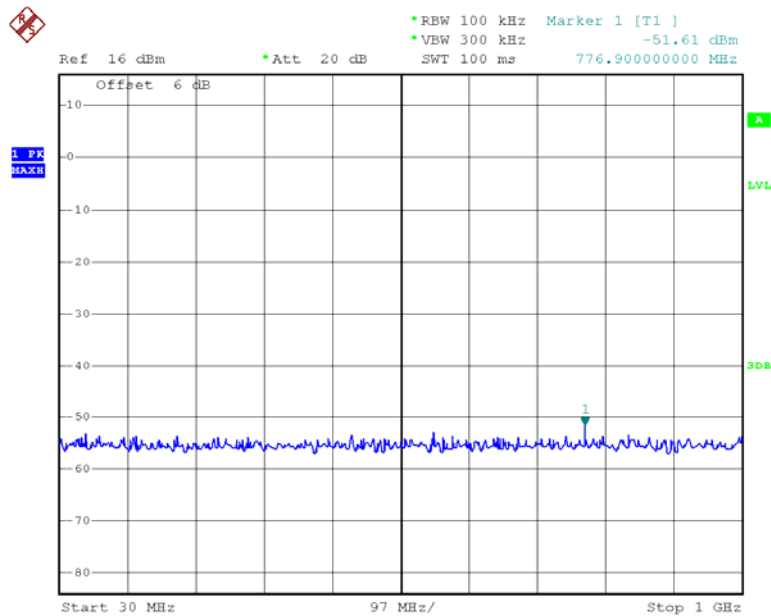


Date: 28.FEB.2013 17:44:41

802.11n40 Low Channel 1G-26.5G

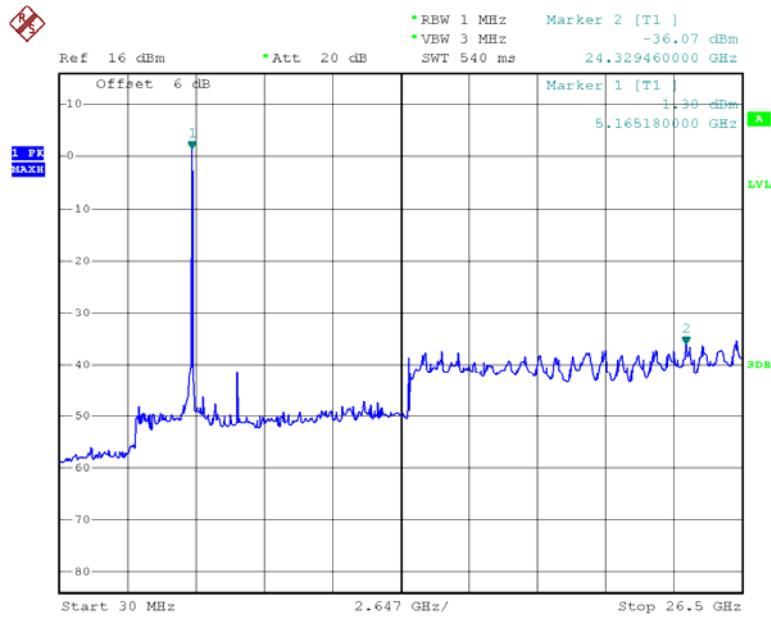


Date: 28.FEB.2013 17:46:02

802.11n40 Low Channel 26.5-40G

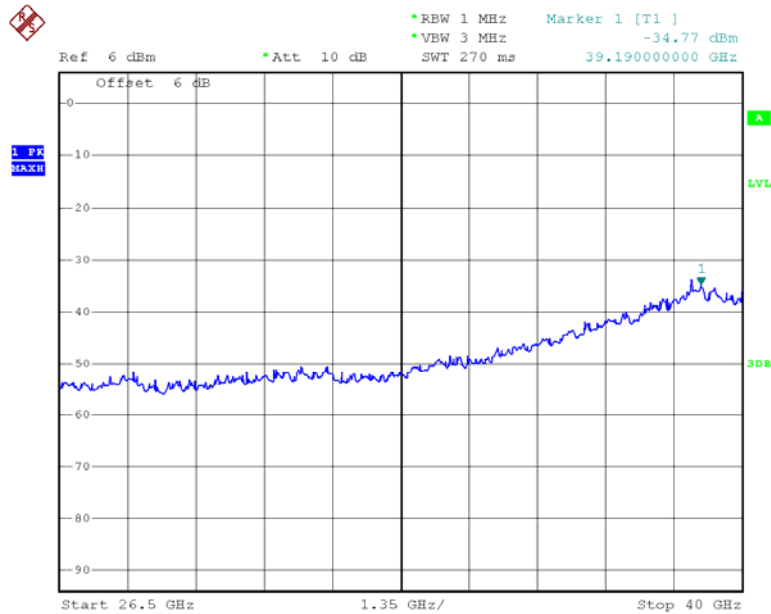


Date: 28.FEB.2013 17:52:27

802.11n40 High Channel 30M-1G

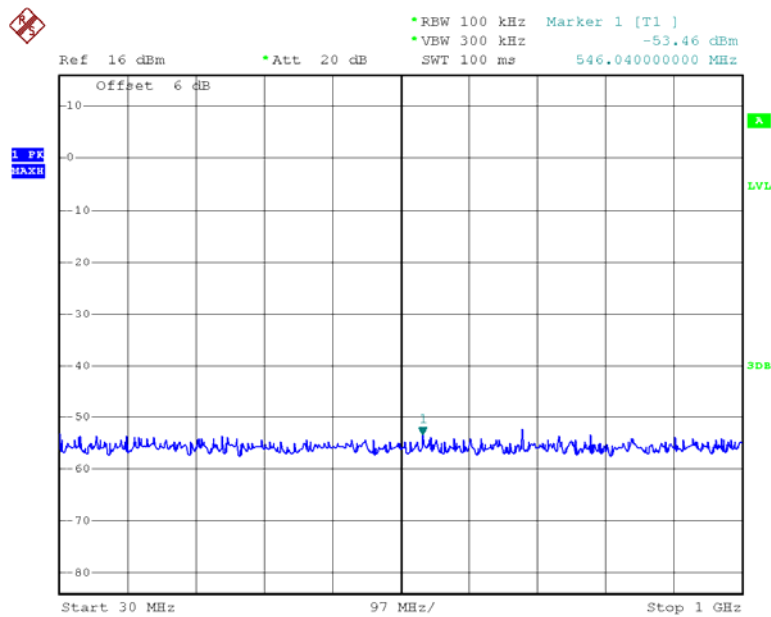


Date: 28.FEB.2013 17:44:58

802.11n40 High Channel 1G-26.5G

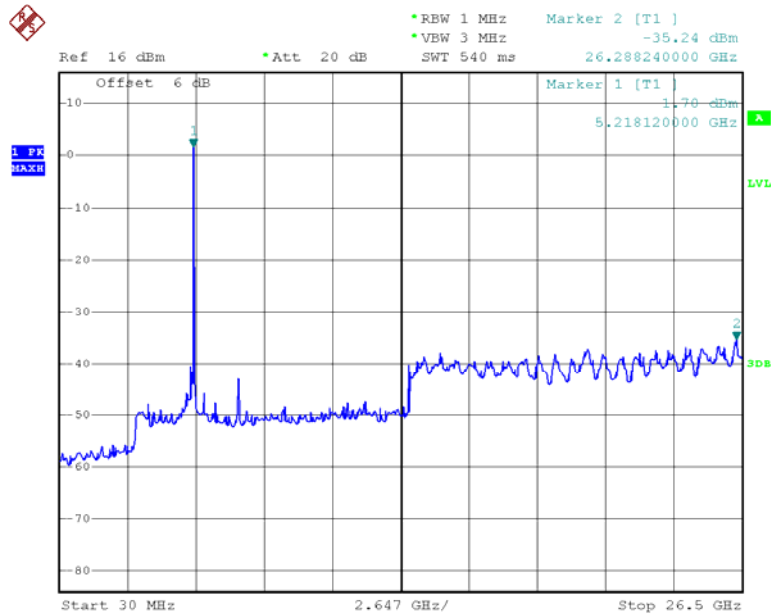


Date: 28.FEB.2013 17:46:52

802.11n40 High Channel 26.5-40G

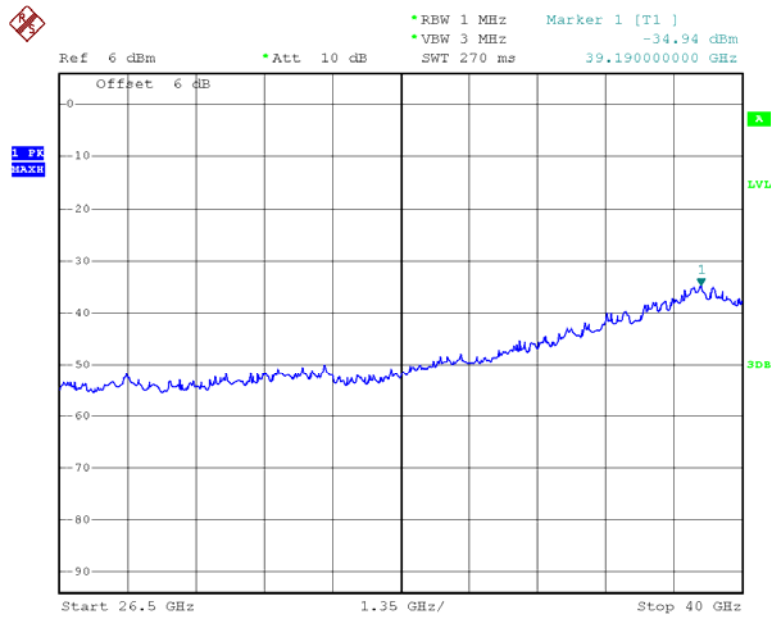


Date: 28.FEB.2013 17:53:11

802.11ac20 Low Channel 30M-1G

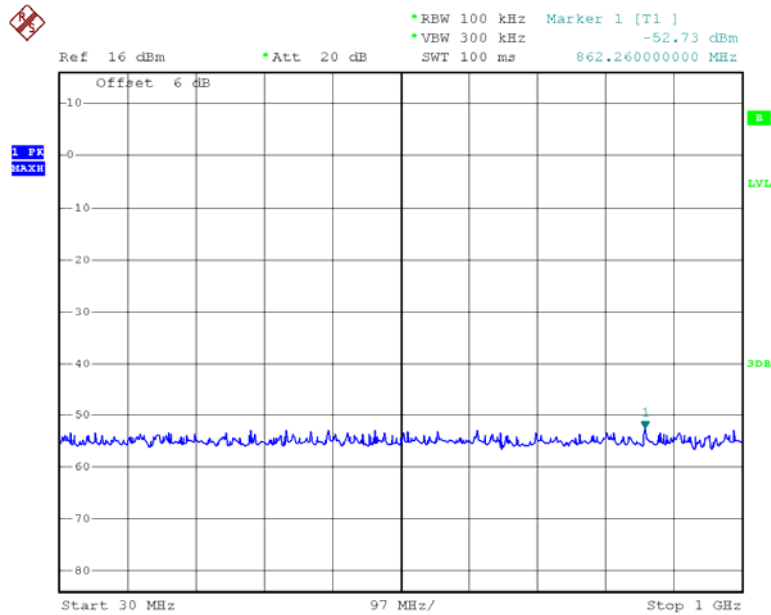


Date: 13.MAR.2013 18:51:45

802.11ac20 Low Channel 1G-26.5G

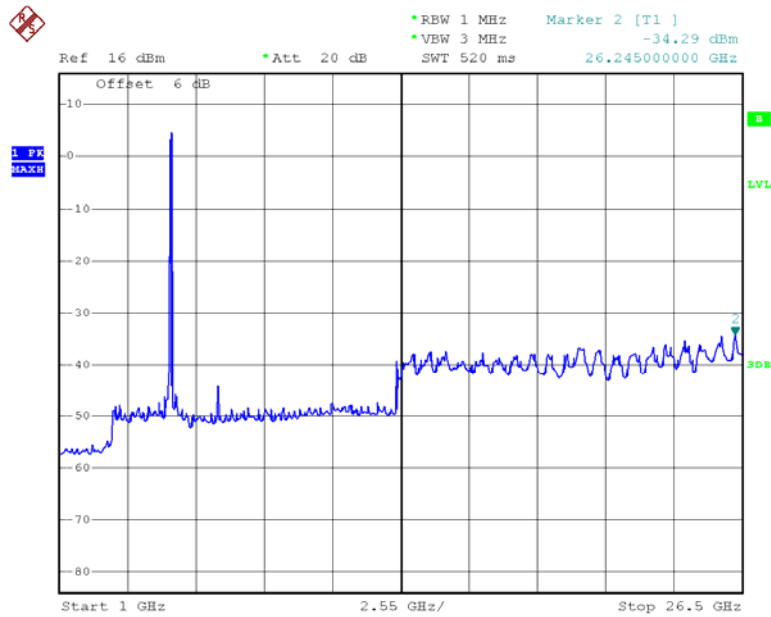


Date: 13.MAR.2013 18:52:48

802.11ac20 Low Channel 26.5-40G

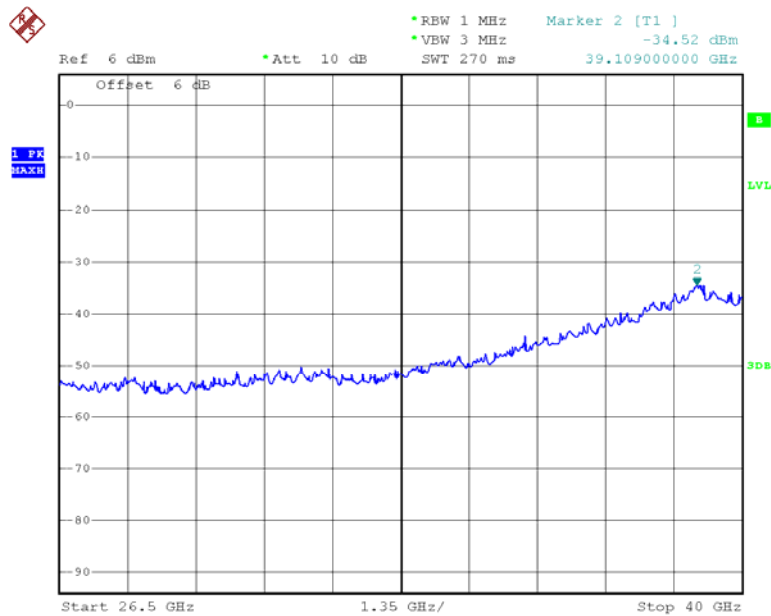


Date: 13.MAR.2013 18:54:37

802.11ac20 Middle Channel 30M-1G

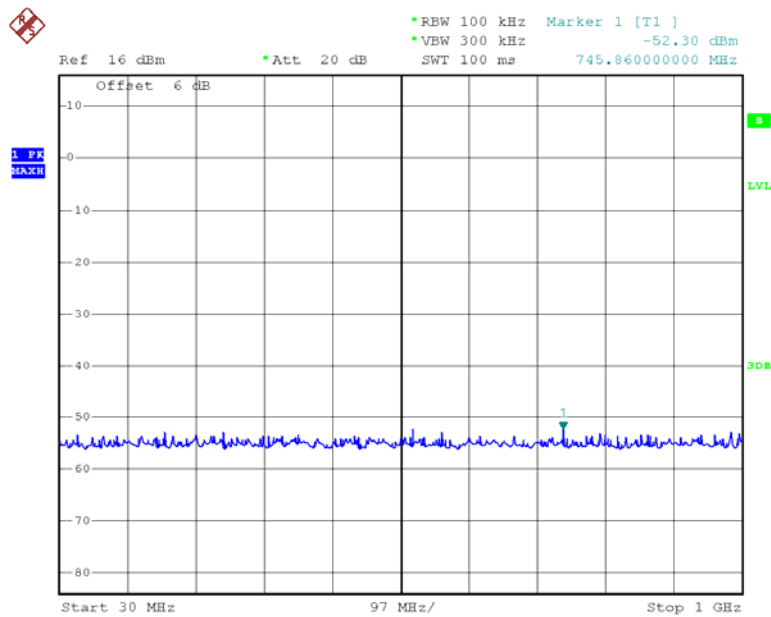


Date: 13.MAR.2013 19:02:55

802.11ac20 Middle Channel 1G -26.5G

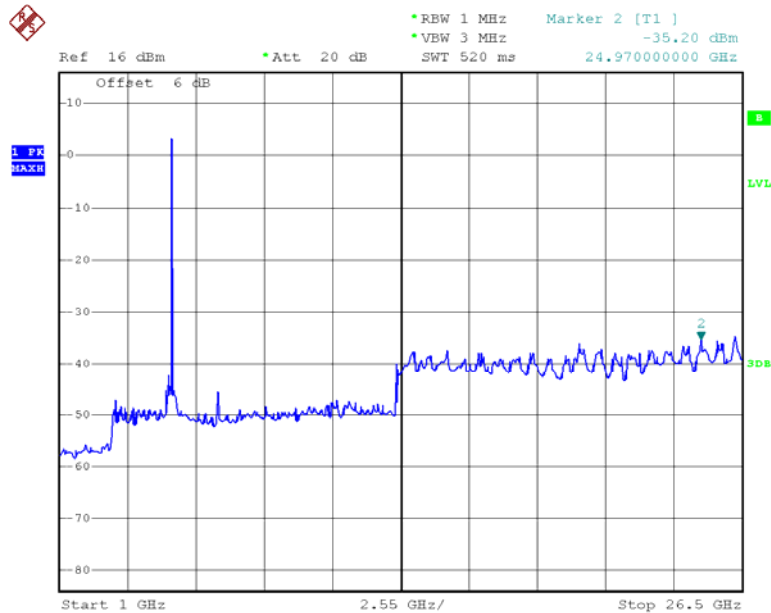


Date: 13.MAR.2013 19:03:40

802.11ac20 Middle Channel 26.5-40G

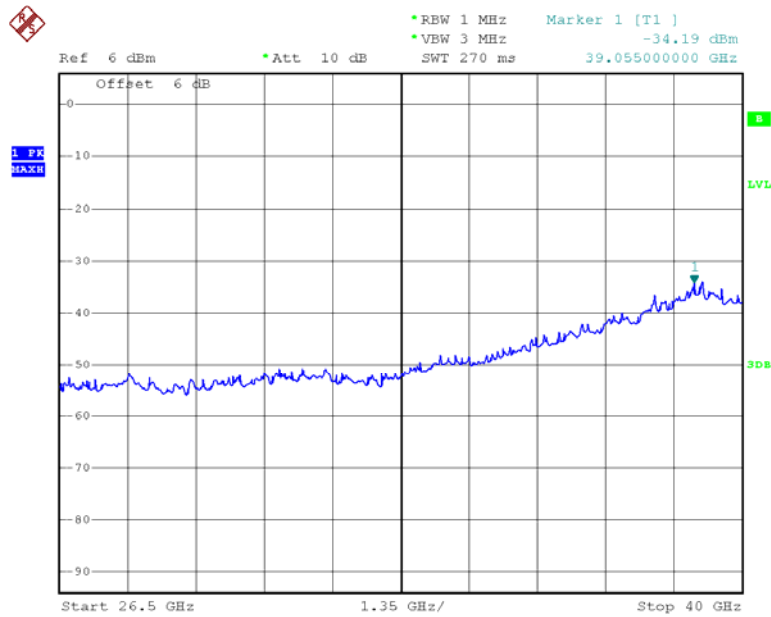


Date: 13.MAR.2013 19:04:55

802.11ac20 High Channel 30M-1G

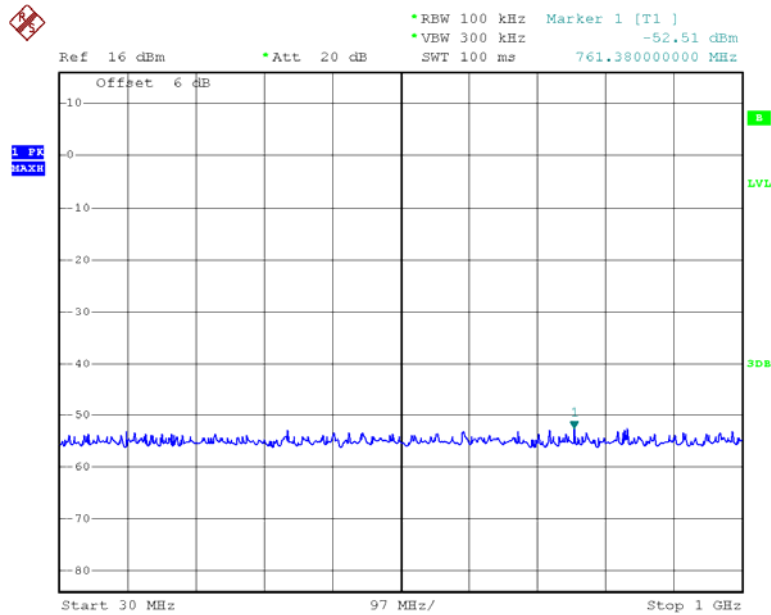


Date: 13.MAR.2013 19:17:25

802.11ac20 High Channel 1G-26.5G

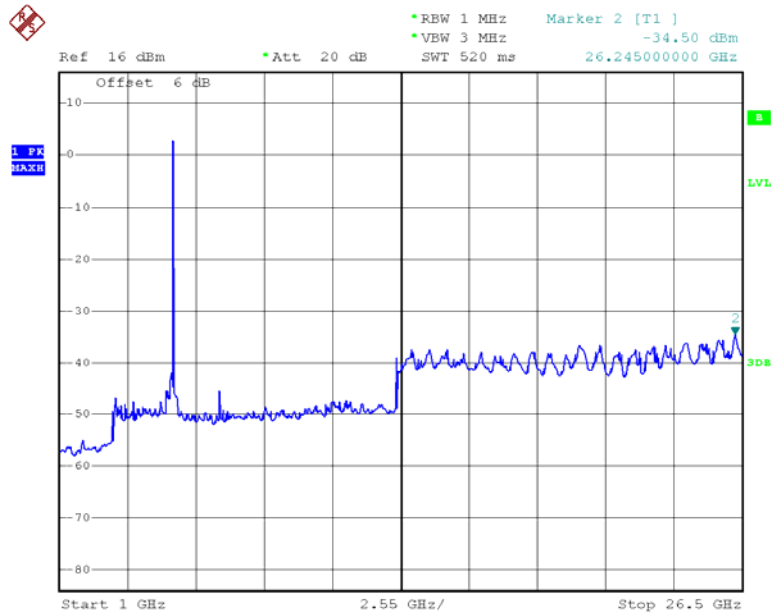


Date: 13.MAR.2013 19:18:23

802.11ac20 High Channel 26.5-40G

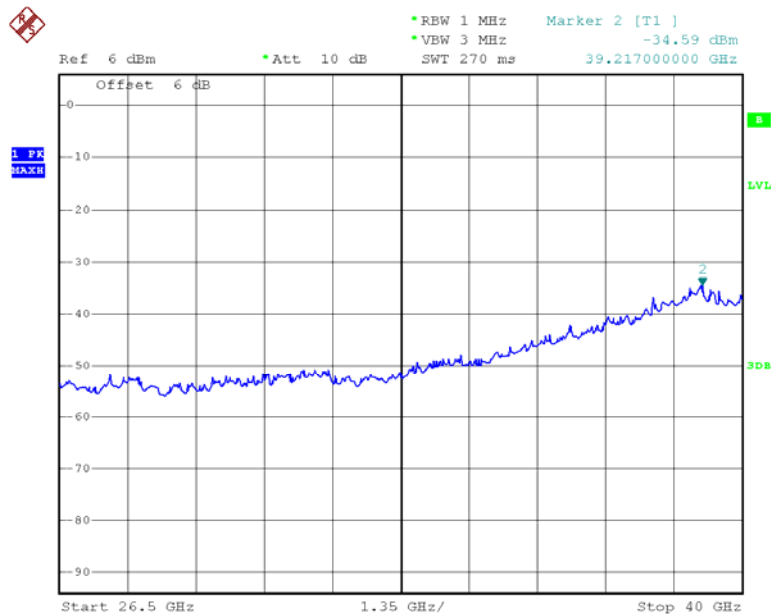


Date: 13.MAR.2013 19:19:36

802.11ac40 Low Channel 30M-1G

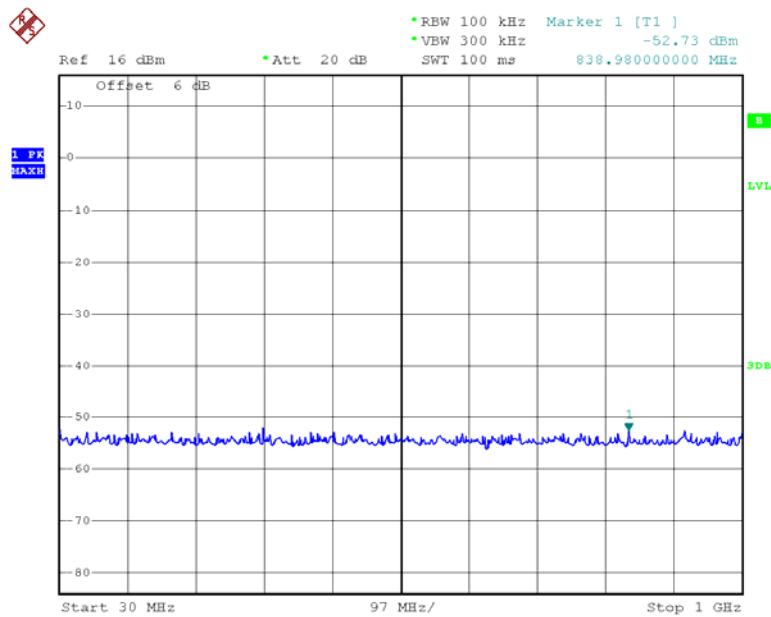


Date: 13.MAR.2013 19:45:06

802.11ac40 Low Channel 1G-26.5G

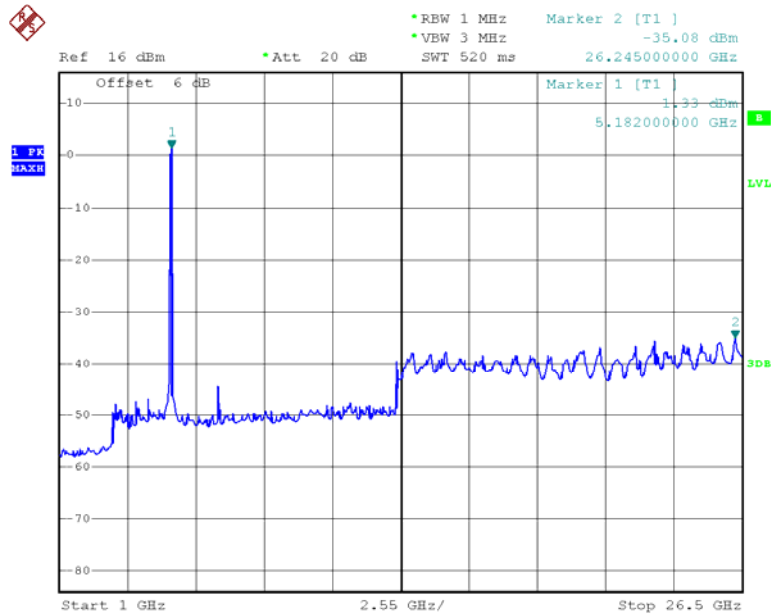


Date: 13.MAR.2013 19:45:40

802.11ac40 Low Channel 26.5-40G

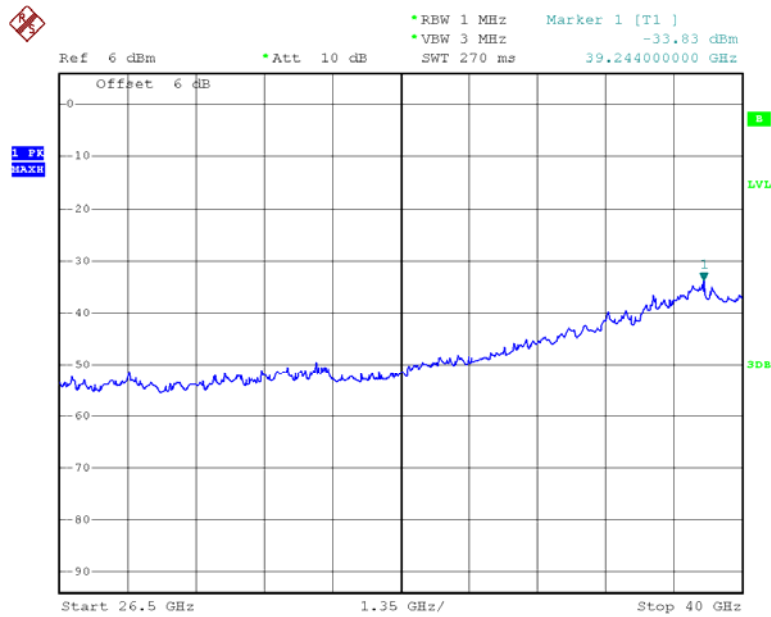


Date: 13.MAR.2013 19:46:37

802.11ac40 High Channel 30M-1G

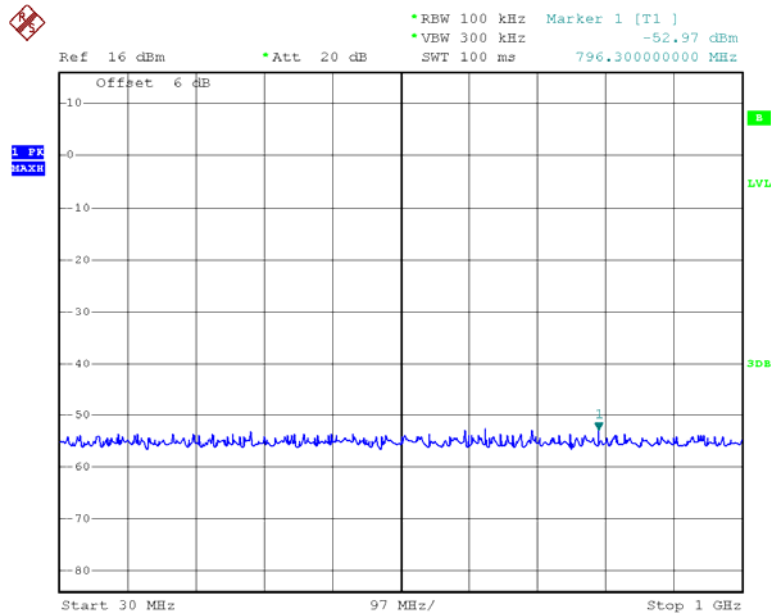


Date: 13.MAR.2013 19:41:23

802.11ac40 High Channel 1G-26.5G

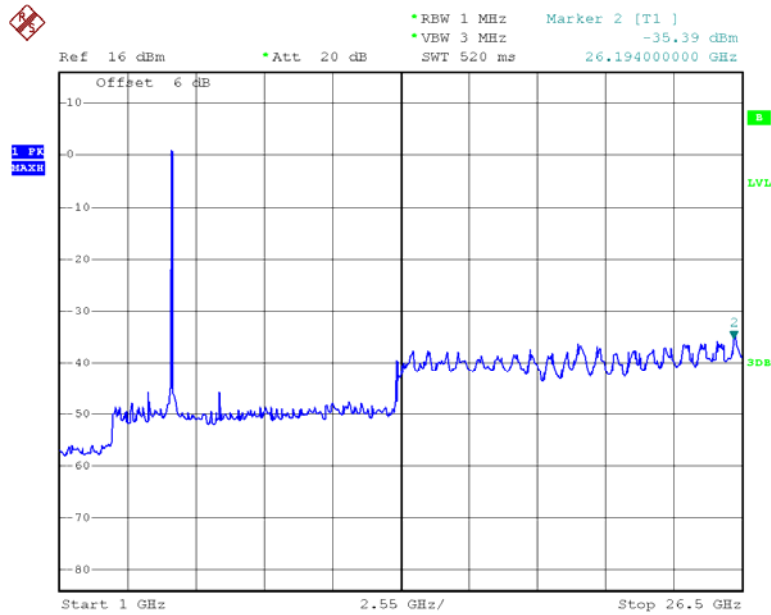


Date: 13.MAR.2013 19:42:28

802.11ac40 High Channel 26.5-40G

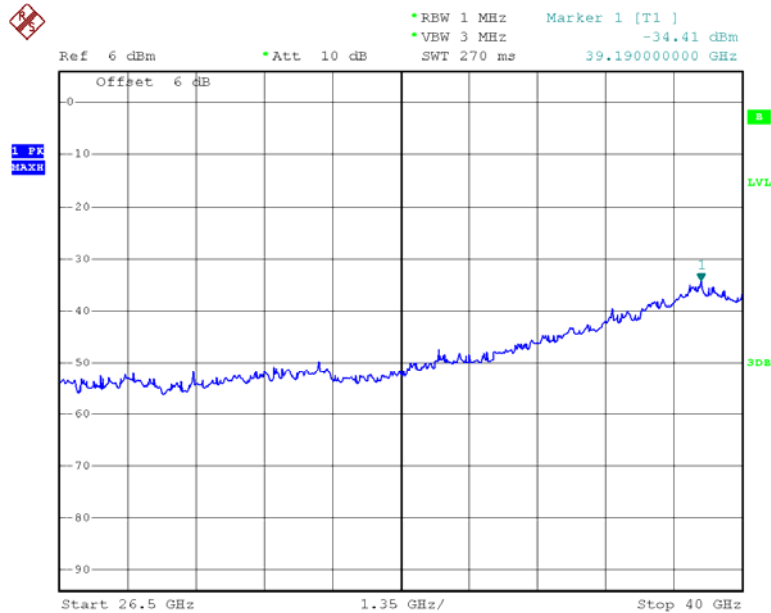


Date: 13.MAR.2013 19:43:28

802.11 ac80 30M-1G

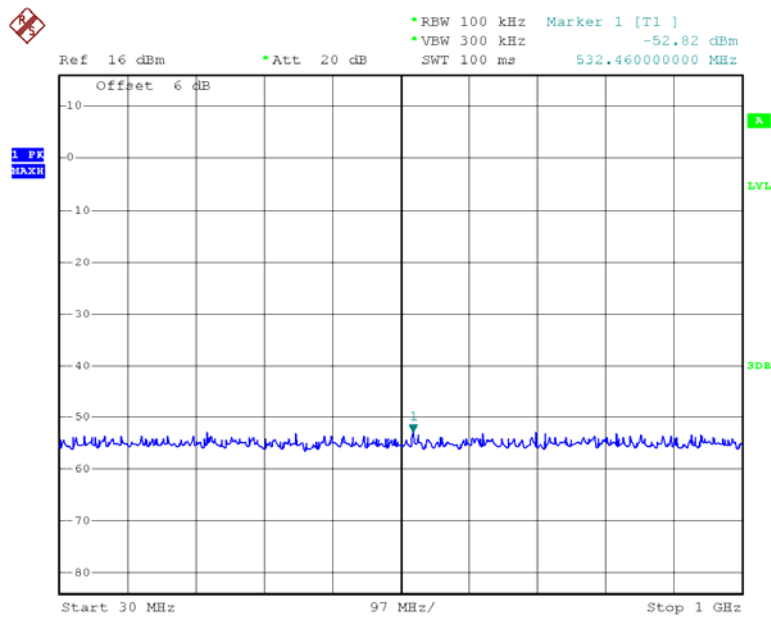


Date: 28.FEB.2013 17:45:15

802.11 ac80 1G-26.5G

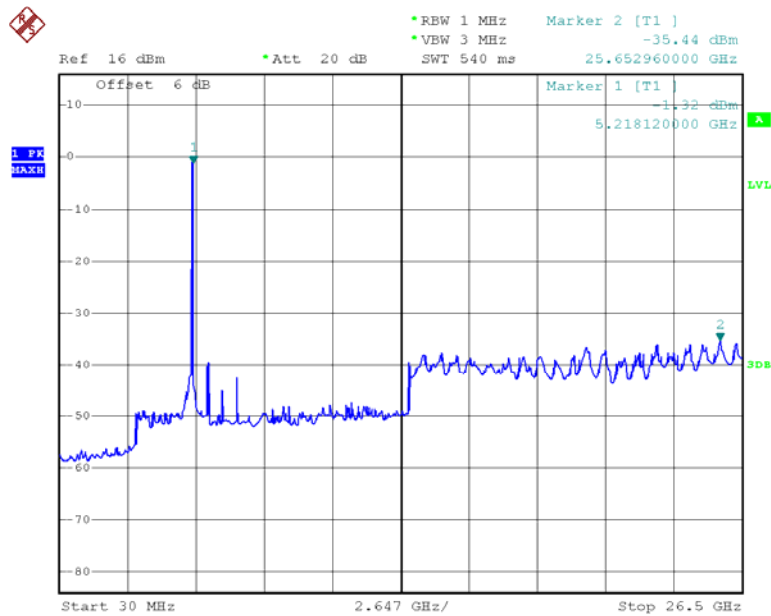

Date: 28.FEB.2013 17:47:51


802.11 ac80 26.5-40G

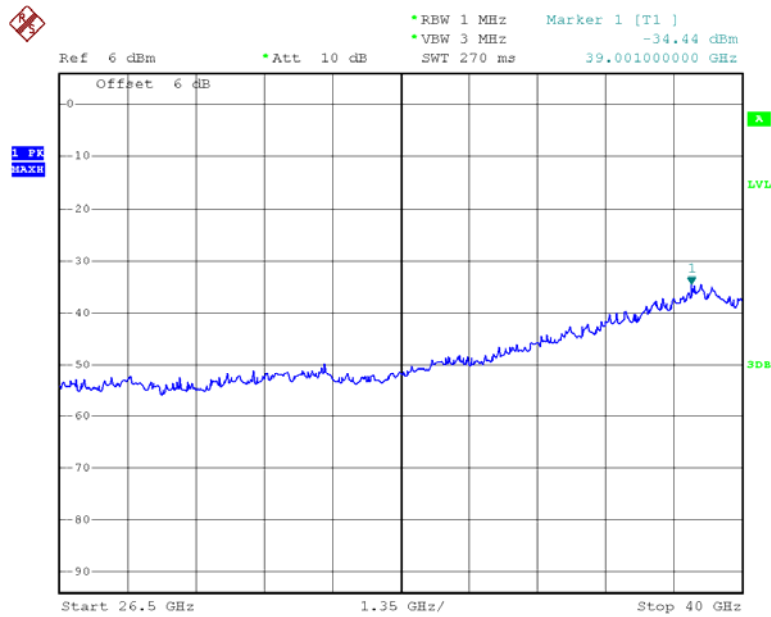

Date: 28.FEB.2013 17:51:58


Chain 2:

802.11n20 Low Channel 30M-1G

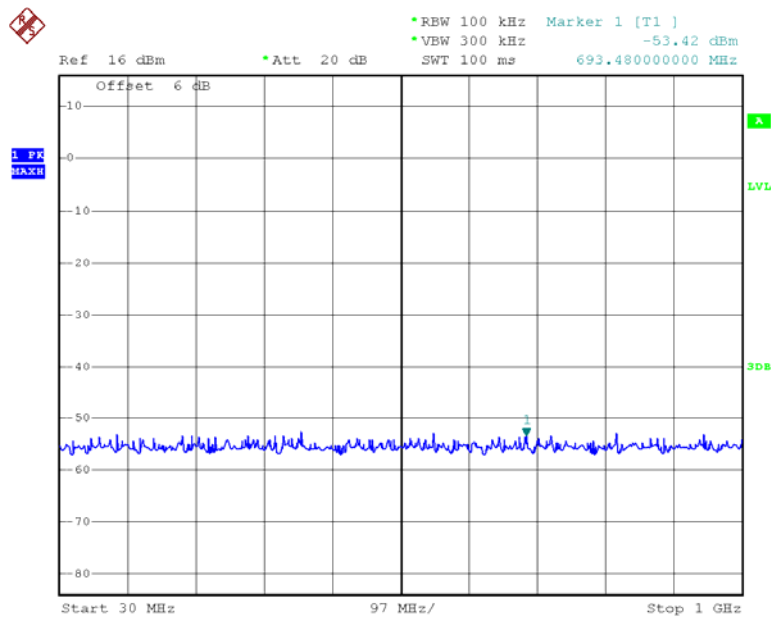


Date: 28.FEB.2013 17:30:35

802.11n20 Low Channel 1G-26.5G

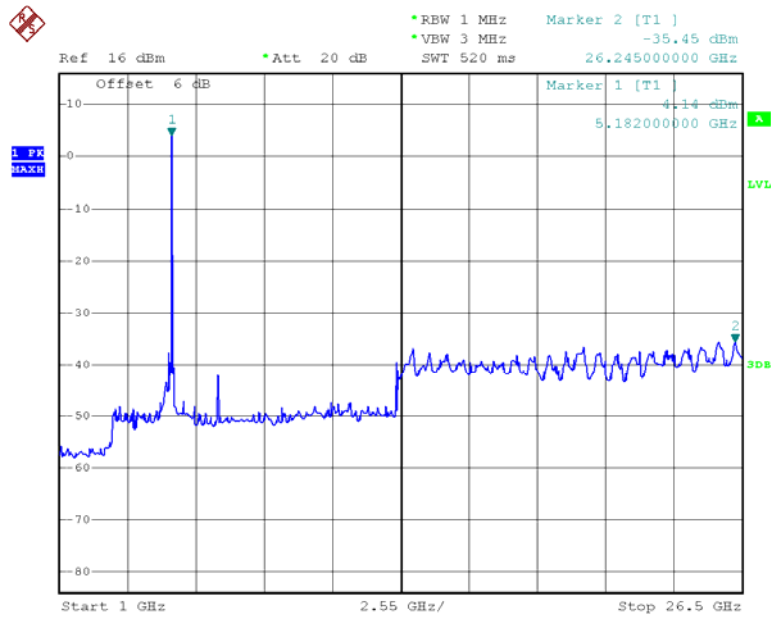


Date: 28.FEB.2013 17:42:26

802.11n20 Low Channel 26.5-40G

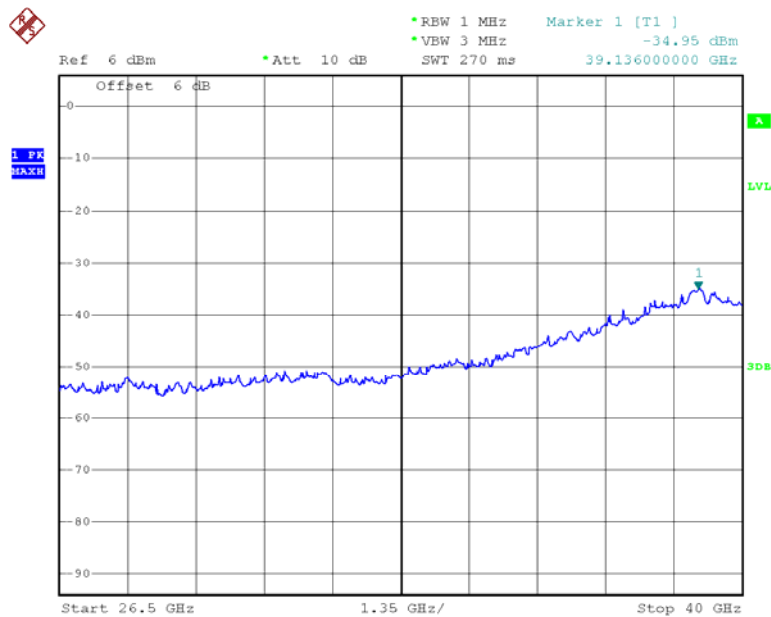


Date: 28.FEB.2013 17:51:04

802.11n20 Middle Channel 30M-1G

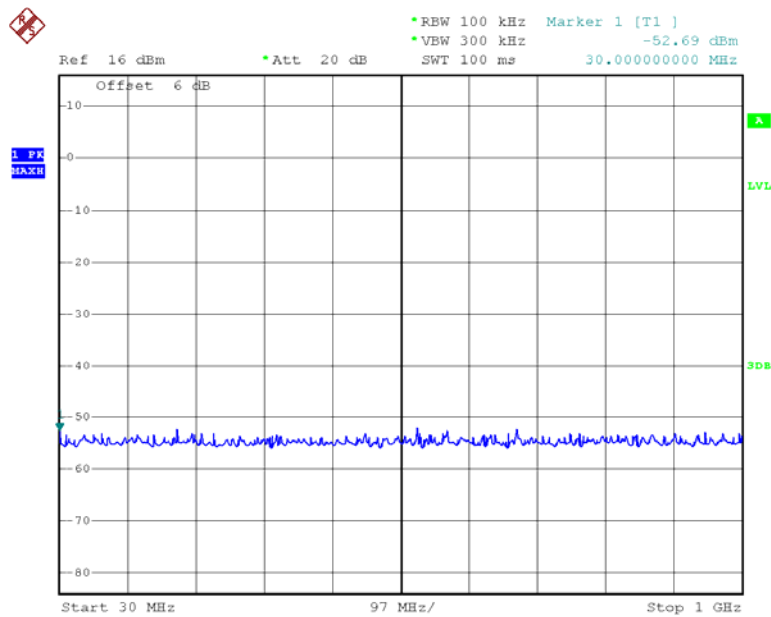


Date: 28.FEB.2013 17:30:07

802.11n20 Middle Channel 1G -26.5G

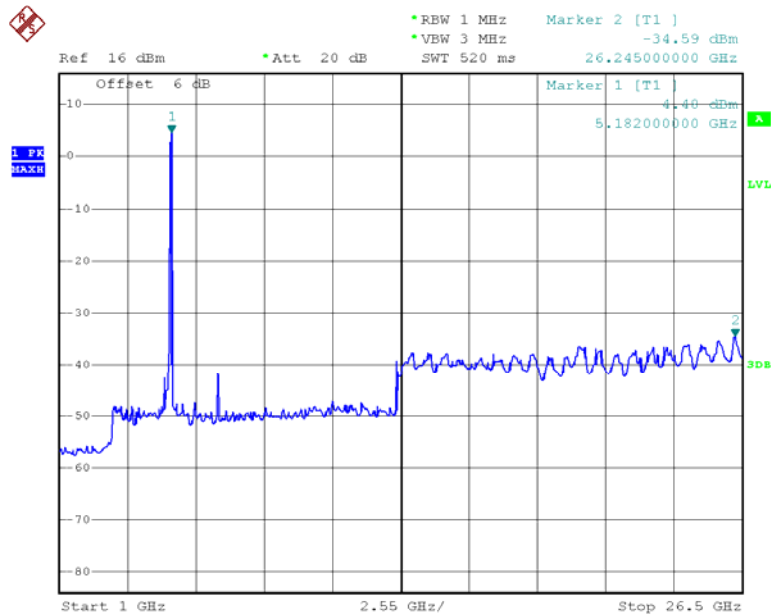


Date: 28.FEB.2013 17:41:30

802.11n20 Middle Channel 26.5-40G

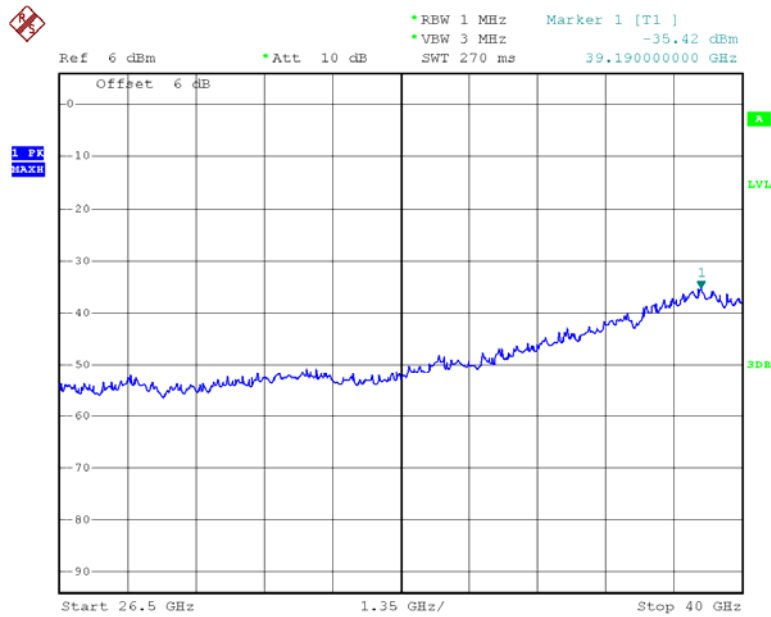


Date: 28.FEB.2013 17:50:32

802.11n20 High Channel 30M-1G

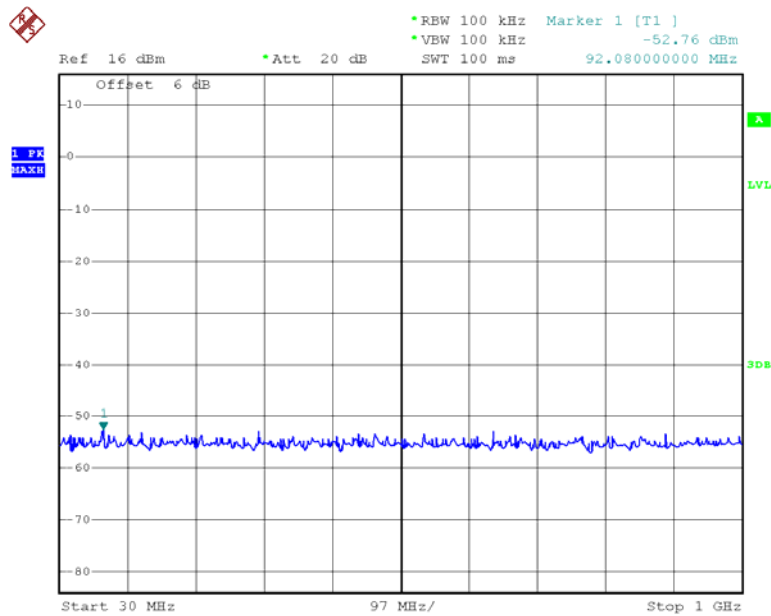


Date: 28.FEB.2013 17:36:55

802.11n20 High Channel 1G-26.5G

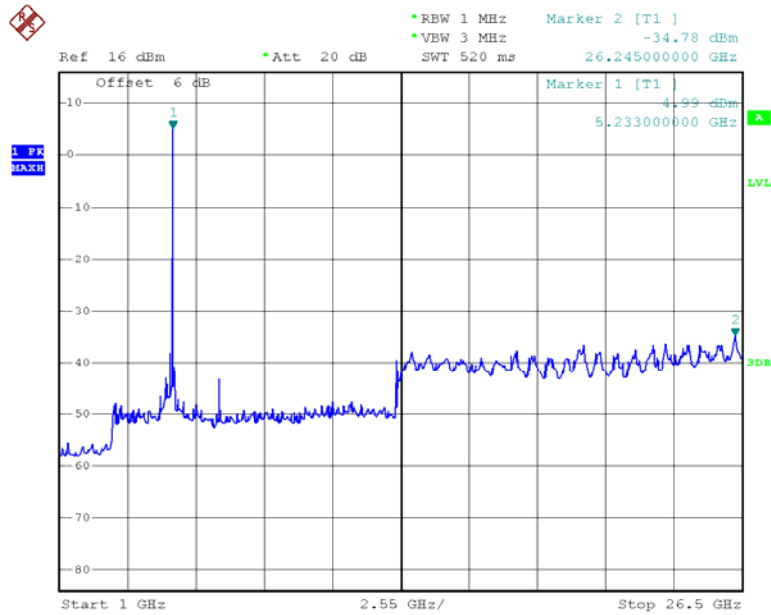


Date: 28.FEB.2013 17:43:49

802.11n20 High Channel 26.5-40G

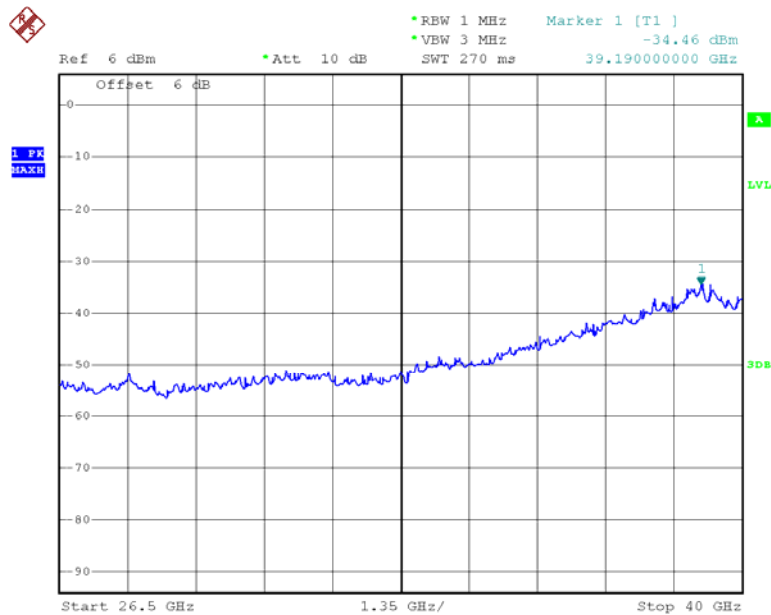


Date: 28.FEB.2013 17:51:39

802.11n40 Low Channel 30M-1G

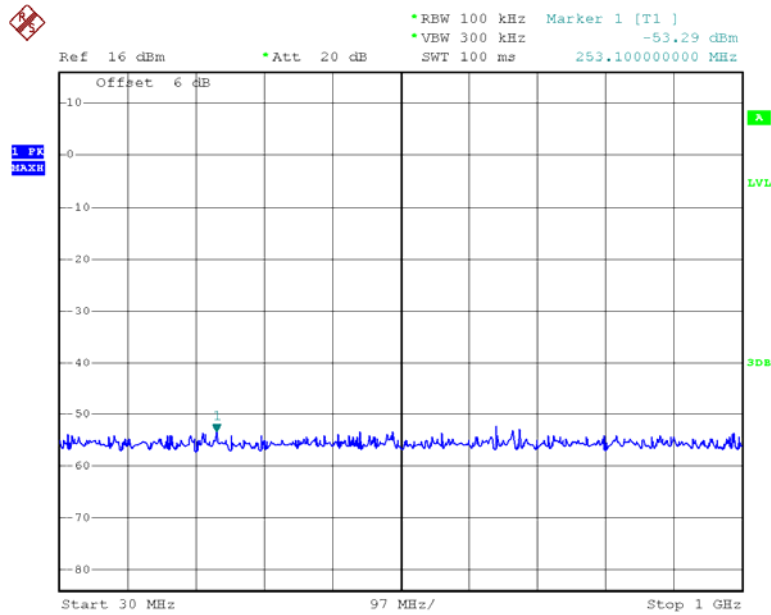


Date: 28.FEB.2013 17:44:49

802.11n40 Low Channel 1G-26.5G

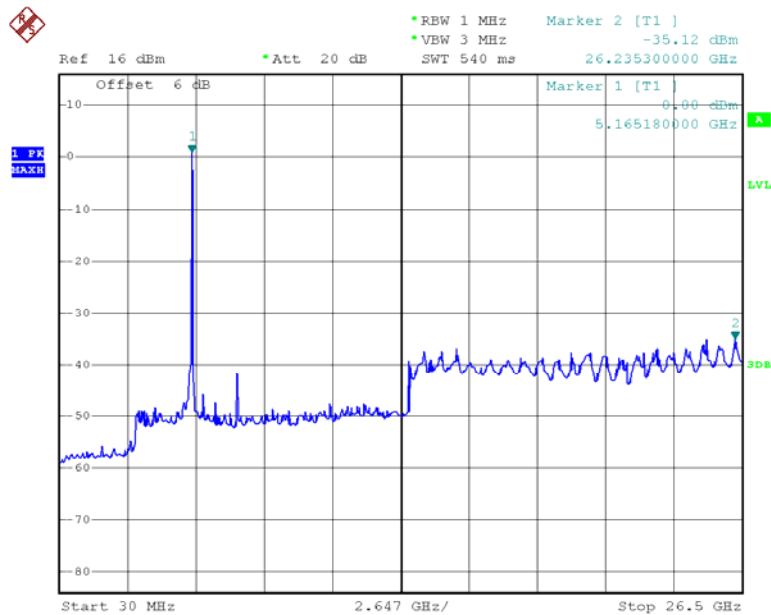


Date: 28.FEB.2013 17:46:15

802.11n40 Low Channel 26.5-40G

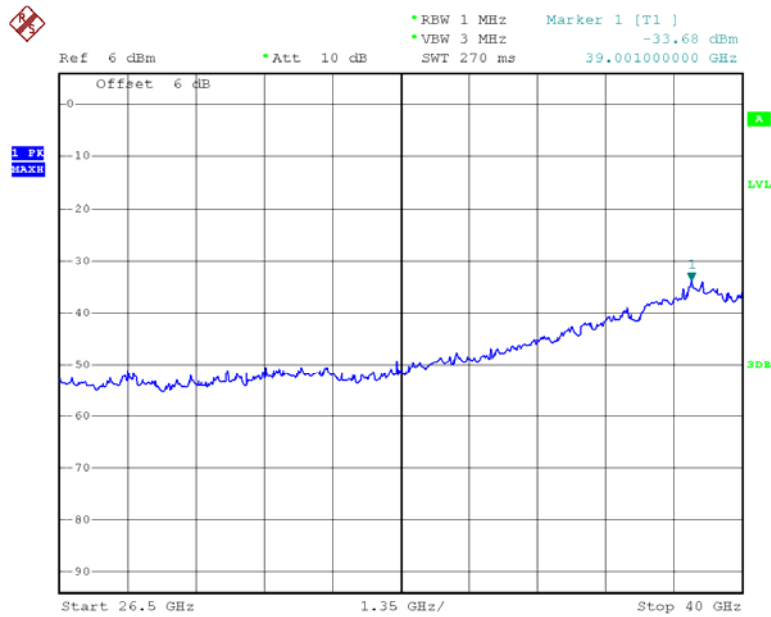


Date: 28.FEB.2013 17:52:45

802.11n40 High Channel 30M-1G

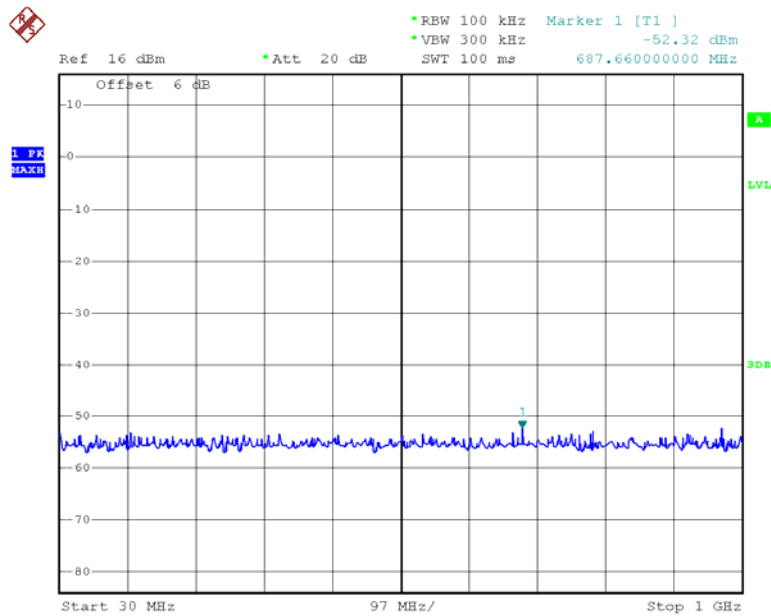


Date: 28.FEB.2013 17:45:02

802.11n40 High Channel 1G-26.5G

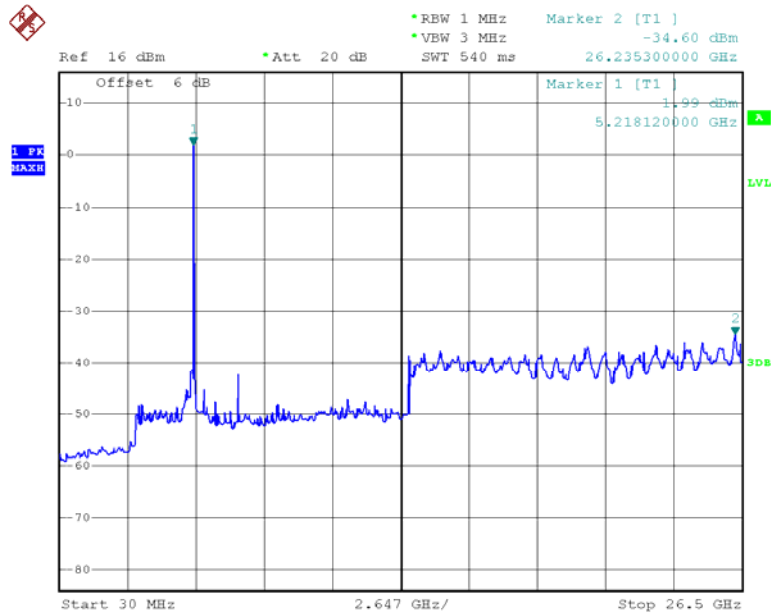


Date: 28.FEB.2013 17:47:05

802.11n40 High Channel 26.5-40G

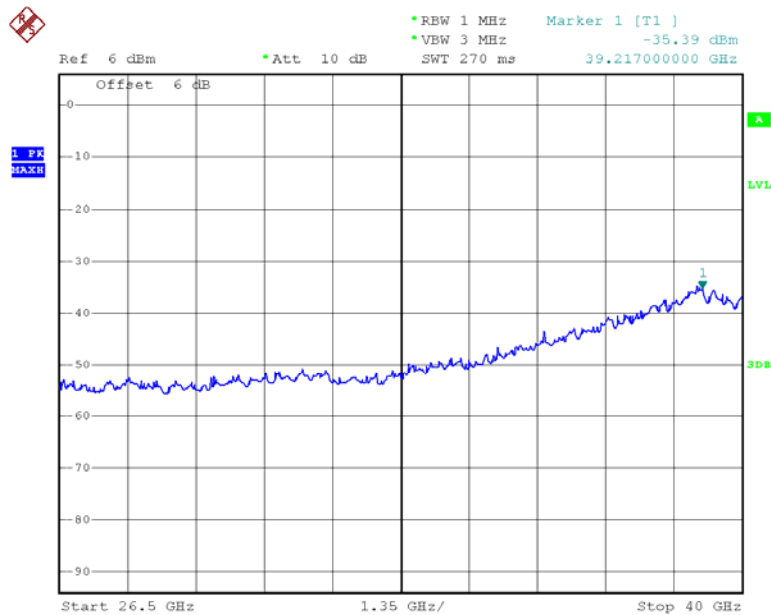


Date: 28.FEB.2013 17:53:22

802.11ac20 Low Channel 30M-1G

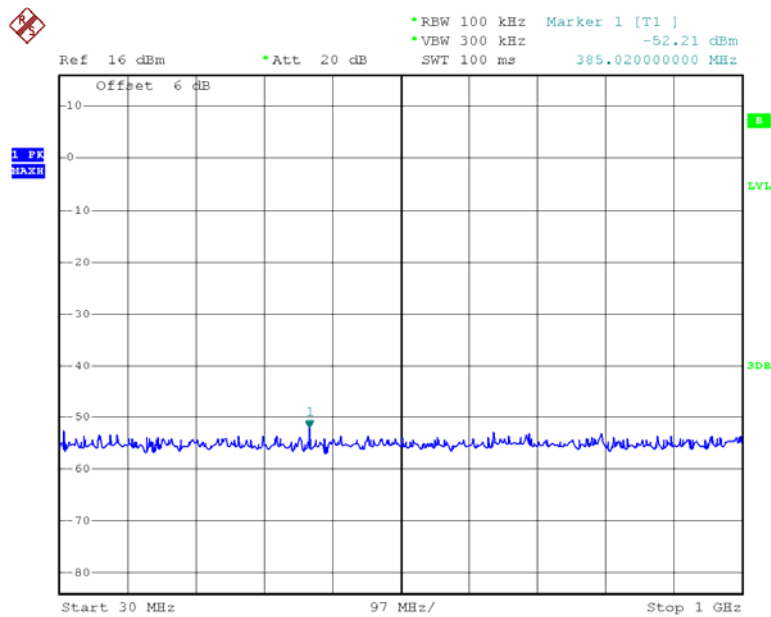


Date: 13.MAR.2013 18:51:56

802.11ac20 Low Channel 1G-26.5G

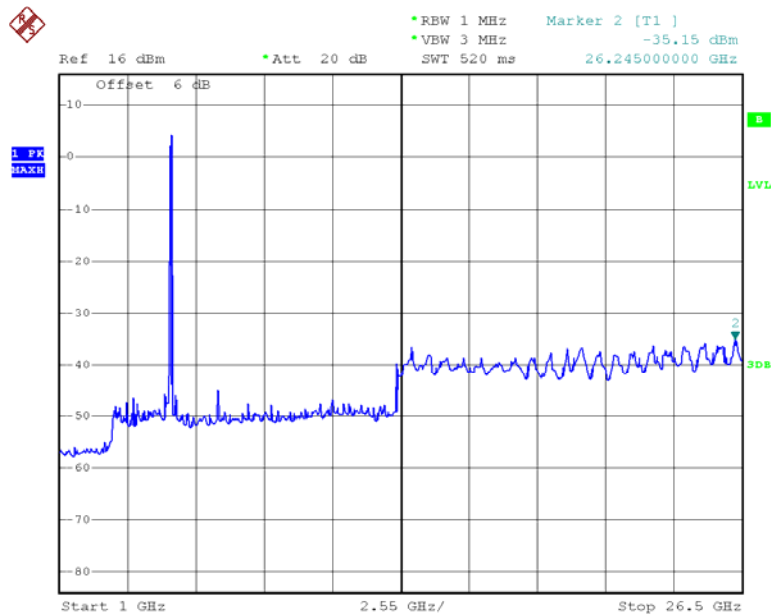


Date: 13.MAR.2013 18:53:06

802.11ac20 Low Channel 26.5-40G

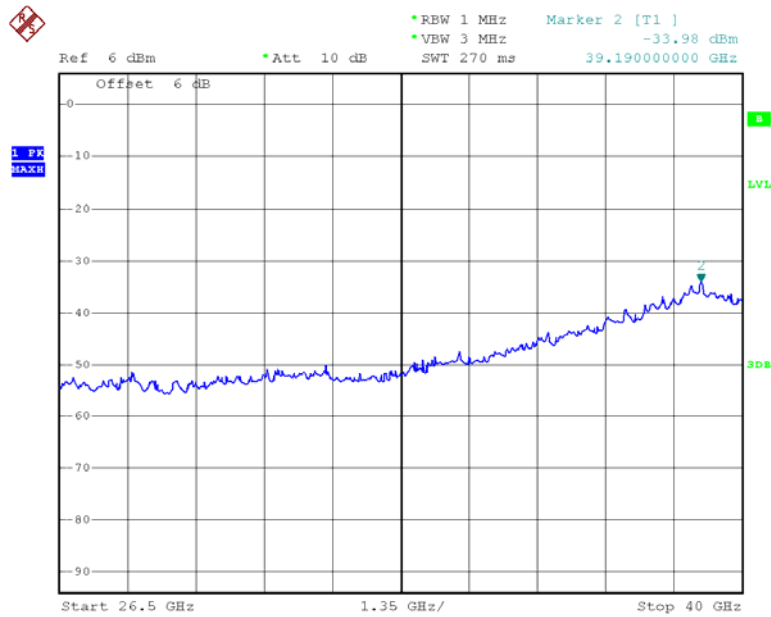

Date: 13.MAR.2013 18:54:51

802.11ac20 Middle Channel 30M-1G

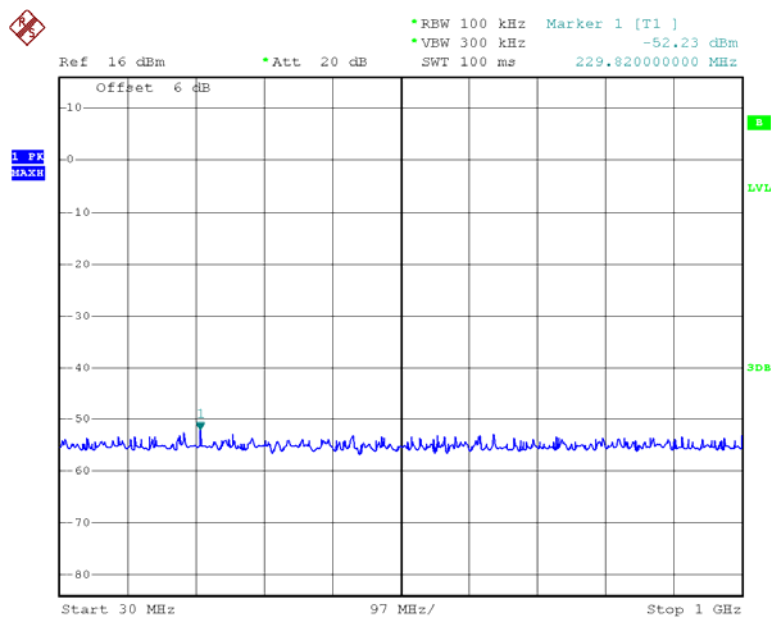


Date: 13.MAR.2013 19:03:07

[illegible]

802.11ac20 Middle Channel 26.5-40G




802.11ac20 High Channel 30M-1G

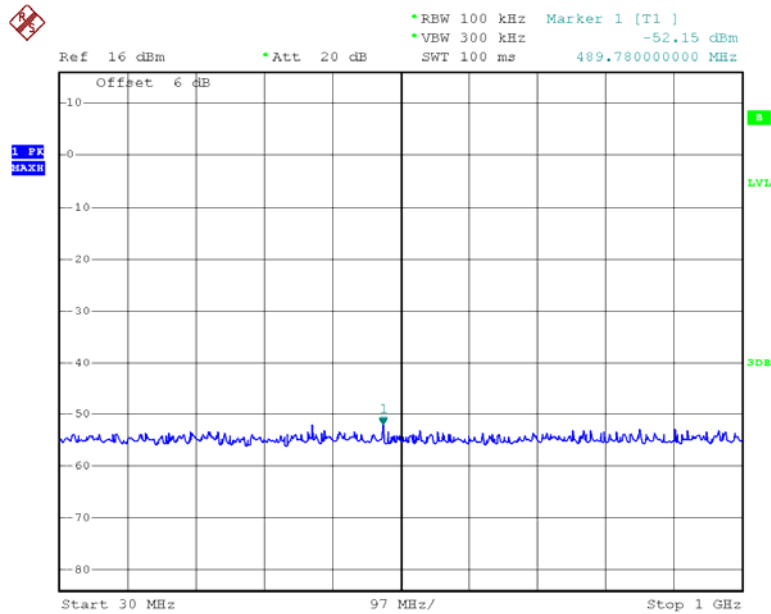


Date: 13.MAR.2013 19:17:42

802.11ac20 High Channel 1G-26.5G

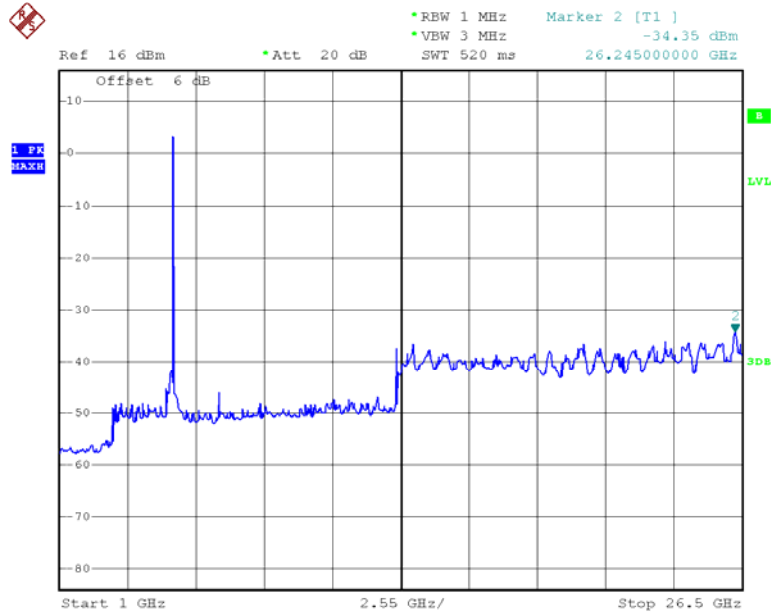


Date: 13.MAR.2013 19:18:42

802.11ac20 High Channel 26.5-40G

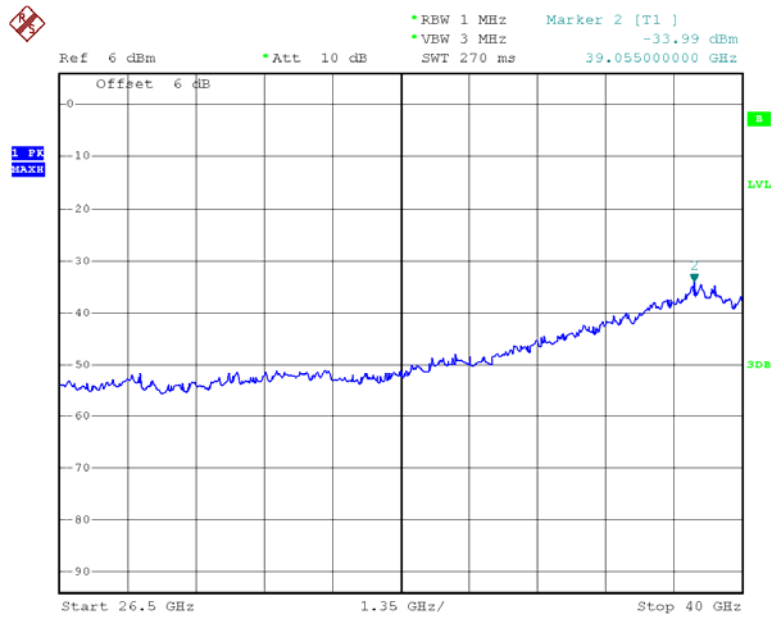


Date: 13.MAR.2013 19:19:47

802.11ac40 Low Channel 30M-1G

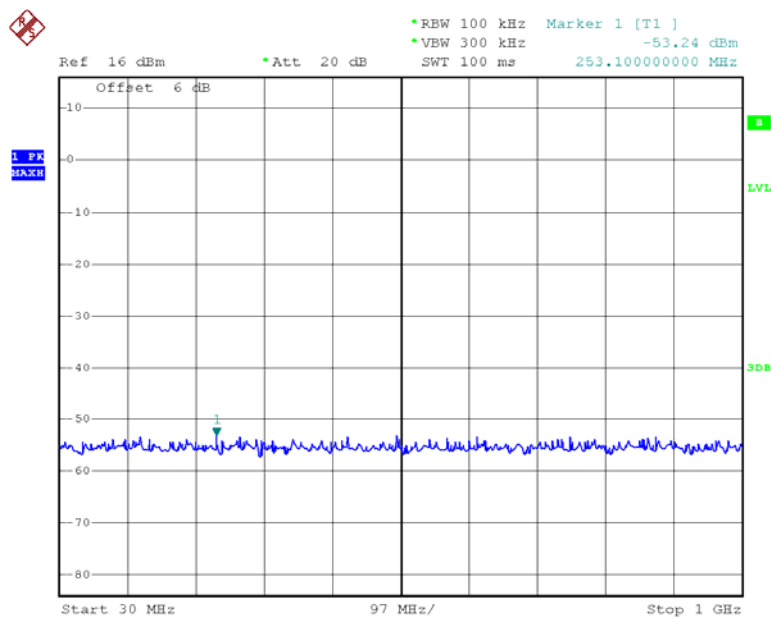


Date: 13.MAR.2013 19:45:16

802.11ac40 Low Channel 1G-26.5G

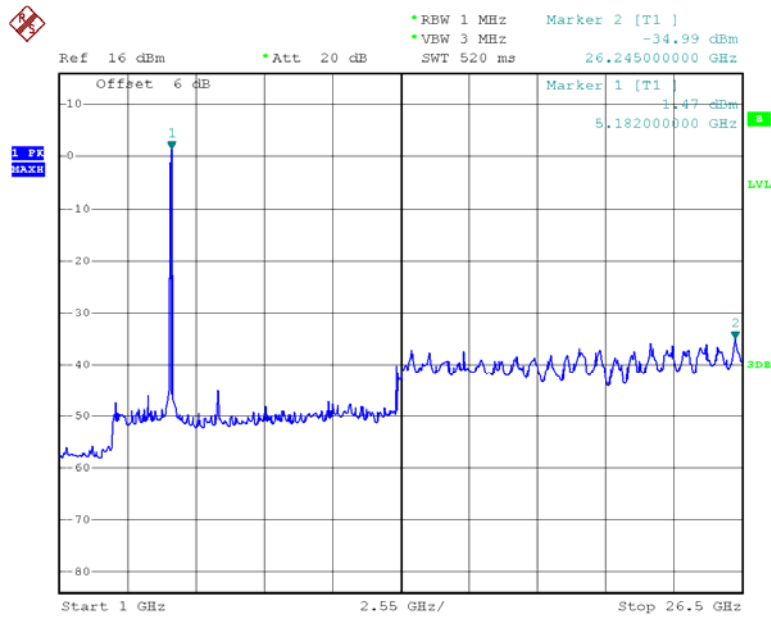


Date: 13.MAR.2013 19:45:51

802.11ac40 Low Channel 26.5-40G

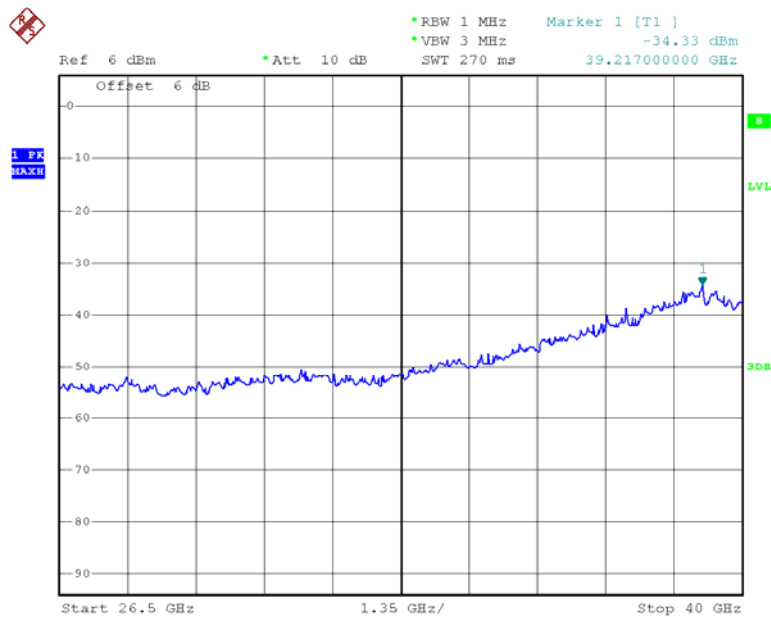


Date: 13.MAR.2013 19:46:47

802.11ac40 High Channel 30M-1G

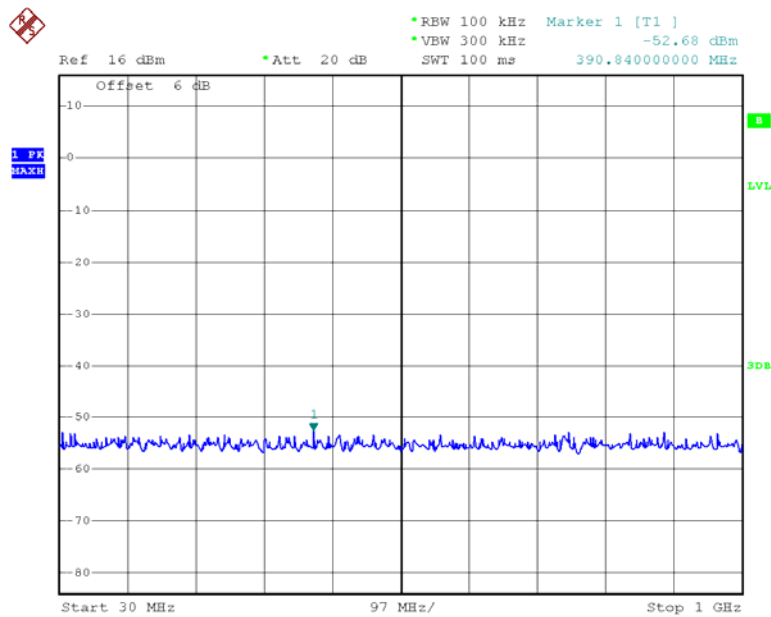


Date: 13.MAR.2013 19:41:33

802.11ac40 High Channel 1G-26.5G

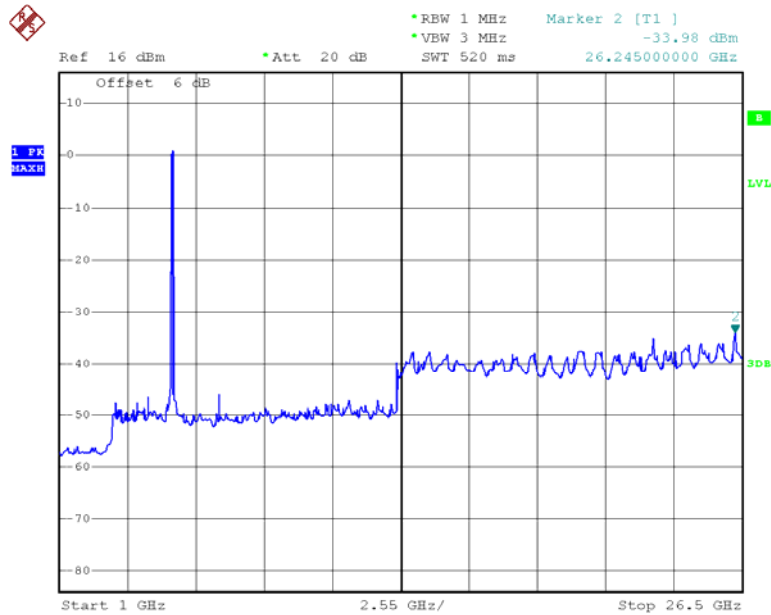


Date: 13.MAR.2013 19:42:46

802.11ac40 High Channel 26.5-40G

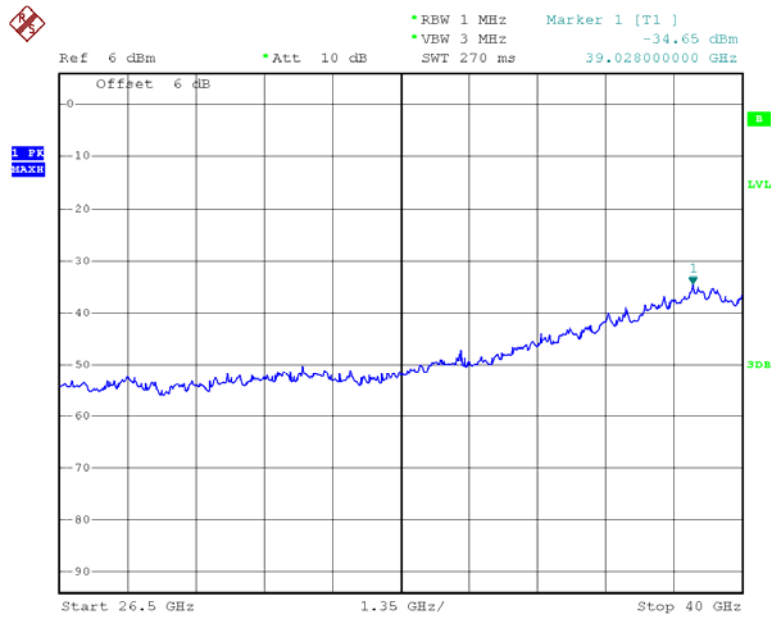


Date: 13.MAR.2013 19:43:39

802.11 ac80 30M-1G

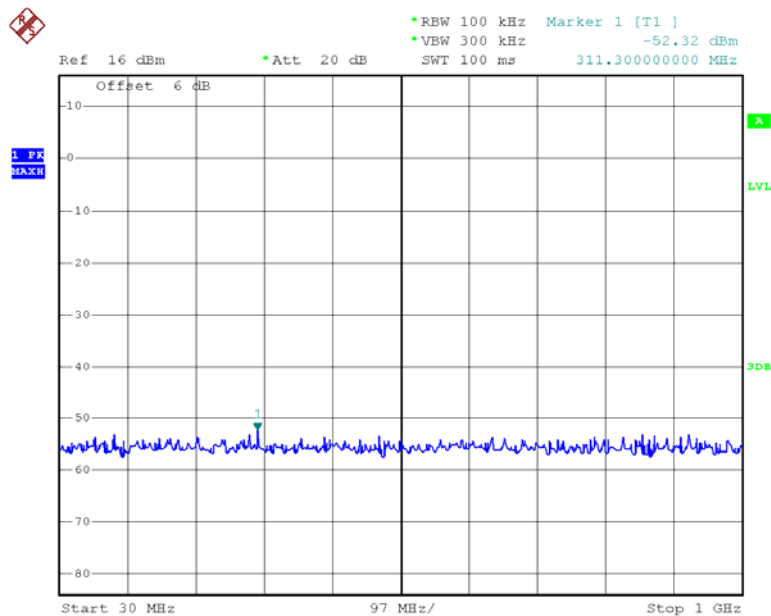


Date: 28.FEB.2013 17:45:23

802.11 ac80 1G-26.5G

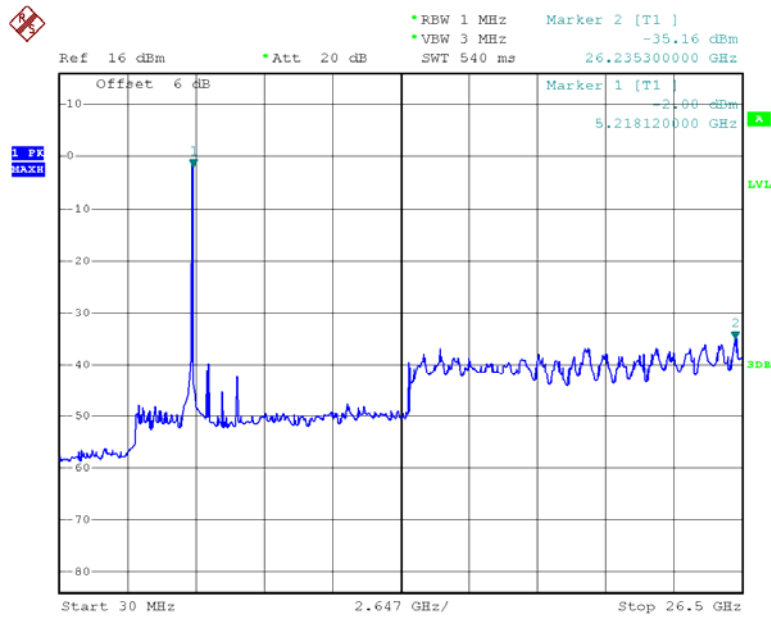

Date: 28.FEB.2013 17:48:08

802.11 ac80 26.5-40G

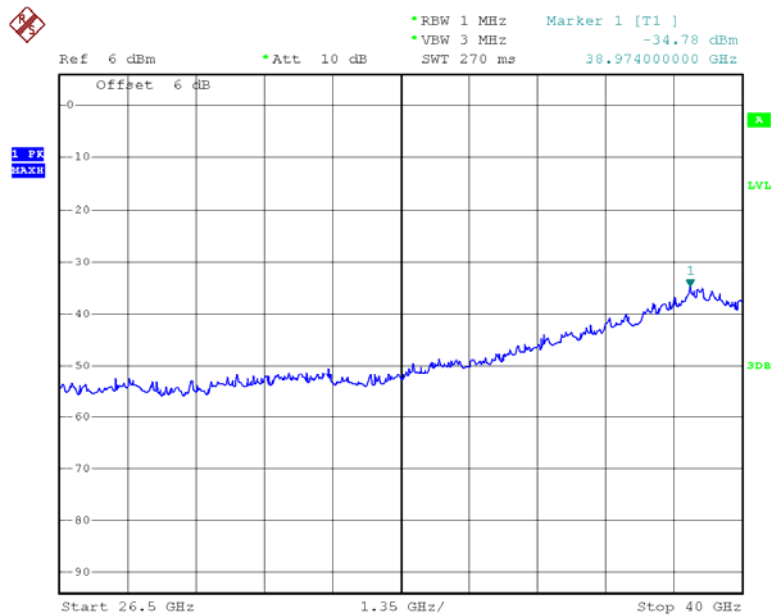

Date: 28.FEB.2013 17:52:08

FCC §15.407(b) (1) (2) (3) (4) – OUT OF BAND EMISSIONS

Applicable Standard

FCC §15.407 (b) (1),(2), (3), (4),;

For transmitters operating in the 5.15–5.25 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.25–5.35 GHz band: all emissions outside of the 5.15–5.35 GHz band shall not exceed an EIRP of –27 dBm/MHz. Devices operating in the 5.25–5.35 GHz band that generate emissions in the 5.15–5.25 GHz band must meet all applicable technical requirements for operation in the 5.15–5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of –27 dBm/MHz in the 5.15–5.25 GHz band.

For transmitters operating in the 5.47–5.725 GHz band: all emissions outside of the 5.47–5.725 GHz band shall not exceed an EIRP of –27 dBm/MHz.

For transmitters operating in the 5.725–5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of –17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of –27 dBm/MHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibration or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 1 MHz and VBW to 3MHz of spectrum analyzer. Offset the antenna gain and cable loss.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data

Environmental Conditions

Temperature:	23.4 °C~26.8 °C
Relative Humidity:	29%~62%
ATM Pressure:	100.8 kPa~101.9 kPa


The testing was performed by Leon Chen from 2013-02-28 to 2013-03-13.

Please refer to the following table and plots.

Bandedge	Worst Reading Level (dBm)	Limit (dBm)	Result
802.11a			
Left	-34.90	-27	PASS
Right	-34.34	-27	PASS
802.11n20 Chain 0			
Left	-36.98	-27	PASS
Right	-44.74	-27	PASS
802.11n20 Chain 1			
Left	-36.87	-27	PASS
Right	-44.49	-27	PASS
802.11n20 Chain 2			
Left	-36.72	-27	PASS
Right	-44.98	-27	PASS
802.11n20 Total:Chain 0+ Chain 1+ Chain 2			
Left	-32.08	-27	PASS
Right	-39.96	-27	PASS
802.11n40 Chain 0			
Left	-39.37	-27	PASS
Right	-46.59	-27	PASS
802.11n40 Chain 1			
Left	-36.72	-27	PASS
Right	-44.98	-27	PASS
802.11n40 Chain 2			
Left	-39.48	-27	PASS
Right	-45.78	-27	PASS
802.11n40 Total:Chain 0+ Chain 1+ Chain 2			
Left	-33.55	-27	PASS
Right	-40.96	-27	PASS
802.11ac20 Chain 0			
Left	-41.06	-27	PASS
Right	-45.65	-27	PASS
802.11ac20 Chain 1			
Left	-41.40	-27	PASS
Right	-45.33	-27	PASS
802.11ac20 Chain 2			
Left	-42.41	-27	PASS
Right	-45.76	-27	PASS
802.11ac20 Total:Chain 0+ Chain 1+ Chain 2			
Left	-36.82	-27	PASS
Right	-40.80	-27	PASS


802.11ac40 Chain 0			
Left	-45.39	-27	PASS
Right	-46.61	-27	PASS
802.11ac40 Chain 1			
Left	-44.27	-27	PASS
Right	-46.15	-27	PASS
802.11ac40 Chain 2			
Left	-42.39	-27	PASS
Right	-47.50	-27	PASS
802.11ac40 Total:Chain 0+ Chain 1+ Chain 2			
Left	-39.07	-27	PASS
Right	-41.95	-27	PASS
802.11ac80 Chain 0			
Left	-38.16	-27	PASS
Right	-46.39	-27	PASS
802.11ac80 Chain 1			
Left	-36.15	-27	PASS
Right	-46.39	-27	PASS
802.11ac80 Chain 2			
Left	-37.32	-27	PASS
Right	-47.16	-27	PASS
802.11ac80 Total:Chain 0+ Chain 1+ Chain 2			
Left	-32.36	-27	PASS
Right	-41.86	-27	PASS

802.11a Left Bandedge

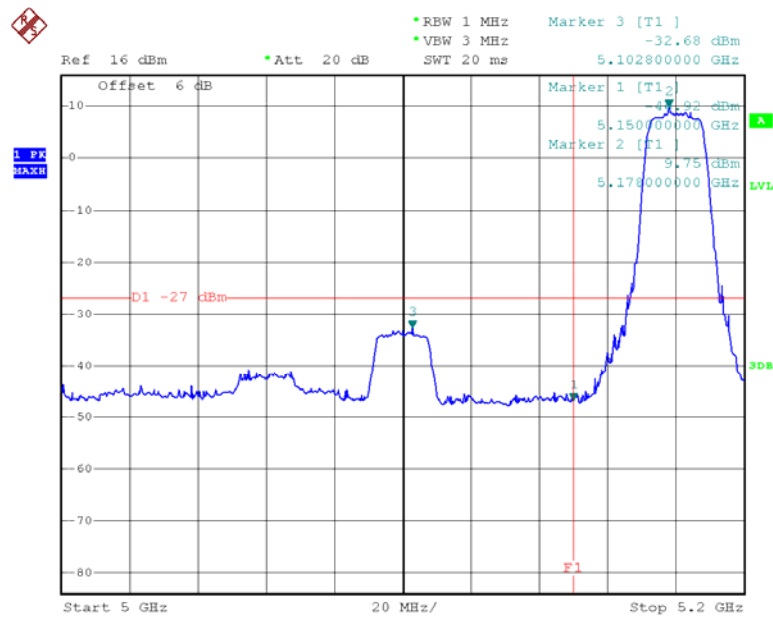

Date: 28.FEB.2013 17:10:01


802.11a Right Bandedge

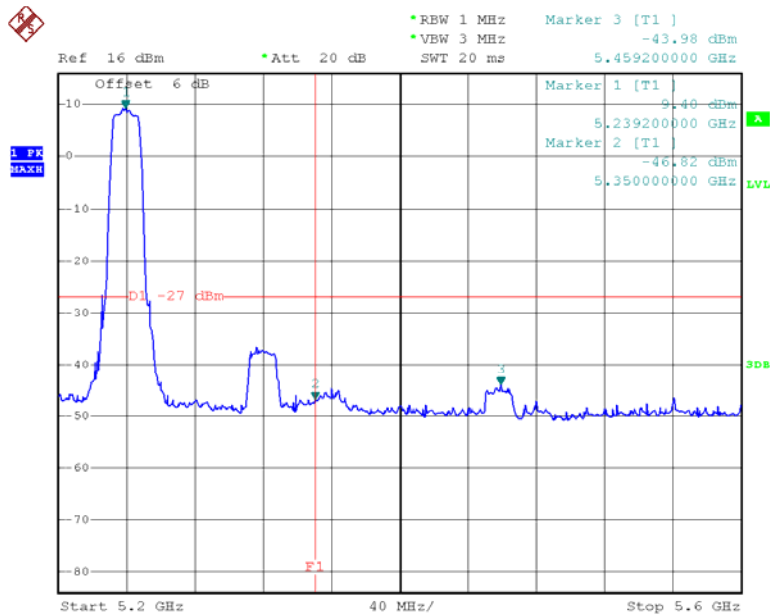

Date: 28.FEB.2013 17:14:19


v

Chain 0:802.11n20 Left Bandedge

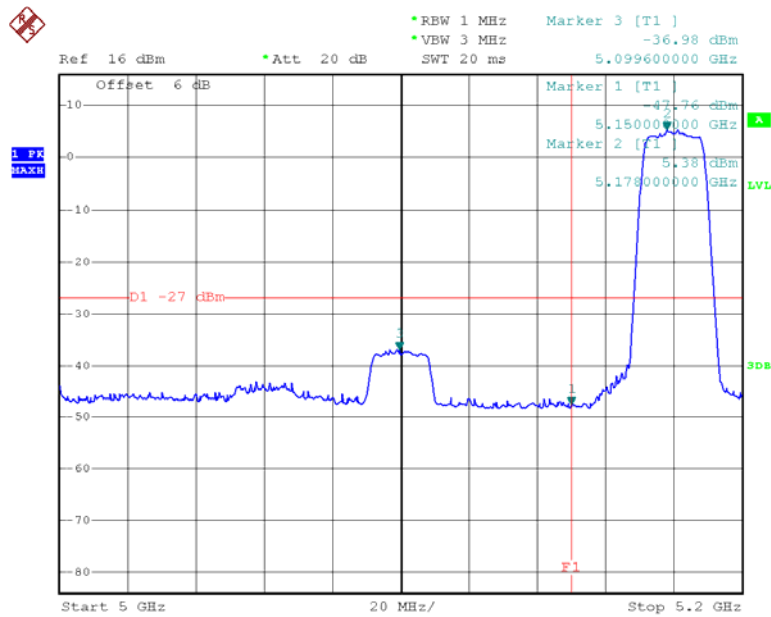


Date: 28.FEB.2013 16:53:49

Chain 0:802.11n20 Right Bandedge

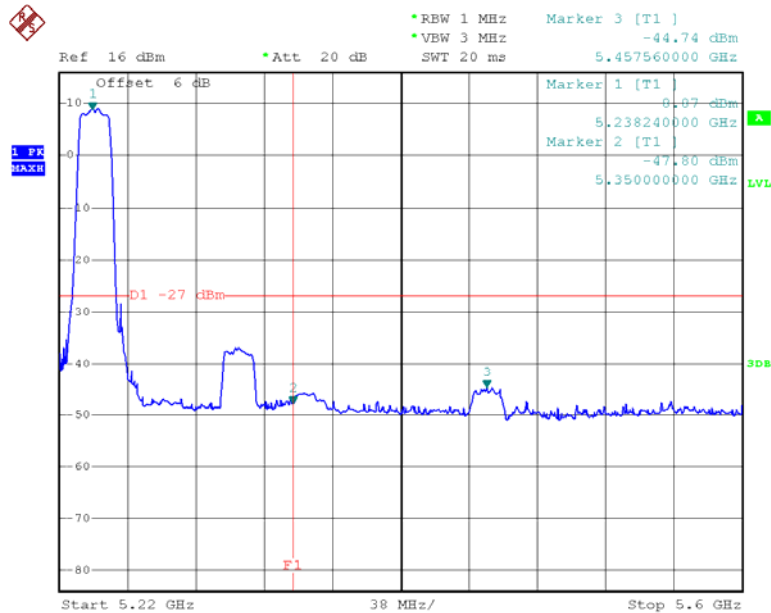


Date: 28.FEB.2013 17:23:22

Chain 0:802.11n40 Left Bandedge

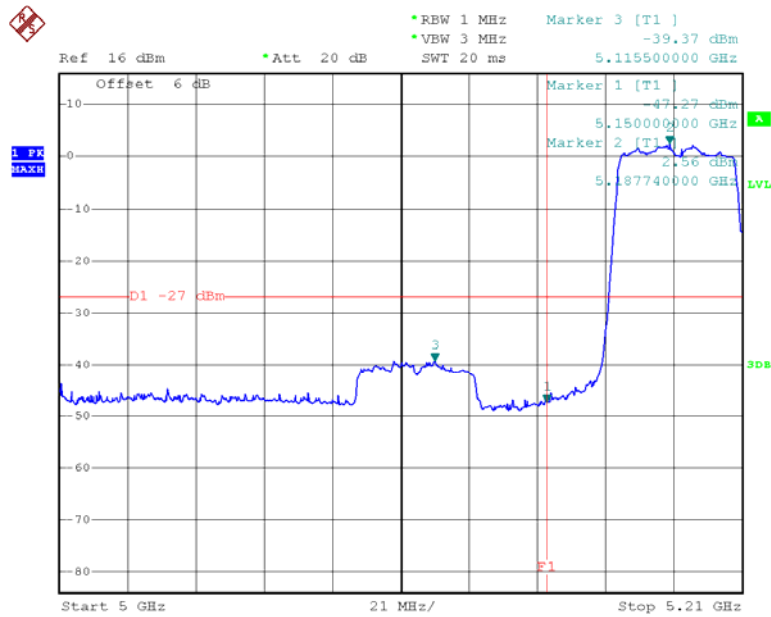


Date: 28.FEB.2013 16:56:04

Chain 0:802.11n40 Right Bandedge

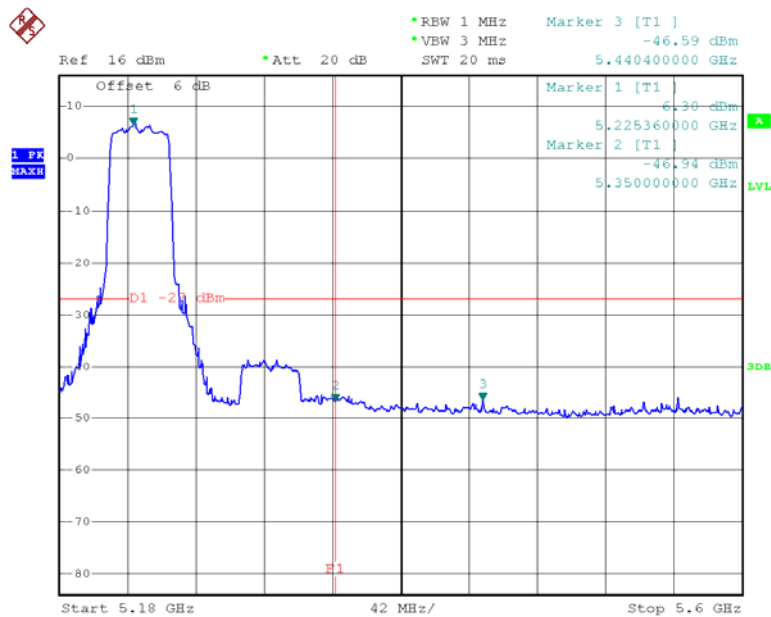


Date: 28.FEB.2013 17:21:46

Chain 0:802.11ac20 Left Bandedge

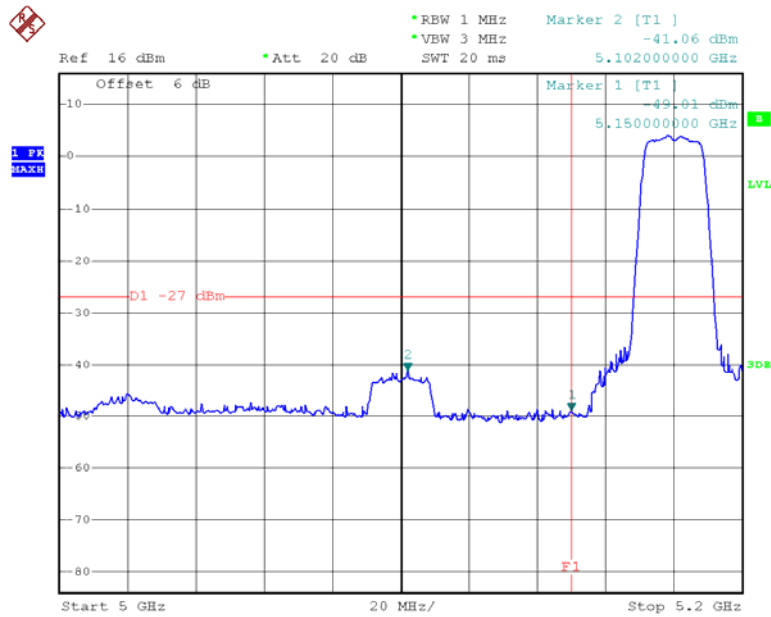


Date: 13.MAR.2013 19:49:41

Chain 0:802.11ac20 Right Bandedge

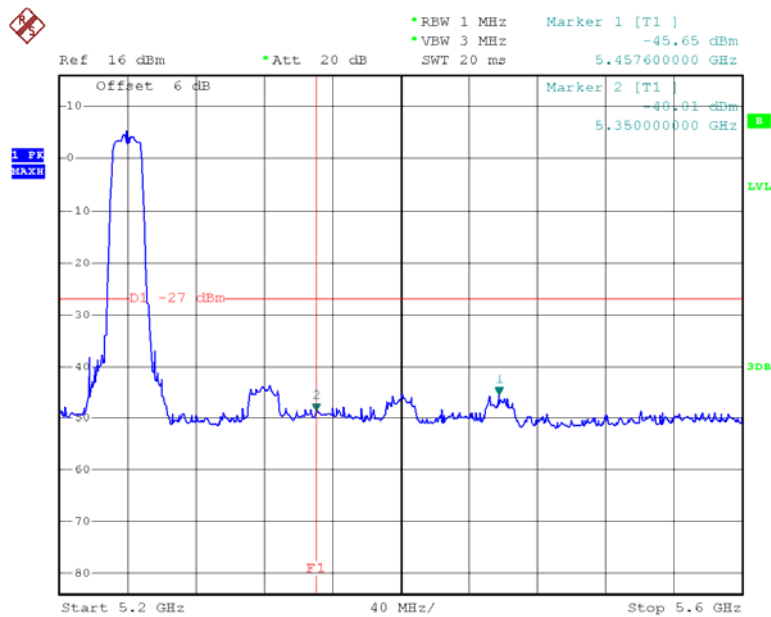


Date: 13.MAR.2013 19:51:36

Chain 0:802.11ac40 Left Bandedge

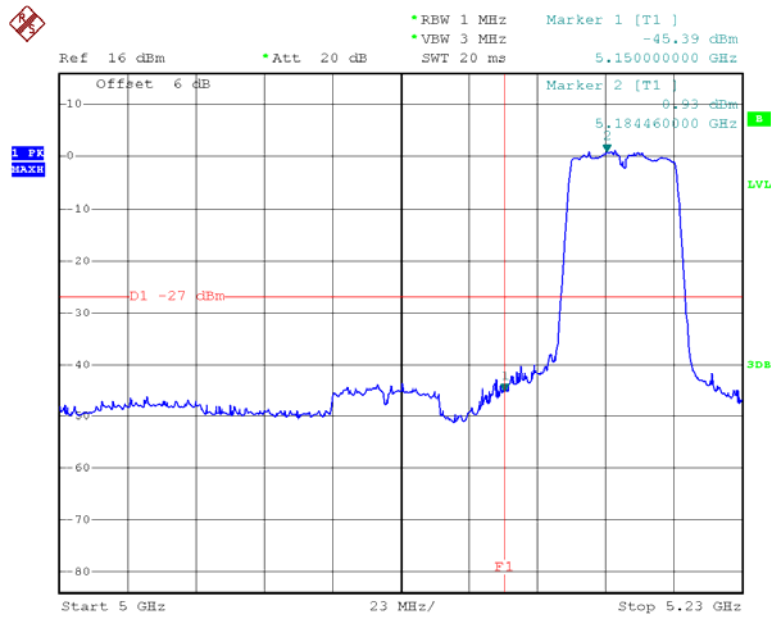


Date: 13.MAR.2013 19:31:21


Chain 0:802.11ac40 Right Bandedge

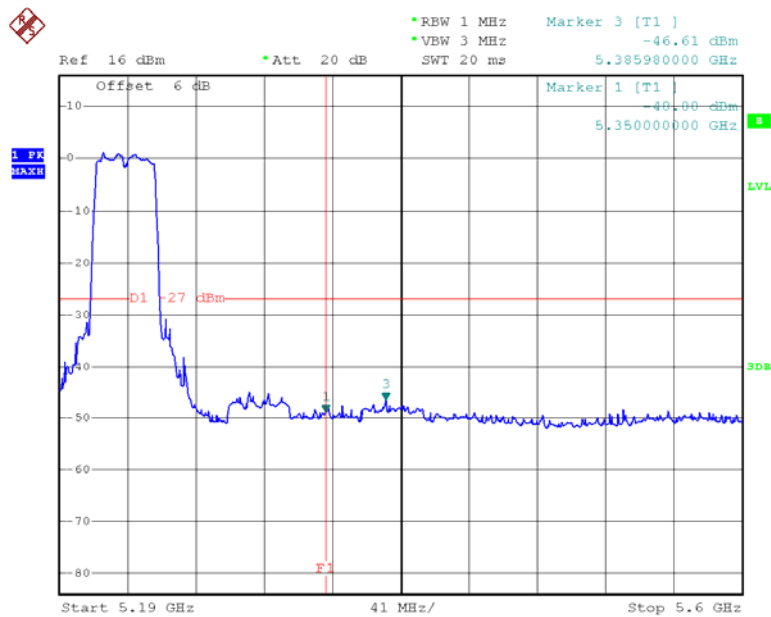

Date: 13.MAR.2013 19:40:58

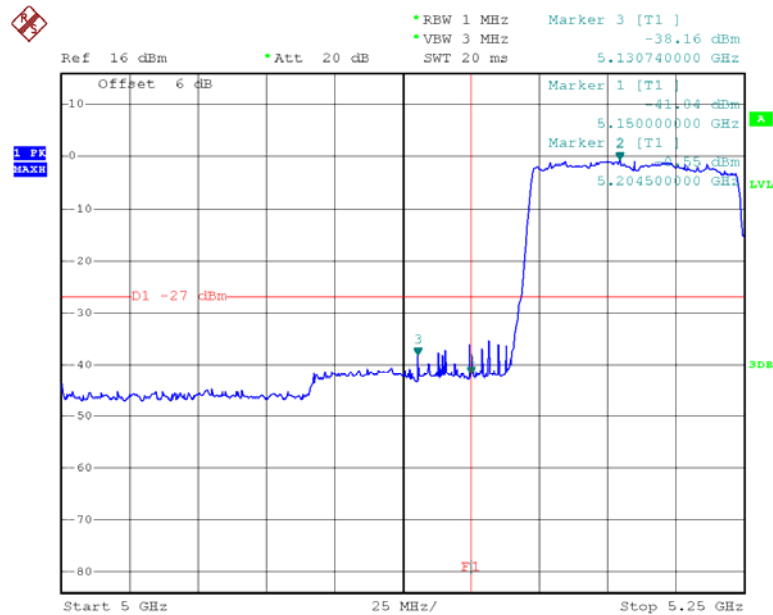
Chain 0:802.11ac80 Left Bandedge

Date: 28.FEB.2013 16:57:52

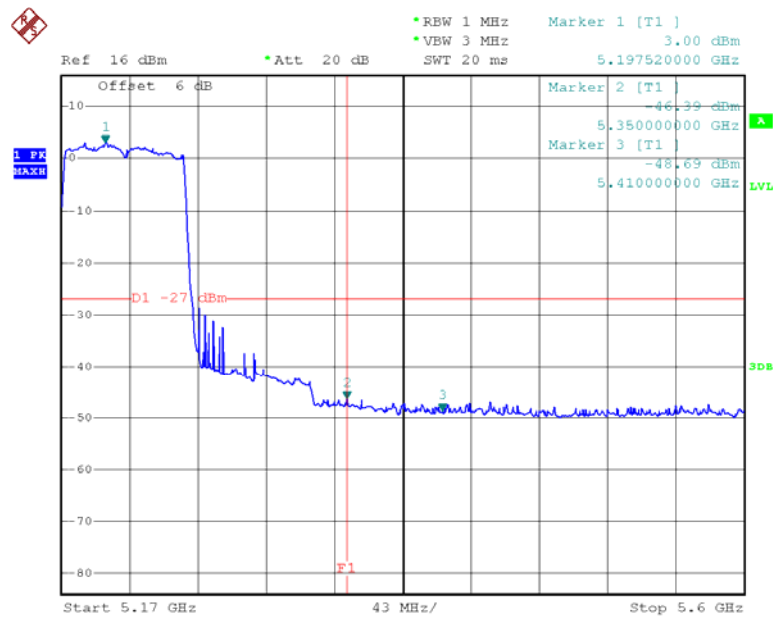Chain 0:802.11ac80 Right Bandedge


Date: 28.FEB.2013 17:19:06

Chain 1:802.11n20 Left Bandedge

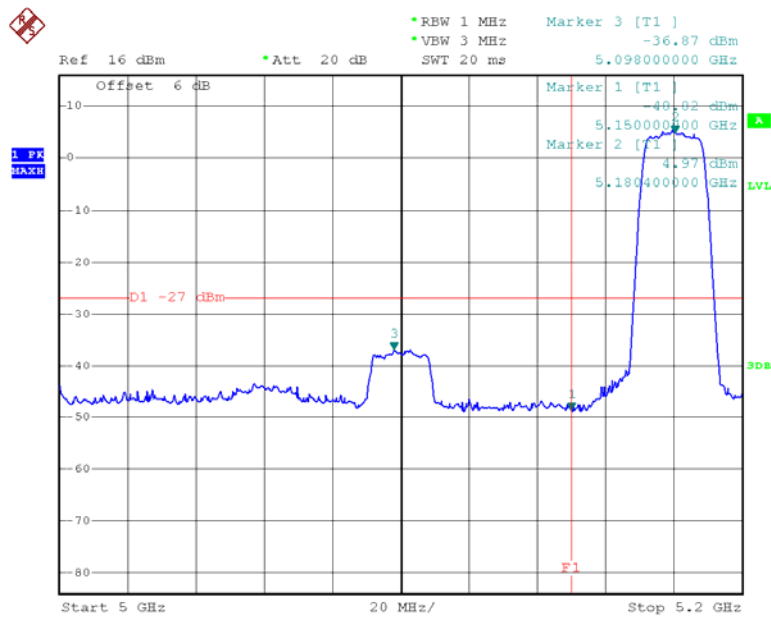


Date: 28.FEB.2013 16:54:21

Chain 1:802.11n20 Right Bandedge

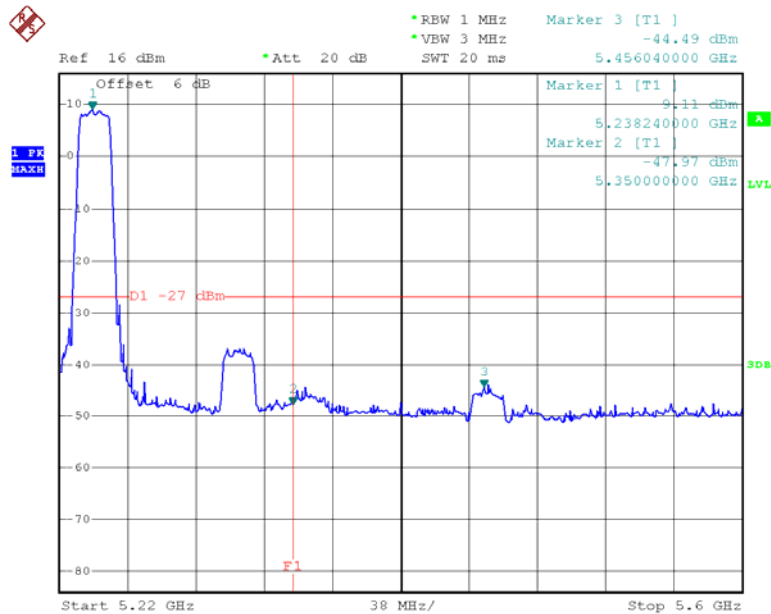


Date: 28.FEB.2013 17:23:36

Chain 1:802.11n40 Left Bandedge

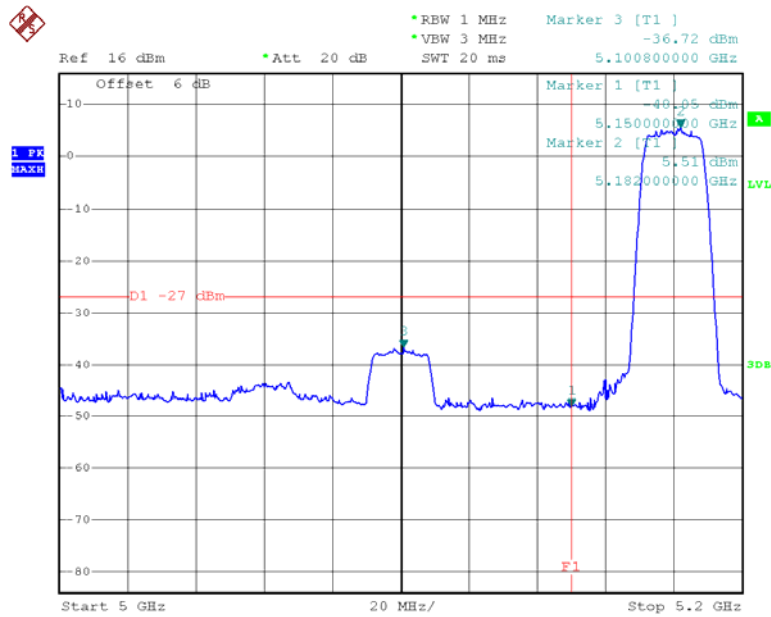


Date: 28.FEB.2013 16:55:00

Chain 1:802.11n40 Right Bandedge

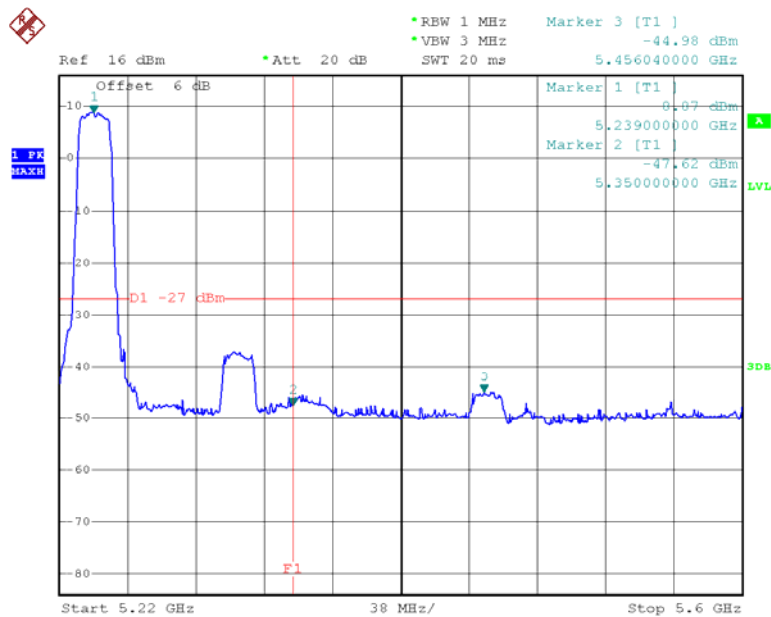


Date: 28.FEB.2013 17:23:50

Chain 1:802.11ac20 Left Bandedge

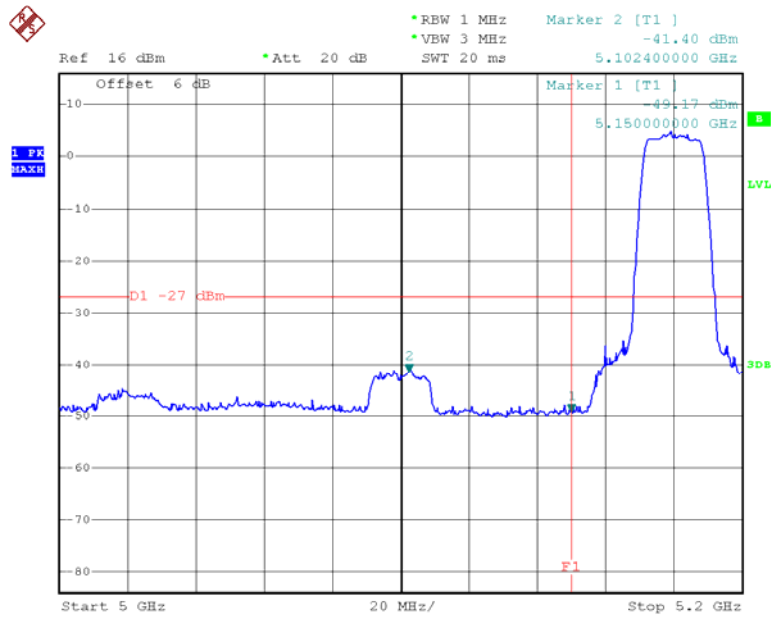


Date: 13.MAR.2013 19:49:20

Chain 1:802.11ac20 Right Bandedge

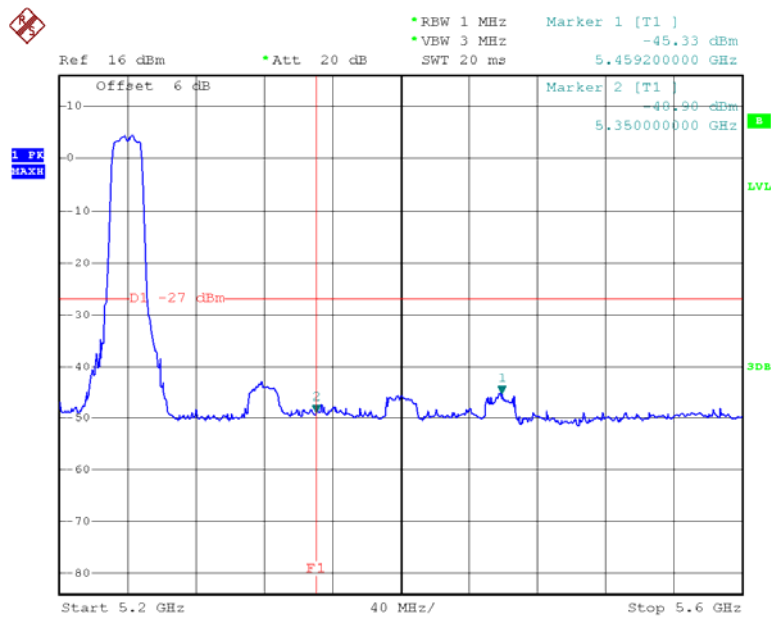


Date: 13.MAR.2013 19:51:11

Chain 1:802.11ac40 Left Bandedge

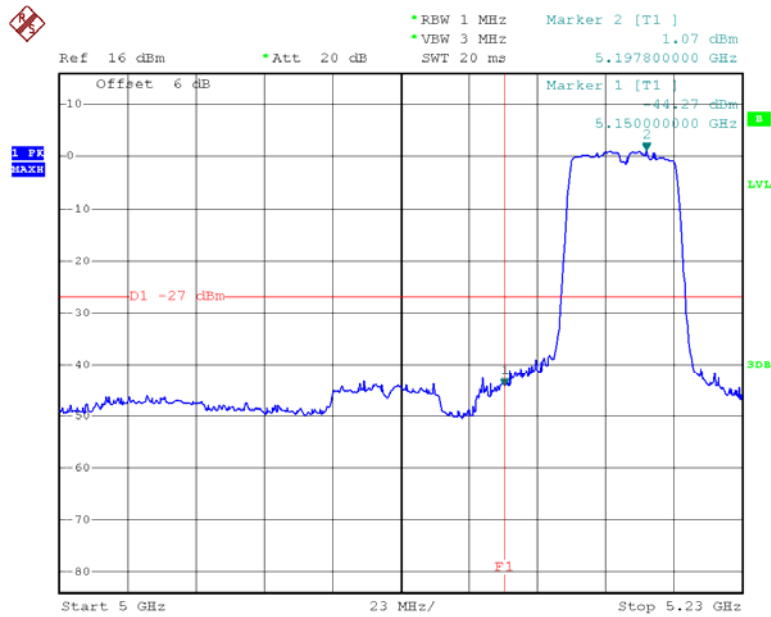


Date: 13.MAR.2013 19:30:56

Chain 1:802.11ac40 Right Bandedge

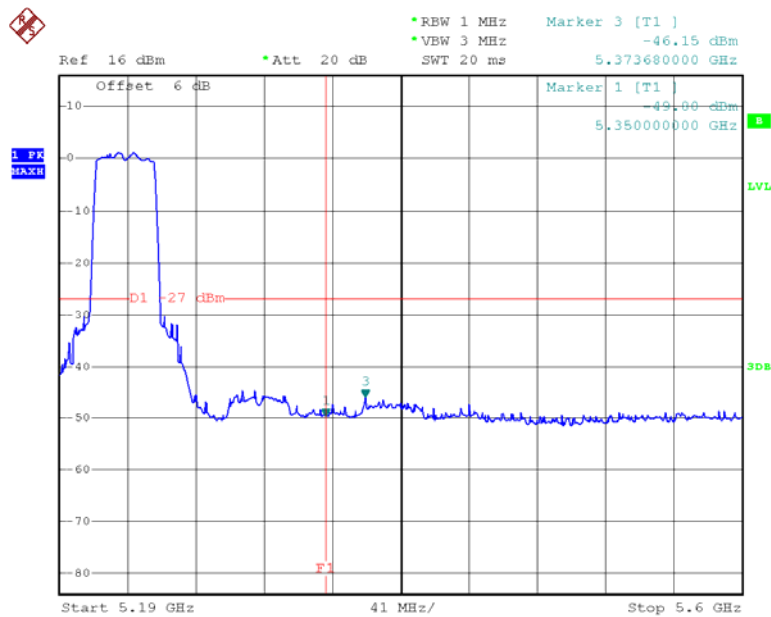


Date: 13.MAR.2013 19:40:32

Chain 1:802.11ac80 Left Bandedge

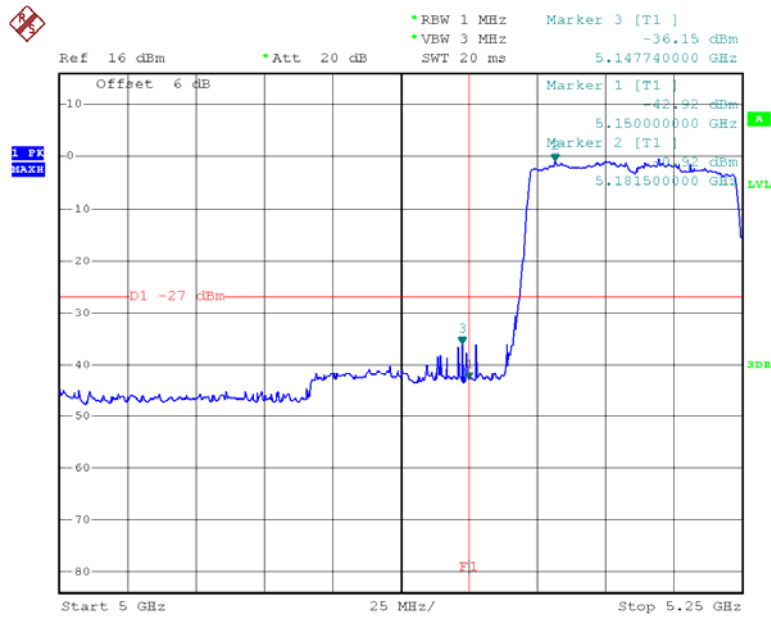


Date: 28.FEB.2013 16:58:08

Chain 1:802.11ac80 Right Bandedge

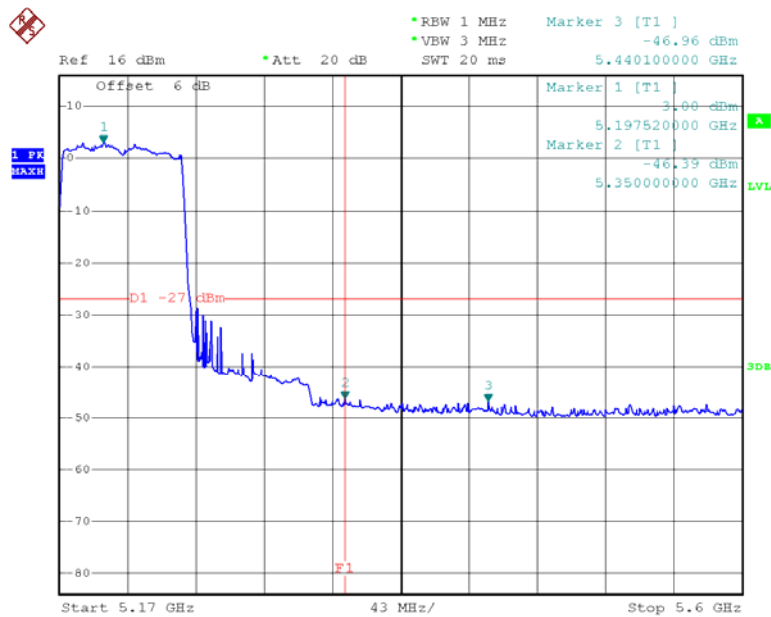


Date: 28.FEB.2013 17:19:13

Chain 2:802.11n20 Left Bandedge

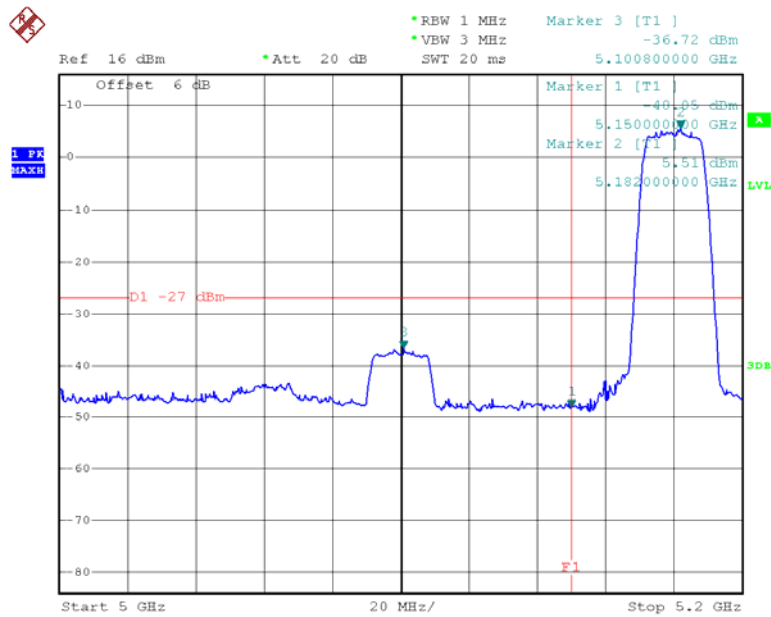


Date: 28.FEB.2013 16:55:00

Chain 2:802.11n20 Right Bandedge

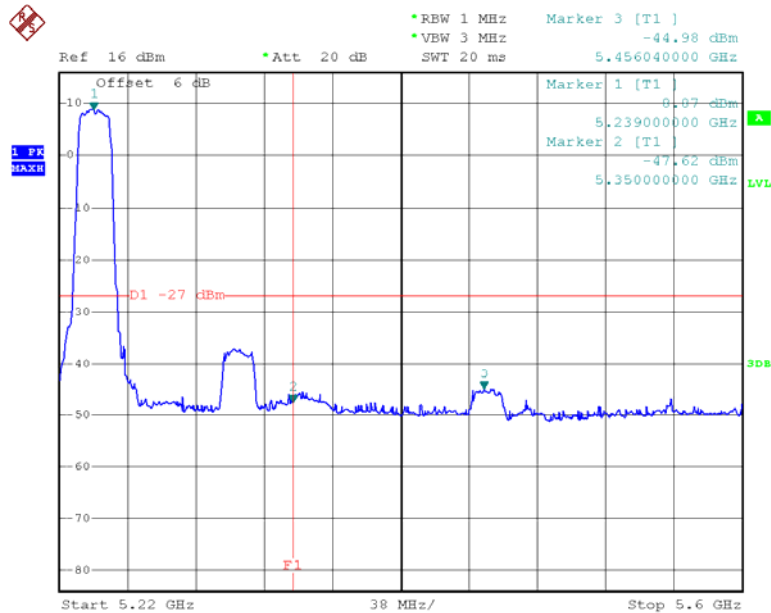


Date: 28.FEB.2013 17:23:50

Chain 2:802.11n40 Left Bandedge

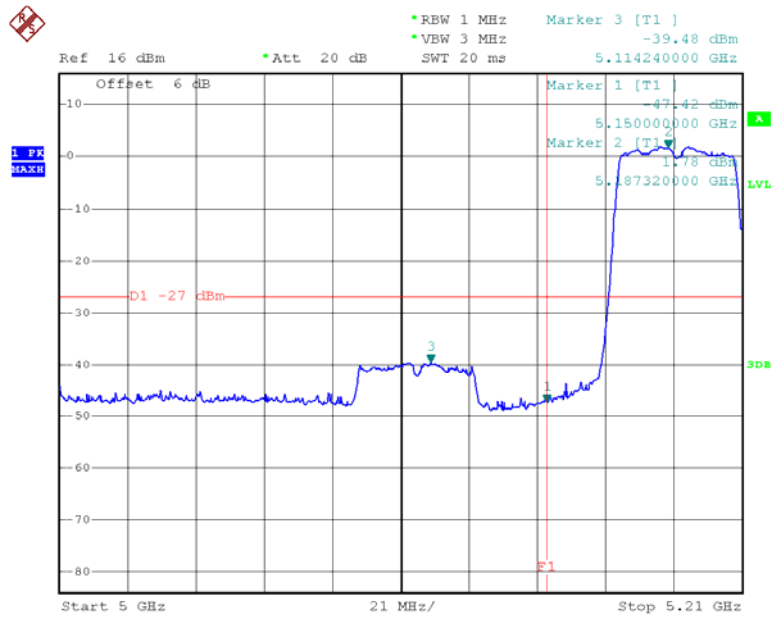


Date: 28.FEB.2013 16:56:43

Chain 2:802.11n40 Right Bandedge

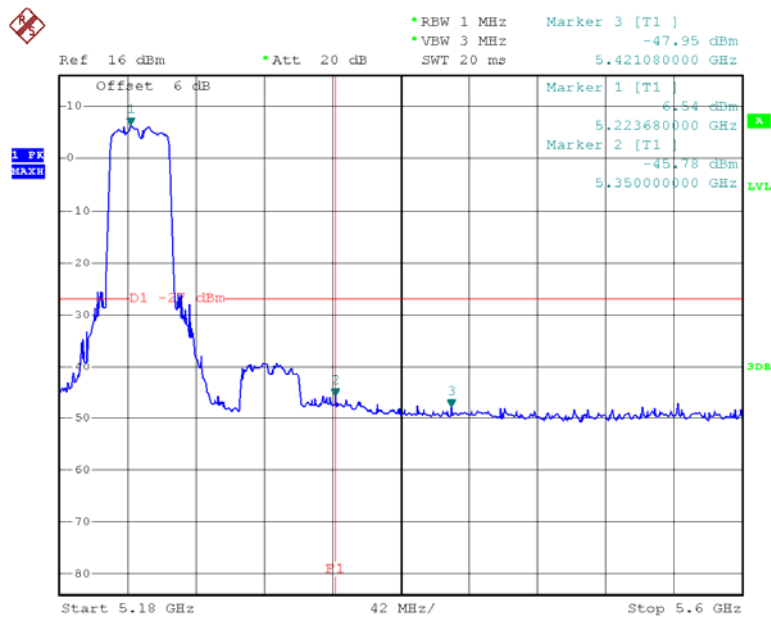


Date: 28.FEB.2013 17:22:24

Chain 2:802.11ac20 Left Bandedge

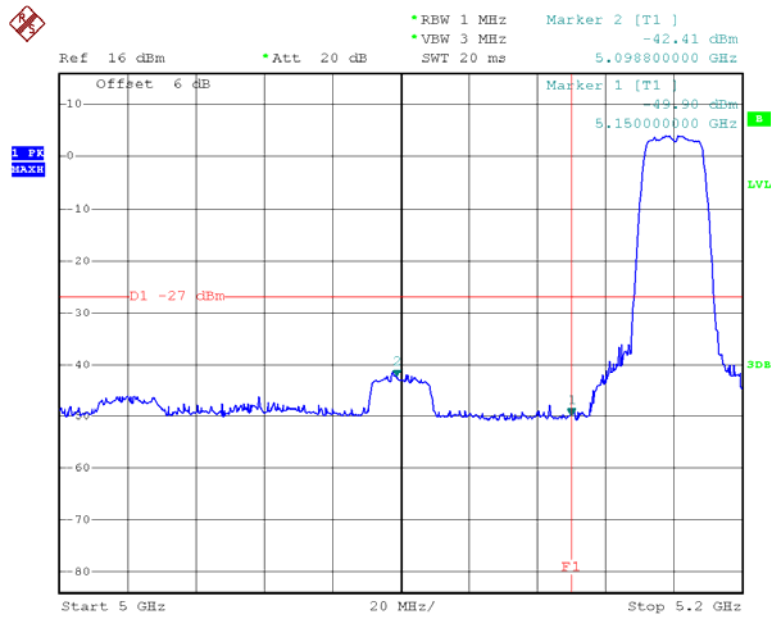


Date: 13.MAR.2013 19:49:31

Chain 2:802.11ac20 Right Bandedge

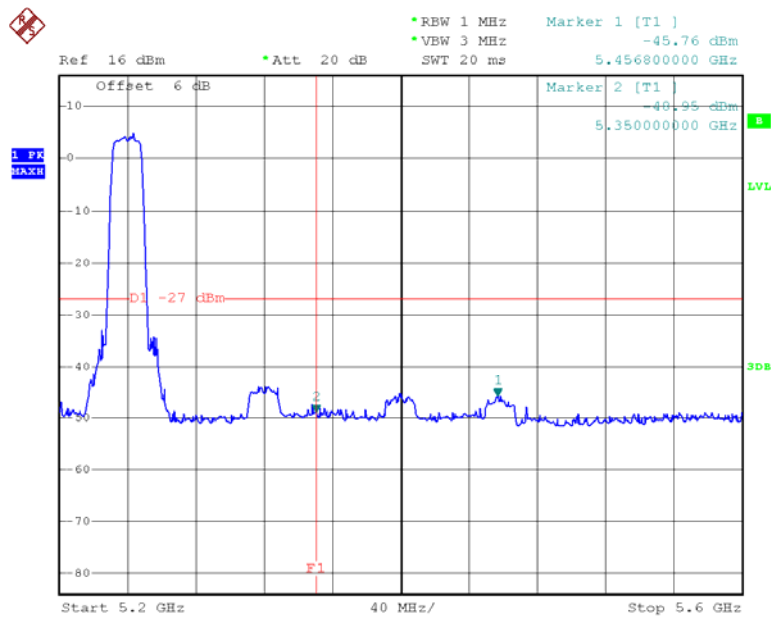


Date: 13.MAR.2013 19:51:25

Chain 2:802.11ac40 Left Bandedge

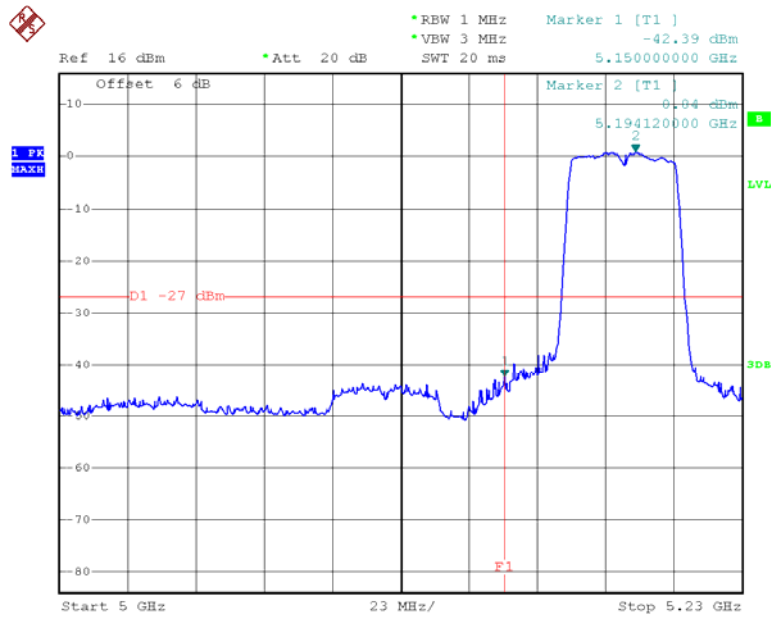


Date: 13.MAR.2013 19:31:09

Chain 2:802.11ac40 Right Bandedge

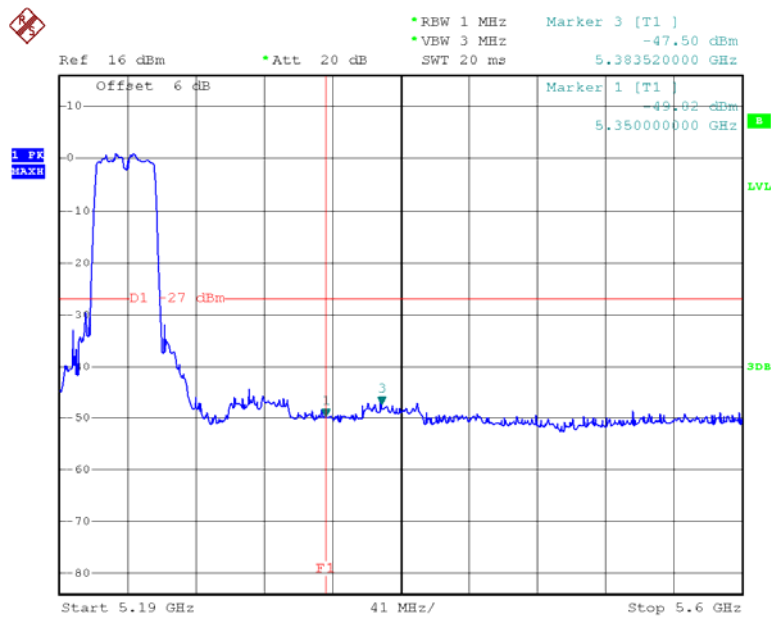


Date: 13.MAR.2013 19:40:45

Chain 2:802.11ac80 Left Bandedge

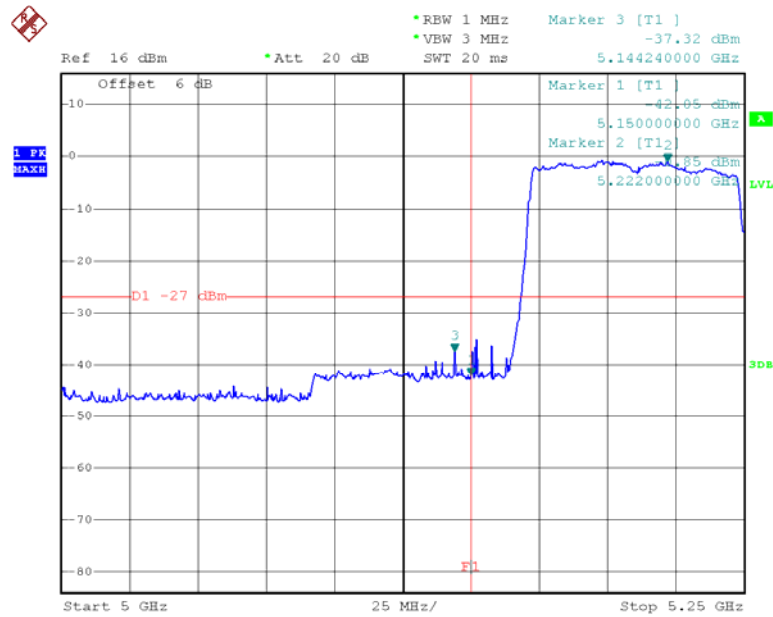

Date: 28.FEB.2013 16:58:27

Chain 2:802.11ac80 Right Bandedge

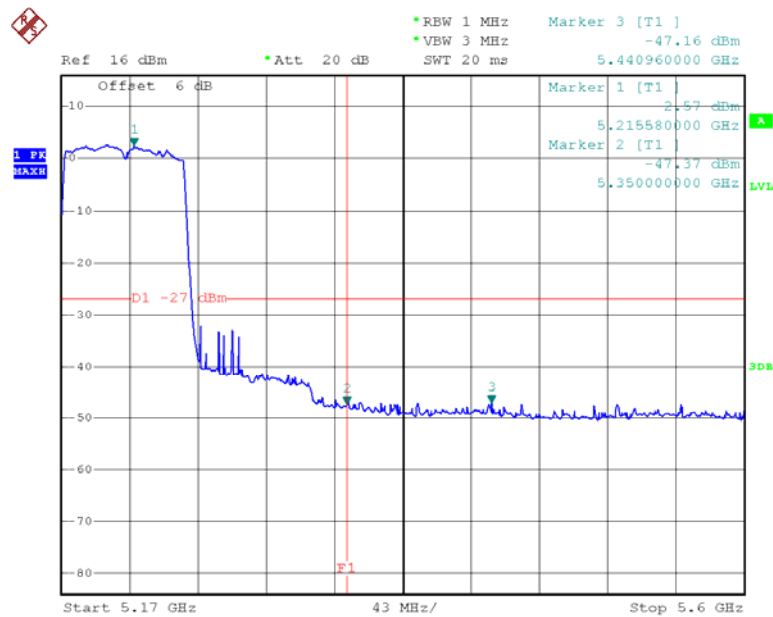

Date: 28.FEB.2013 17:19:33

FCC §15.407(a) (1) – 26 dB OCCUPIED BANDWIDTH

Applicable Standard


For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Procedure

- Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- Use a RBW = approximately 1% of the emission bandwidth. Set the VBW > RBW. Use a peak detector. Do not use the Max Hold function. Rather, use the view button to capture the emission. Measure maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat, measurement as needed until the RBW/EBW ratio is approximately 1%.
- Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

Temperature:	23.4 ~26.8 °C
Relative Humidity:	29 ~63 %
ATM Pressure:	100.8 ~101.9kPa

The testing was performed by Leon Chen from 2013-02-23 to 2013-03-13.

Test Result: Pass.


Please refer to the following tables and plots.

Test mode: Transmitting

Channel	Frequency	26 dB Bandwidth	Limit
	(MHz)	(MHz)	(kHz)
802.11a mode			
Low	5180	20.88	>500
Middle	5200	20.88	>500
High	5240	21.04	>500
chain 0:802.11n20 mode			
Low	5180	21.28	>500
Middle	5200	21.28	>500
High	5240	21.20	>500
chain 0:802.11n40 mode			
Low	5190	40.16	>500
High	5230	40.32	>500
chain 0:802.11ac20 mode			
Low	5180	21.36	>500
Middle	5200	21.36	>500
High	5240	21.36	>500
chain 0:802.11ac40 mode			
Low	5190	40.32	>500
High	5230	40.32	>500
chain 0:802.11ac80 mode			
Low	5210	84.16	>500
chain 1:802.11n20 mode			
Low	5180	21.28	>500
Middle	5200	21.28	>500
High	5240	21.28	>500
Chain1:802.11n40 mode			
Low	5190	40.16	>500
High	5230	40.32	>500
chain 1:802.11ac20 mode			
Low	5180	21.36	>500
Middle	5200	21.36	>500
High	5240	21.36	>500
Chain1:802.11ac40 mode			
Low	5190	40.32	>500
High	5230	40.32	>500
Chain1:802.11ac80 mode			
Low	5210	84.16	>500


chain 2:802.11n20 mode			
Low	5180	21.28	>500
Middle	5200	21.28	>500
High	5240	21.20	>500
Chain2:802.11n40 mode			
Low	5190	40.16	>500
High	5230	40.32	>500
chain 2:802.11ac20 mode			
Low	5180	21.36	>500
Middle	5200	21.36	>500
High	5240	21.36	>500
Chain2:802.11a40 mode			
Low	5190	40.32	>500
High	5230	40.32	>500
Chain2:802.11ac80 mode			
Low	5210	84.16	>500

802.11a Low Channel

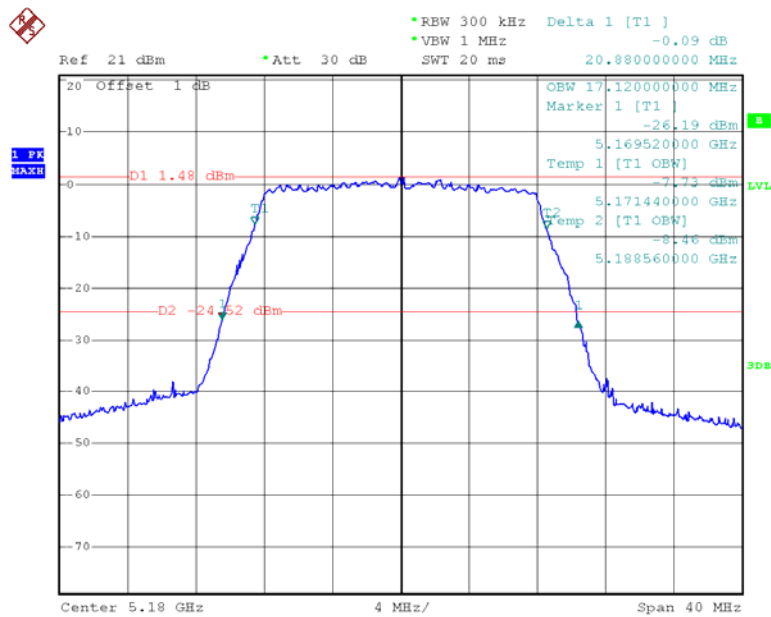


Date: 23.FEB.2013 16:25:09

802.11a Middle Channel

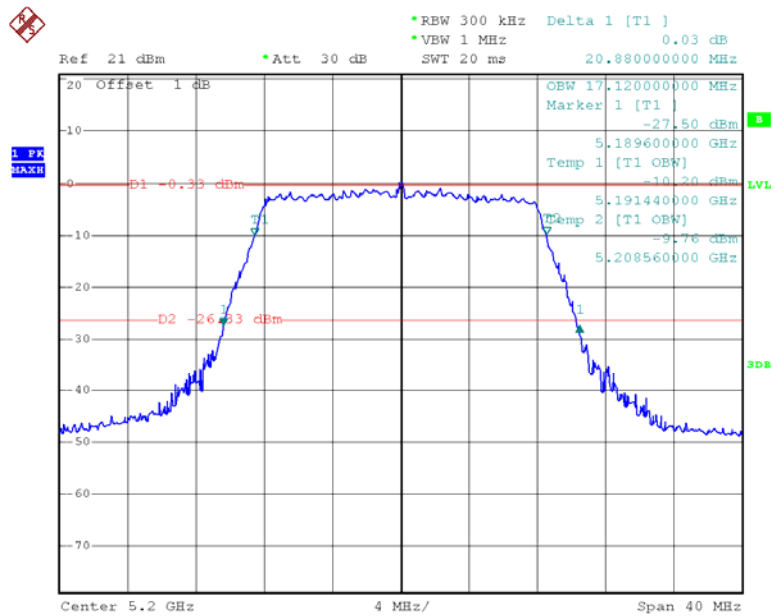


Date: 23.FEB.2013 16:56:24

802.11a High Channel

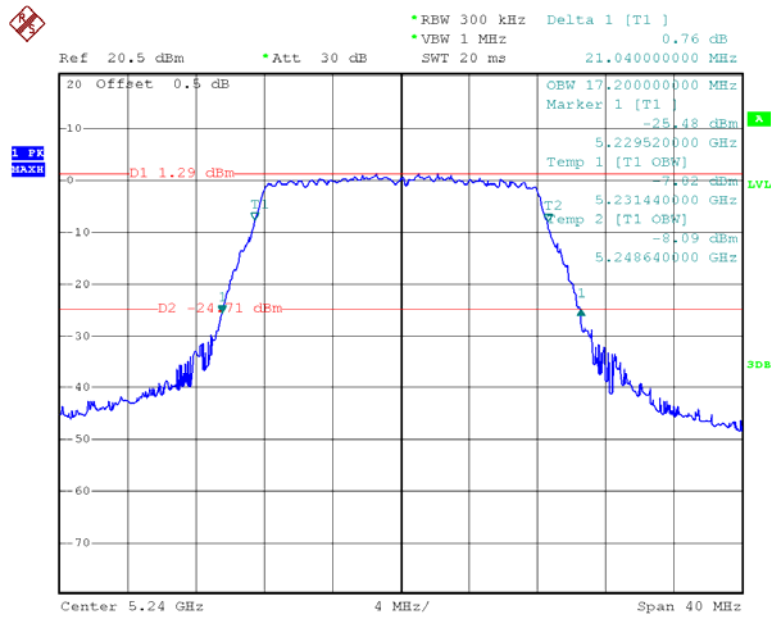


Date: 23.FEB.2013 11:48:55

Chain 0:802.11n20 Low Channel

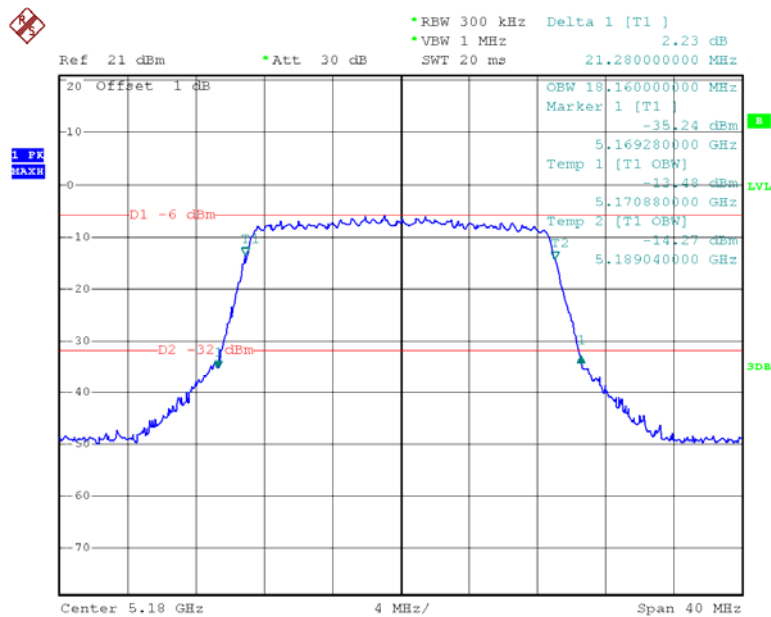


Date: 23.FEB.2013 17:32:07

Chain 0:802.11n20 Middle Channel

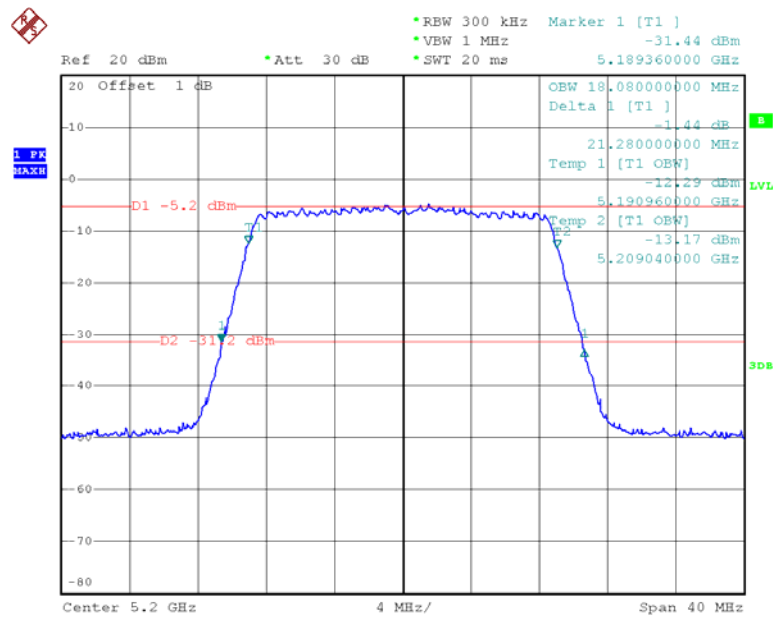


Date: 25.FEB.2013 09:50:10

Chain 0:802.11n20 High Channel

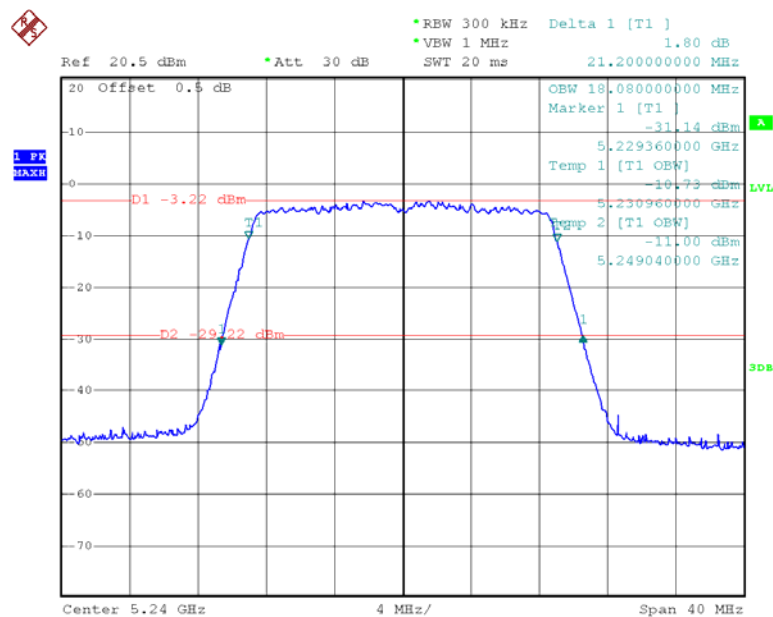


Date: 23.FEB.2013 13:35:32

Chain 0:802.11n40 Low Channel

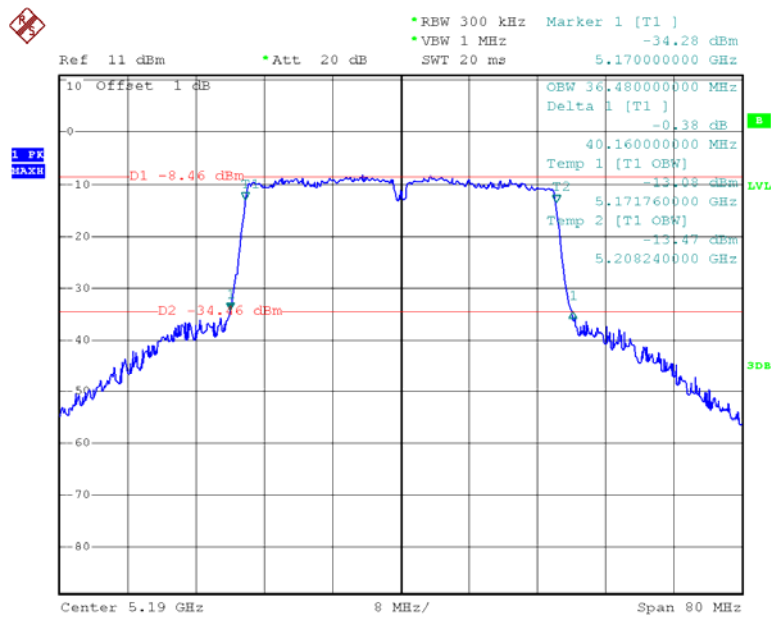


Date: 25.FEB.2013 10:16:56


Chain 0:802.11n40 High Channel

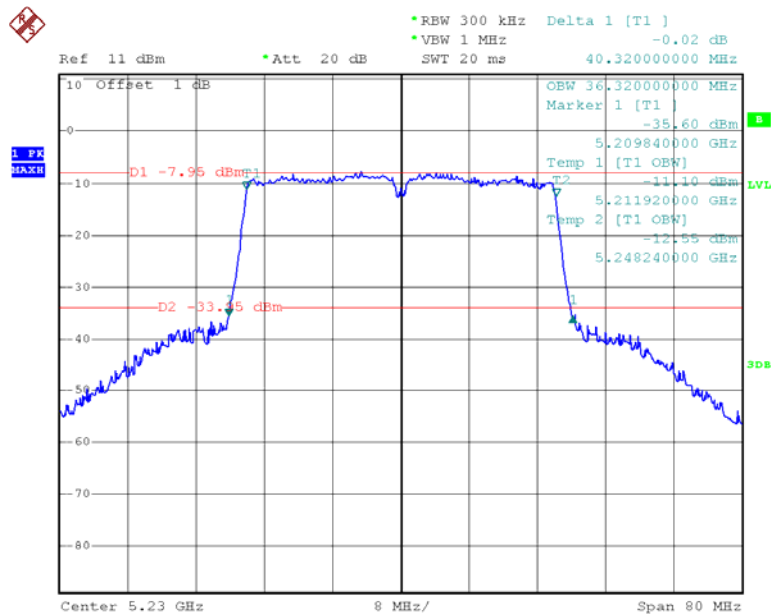


Date: 25.FEB.2013 10:39:24

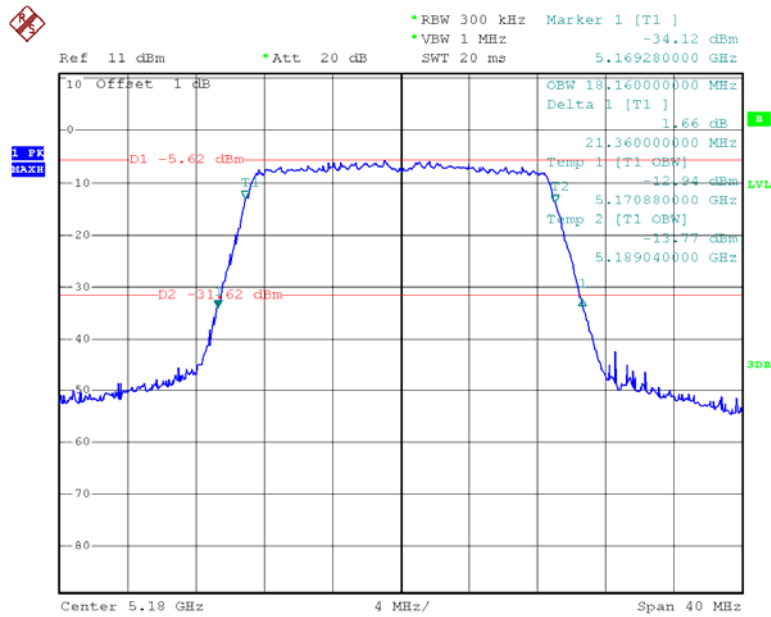Chain 0:802.11ac20 Low Channel


Date: 13.MAR.2013 17:42:11

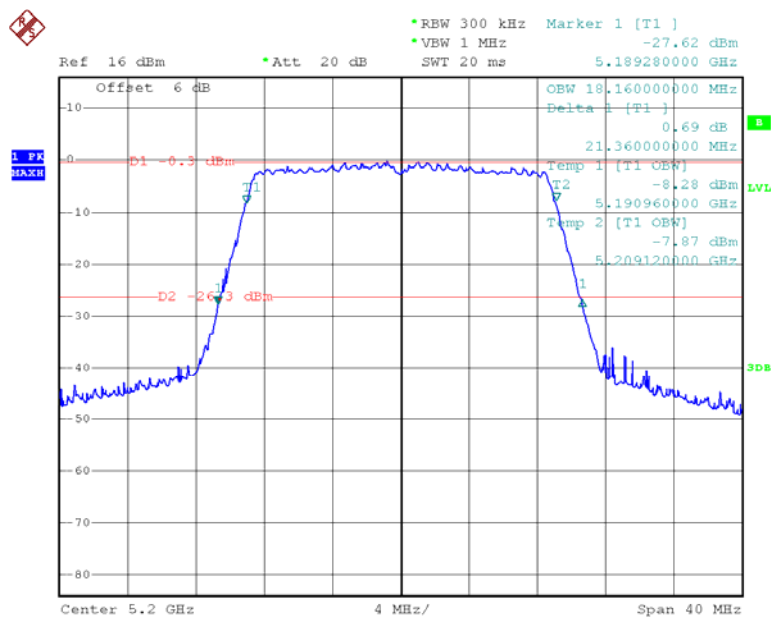Chain 0:802.11ac20 Middle Channel


Date: 13.MAR.2013 18:58:32

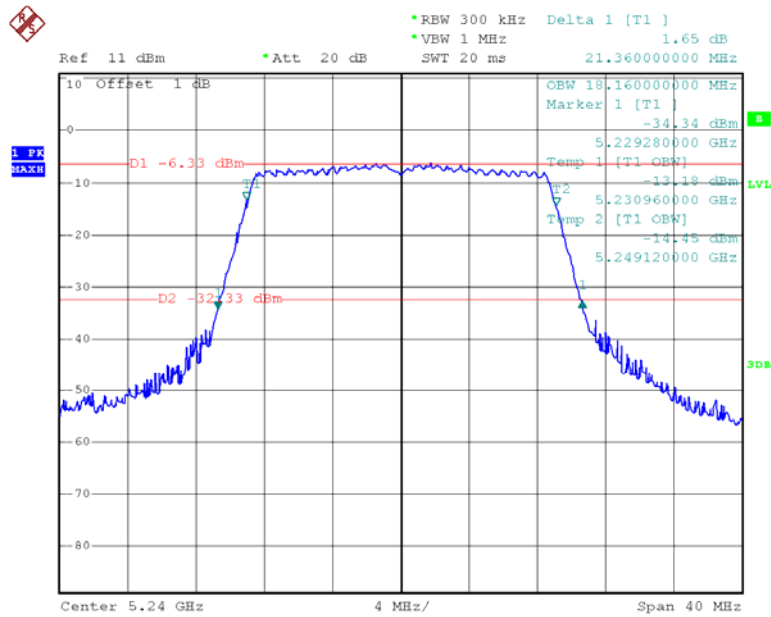Chain 0:802.11ac20 High Channel


Date: 13.MAR.2013 19:15:05

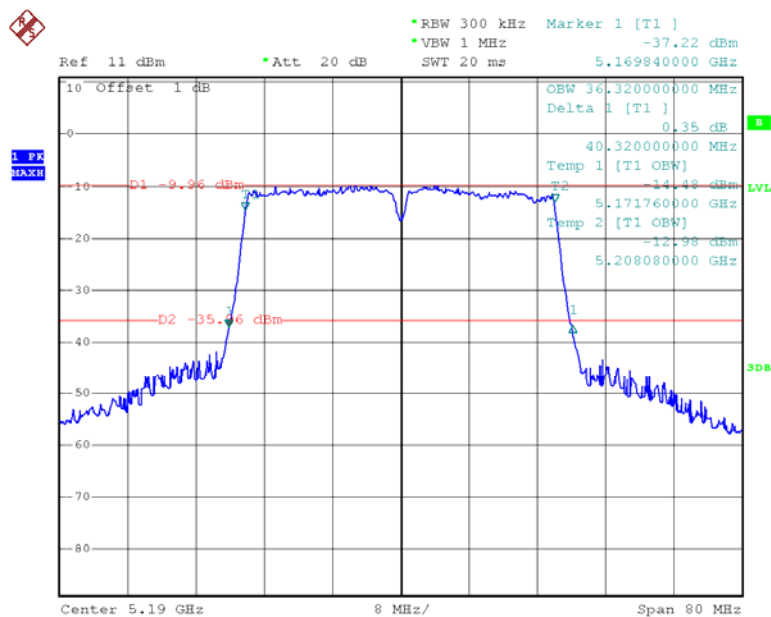Chain 0:802.11ac40 Low Channel

Date: 13.MAR.2013 19:25:22

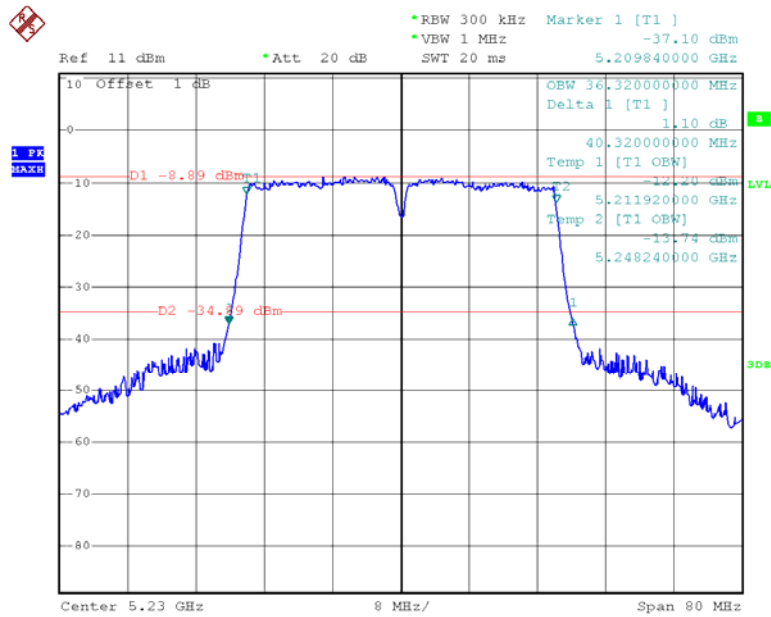
Chain 0:802.11ac40 High Channel

Date: 13.MAR.2013 19:35:01

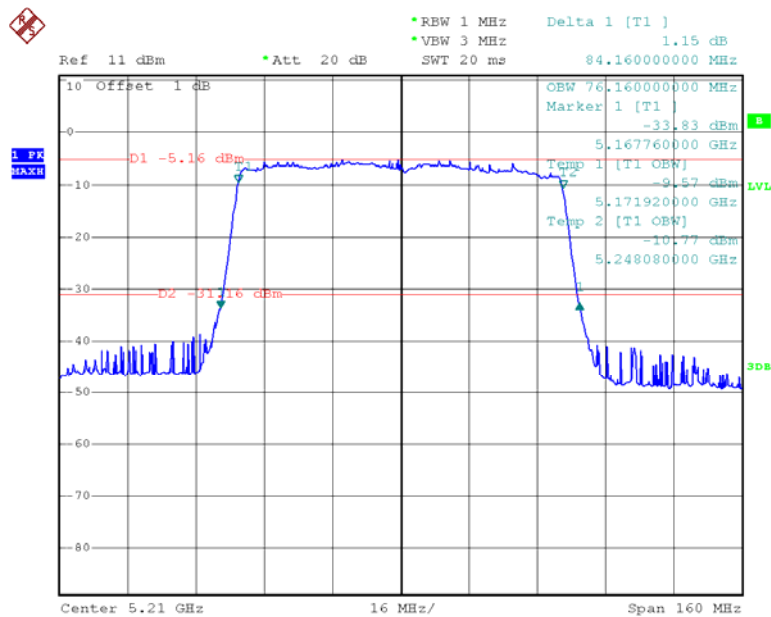Chain 0:802.11ac80


Date: 25.FEB.2013 10:52:37

Chain 1:802.11n20 Low Channel

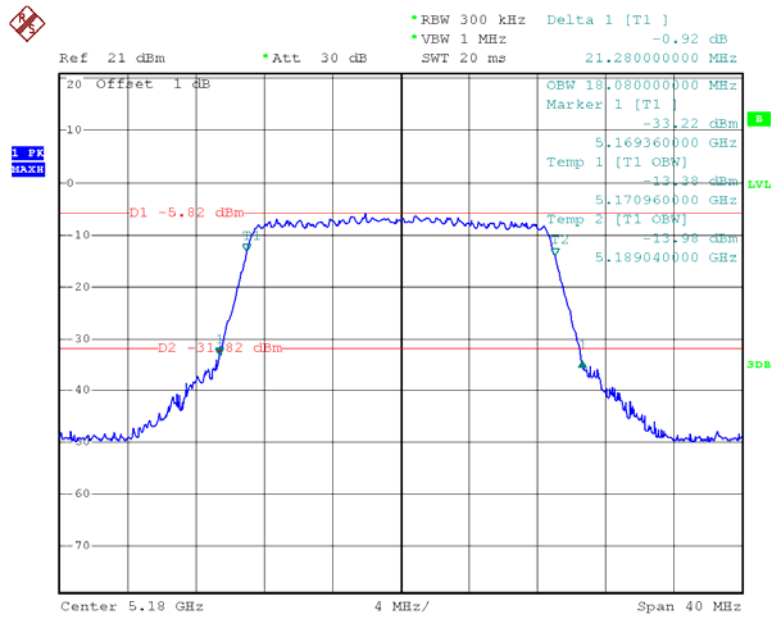


Date: 23.FEB.2013 17:33:16

Chain 1:802.11n20 Middle Channel

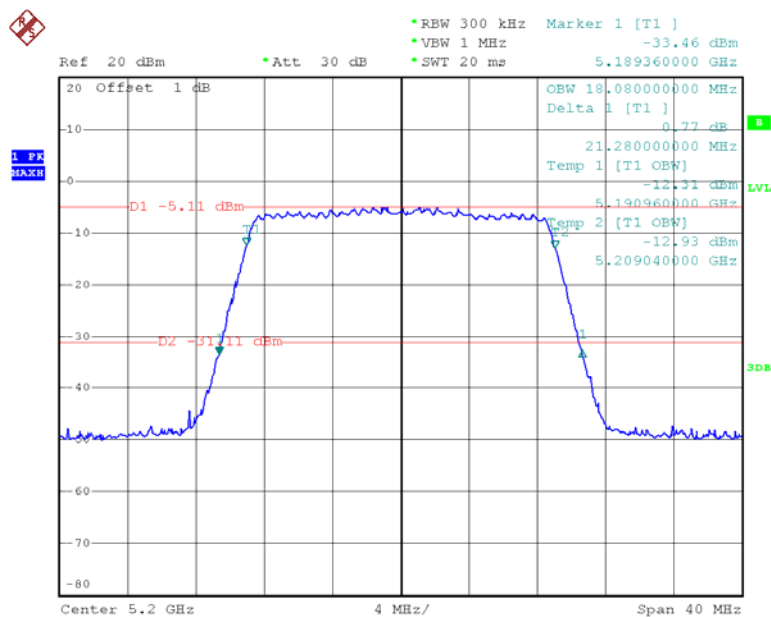


Date: 25.FEB.2013 09:51:03

Chain 1:802.11n20 High Channel

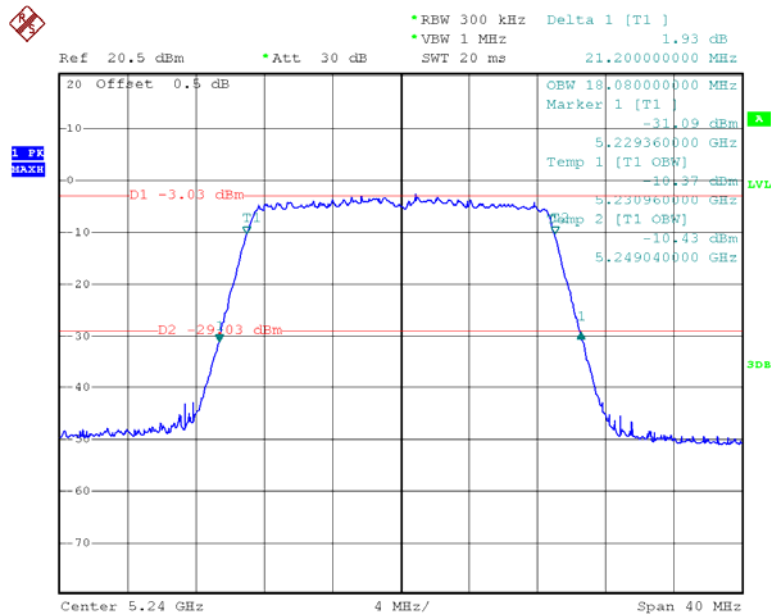


Date: 23.FEB.2013 13:41:34

Chain 1:802.11n40 Low Channel

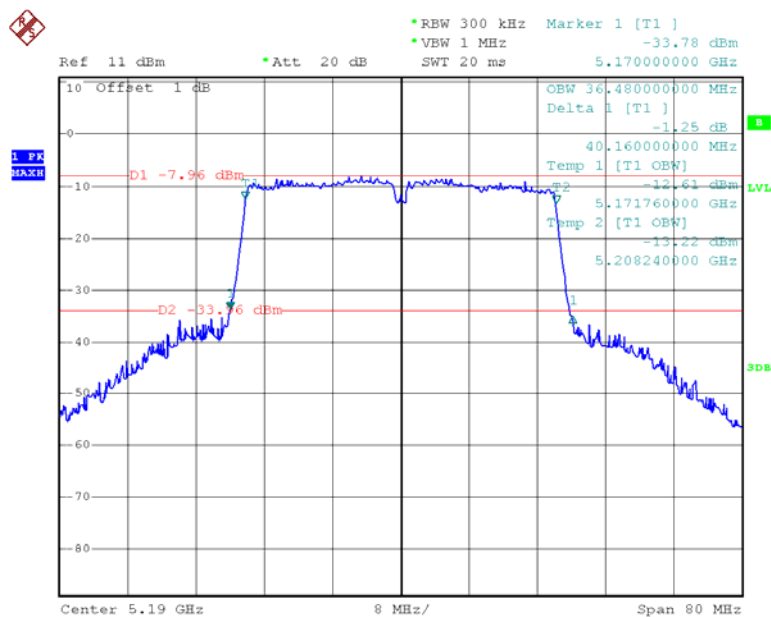


Date: 25.FEB.2013 10:19:33

Chain 1:802.11n40 High Channel

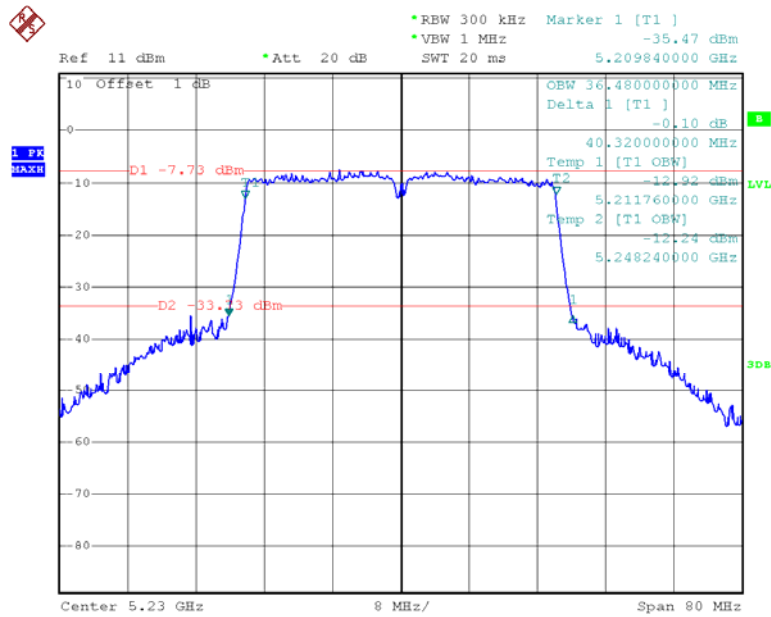


Date: 25.FEB.2013 10:40:31

Chain 1:802.11ac20 Low Channel

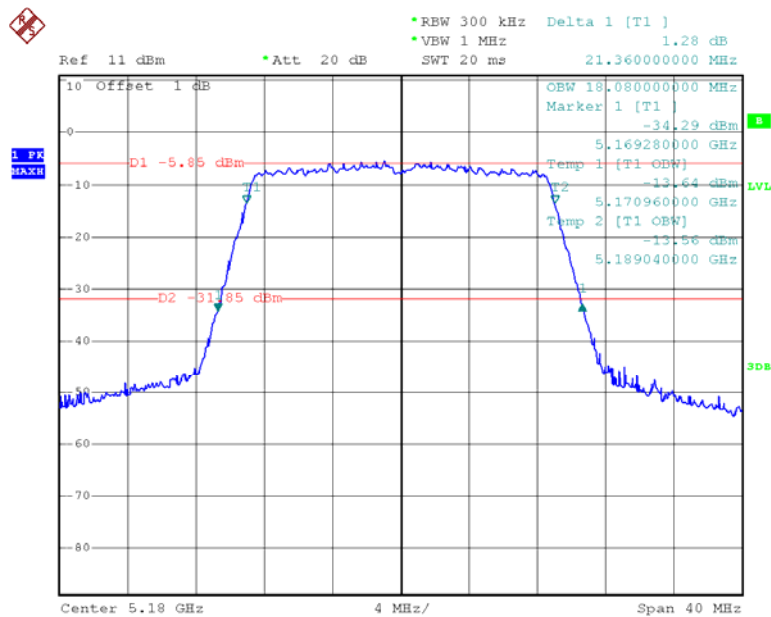


Date: 13.MAR.2013 17:40:39

Chain 1:802.11ac20 Middle Channel

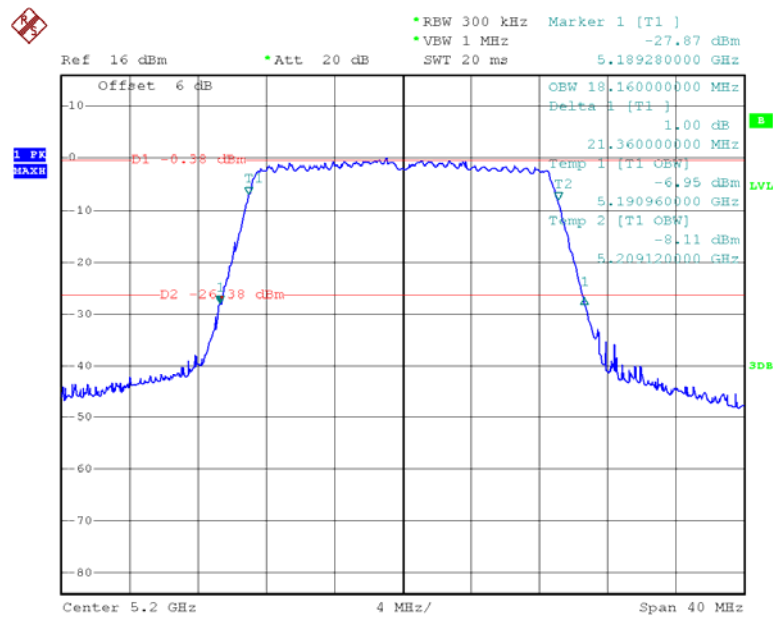


Date: 13.MAR.2013 18:57:31

Chain 1:802.11ac20 High Channel

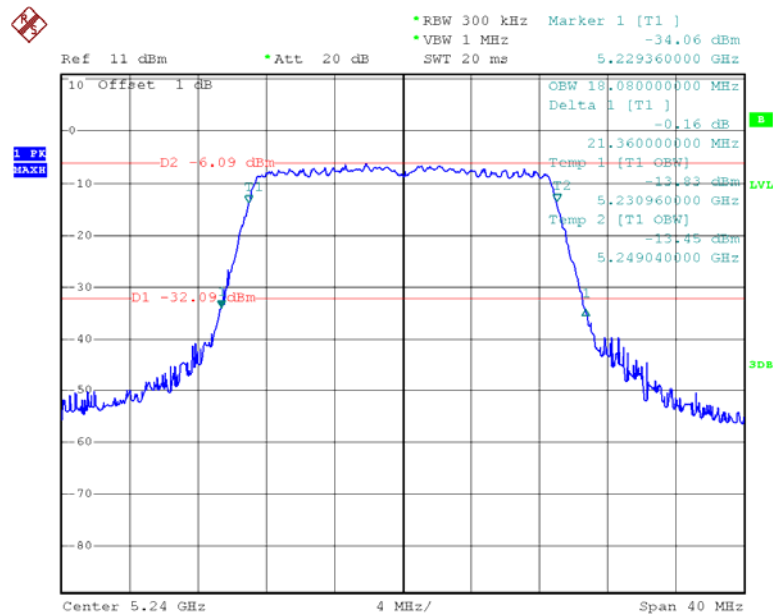


Date: 13.MAR.2013 19:13:41

Chain 1:802.11ac40 Low Channel

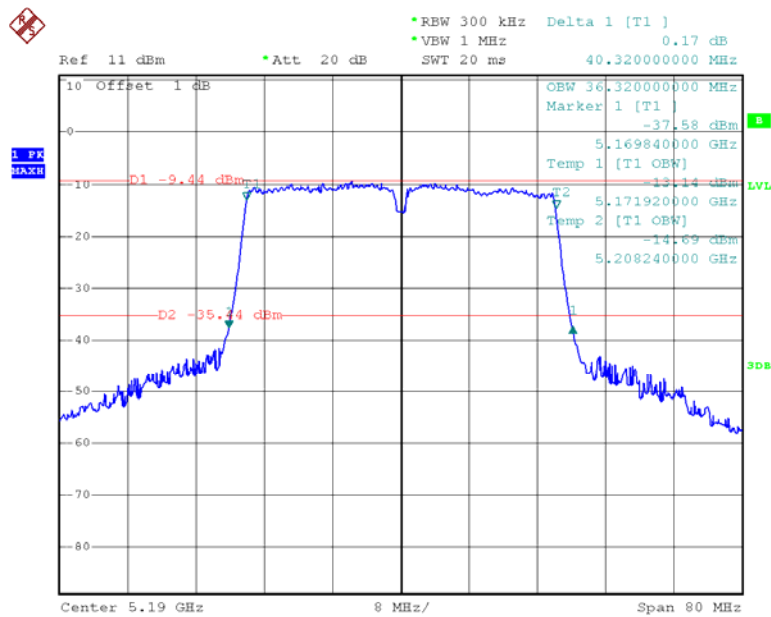


Date: 13.MAR.2013 19:23:45

Chain 1:802.11ac40 High Channel

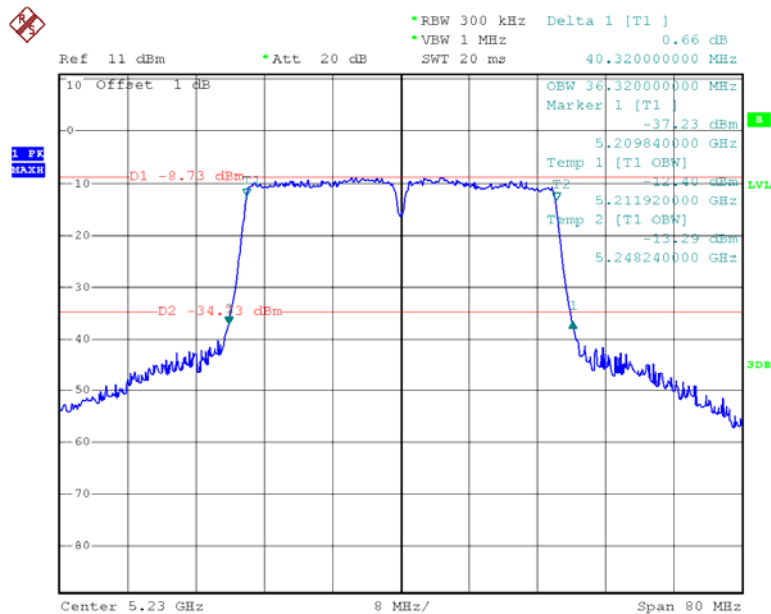


Date: 13.MAR.2013 19:33:30

Chain 1:802.11ac80

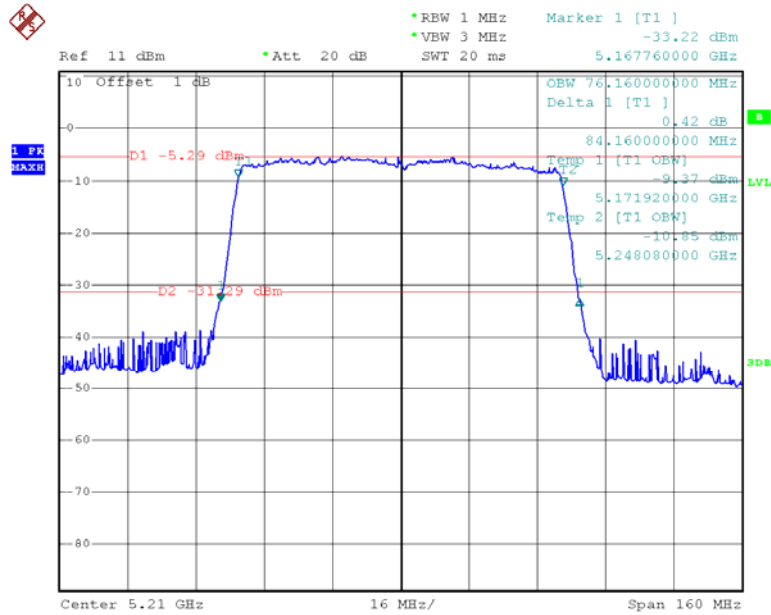


Date: 25.FEB.2013 10:53:27

Chain 2:802.11n20 Low Channel

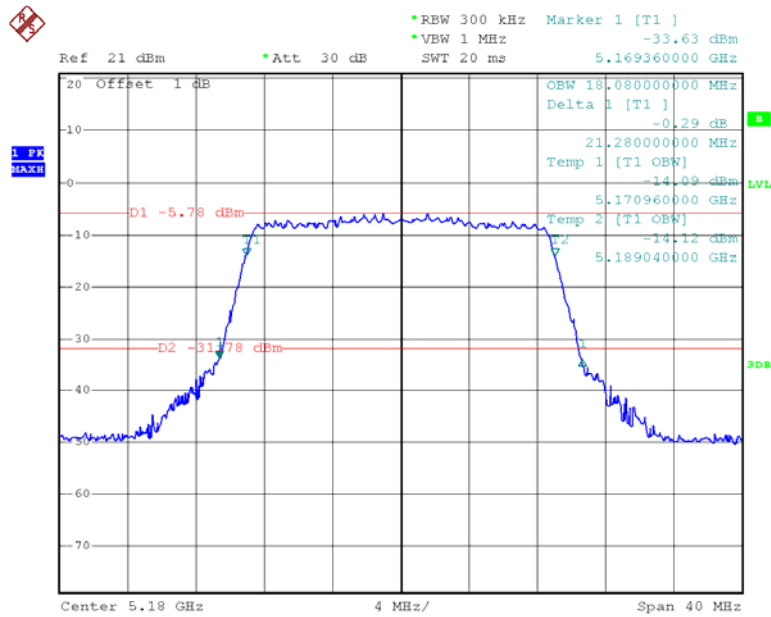


Date: 23.FEB.2013 17:33:56

Chain 2:802.11n20 Middle Channel

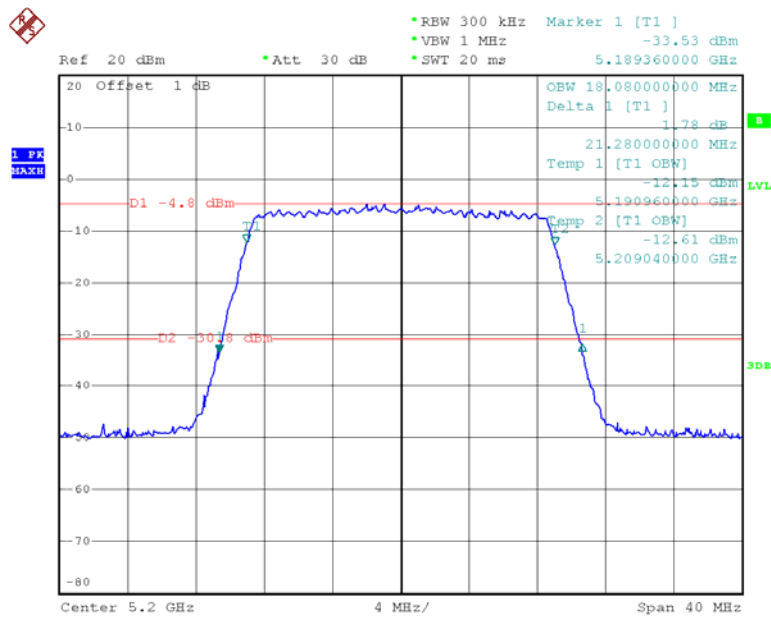


Date: 25.FEB.2013 09:51:41

Chain 2:802.11n20 High Channel

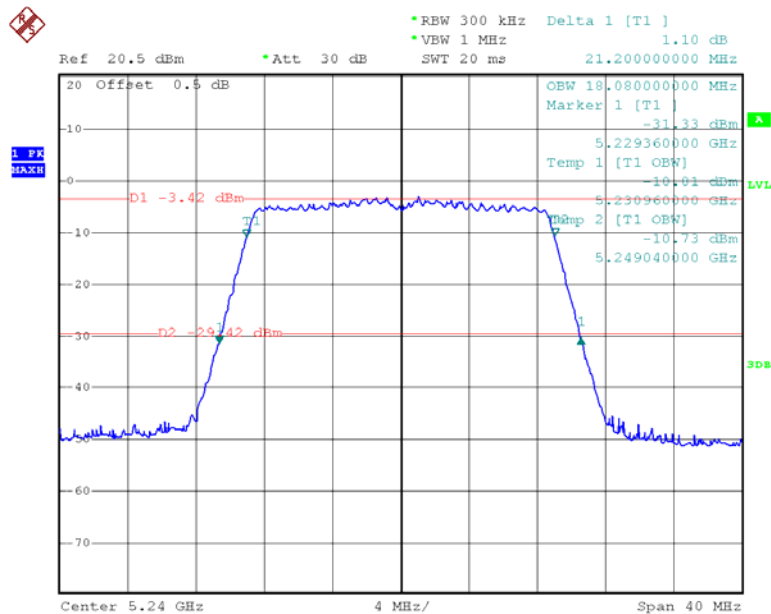


Date: 23.FEB.2013 15:24:22

Chain 2:802.11n40 Low Channel

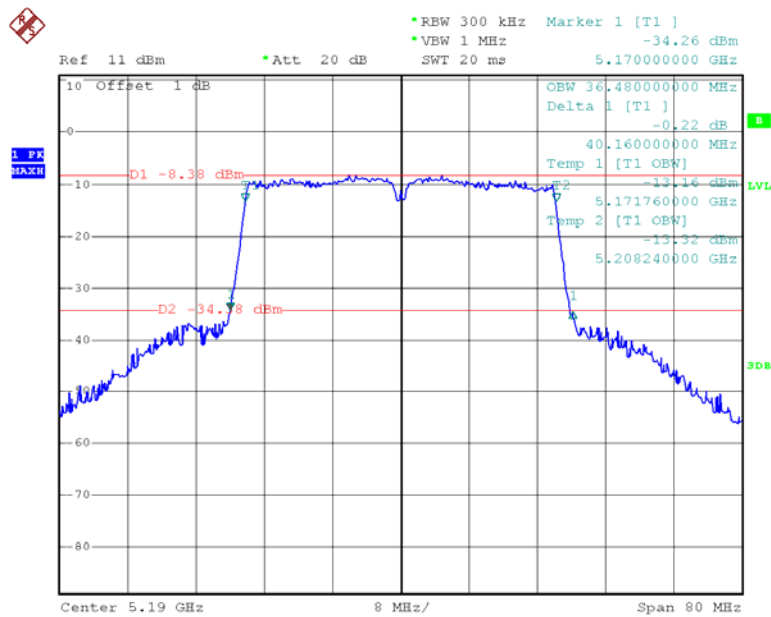


Date: 25.FEB.2013 10:20:17

Chain 2:802.11n40 High Channel

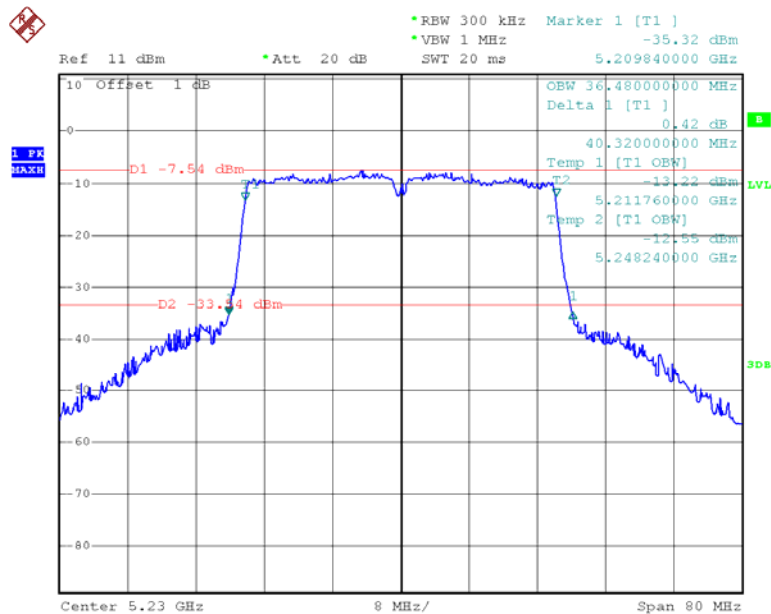


Date: 25.FEB.2013 10:41:25

Chain 2:802.11ac20 Low Channel

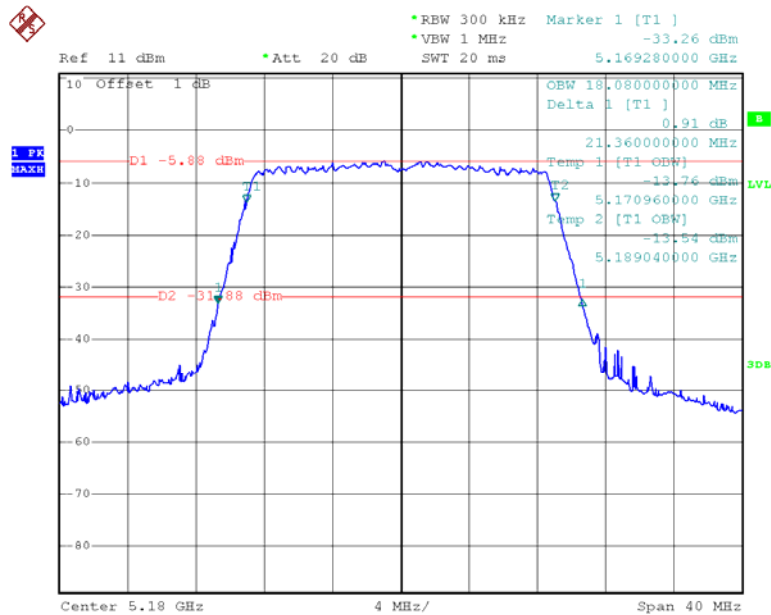


Date: 13.MAR.2013 17:41:34

Chain 2:802.11ac20 Middle Channel

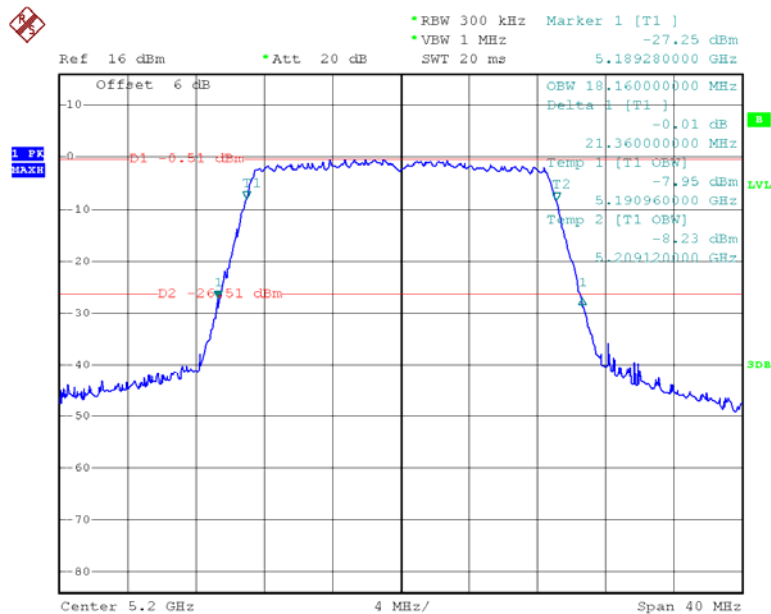


Date: 13.MAR.2013 18:58:04

Chain 2:802.11ac20 High Channel

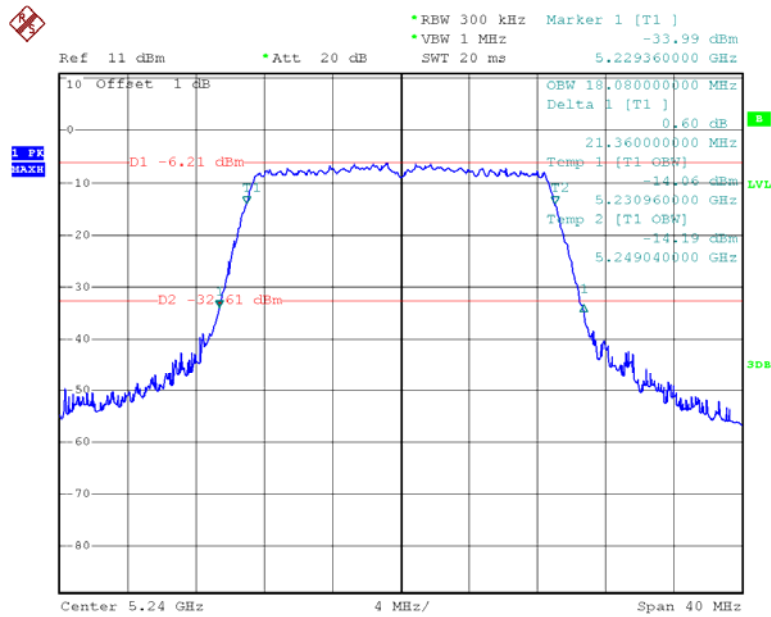


Date: 13.MAR.2013 19:14:16

Chain 2:802.11ac40 Low Channel

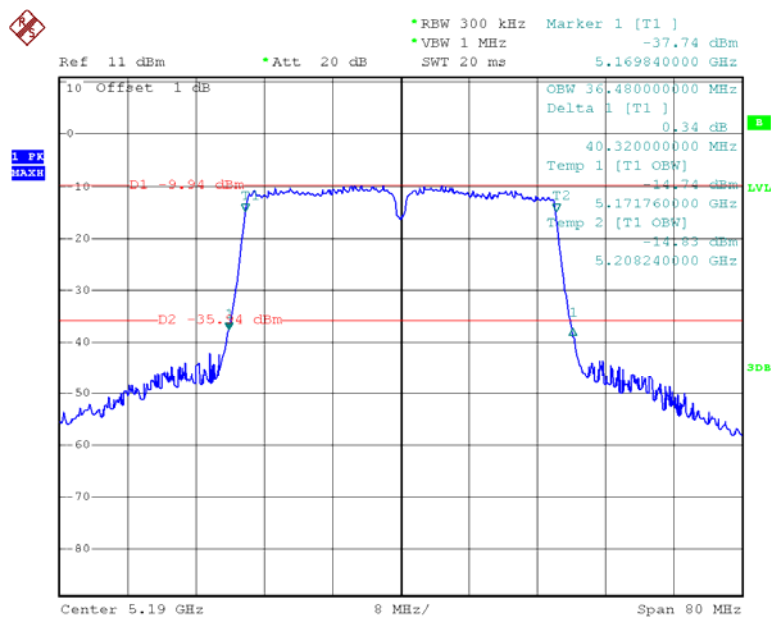


Date: 13.MAR.2013 19:24:44

Chain 2:802.11ac40 High Channel

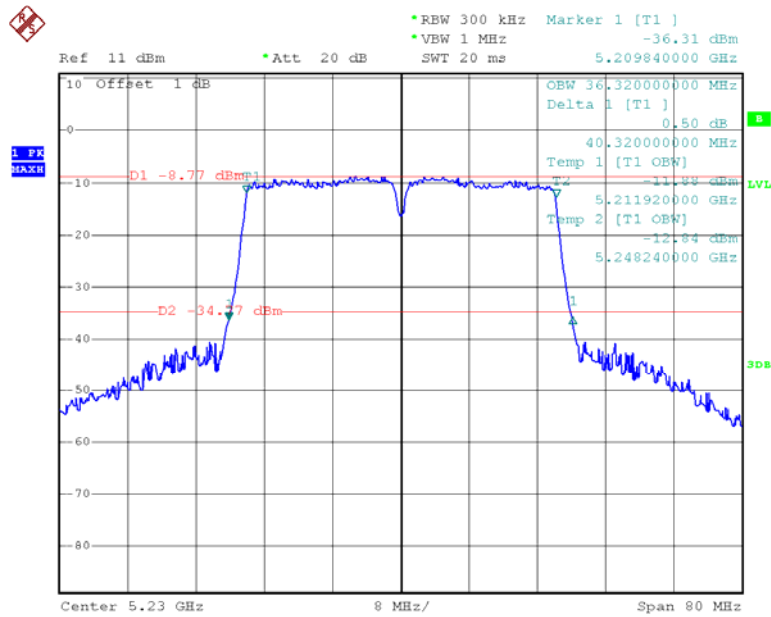

Date: 13.MAR.2013 19:34:26

Chain 2:802.11ac80

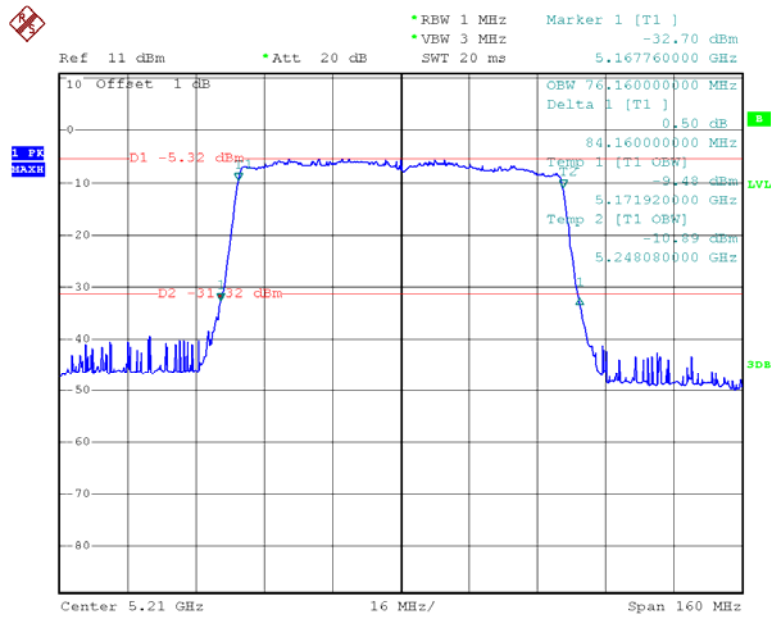

Date: 25.FEB.2013 10:54:07

FCC §15.407(a) (1) – CONDUCTED TRANSMITTER OUTPUT POWER**Applicable Standard**

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set span to encompass the entire emission bandwidth (EBW) of the signal. Set RBW = 1 MHz. Set VBW $\geq$ 3 MHz. Use sample detector mode Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to “free run”. Trace average 100 traces in power averaging mode. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer’s band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	23.4 ~26.8 °C
Relative Humidity:	29 ~63 %
ATM Pressure:	100.8 ~101.9kPa

The testing was performed by Leon Chen from 2013-02-23 to 2013-03-13.

Test Mode: Transmitting


Channel	Frequency	Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
802.11a mode				
Low	5180	13.62	17	PASS
Middle	5200	13.12	17	PASS
High	5240	13.12	17	PASS
chain 0:802.11n20 mode				
Low	5180	8.16	17	PASS
Middle	5200	8.10	17	PASS
High	5240	7.97	17	PASS
chain 1:802.11n20 mode				
Low	5180	8.24	17	PASS
Middle	5200	8.05	17	PASS
High	5240	8.48	17	PASS
chain 2:802.11n20 mode				
Low	5180	8.36	17	PASS
Middle	5200	8.29	17	PASS
High	5240	8.52	17	PASS
chain 0:802.11n40 mode				
Low	5190	8.42	17	PASS
High	5230	8.29	17	PASS
chain 1:802.11n40 mode				
Low	5190	8.57	17	PASS
High	5230	8.28	17	PASS
chain 2:802.11n40 mode				
Low	5190	8.15	17	PASS
High	5230	8.43	17	PASS
chain 0:802.11ac20 mode				
Low	5180	8.23	17	PASS
Middle	5200	8.14	17	PASS
High	5240	8.13	17	PASS
chain 1:802.11ac20 mode				
Low	5180	8.24	17	PASS
Middle	5200	8.60	17	PASS
High	5240	8.16	17	PASS
chain 2:802.11ac20 mode				
Low	5180	8.25	17	PASS
Middle	5200	8.37	17	PASS
High	5240	8.25	17	PASS
chain 0:802.11ac40 mode				
Low	5190	8.04	17	PASS
High	5230	8.21	17	PASS
chain 1:802.11ac40 mode				
Low	5190	8.24	17	PASS
High	5230	8.23	17	PASS
chain 2:802.11ac40 mode				
Low	5190	7.67	17	PASS
High	5230	8.09	17	PASS

chain 0:802.11ac80 mode				
Low	5210	8.07	17	PASS
chain 1:802.11ac80 mode				
Low	5210	8.27	17	PASS
chain 2:802.11ac80 mode				
Low	5210	8.27	17	PASS

Total power of 802.11n, 802.11ac: chain 0+ chain 1+chain 2


Channel	Frequency	Conducted Output Power	Limit	Result
	(MHz)	(dBm)	(dBm)	
Total:802.11n20 mode				
Low	5180	13.03	17	PASS
Middle	5200	12.92	17	PASS
High	5240	13.10	17	PASS
Total:802.11n40 mode				
Low	5190	13.15	17	PASS
High	5230	13.11	17	PASS
Total:802.11ac20 mode				
Low	5180	13.01	17	PASS
Middle	5200	13.15	17	PASS
High	5240	12.95	17	PASS
Total:802.11ac40 mode				
Low	5190	12.76	17	PASS
High	5230	12.95	17	PASS
Total:802.11ac80 mode				
Low	5210	12.98	17	PASS

802.11a RF Output Power, Low Channel

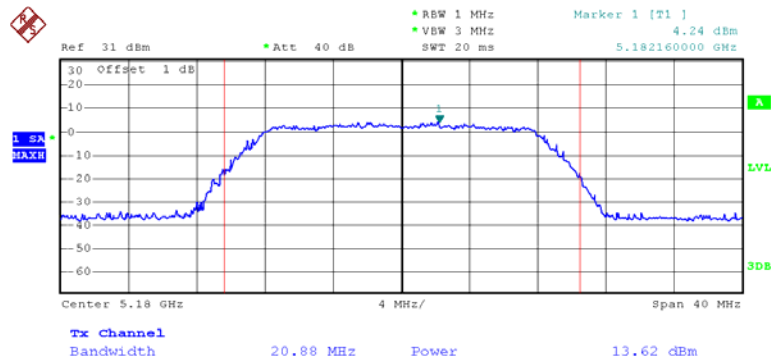


Date: 23.FEB.2013 16:36:43

802.11a RF Output Power, Middle Channel

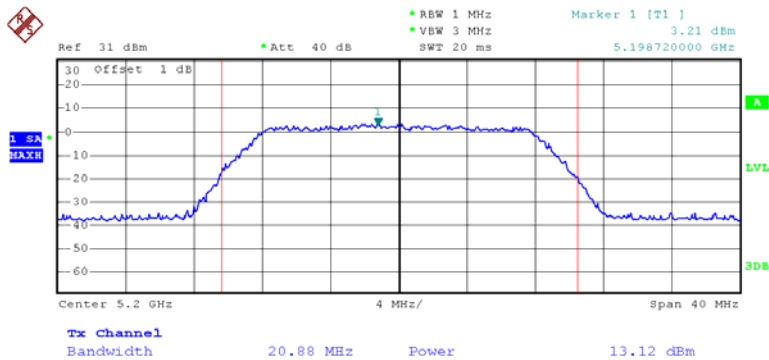


Date: 23.FEB.2013 17:06:46

802.11a RF Output Power, High Channel

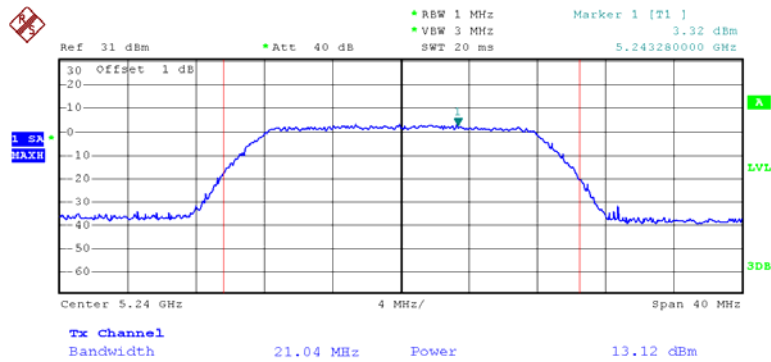


Date: 23.FEB.2013 17:13:51

Chain 0:802.11n20 RF Output Power, Low Channel

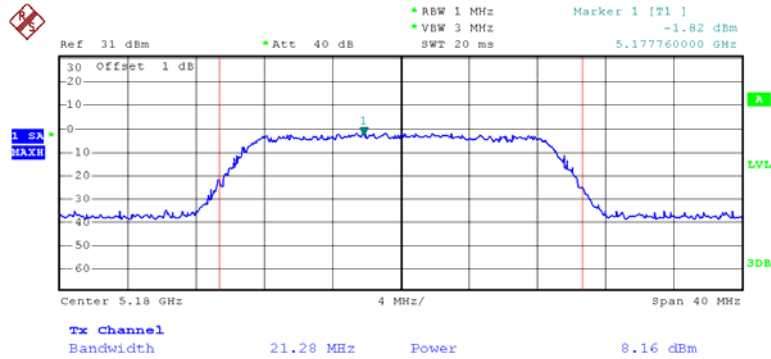


Date: 23.FEB.2013 17:34:23

Chain 0:802.11n20 RF Output Power, Middle Channel

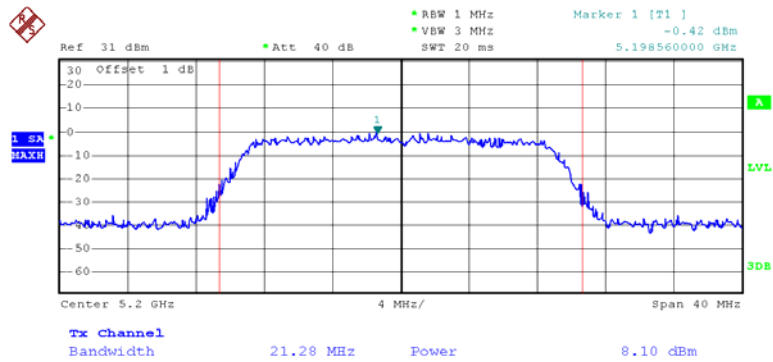


Date: 25.FEB.2013 09:47:55

Chain 0:802.11n20 RF Output Power, High Channel

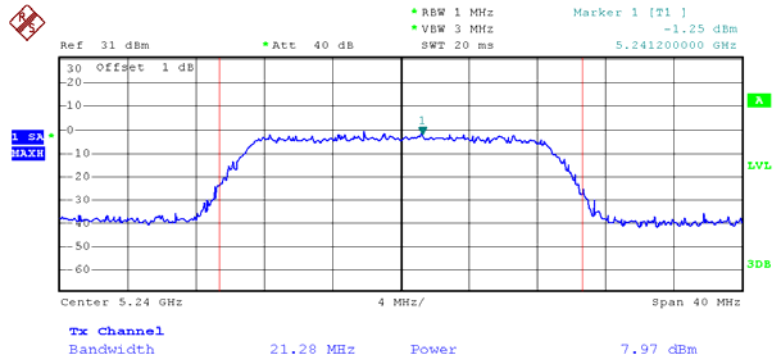


Date: 25.FEB.2013 09:59:23

Chain 0:802.11n40 RF Output Power, Low Channel

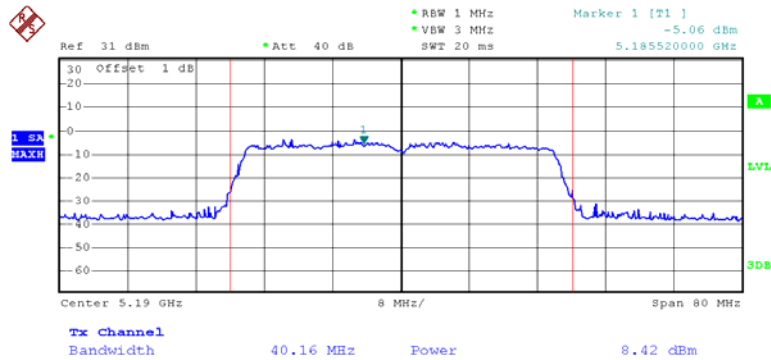


Date: 25.FEB.2013 10:14:36

Chain 0:802.11n40 RF Output Power, High Channel

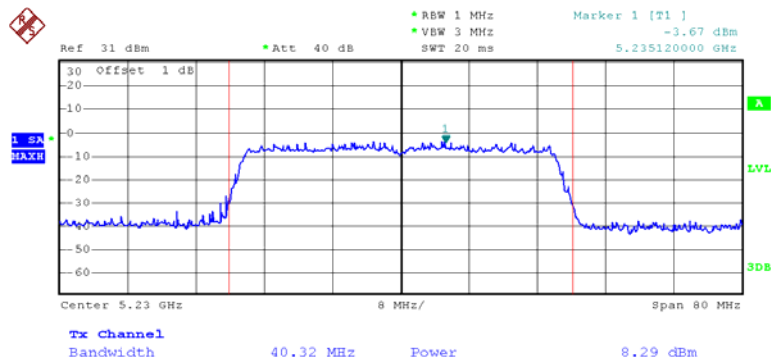


Date: 25.FEB.2013 10:42:18

Chain 0:802.11ac20 RF Output Power, Low Channel

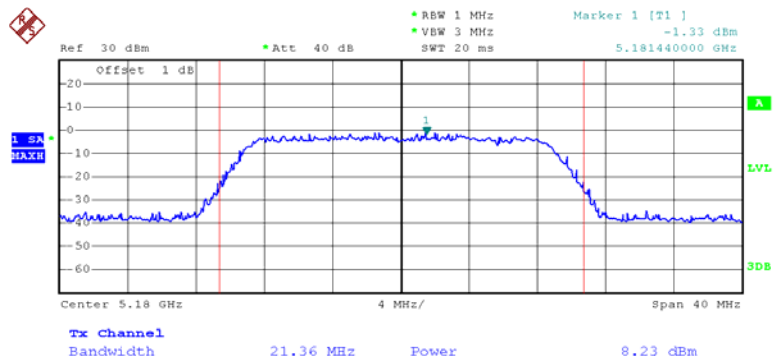


Date: 13.MAR.2013 17:43:00

Chain 0:802.11ac20 RF Output Power, Middle Channel

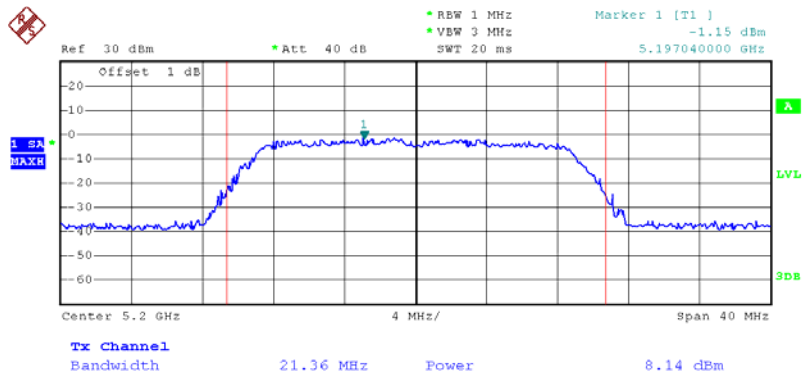


Date: 13.MAR.2013 18:59:35

Chain 0:802.11ac20 RF Output Power, High Channel

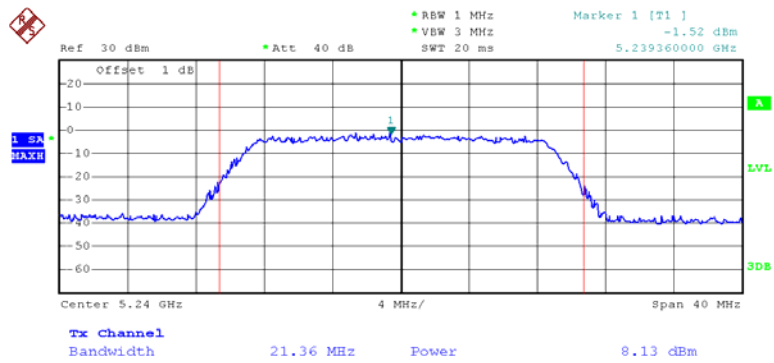


Date: 13.MAR.2013 19:09:27

Chain 0:802.11ac40 RF Output Power, Low Channel

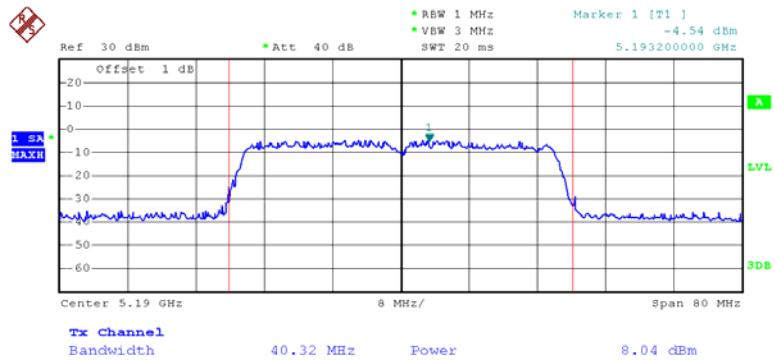


Date: 13.MAR.2013 19:26:19

Chain 0:802.11ac40 RF Output Power, High Channel

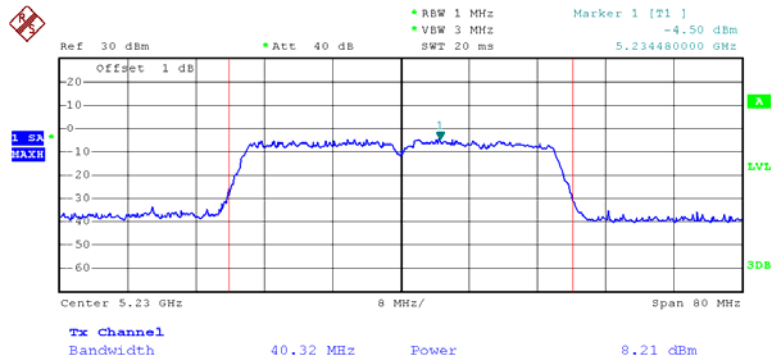


Date: 13.MAR.2013 19:35:46

Chain 0:802.11ac80 RF Output Power

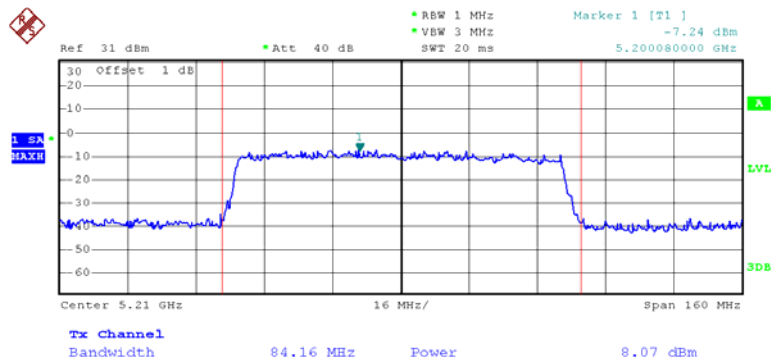


Date: 25.FEB.2013 10:54:32

Chain 1:802.11n20 RF Output Power, Low Channel

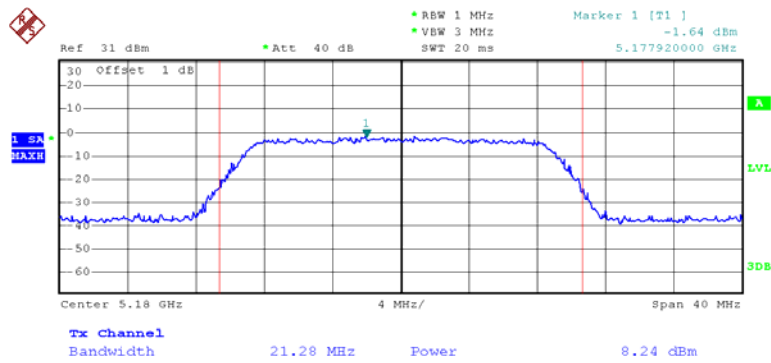


Date: 23.FEB.2013 17:34:45


Chain 1:802.11n20 RF Output Power, Middle Channel

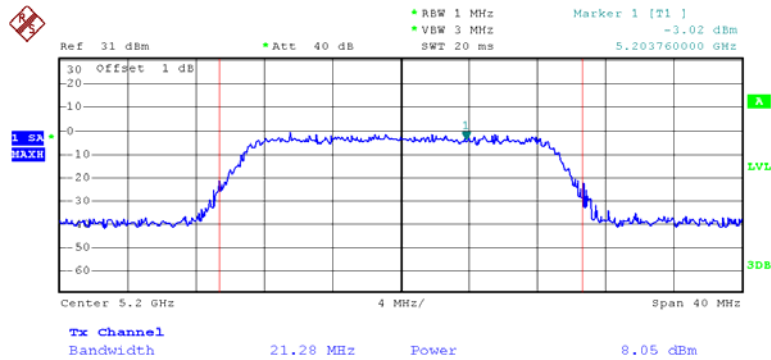

Date: 25.FEB.2013 09:48:08

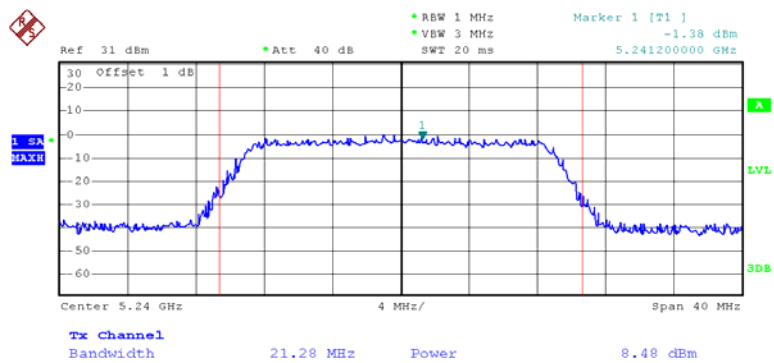
Chain 1:802.11n20 RF Output Power, High Channel

Date: 25.FEB.2013 09:59:33

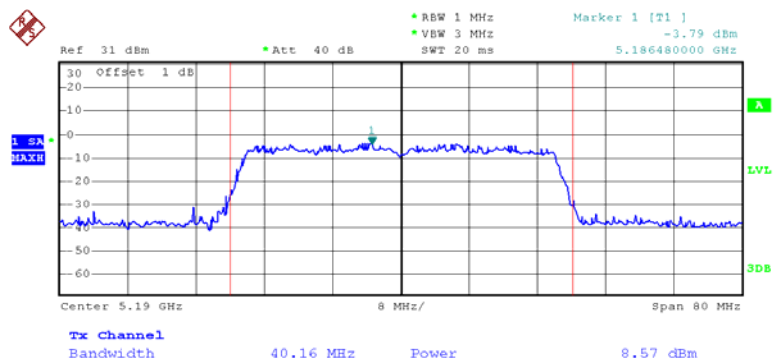Chain 1:802.11n40 RF Output Power, Low Channel


Date: 25.FEB.2013 10:14:48

Chain 1:802.11n40 RF Output Power, High Channel

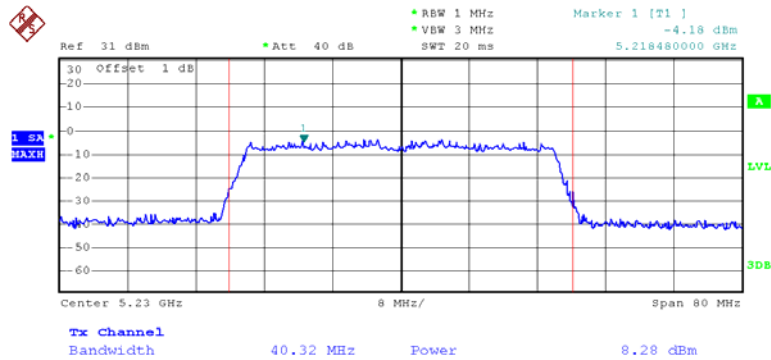


Date: 25.FEB.2013 10:42:54

Chain 1:802.11ac20 RF Output Power, Low Channel

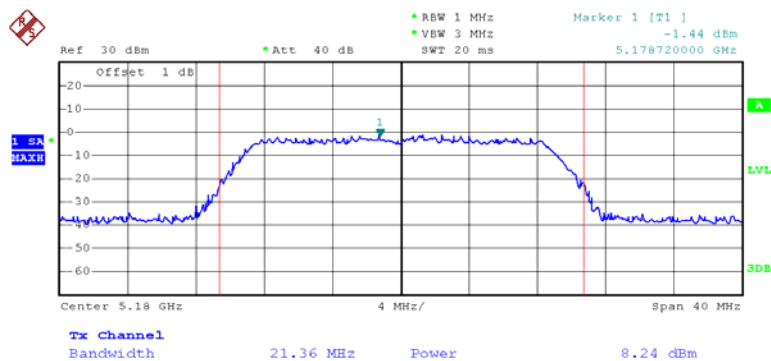


Date: 13.MAR.2013 17:42:39

Chain 1:802.11ac20 RF Output Power, Middle Channel

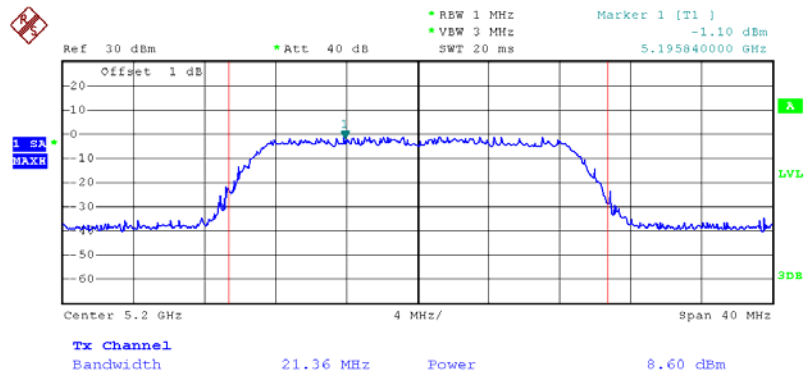


Date: 13.MAR.2013 18:58:59

Chain 1:802.11ac20 RF Output Power, High Channel

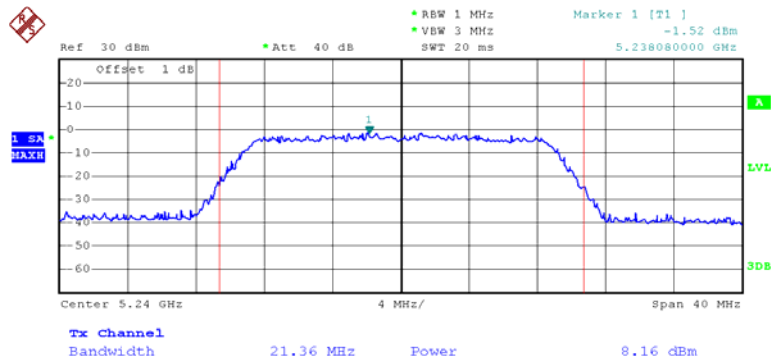


Date: 13.MAR.2013 19:09:42

Chain 1:802.11ac40 RF Output Power, Low Channel

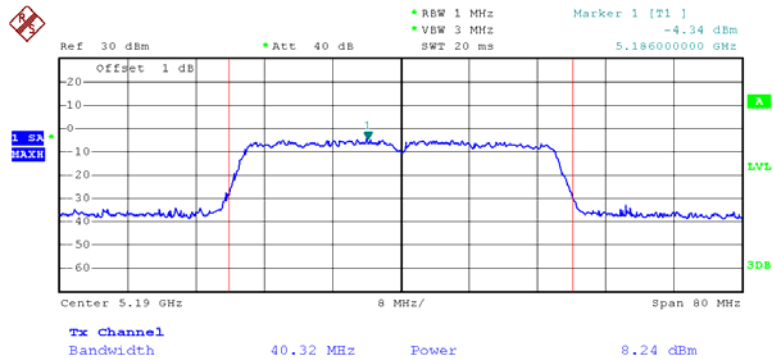


Date: 13.MAR.2013 19:25:58

Chain 1:802.11ac40 RF Output Power, High Channel

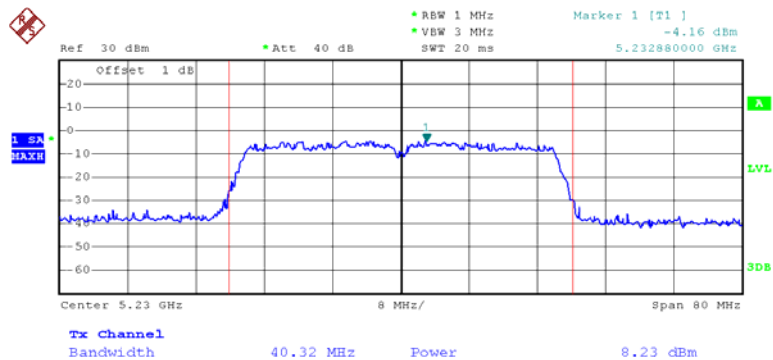


Date: 13.MAR.2013 19:35:18

Chain 1:802.11ac80 RF Output Power

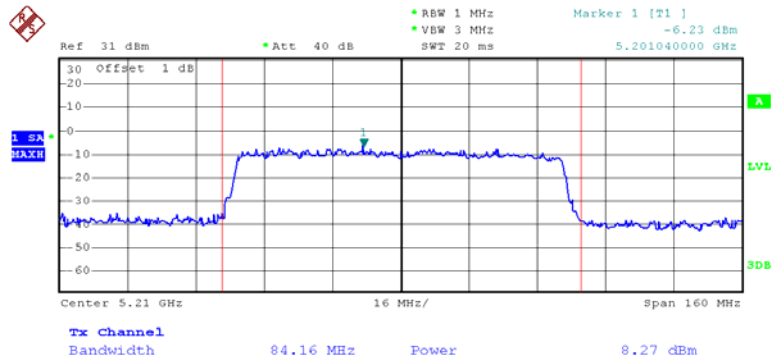


Date: 25.FEB.2013 10:54:40

Chain 2:802.11n20 RF Output Power, Low Channel

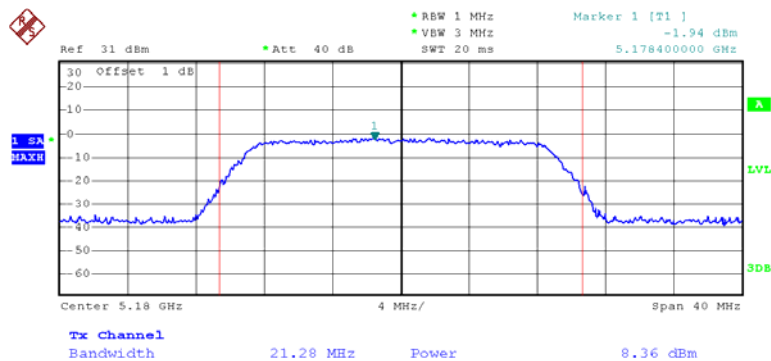


Date: 23.FEB.2013 17:35:08

Chain 2:802.11n20 RF Output Power, Middle Channel

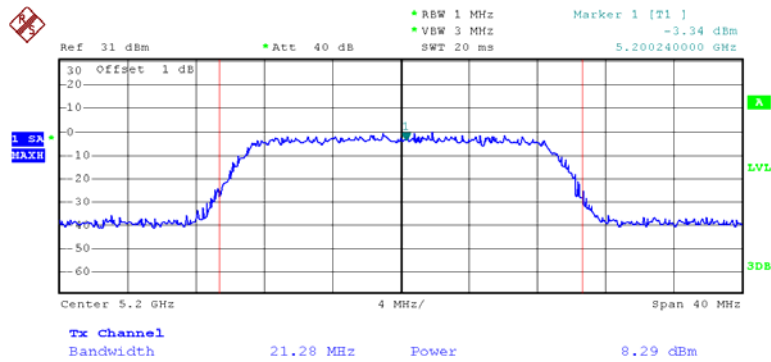


Date: 25.FEB.2013 09:48:38


Chain 2:802.11n20 RF Output Power, High Channel

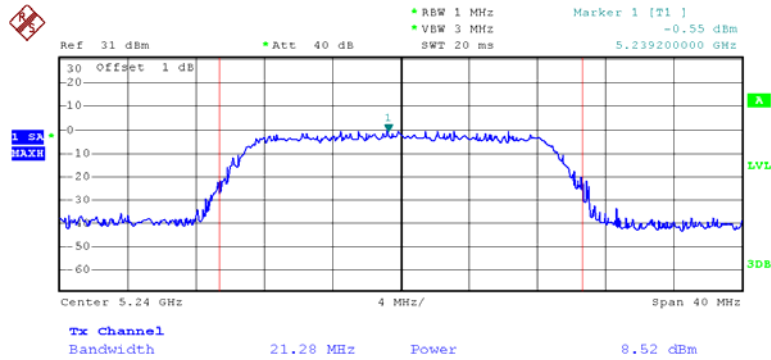

Date: 25.FEB.2013 09:59:47

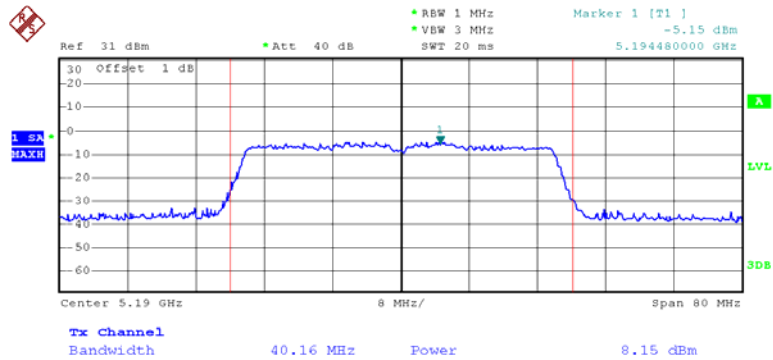
Chain 2:802.11n40 RF Output Power, Low Channel

Date: 25.FEB.2013 10:15:21

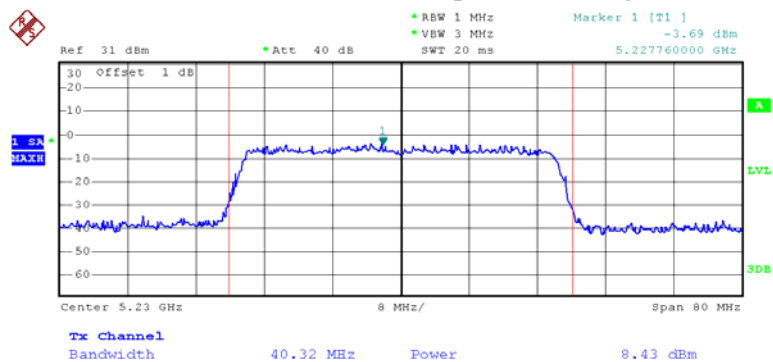Chain 2:802.11n40 RF Output Power, High Channel


Date: 25.FEB.2013 10:43:20

Chain 2:802.11ac20 RF Output Power, Low Channel

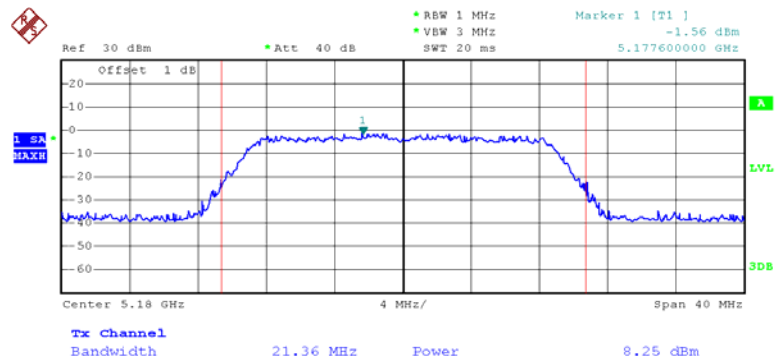


Date: 13.MAR.2013 17:42:49

Chain 2:802.11ac20 RF Output Power, Middle Channel

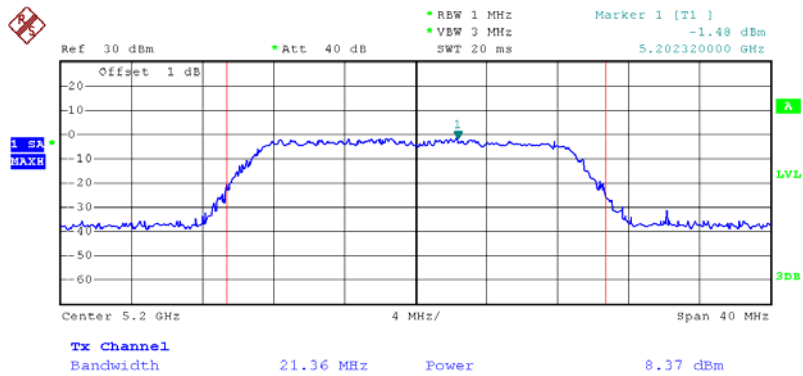


Date: 13.MAR.2013 18:59:22

Chain 2:802.11ac20 RF Output Power, High Channel

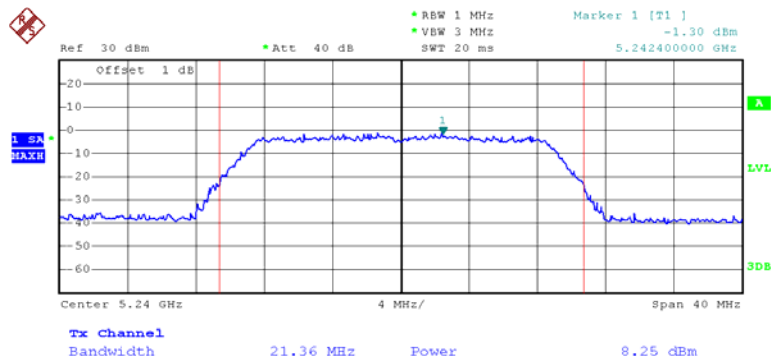


Date: 13.MAR.2013 19:10:00

Chain 2:802.11ac40 RF Output Power, Low Channel

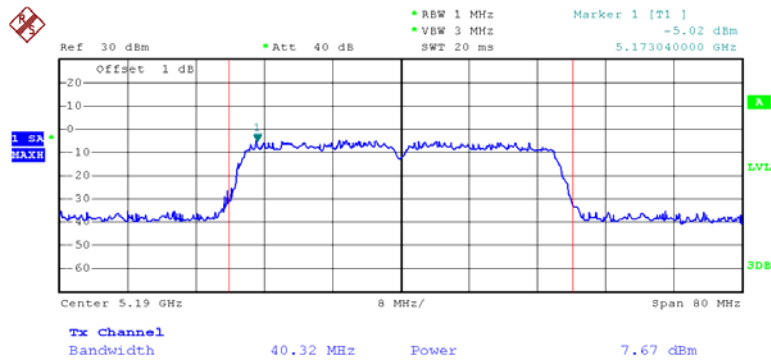


Date: 13.MAR.2013 19:26:05

Chain 2:802.11ac40 RF Output Power, High Channel

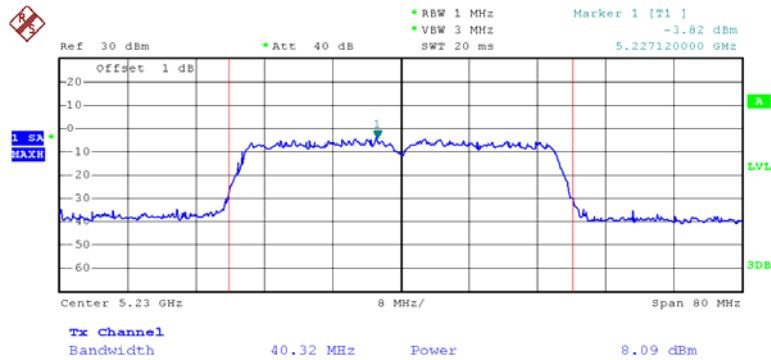

Date: 13.MAR.2013 19:35:30

Chain 2:802.11ac80 RF Output Power

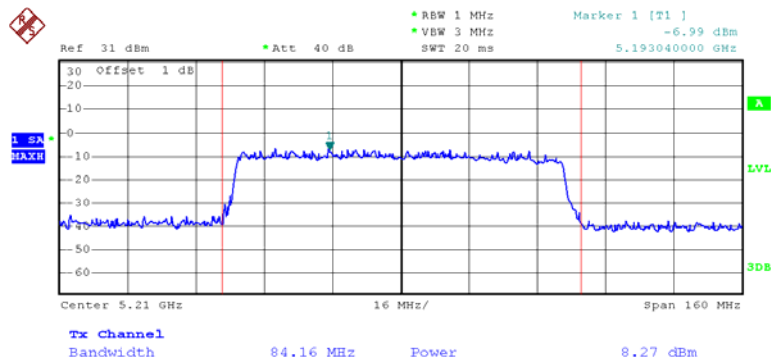

Date: 25.FEB.2013 10:54:49

FCC §15.407(a) (1) (5) - POWER SPECTRAL DENSITY**Applicable Standard**

For the band 5.15–5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $4 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. In addition, the peak power spectral density shall not exceed 4 dBm in any 1-MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The peak power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A resolution bandwidth less than the measurement bandwidth can be used, provided that the measured power is integrated to show total power over the measurement bandwidth. If the resolution bandwidth is approximately equal to the measurement bandwidth, and much less than the emission bandwidth of the equipment under test, the measured results shall be corrected to account for any difference between the resolution bandwidth of the test instrument and its actual noise bandwidth.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Use sample detector and power averaging (not video averaging) mode. Set RBW= 1 MHz, VBW > 1 MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmits power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data**Environmental Conditions**

Temperature:	23.4 ~26.8 °C
Relative Humidity:	29 ~63 %
ATM Pressure:	100.8 ~101.9kPa

The testing was performed by Leon Chen from 2013-02-23 to 2013-03-13.

Test Mode: Transmitting

Test Result: Pass

Test mode: Transmitting


Channel	Power Spectral Density (dBm/MHz)	Limit (dBm/MHz)	Result
802.11a mode			
Low	3.73	4	PASS
Middle	3.1	4	PASS
High	2.94	4	PASS
Chain 0:802.11n20 mode			
Low	-1.09	4	PASS
Middle	-0.93	4	PASS
High	-1.06	4	PASS
Chain 1:802.11n20 mode			
Low	-1.73	4	PASS
Middle	-1.62	4	PASS
High	-0.92	4	PASS
Chain 2:802.11n20 mode			
Low	-1.65	4	PASS
Middle	-1.1	4	PASS
High	-1.89	4	PASS
Chain 0:802.11n40 mode			
Low	-3.7	4	PASS
High	-3.68	4	PASS
Chain 1:802.11n40 mode			
Low	-3.61	4	PASS
High	-3.37	4	PASS
Chain 2:802.11n40 mode			
Low	-3.59	4	PASS
High	-3.62	4	PASS

Chain 0:802.11ac20 mode			
Low	-1.83	4	PASS
Middle	-1.99	4	PASS
High	-1.70	4	PASS
Chain 1:802.11ac20 mode			
Low	-1.05	4	PASS
Middle	-1.69	4	PASS
High	-1.63	4	PASS
Chain 2:802.11ac20 mode			
Low	-1.14	4	PASS
Middle	-1.63	4	PASS
High	-1.50	4	PASS
Chain 0:802.11ac40 mode			
Low	-4.42	4	PASS
High	-4.92	4	PASS
Chain 1:802.11ac40 mode			
Low	-4.81	4	PASS
High	-4.67	4	PASS
Chain 2:802.11ac40 mode			
Low	-4.61	4	PASS
High	-4.48	4	PASS
Chain 0:802.11ac80 mode			
Low	-6.73	4	PASS
Chain 1:802.11ac80 mode			
Low	-7	4	PASS
Chain 2:802.11ac80 mode			
Low	-6.75	4	PASS

Total power of 802.11n, 802.11ac: chain 0+ chain 1+chain 2


Channel	Power Spectral Density	Limit	Result
	(dBm/MHz)	(dBm/MHz)	
Total:802.11n20 mode			
Low	3.29	4	PASS
Middle	3.56	4	PASS
High	3.50	4	PASS
Total:802.11n40 mode			
Low	1.14	4	PASS
High	1.22	4	PASS
Total:802.11ac20 mode			
Low	3.44	4	PASS
Middle	3.00	4	PASS
High	3.16	4	PASS
Total:802.11ac40 mode			
Low	0.16	4	PASS
High	0.08	4	PASS
Total:802.11ac80 mode			
Low	-2.05	4	PASS

Power Spectral Density, 802.11a Low Channel

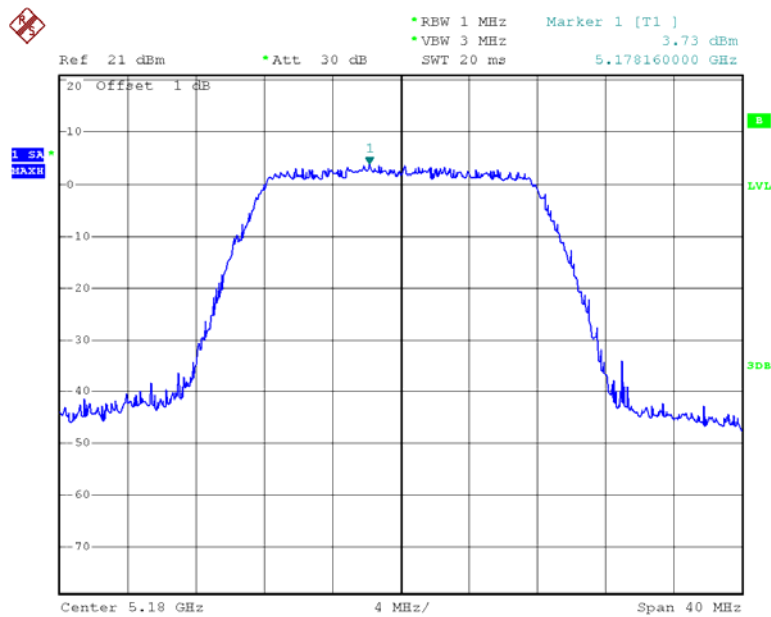


Date: 23.FEB.2013 16:36:13

Power Spectral Density, 802.11a Middle Channel

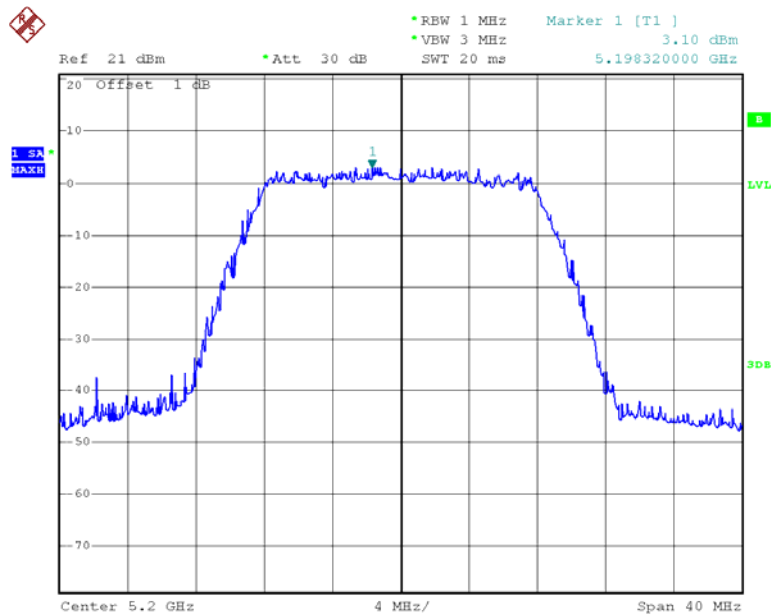


Date: 23.FEB.2013 17:07:20

Power Spectral Density, 802.11a High Channel

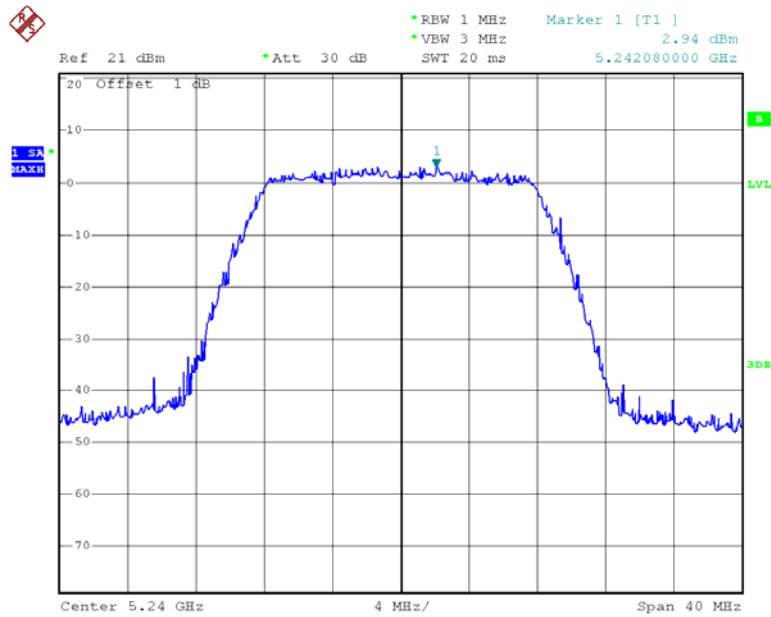


Date: 23.FEB.2013 17:13:08

Chain 0:Power Spectral Density, 802.11n20 Low Channel

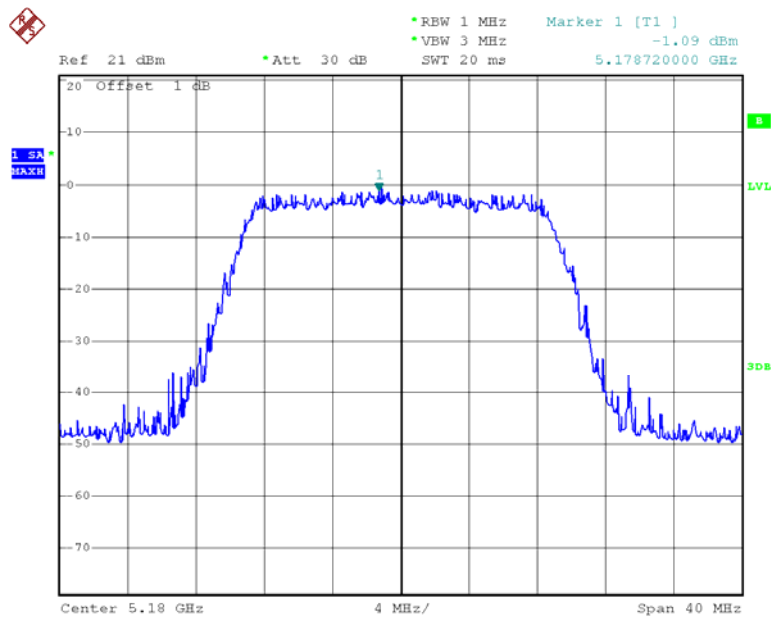


Date: 23.FEB.2013 17:25:50

Chain 0: Power Spectral Density, 802.11n20 Middle Channel

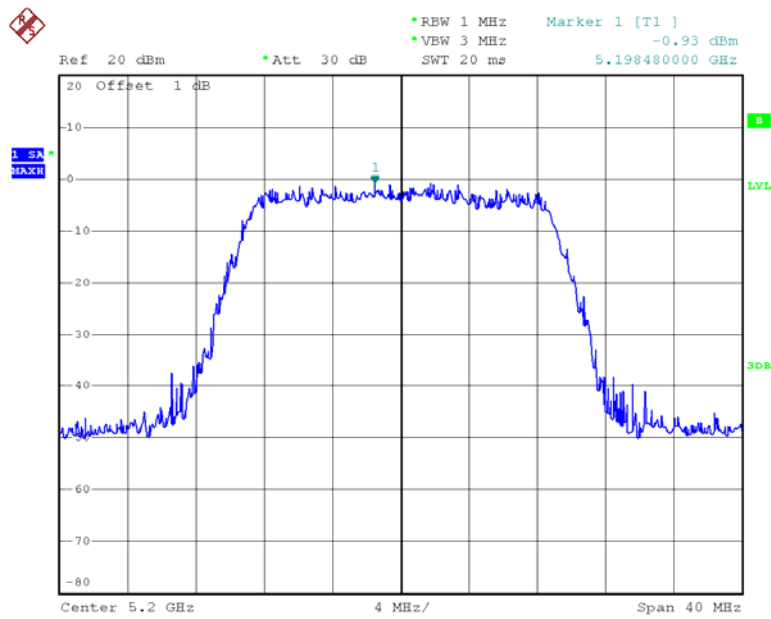


Date: 25.FEB.2013 09:34:39

Chain 0: Power Spectral Density, 802.11n20 High Channel

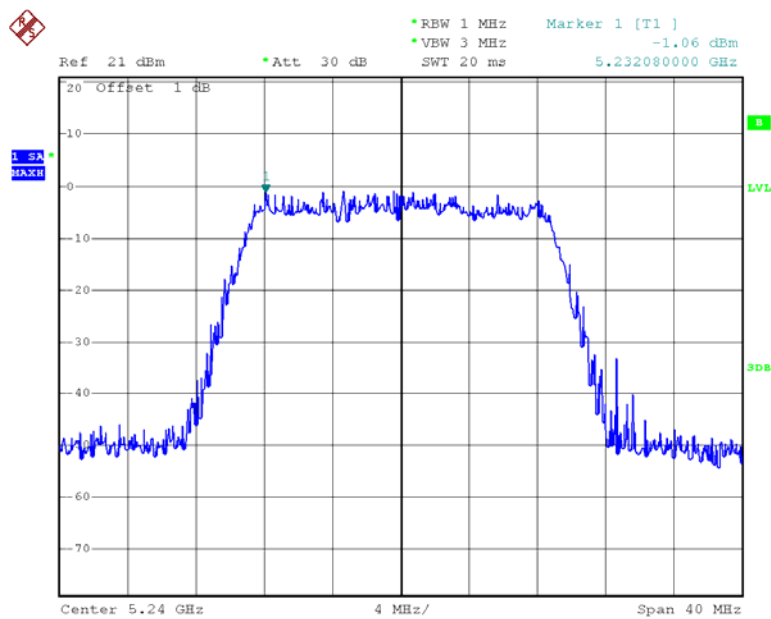


Date: 25.FEB.2013 09:57:03

Chain 0:Power Spectral Density, 802.11n40 Low Channel

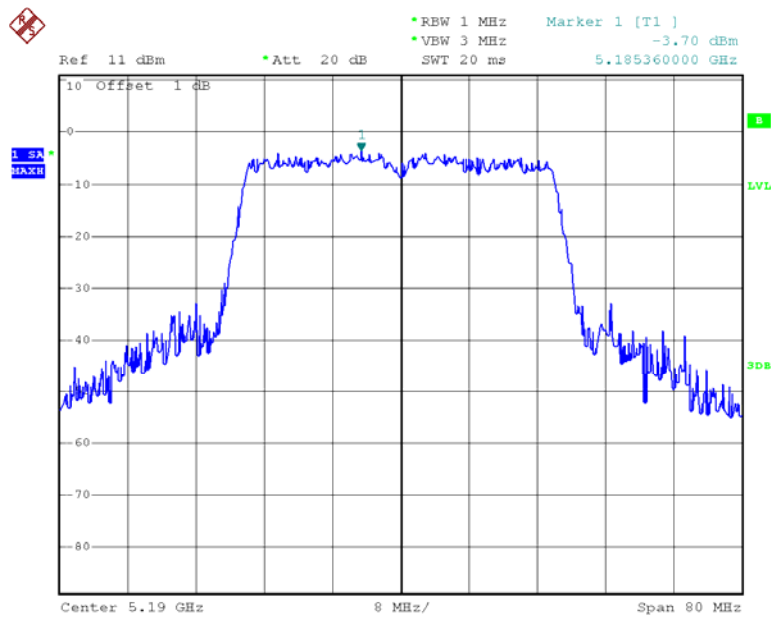


Date: 25.FEB.2013 10:20:54


Chain 0:Power Spectral Density, 802.11n40 High Channel

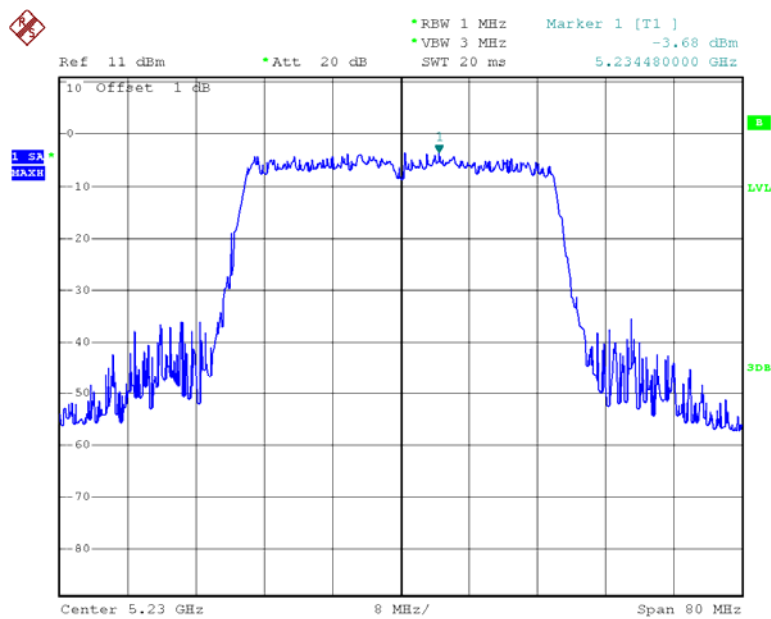

Date: 25.FEB.2013 10:43:58

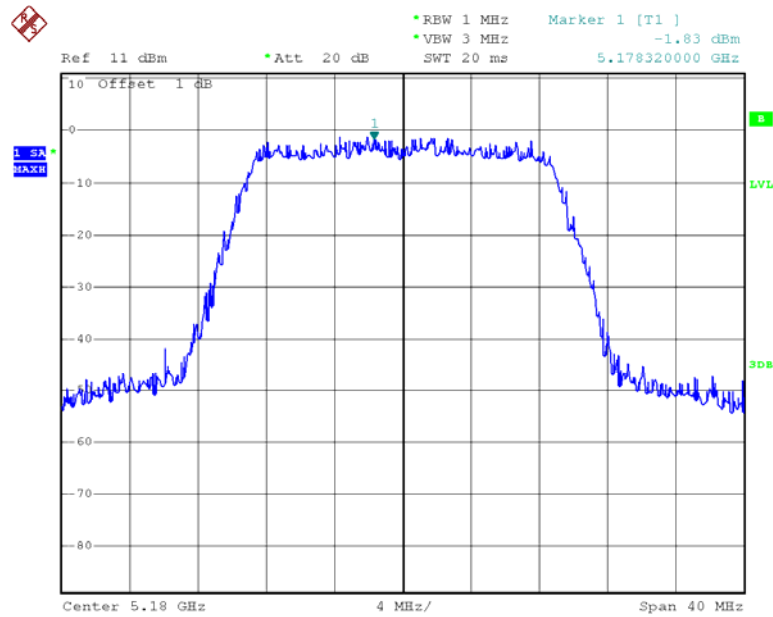
Chain 0:Power Spectral Density, 802.11ac20 Low Channel

Date: 13.MAR.2013 18:47:31

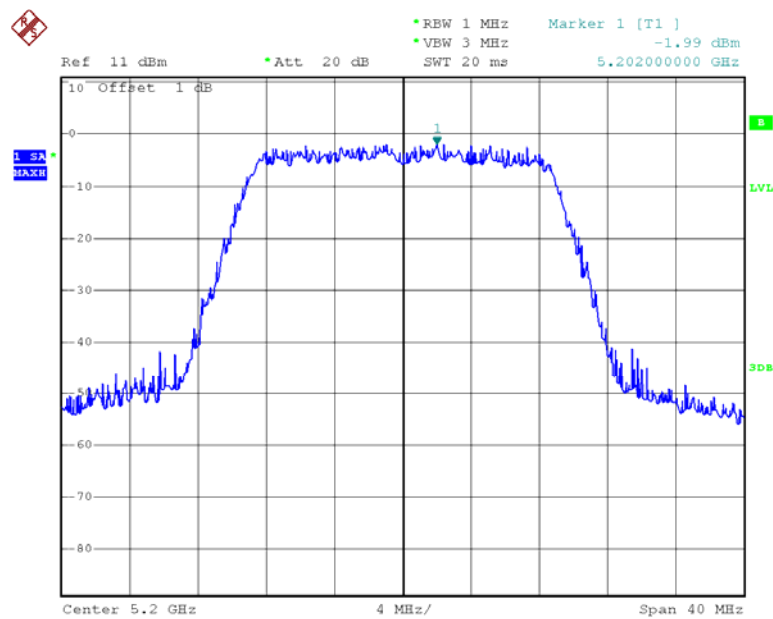Chain 0:Power Spectral Density, 802.11ac20 Middle Channel


Date: 13.MAR.2013 19:00:36

Chain 0:Power Spectral Density, 802.11ac20 High Channel

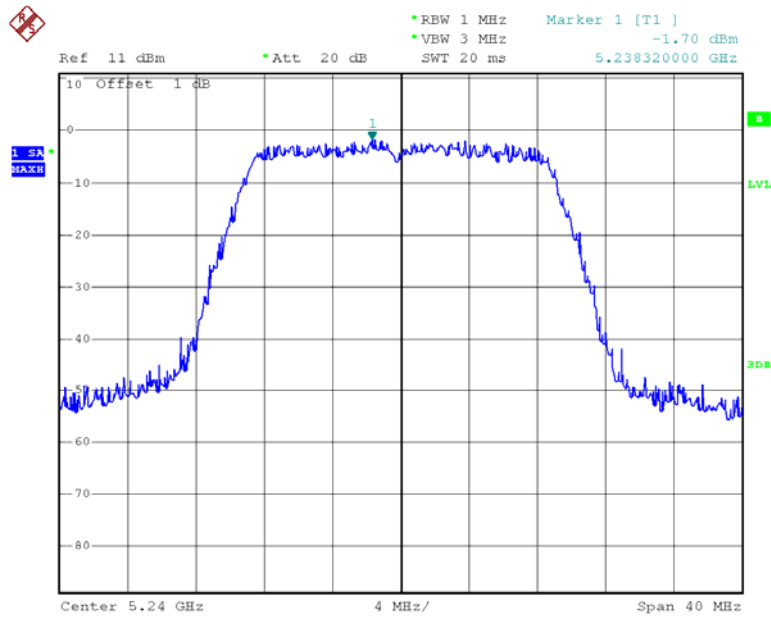


Date: 13.MAR.2013 19:10:45

Chain 0:Power Spectral Density, 802.11ac40 Low Channel

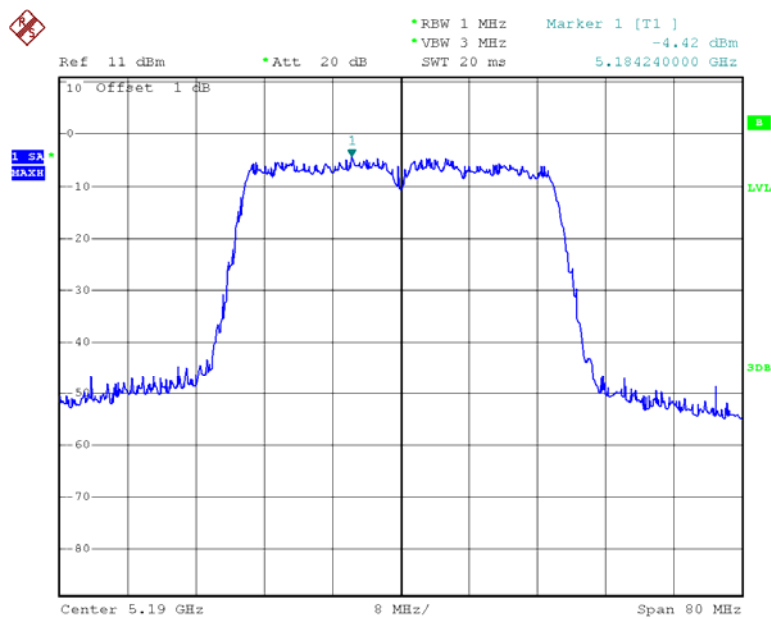


Date: 13.MAR.2013 19:27:09

Chain 0:Power Spectral Density, 802.11ac40 High Channel

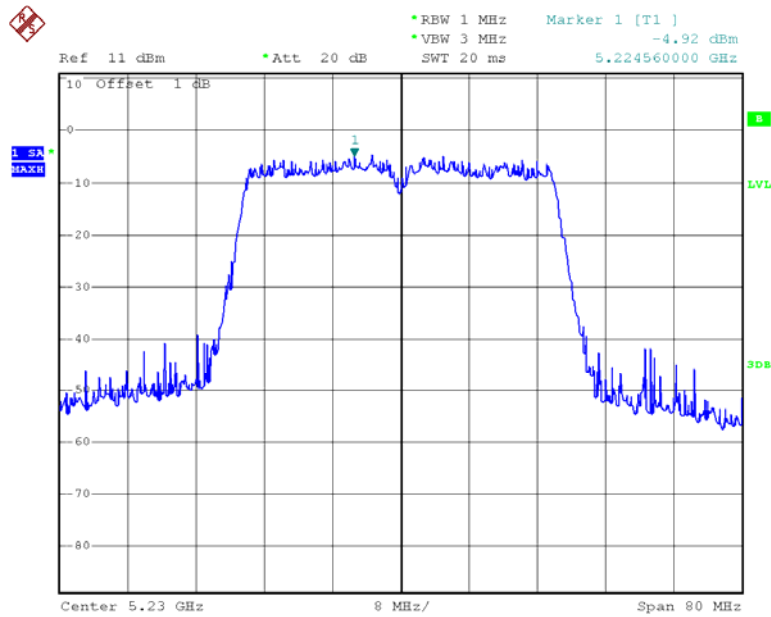


Date: 13.MAR.2013 19:36:39

Chain 0:Power Spectral Density, 802.11ac80

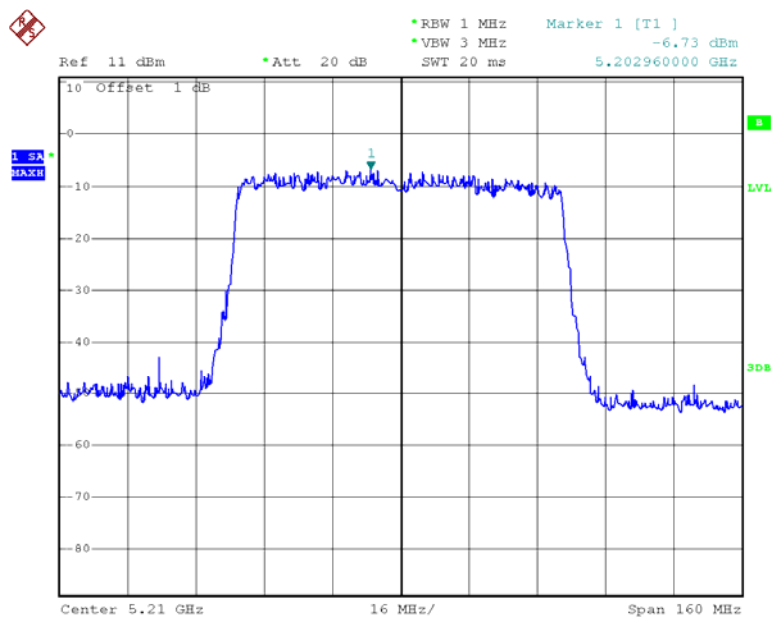


Date: 25.FEB.2013 10:55:12

Chain 1:Power Spectral Density, 802.11 n20 Low Channel

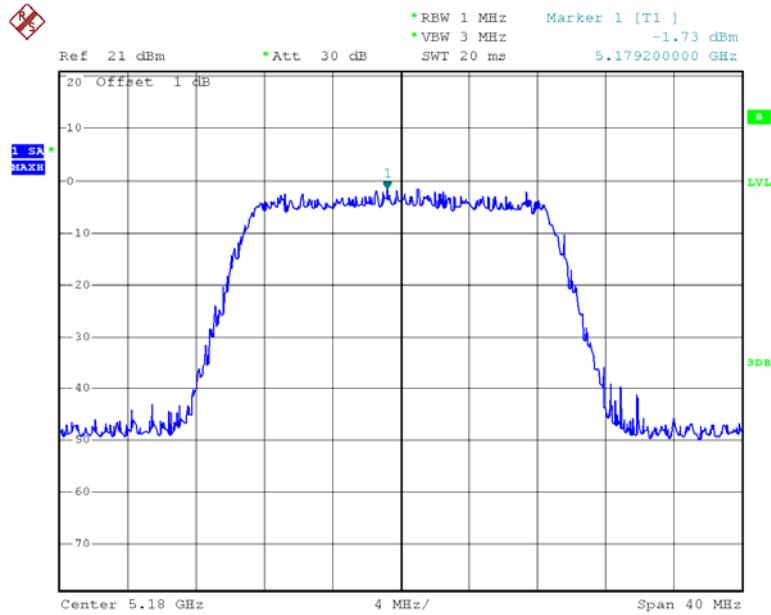


Date: 23.FEB.2013 17:27:23


Chain 1:Power Spectral Density, 802.11n20 Middle Channel

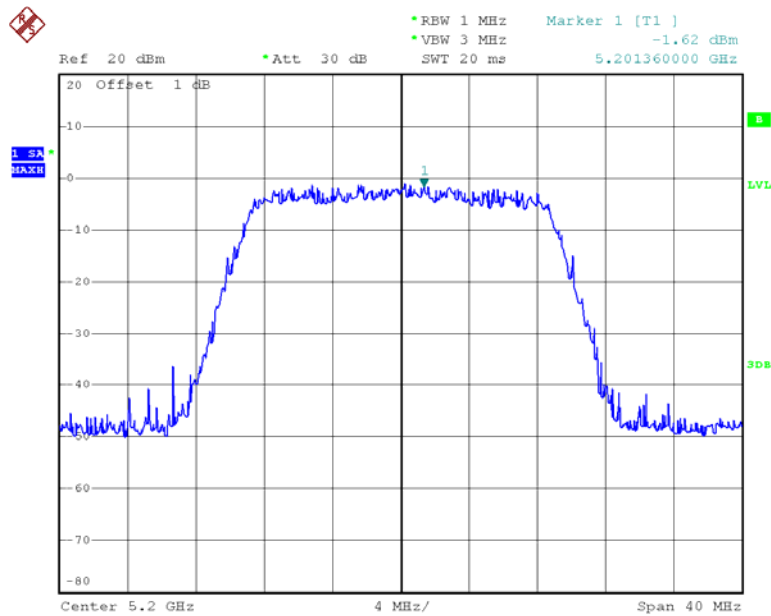


Date: 25.FEB.2013 09:35:45

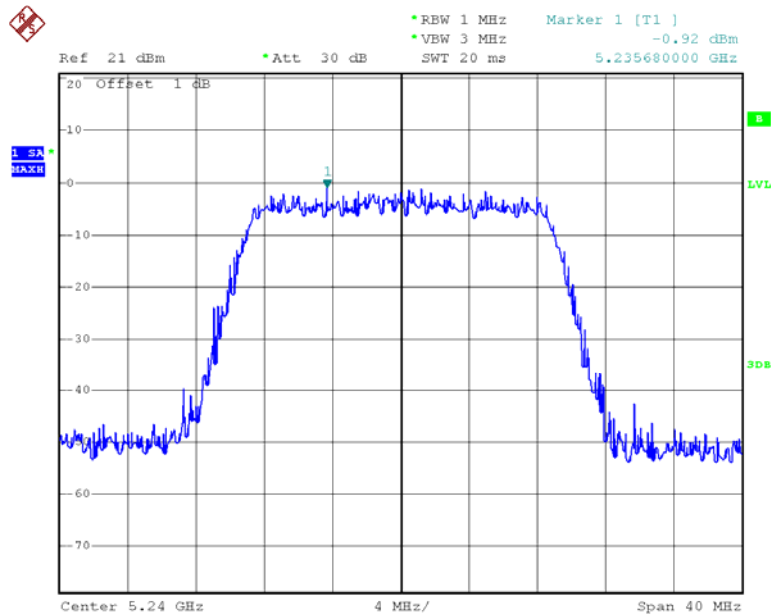Chain 1:Power Spectral Density, 802.11n20 High Channel


Date: 25.FEB.2013 09:58:07

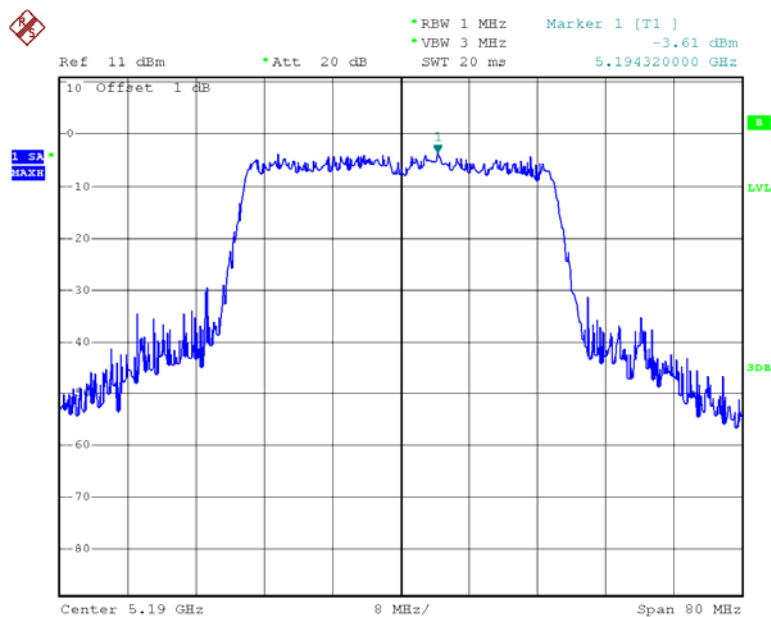Chain 1:Power Spectral Density, 802.11n40 Low Channel


Date: 25.FEB.2013 10:21:13

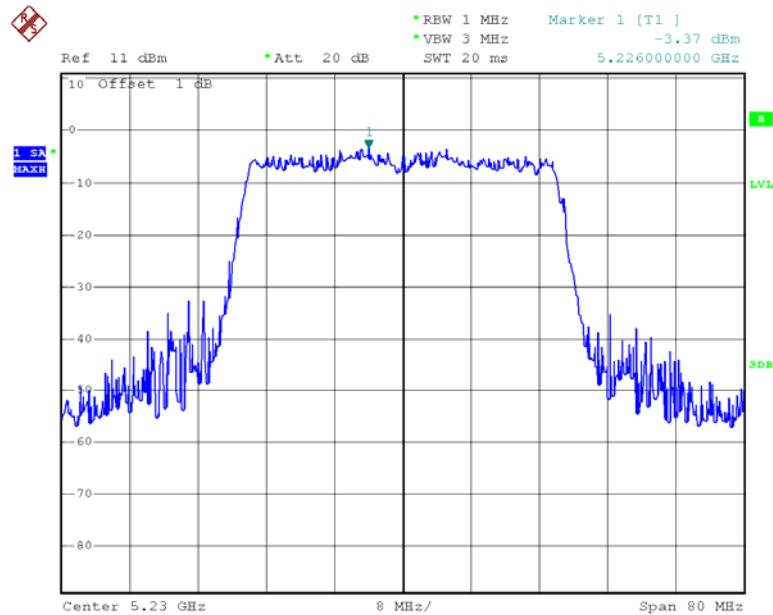Chain 1:Power Spectral Density, 802.11n40 High Channel


Date: 25.FEB.2013 10:44:10

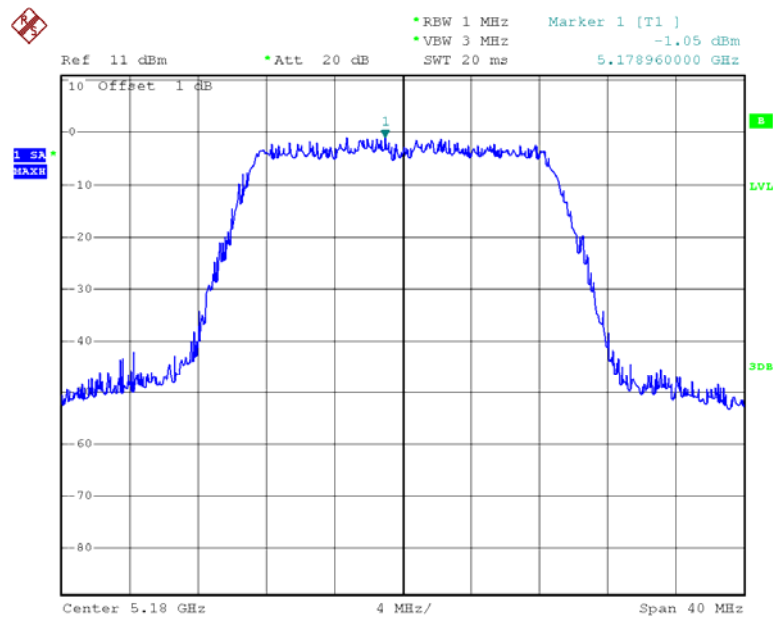Chain 1:Power Spectral Density, 802.11ac20 Low Channel

Date: 13.MAR.2013 18:47:15

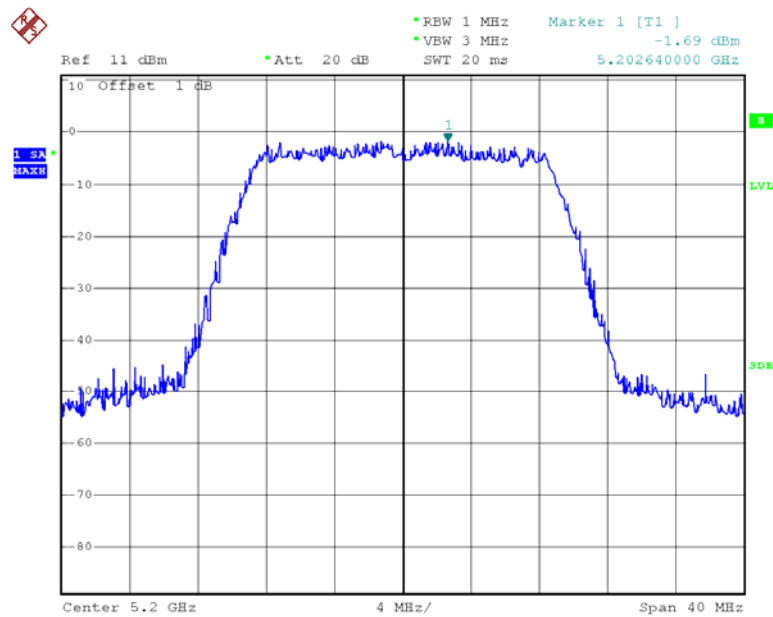
Chain 1:Power Spectral Density, 802.11ac20 Middle Channel

Date: 13.MAR.2013 19:00:16

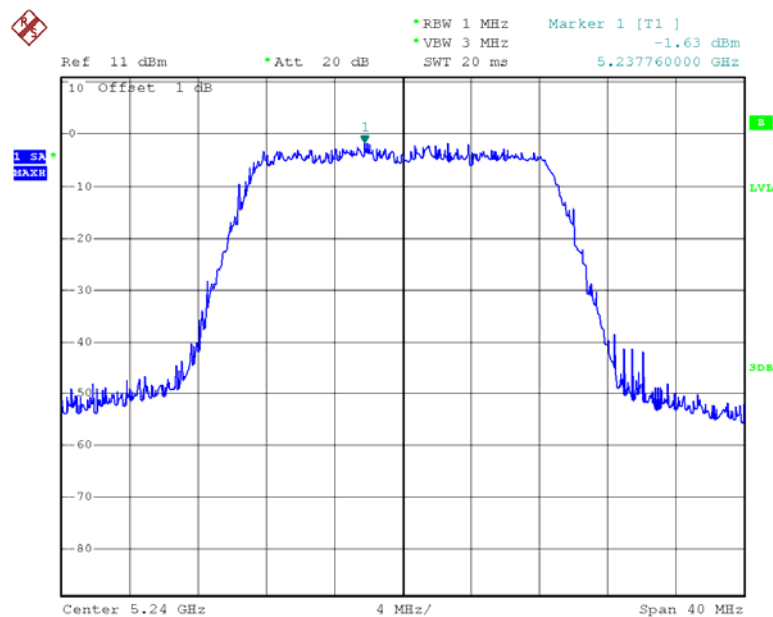Chain 1:Power Spectral Density, 802.11ac20 High Channel


Date: 13.MAR.2013 19:10:20

Chain 1: Power Spectral Density, 802.11ac40 Low Channel

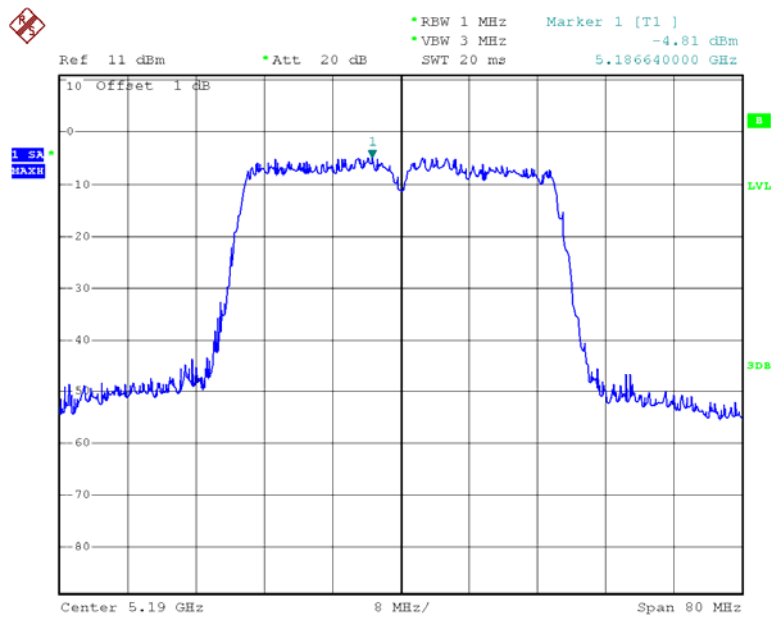


Date: 13.MAR.2013 19:26:51

Chain 1: Power Spectral Density, 802.11ac40 High Channel

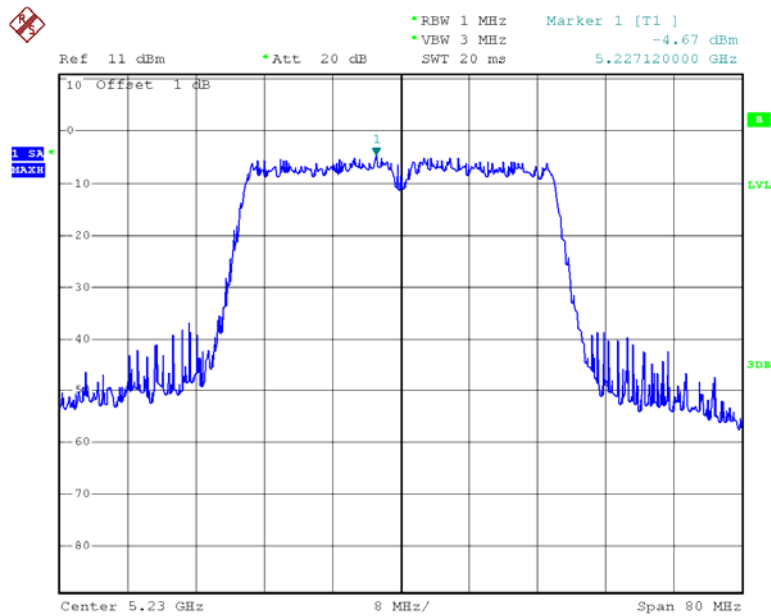


Date: 13.MAR.2013 19:36:12

Chain 1:Power Spectral Density, 802.11ac 80

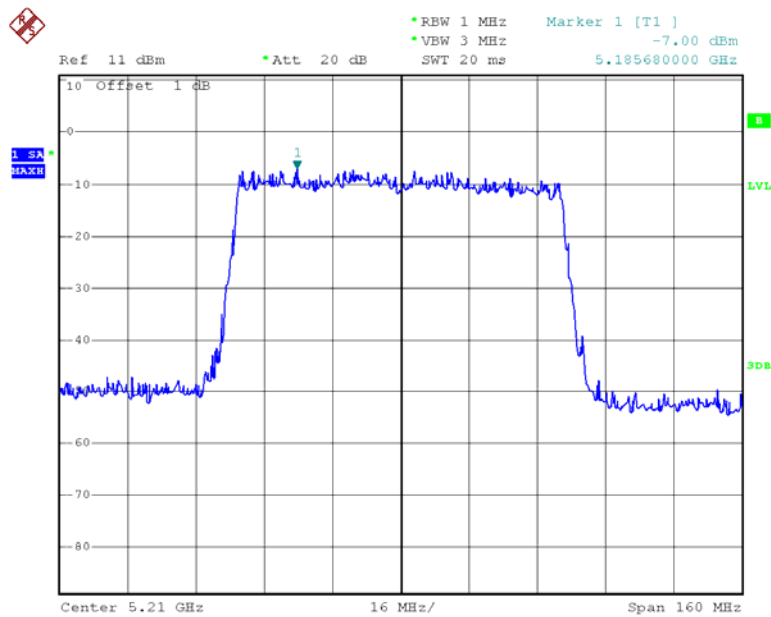


Date: 25.FEB.2013 10:55:24


Chain 2:Power Spectral Density, 802.11 n20 Low Channel

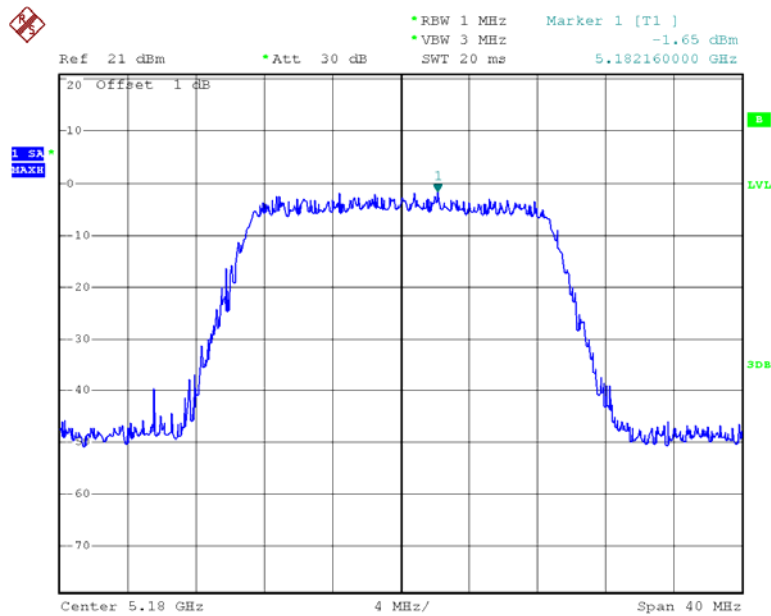

Date: 23.FEB.2013 17:27:31

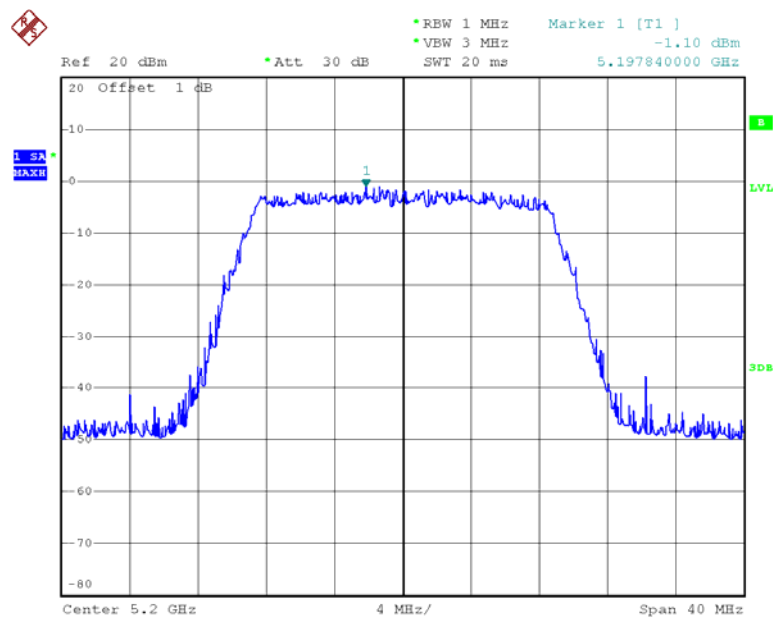
Chain 2:Power Spectral Density, 802.11n20 Middle Channel

Date: 25.FEB.2013 09:35:56

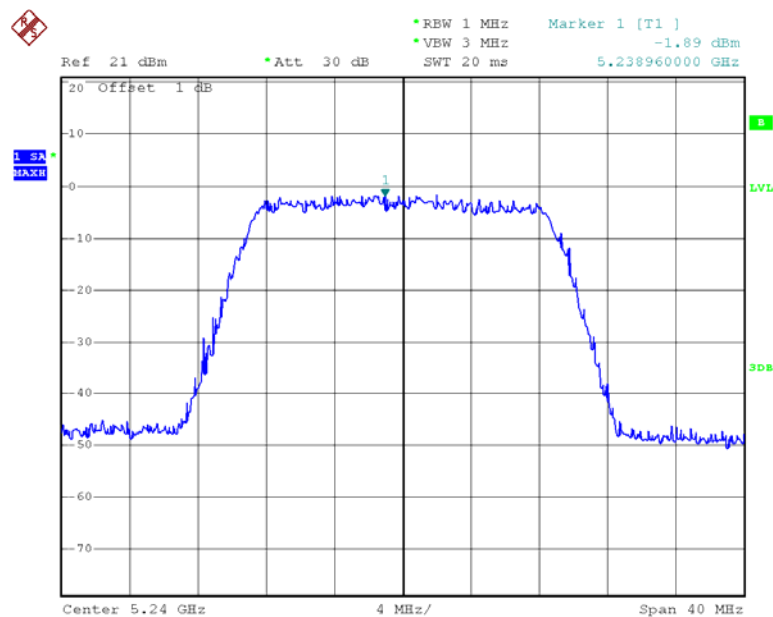Chain 2:Power Spectral Density, 802.11n20 High Channel


Date: 25.FEB.2013 09:59:01

Chain 2:Power Spectral Density, 802.11n40 Low Channel

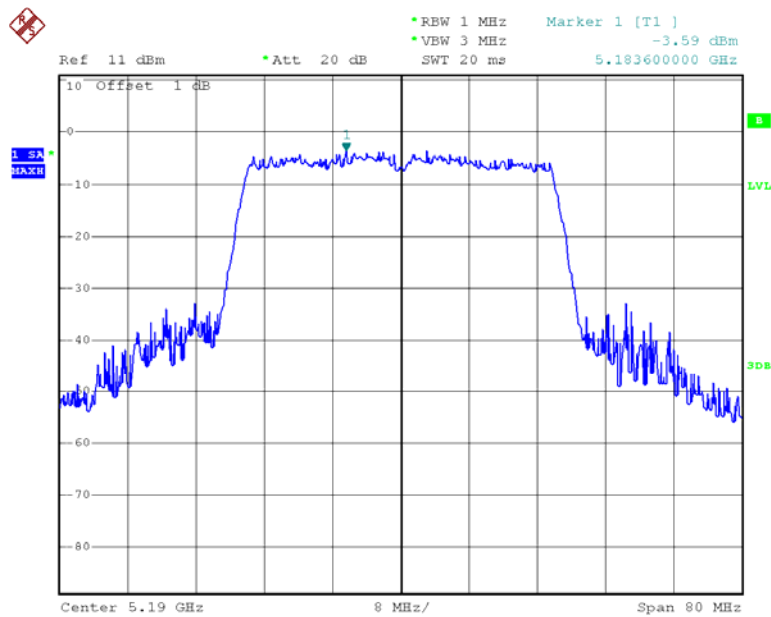


Date: 25.FEB.2013 10:21:37

Chain 2:Power Spectral Density, 802.11n40 High Channel

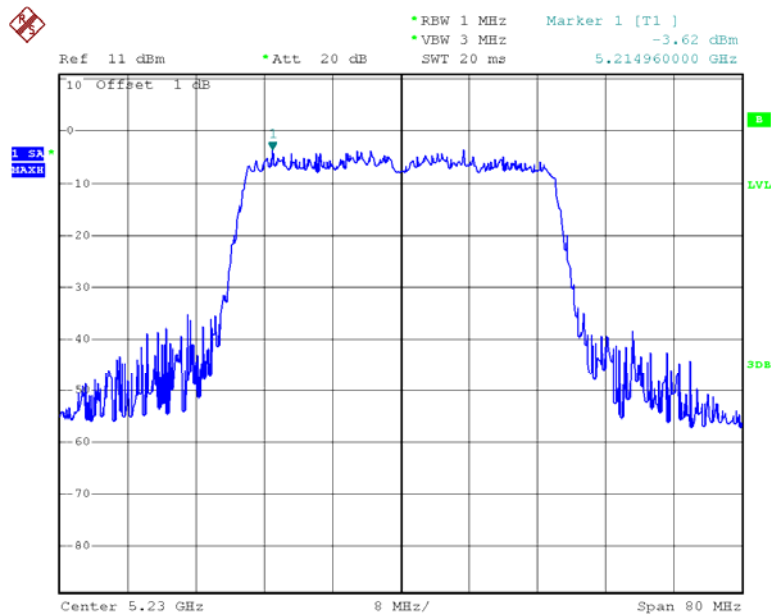


Date: 25.FEB.2013 10:44:24

Chain 2:Power Spectral Density, 802.11ac20 Low Channel

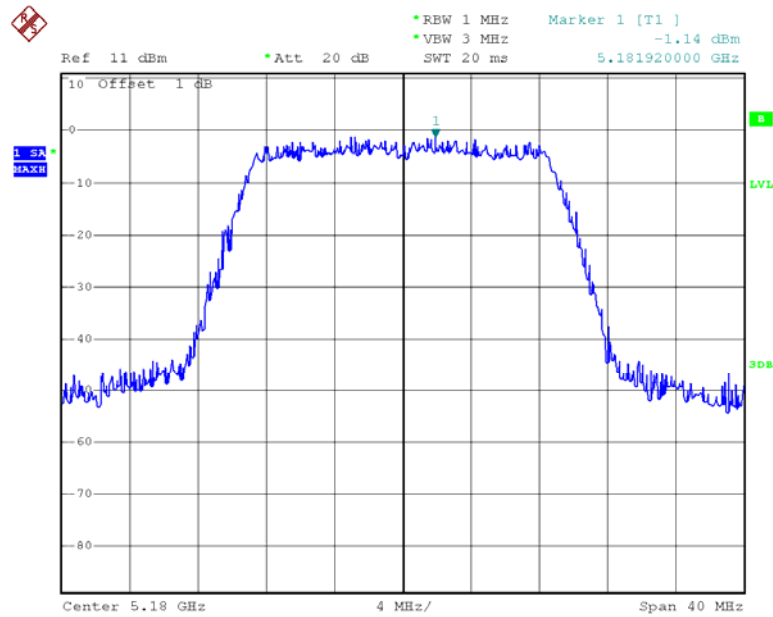


Date: 13.MAR.2013 18:47:22


Chain 2:Power Spectral Density, 802.11ac20 Middle Channel

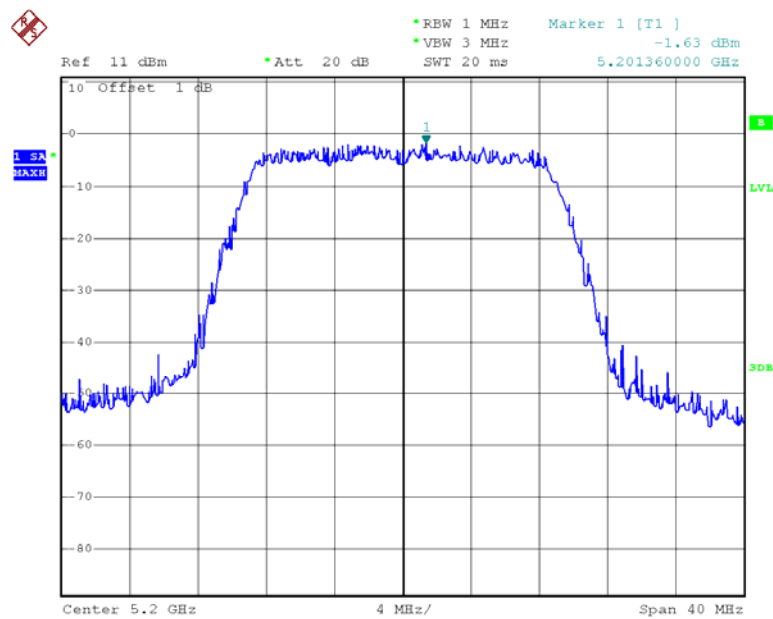


Date: 13.MAR.2013 19:00:25

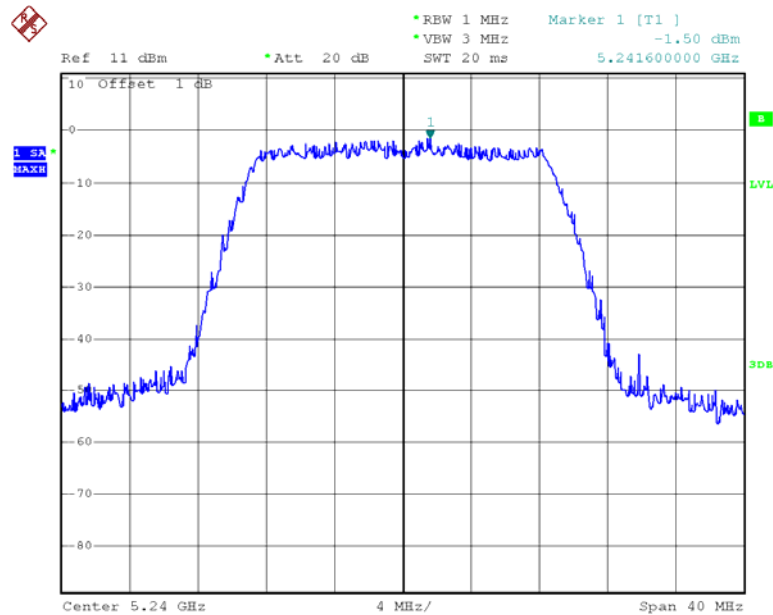Chain 2:Power Spectral Density, 802.11ac20 High Channel


Date: 13.MAR.2013 19:10:32

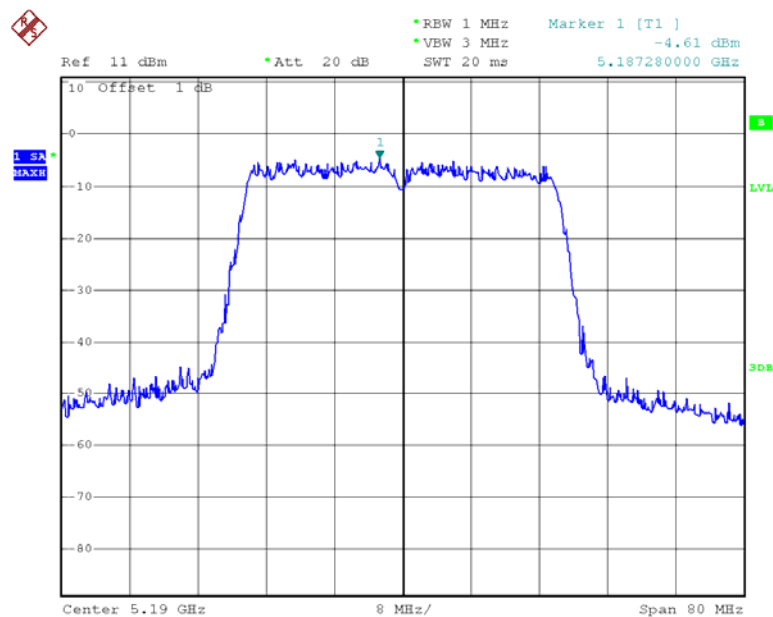Chain 2:Power Spectral Density, 802.11ac40 Low Channel

Date: 13.MAR.2013 19:27:02

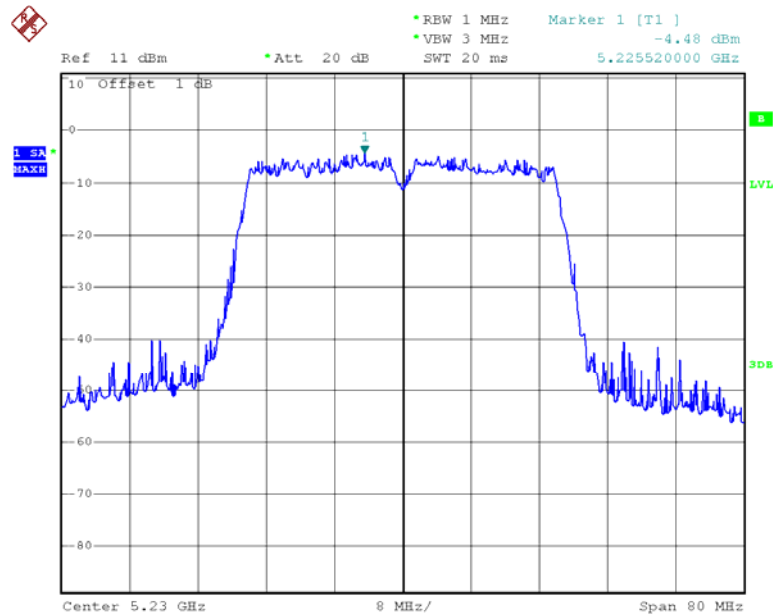Chain 2:Power Spectral Density, 802.11ac40 High Channel

Date: 13.MAR.2013 19:36:27

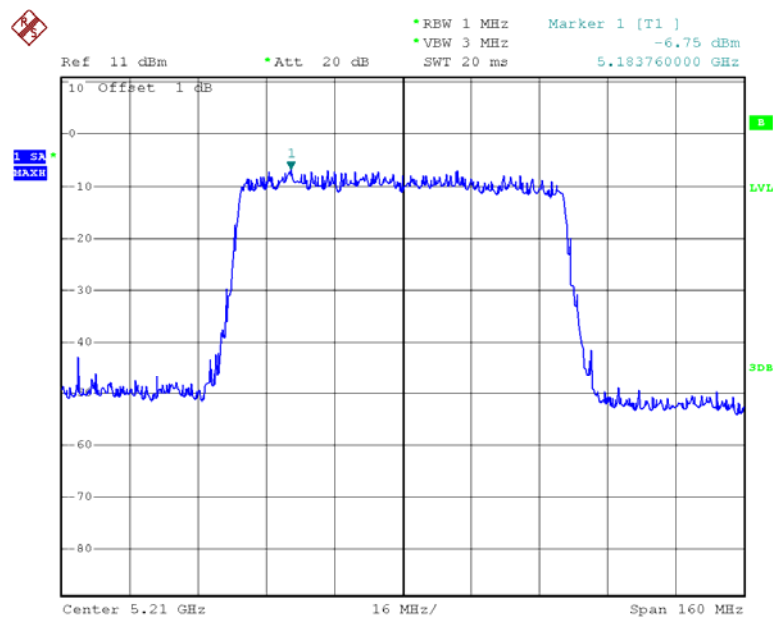Chain 2:Power Spectral Density, 802.11ac80 Low Channel

Date: 25.FEB.2013 10:55:38

FCC §15.407(a) (6) – PEAK EXCURSION RATIO

Applicable Standard

According to §15.407(a) (6), the ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

Test Procedure


Set the spectrum analyzer span to view the entire emission bandwidth.
The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW = 1 MHz, VBW ≥ 3 MHz with peak detector and maxhold settings.

2nd Trace:

- create the 2nd trace using the settings described in the setion “FCC §15.407(a)(1)(2) – CONDUCTED TRANSMITTER OUTPUT POWER”.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSP38	100478	2012-5-14	2013-5-13

Test Data

Environmental Conditions

Temperature:	23.4 ~26.8 °C
Relative Humidity:	29 ~63 %
ATM Pressure:	100.8 ~101.9kPa


The testing was performed by Leon Chen from 2013-02-23 to 2013-03-13.

Test Mode: Transmitting

Channel	Peak Excursion Ratio	Limit	Result
	(dB)	(dB)	
802.11a mode			
Low	2.15	13	PASS
Middle	2.87	13	PASS
High	2.43	13	PASS
Chain 0:802.11n20 mode			
Low	1.25	13	PASS
Middle	1.01	13	PASS
High	1.31	13	PASS
Chain 1:802.11n20 mode			
Low	1.01	13	PASS
Middle	1.43	13	PASS
High	1.04	13	PASS
Chain 2:802.11n20 mode			
Low	1.5	13	PASS
Middle	0.94	13	PASS
High	0.79	13	PASS
Chain 0:802.11n40 mode			
Low	0.8	13	PASS
High	0.94	13	PASS
Chain 1:802.11n40 mode			
Low	2.19	13	PASS
High	0.49	13	PASS
Chain 2:802.11n40 mode			
Low	1.92	13	PASS
High	1.78	13	PASS
Chain 0:802.11ac20 mode			
Low	1.34	13	PASS
Middle	1.04	13	PASS
High	1.14	13	PASS
Chain 1:802.11ac20 mode			
Low	1.41	13	PASS
Middle	0.50	13	PASS
High	1.01	13	PASS
Chain 2:802.11ac20 mode			
Low	0.26	13	PASS
Middle	1.37	13	PASS
High	1.08	13	PASS
Chain 0:802.11ac40 mode			
Low	1.20	13	PASS
High	1.14	13	PASS
Chain 1:802.11ac40 mode			
Low	0.82	13	PASS
High	1.14	13	PASS
Chain 2:802.11ac40 mode			
Low	1.07	13	PASS
High	0.86	13	PASS


Chain 0:802.11ac80 mode			
Low	1.17	13	PASS
Chain 1:802.11ac80 mode			
Low	1.54	13	PASS
Chain 2:802.11ac80 mode			
Low	0.78	13	PASS

802.11a Peak Excursion, Low Channel

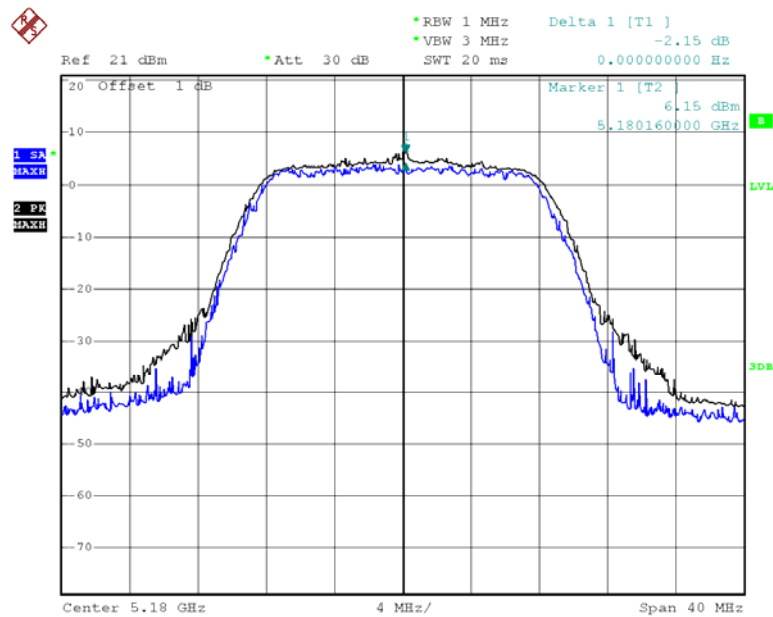


Date: 23.FEB.2013 16:39:25

802.11a Peak Excursion, Middle Channel

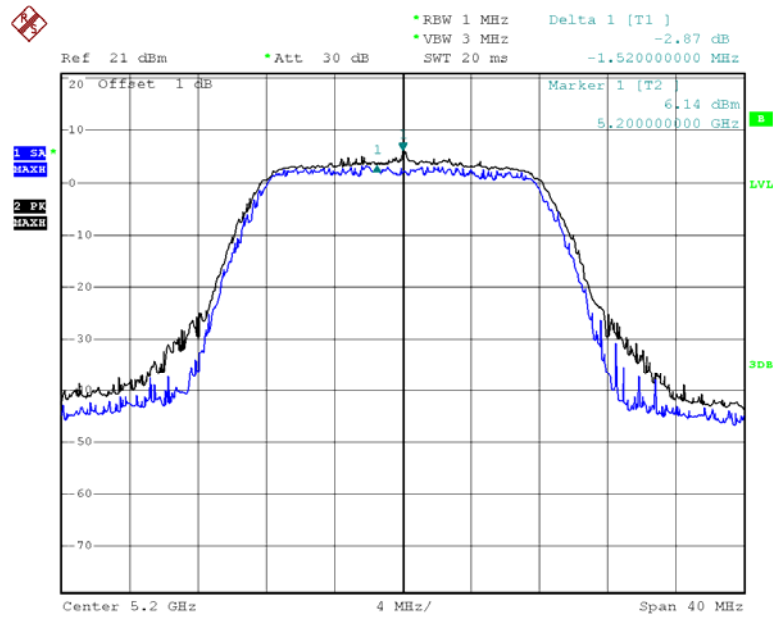


Date: 23.FEB.2013 17:08:32

802.11a Peak Excursion, High Channel

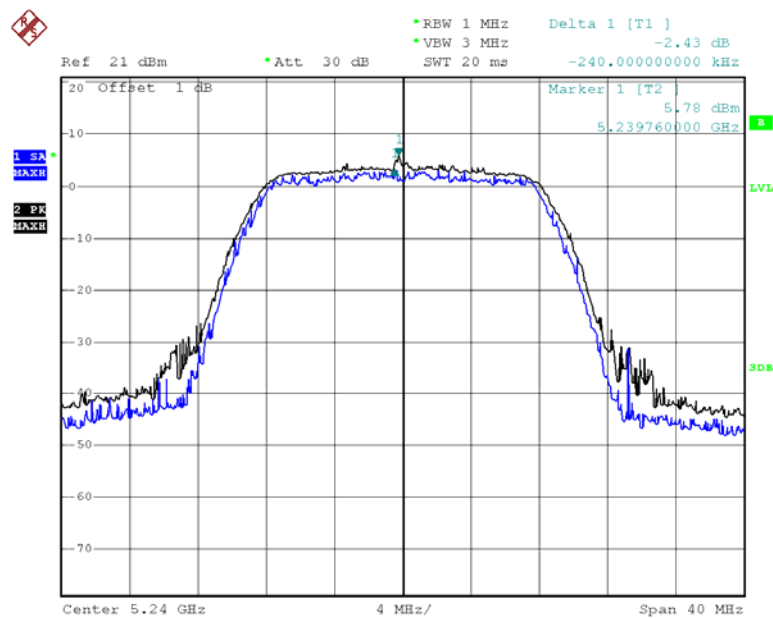


Date: 23.FEB.2013 17:14:34

Chain 0:802.11 n20 Peak Excursion, Low Channel

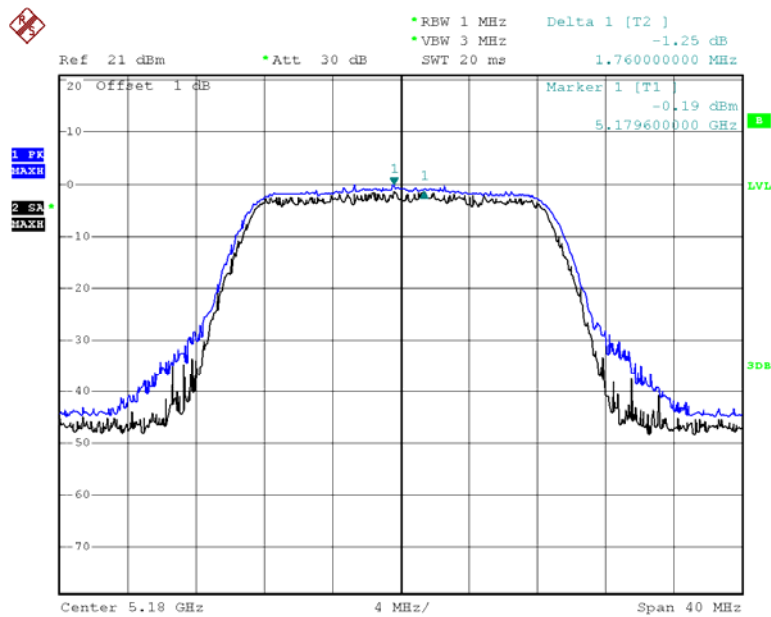


Date: 23.FEB.2013 17:37:54

Chain 0:802.11 n20 Peak Excursion, Middle Channel

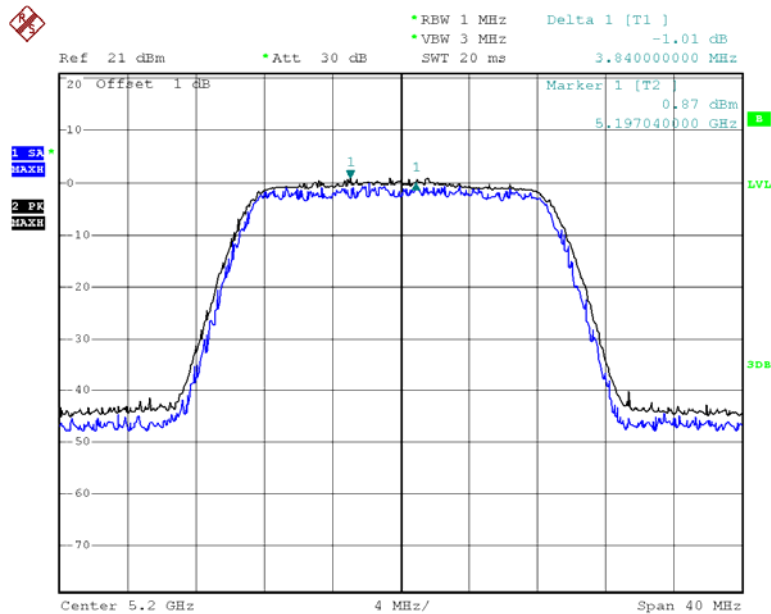


Date: 25.FEB.2013 10:02:42

Chain 0:802.11 n20 Peak Excursion, High Channel

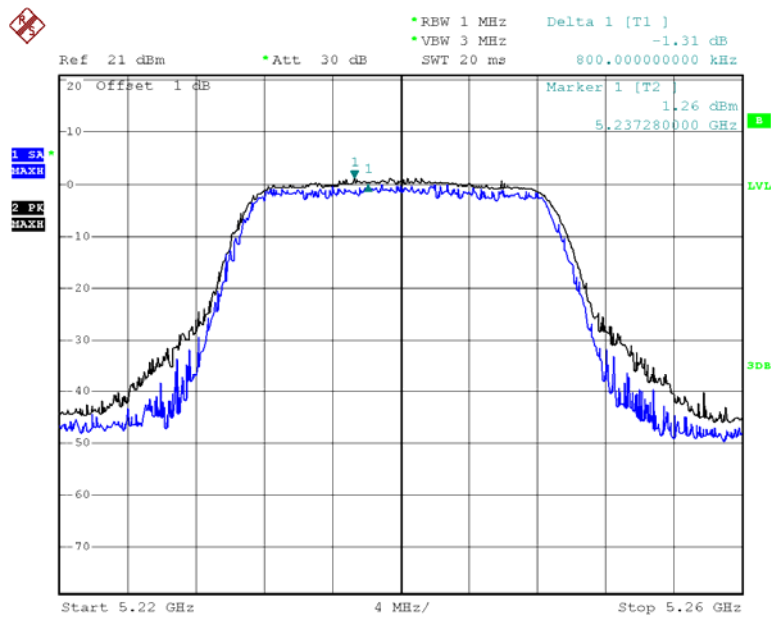


Date: 25.FEB.2013 10:01:08

Chain 0:802.11 n40 Peak Excursion, Low Channel

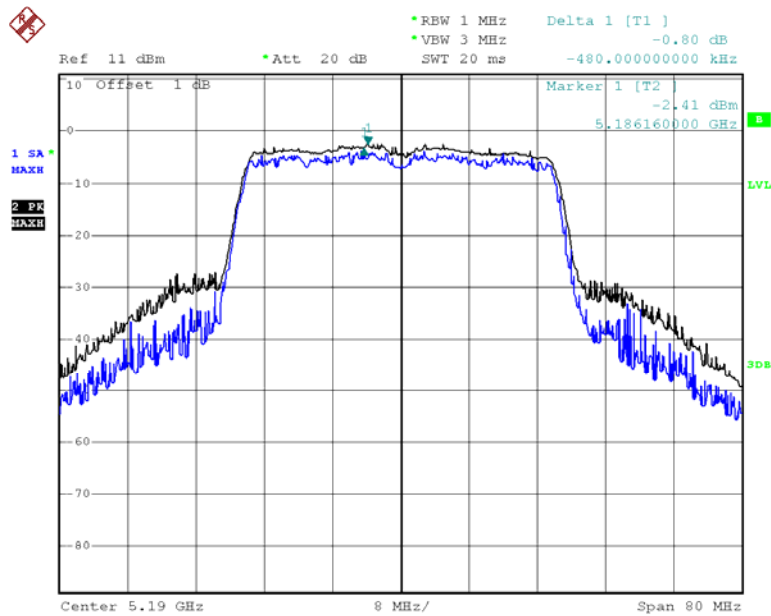


Date: 25.FEB.2013 10:22:11

Chain 0:802.11 n40 Peak Excursion, High Channel

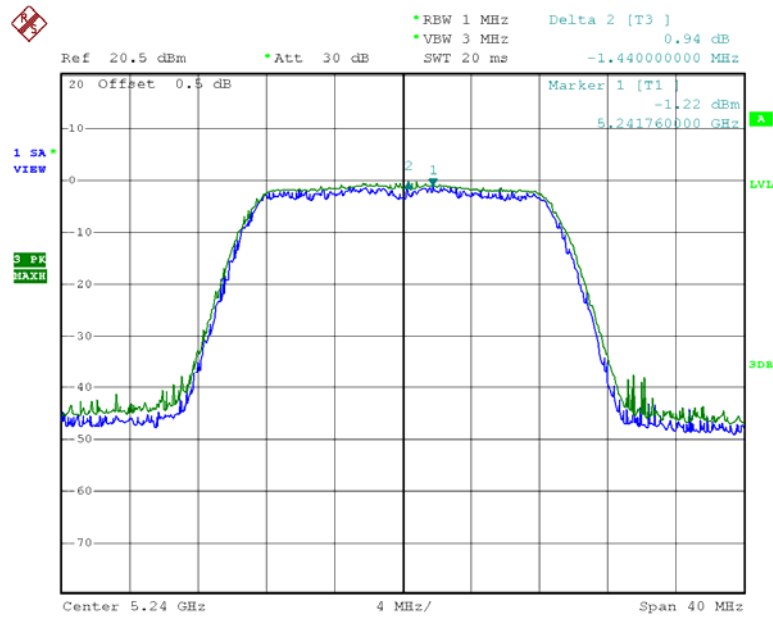


Date: 1.MAR.2013 09:29:59

Chain 0:802.11 ac20 Peak Excursion, Low Channel

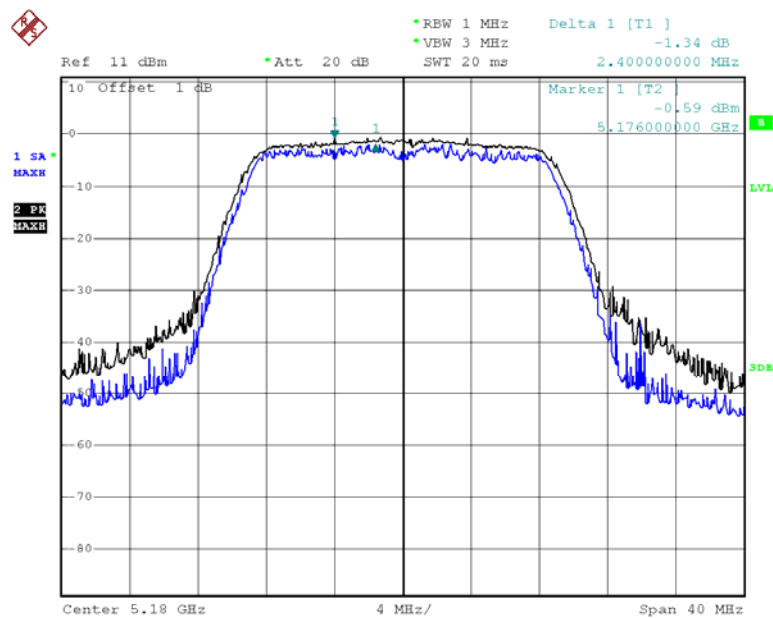


Date: 13.MAR.2013 19:07:28

Chain 0:802.11 ac20 Peak Excursion, Middle Channel

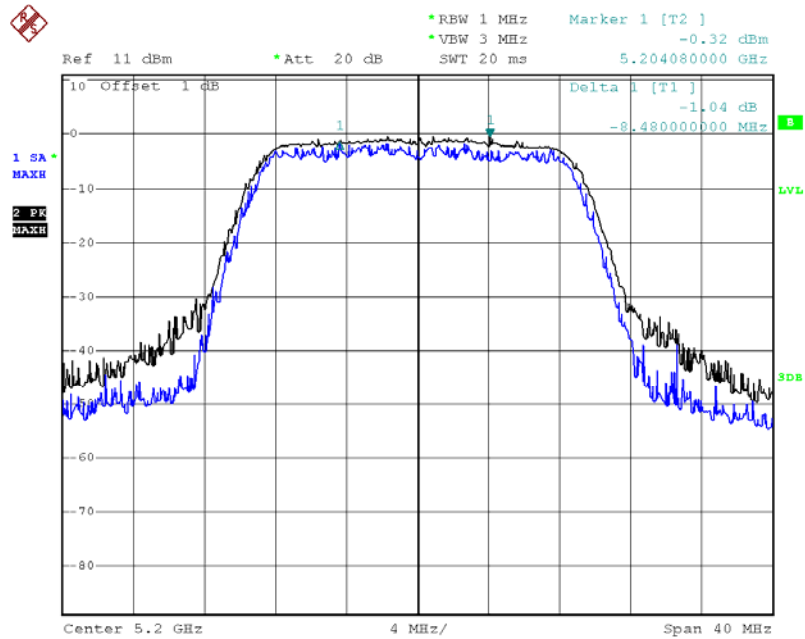


Date: 13.MAR.2013 19:02:01

Chain 0:802.11 ac20 Peak Excursion, High Channel

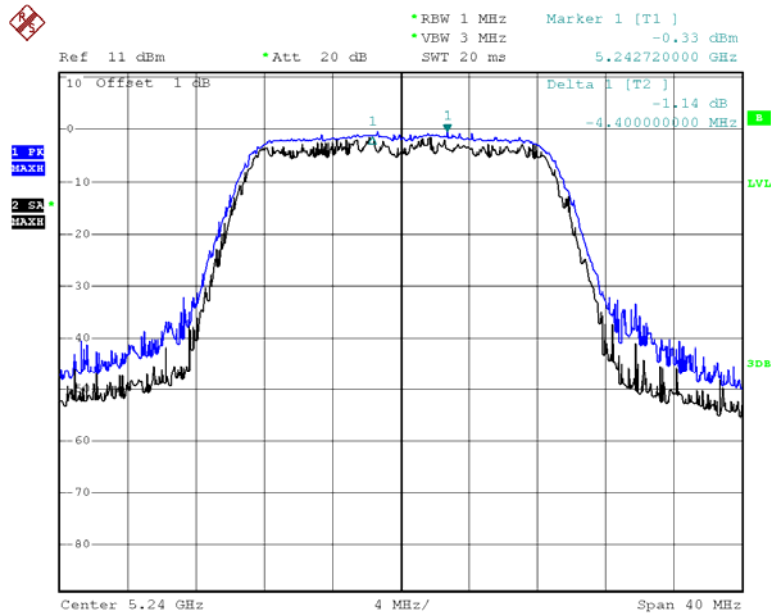


Date: 13.MAR.2013 19:16:37

Chain 0:802.11 ac40 Peak Excursion, Low Channel

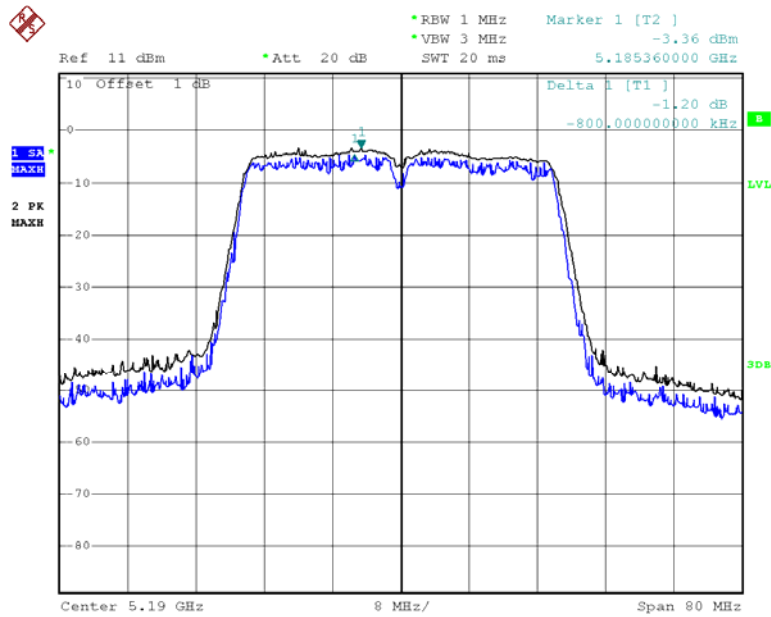


Date: 13.MAR.2013 19:28:24


Chain 0:802.11 ac40 Peak Excursion, High Channel

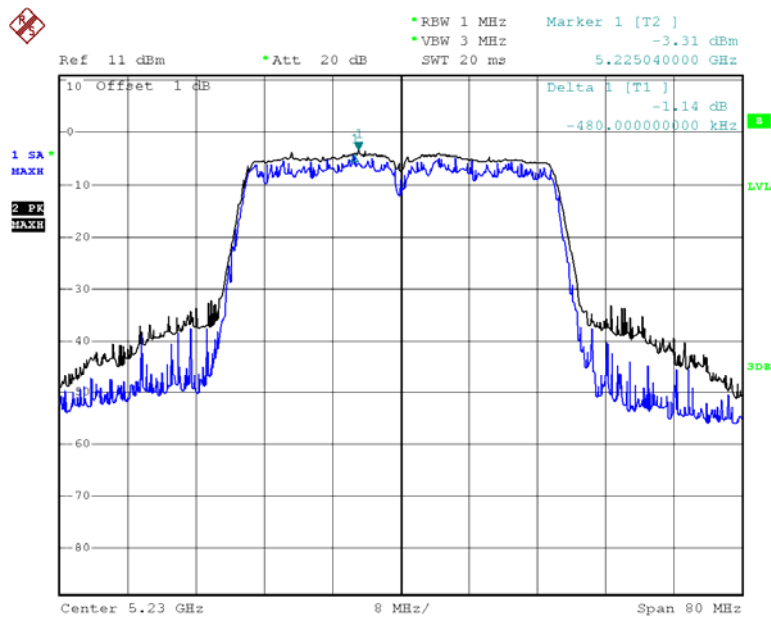

Date: 13.MAR.2013 19:37:45

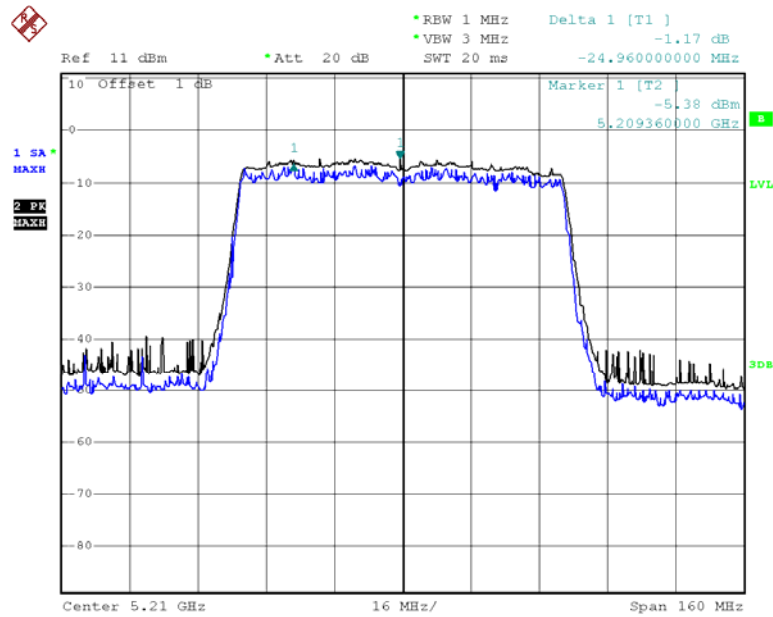
Chain 0:802.11 ac80 Peak Excursion

Date: 25.FEB.2013 10:56:11

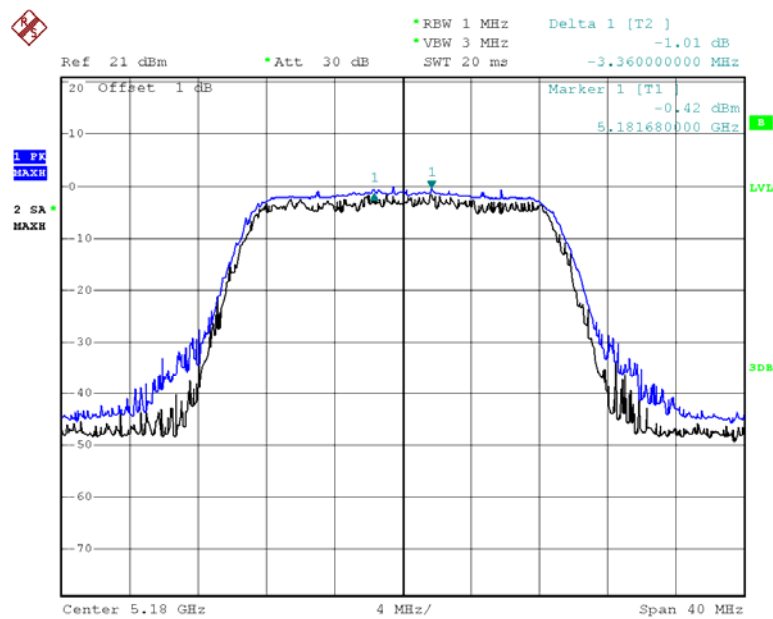Chain 1:802.11 n20 Peak Excursion, Low Channel


Date: 23.FEB.2013 17:38:19

Chain 1:802.11 n20 Peak Excursion, Middle Channel

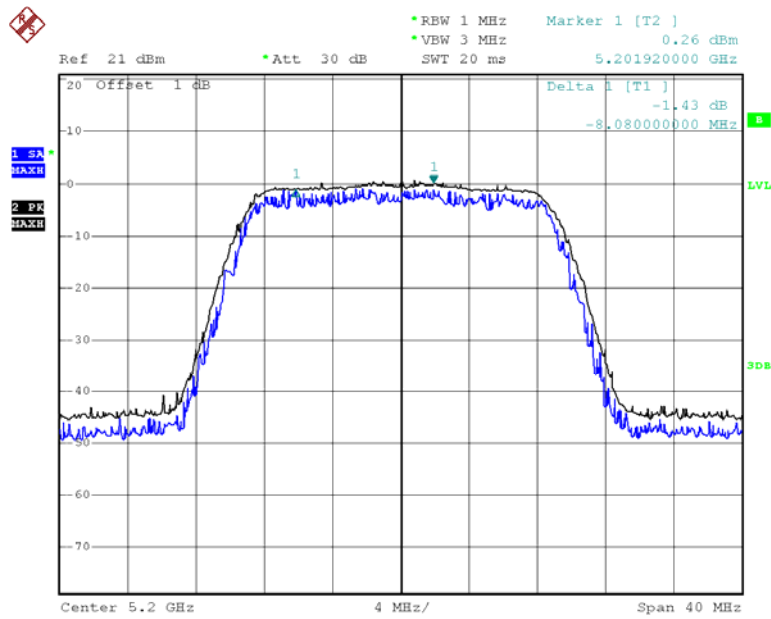


Date: 25.FEB.2013 10:02:55


Chain 1:802.11 n20 Peak Excursion, High Channel

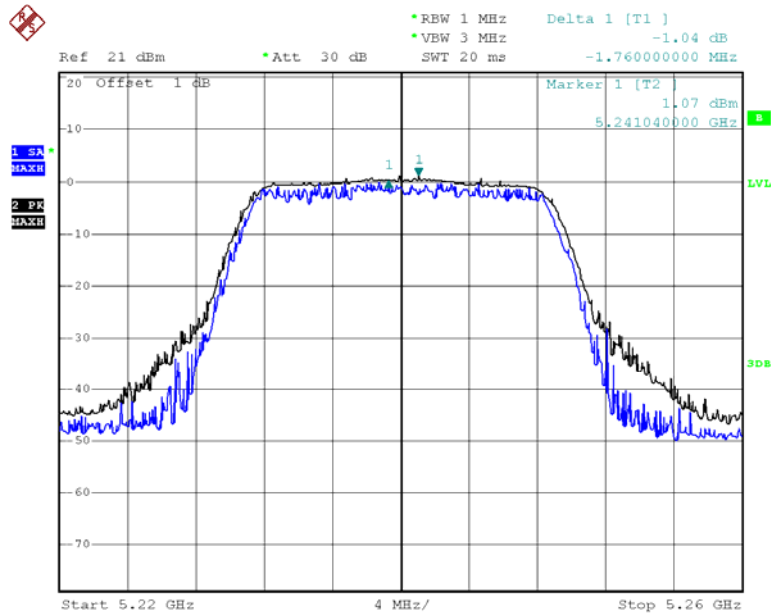


Date: 25.FEB.2013 10:01:28

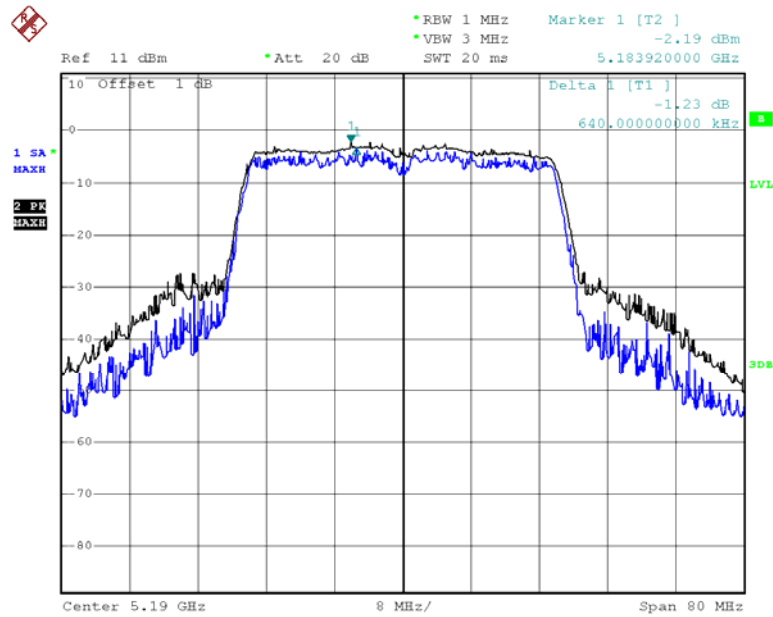Chain 1:802.11 n40 Peak Excursion, Low Channel


Date: 25.FEB.2013 10:22:32

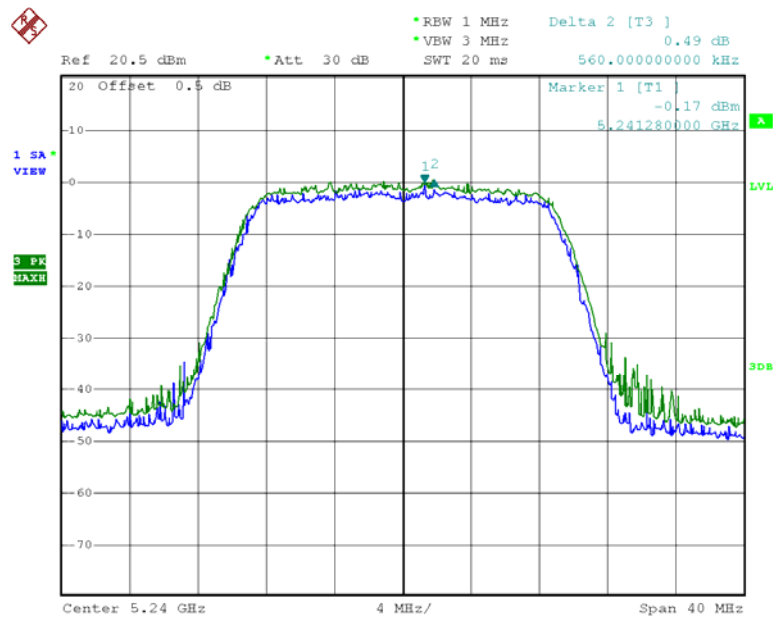Chain 1:802.11 n40 Peak Excursion, High Channel

Date: 1.MAR.2013 10:40:25

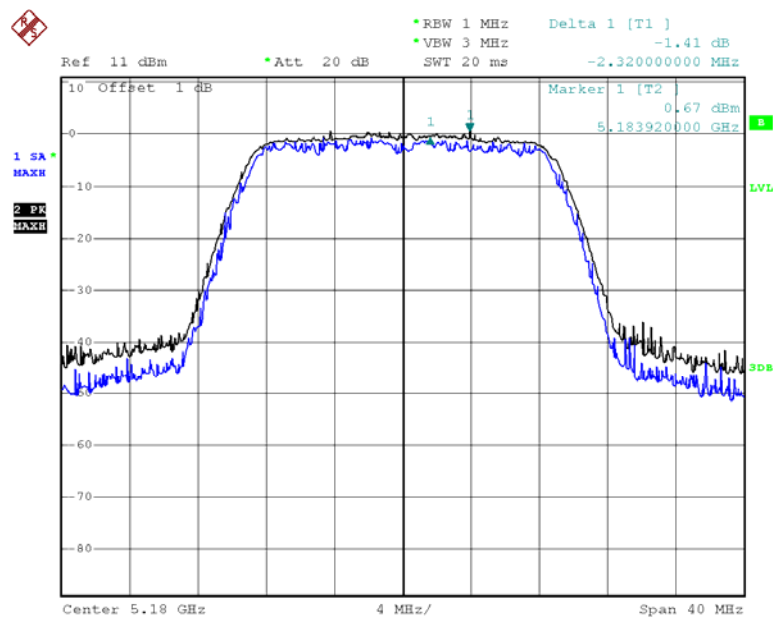
Chain 1:802.11 ac20 Peak Excursion, Low Channel

Date: 13.MAR.2013 18:49:20

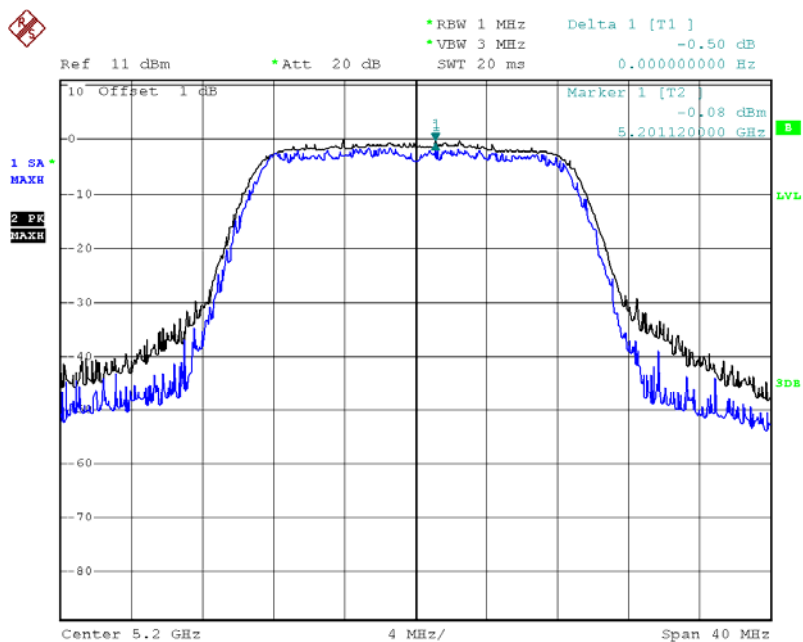Chain 1:802.11 ac20 Peak Excursion, Middle Channel


Date: 13.MAR.2013 19:01:19

Chain 1:802.11 ac20 Peak Excursion, High Channel

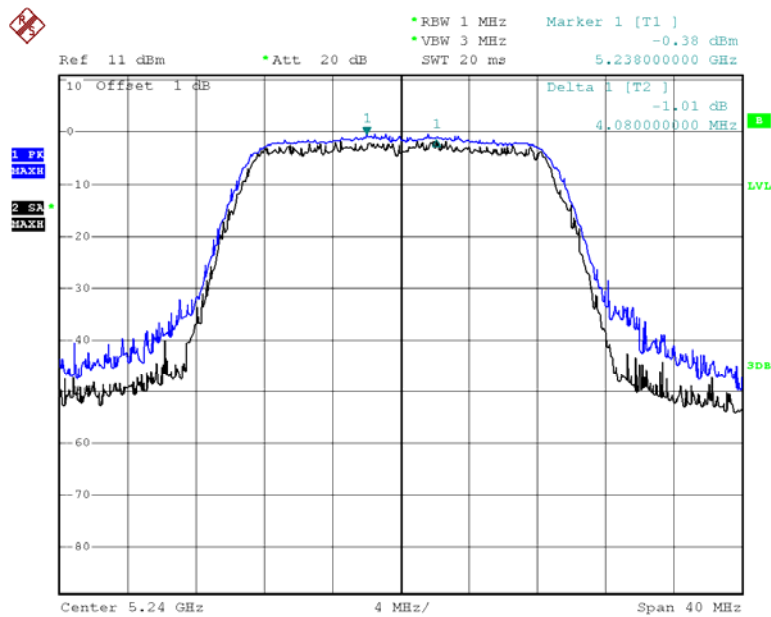


Date: 13.MAR.2013 19:16:03

Chain 1:802.11 ac40 Peak Excursion, Low Channel

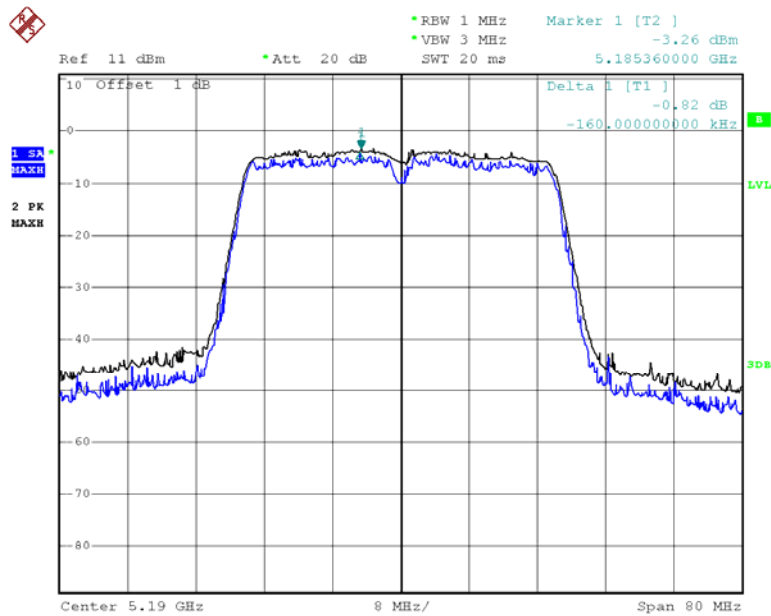


Date: 13.MAR.2013 19:27:51

Chain 1:802.11 ac40 Peak Excursion, High Channel

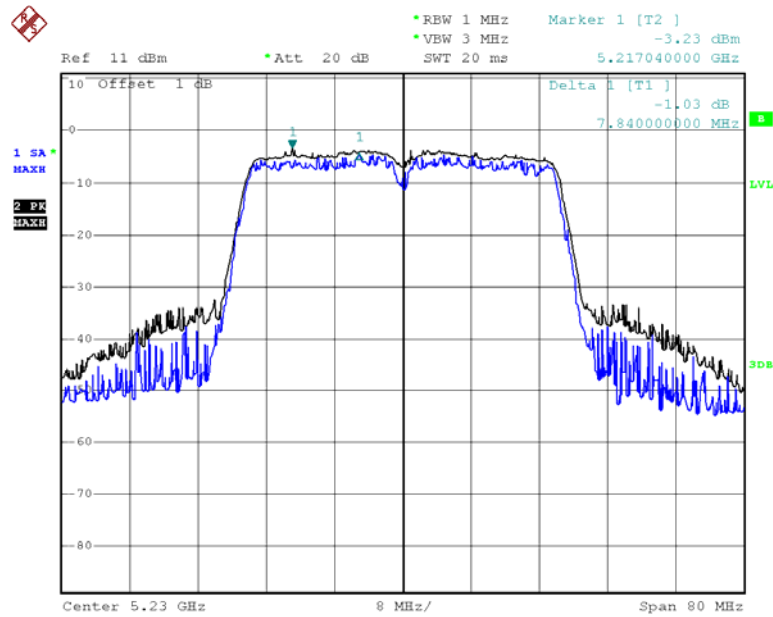


Date: 13.MAR.2013 19:37:08

Chain 1:802.11 ac80 Peak Excursion

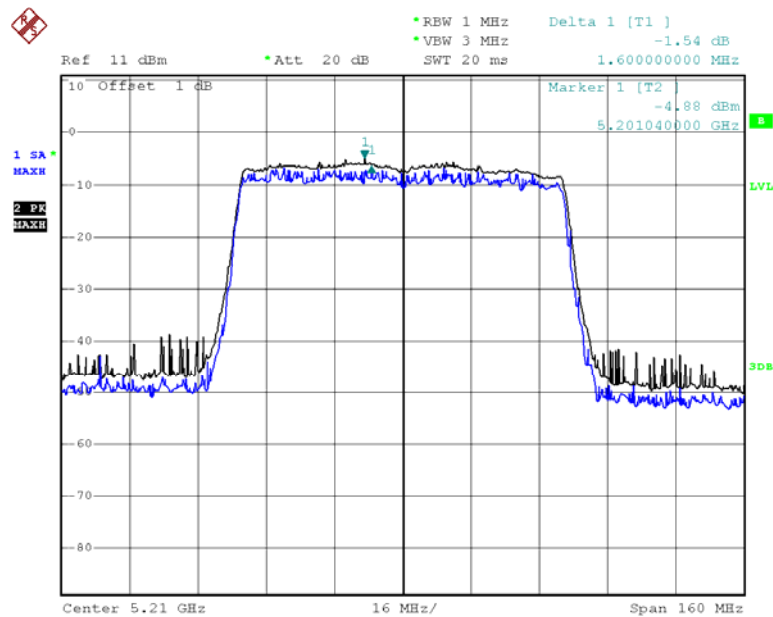


Date: 25.FEB.2013 10:56:40

Chain 2:802.11 n20 Peak Excursion, Low Channel

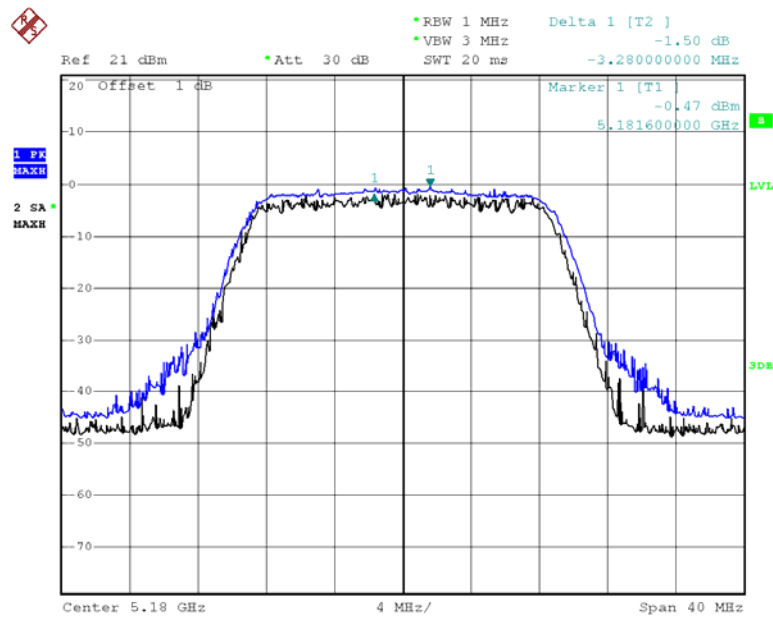


Date: 23.FEB.2013 17:38:43

Chain 2:802.11 n20 Peak Excursion, Middle Channel

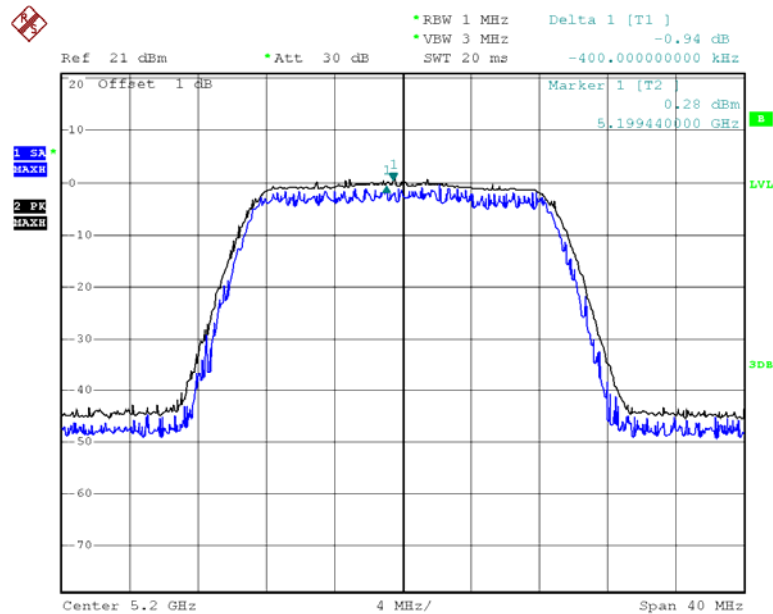


Date: 25.FEB.2013 10:03:08

Chain 2:802.11 n20 Peak Excursion, High Channel

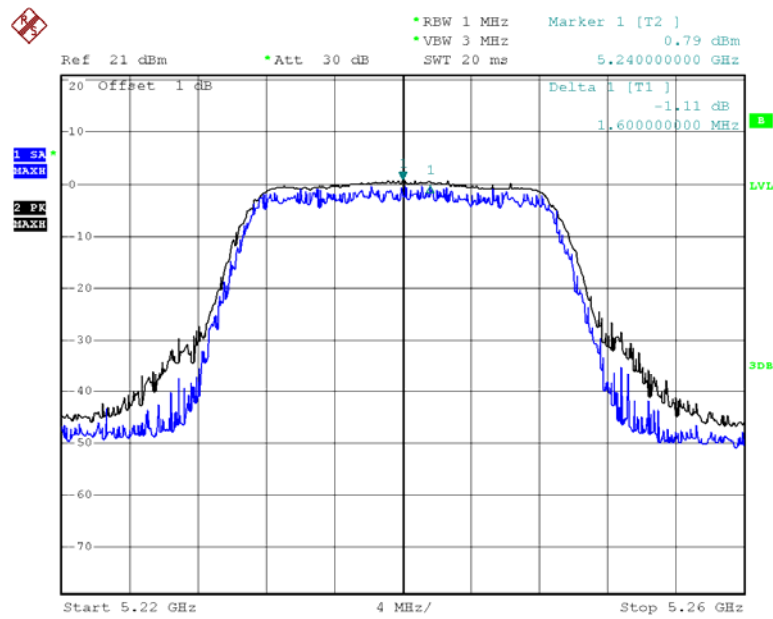


Date: 25.FEB.2013 10:01:51

Chain 2:802.11 n40 Peak Excursion, Low Channel

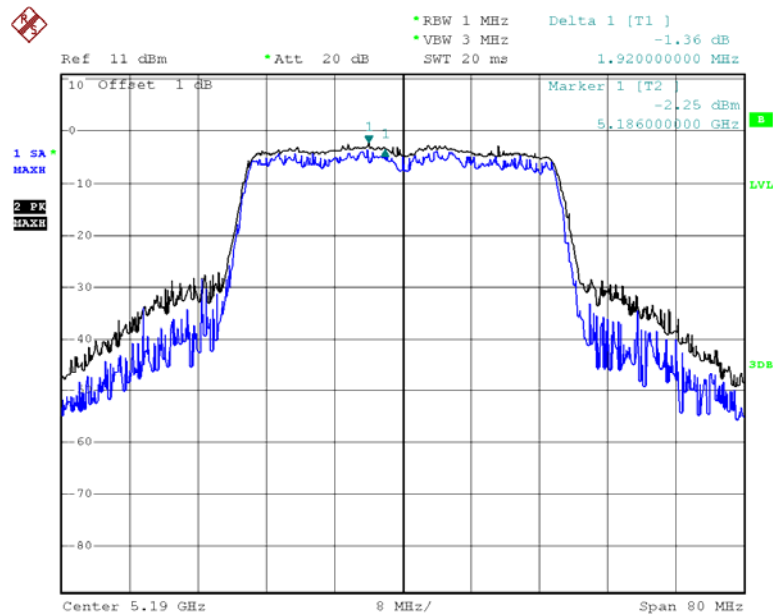


Date: 25.FEB.2013 10:22:54

Chain 2:802.11 n40 Peak Excursion, High Channel

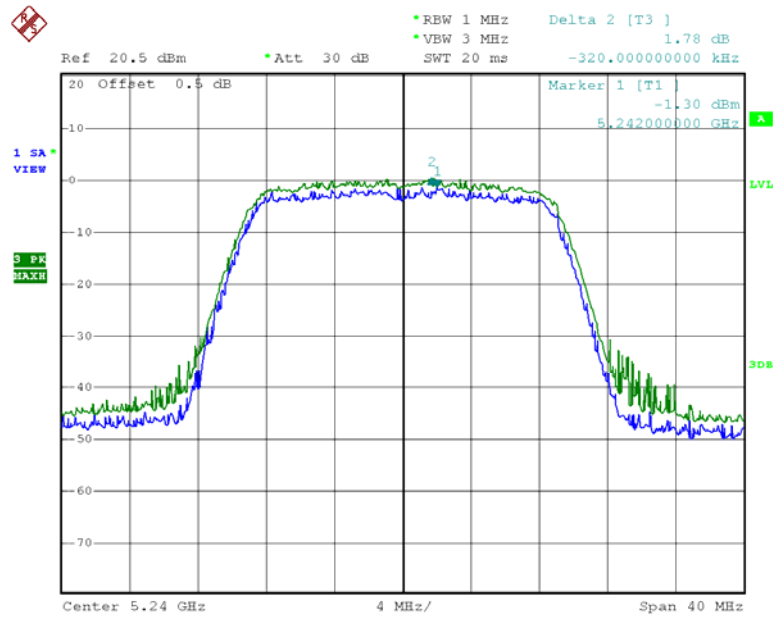


Date: 1.MAR.2013 10:36:56

Chain 2:802.11 ac20 Peak Excursion, Low Channel

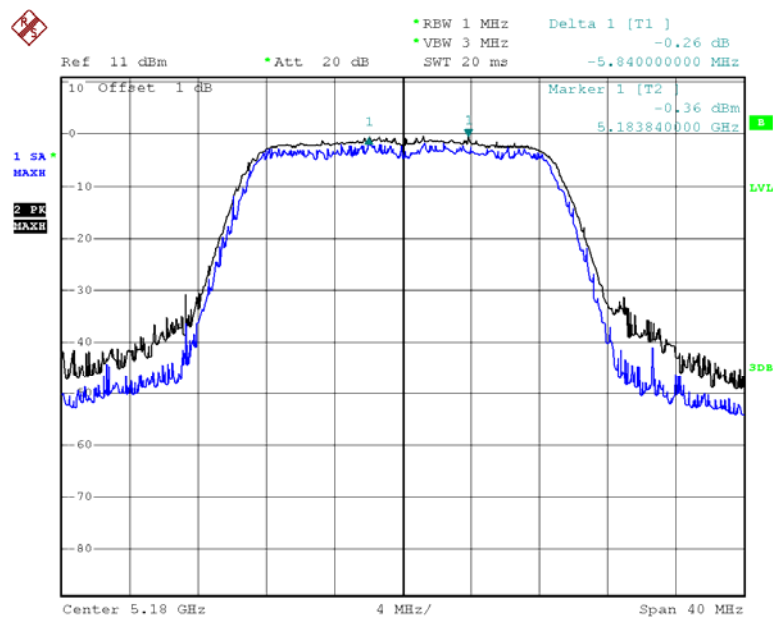


Date: 13.MAR.2013 19:07:04

Chain 2:802.11 ac20 Peak Excursion, Middle Channel

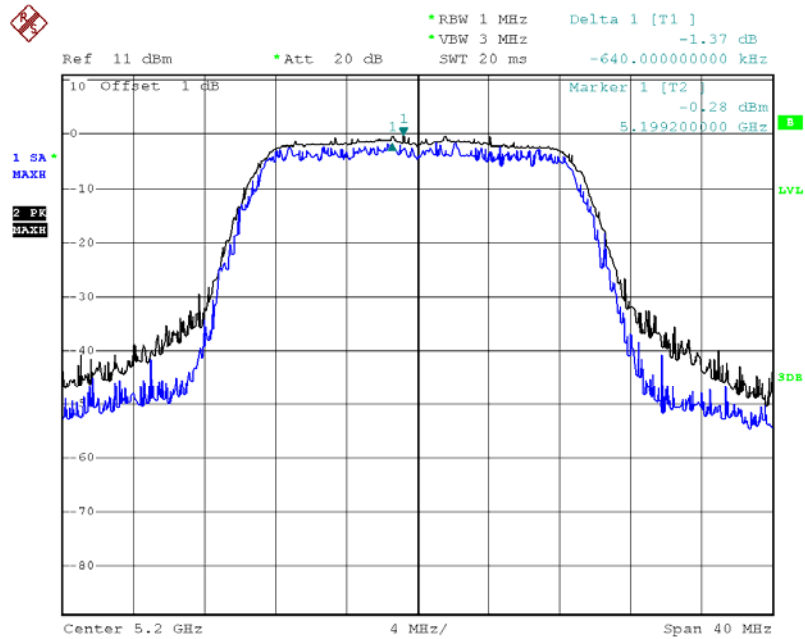


Date: 13.MAR.2013 19:01:43

Chain 2:802.11 ac20 Peak Excursion, High Channel

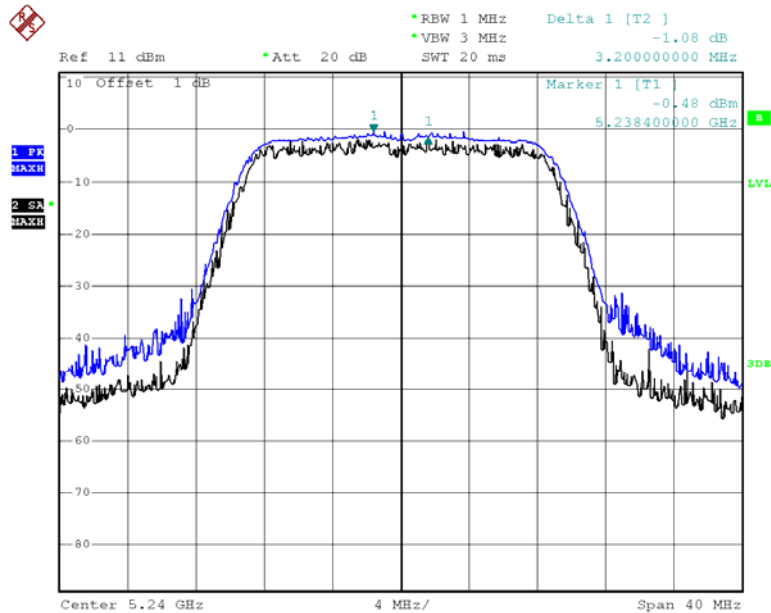


Date: 13.MAR.2013 19:16:20

Chain 2:802.11 ac40 Peak Excursion, Low Channel

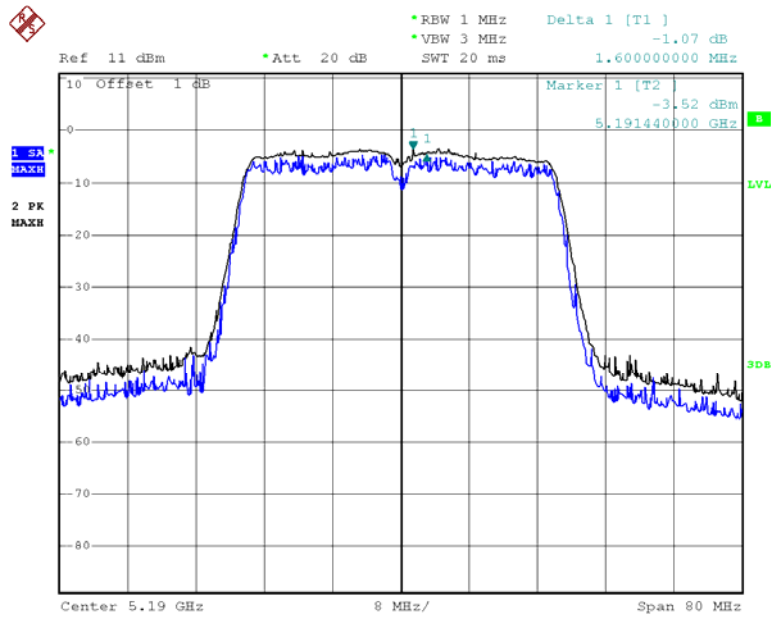


Date: 13.MAR.2013 19:28:06

Chain 2:802.11 ac40 Peak Excursion, High Channel

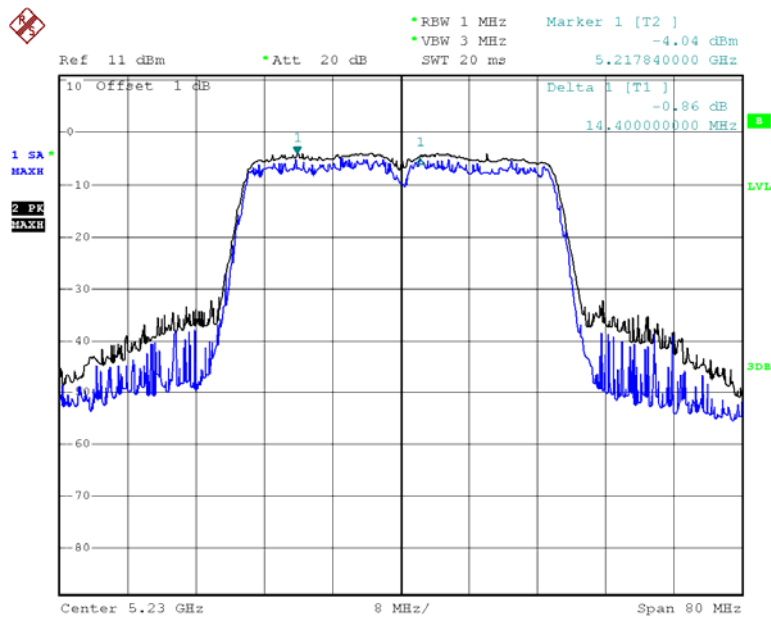

Date: 13.MAR.2013 19:37:29

Chain 2:802.11 ac80 Peak Excursion

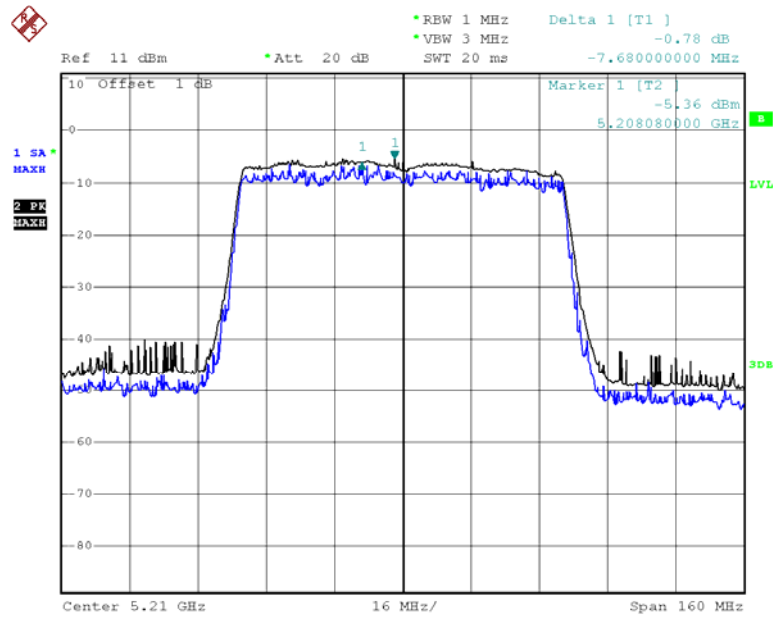

Date: 25.FEB.2013 10:57:02

***** END OF REPORT *****