



**CONFORMANCE TEST REPORT
FOR
FCC 47 CFR, Part 15 Subpart B & Subpart C**

Report No.: 07-03-MAS-166-02

Client: Boryeu Technology Co., Ltd
Product: Long Range RFID System
Model: PC-1015CR
FCC ID: VALPC-1015P
Manufacturer/supplier: Boryeu Technology Co., Ltd

Date test item received: 2007/03/20
Date test campaign completed: 2007/04/19
Date of issue: 2007/05/07

The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 25 pages

*Total number of pages of photos: External photos 1 pages
Internal photos 2 pages
Setup photos 2 pages*

Test Engineer	Checked By	Approved By
Eric Lin	James	Joe Hsieh

ELECTRONICS TESTING CENTER, TAIWAN
NO.8, LANE 29, WENMING RD.,
LESHAN TSUEN, GUISHAN SHIANG,
TAOYUAN COUNTY, TAIWAN 33383, R.O.C.

TEL: (03) 3276170~4
INT: +886-3-3276170~4
FAX: (03) 3276188
INT: +886-3-3276188



Client : Boryeu Technology Co., Ltd
Address : 6F-2, No.189, Sec.2, Keelung Rd., Sinyi District, Taipei City 110, Taiwan.
Manufacturer : Boryeu Technology Co., Ltd
Address : 6F-2, No.189, Sec.2, Keelung Rd., Sinyi District, Taipei City 110, Taiwan.
EUT : Long Range RFID System
Trade name : PC-SAFE
Model No. : PC-1015CR
Power Source : 6V DC
Regulations applied : FCC 47 CFR, Part 15 Subpart B & Subpart C (2006)
Test Specifications : Class B

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. It's not intention to assure the quality and performance of the product. This report shall not be reproduced except in full, without the approval of ETC. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: Electronics Testing Center, Taiwan is recognized, filed and mutual recognition arrangement as following:

- ① ISO9001: TÜV Product Service
- ② ISO/IEC 17025: BSMI, CNLA, DGT, NVLAP, CCIBLAC, UL, Compliance
- ③ Filing: FCC, Industry Canada, VCCI
- ④ MRA: Australia, Hong Kong, New Zealand, Singapore, USA, Japan, Korea, China, APLAC through CNLA
- ⑤ FCC Registration Number: 90588, 91094, 91095



NVLAP Lab Code 200133-0

*Table of Contents**Page*

	<i>Page</i>
1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 CHARACTERISTICS OF DEVICE:	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
2. DEFINITION AND LIMITS.....	5
2.1 DEFINITION	5
2.2 RESTRICTED BANDS OF OPERATION.....	5
2.3 LIMITATION.....	6
2.4 LABELING REQUIREMENT	7
2.5 USER INFORMATION.....	7
3. SYSTEM TEST CONFIGURATION.....	8
3.1 EUT CONFIGURATION AND OPERATING	8
3.2 DEVICES FOR TESTED SYSTEM	8
3.3 DEVIATION STATEMENT	8
3.4 MODIFICATION RECORD	8
4. RADIATED EMISSION MEASUREMENT	9
4.1 APPLICABLE STANDARD.....	9
4.2 MEASUREMENT PROCEDURE	9
4.3 TEST DATA	11
4.4 FIELD STRENGTH CALCULATION.....	14
4.5 RADIATED TEST EQUIPMENT	14
4.6 MEASURING INSTRUMENT SETUP.....	20
5. BANDWIDTH OF EMISSION.....	21
5.1 APPLICABLE STANDARD PLOT GRAPHIC OF BANDWIDTH	21
5.2 TEST EQUIPMENT.....	21
5.3 TEST RESULT	21
6. CONDUCTED EMISSION MEASUREMENT	23
7. LIMIT OF TRANSMISSION TIME.....	24
7.1 APPLICABLE STANDARD.....	24
7.2 ACTIVE TIME	24

1. GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Long Range RFID System
- b) Model No. : PC-1015CR
- c) Serial No. : -----
- d) FCC ID : VALPC-1015P
- e) Working Frequency : 433.92 MHz

1.2 Characteristics of Device:

The EUT is a RFID card of Long Range RFID System. The system are used in vehicle and personnel access control. The RFID card transmits the signal to the reader by 433.92 MHz and receives the signal from the reader by 125 kHz.

1.3 Test Methodology

Both Conducted and radiated testing were performed according to the procedures in chapter 7 and chapter 8 of ANSI C63.4 (2003).

The equipment under test was operated continuously in its normal operating mode for the purpose of the measurements. In order to secure the continuous operation of the device under test, the circuit rewired by the manufacturer to affect its intended operation. The receiving antenna was varied from 1 to 4 meters and the wooden turntable was rotated through 360 degrees to obtain the highest reading on the field strength meter or on the display of the spectrum analyzer. And also, each emission was to be maximized by changing the orientation of the equipment transmitter under test.

1.4 Test Facility

The semi-anechoic chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wen-ming Road, Lo-shan Tsun, Kweishan Hsiang, Taoyuan, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

2. DEFINITION AND LIMITS

2.1 Definition

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Remark “**” : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.3 Limitation

(1) Conducted Emission Limits :

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the conducted limit is the following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56	56-46
0.5 - 5.0	56	46
5.0 - 30.0	60	50

(2) Radiated Emission Limits :

According to 15.231 ,Periodic operation in the band 40.66-40.70 MHz and above 70 MHz, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Frequency Band (MHz)	Field strength of Fundamental (uV/m)	Field strength of Spurious (uV/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	*1,250 to 3,750	*125 to 375
174-260	3750	375
260-470	*3,750 to 12,500	*375 to 1250
Above 470	12500	1250

* Linear interpolations.

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209,as following table:

Other Frequencies (MHz)	Field Strength of Fundamental μ V/meter	dB μ V/meter
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

(3) Limit of transmission time

- a) A manually operated equipment transmitter shall employ a switch that will automatically deactivate the equipment transmitter within not more than 5 seconds of being released.
- b) The equipment transmitter activated automatically shall cease transmission within 5 seconds after activation.

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

To comply with the FCC RF exposure compliance requirement, this device and its antenna must not be co-located or operating to conjunction with any other antenna or transmitter.

3. SYSTEM TEST CONFIGURATION

3.1 EUT configuration and operating

Test operation mode: (1) 433 MHz Transmitting Mode.
(2) 125 kHz Receive Mode.

3.2 Devices for Tested System

Description	Manufacturer	Model No.	I/O Cable
* Long Range RFID System	Boryeu Technology Co., Ltd	PC-1015CR	----

“*” means Equipment Under Test

3.3 Deviation Statement

(If any deviation from additions to or exclusions from test method must be stated)

N/A

3.4 Modification Record

N/A

4. RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For periodic operation intentional radiator, the radiated emission shall comply with § 15.231(b).

4.2 Measurement Procedure

A. Preliminary Measurement For Portable Devices.

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions and then each selected frequency is precisely measured. As the same purpose, for emission measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

Figure 1: Frequencies measured 30MHz ~ 1GHz configuration

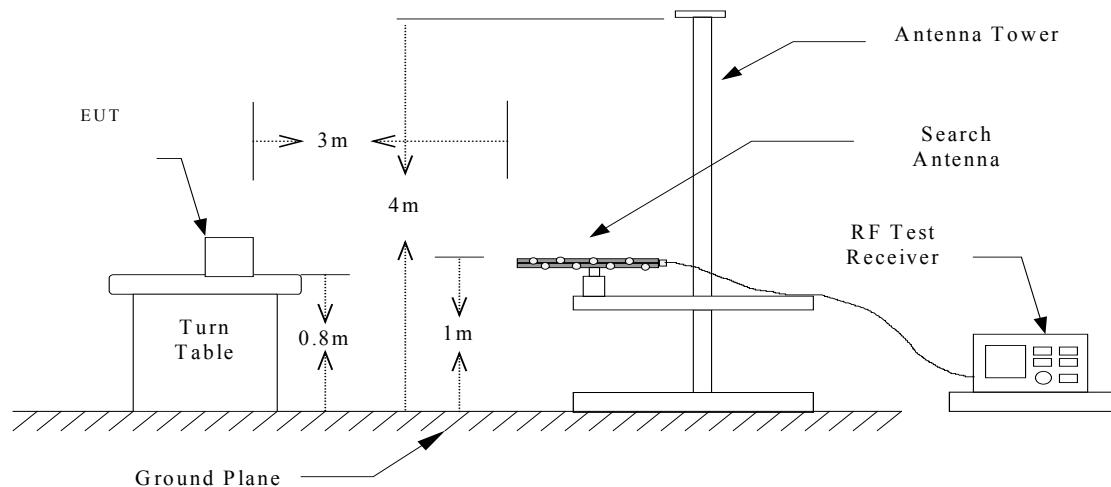


Figure 2 : Frequencies measured above 1 GHz configuration


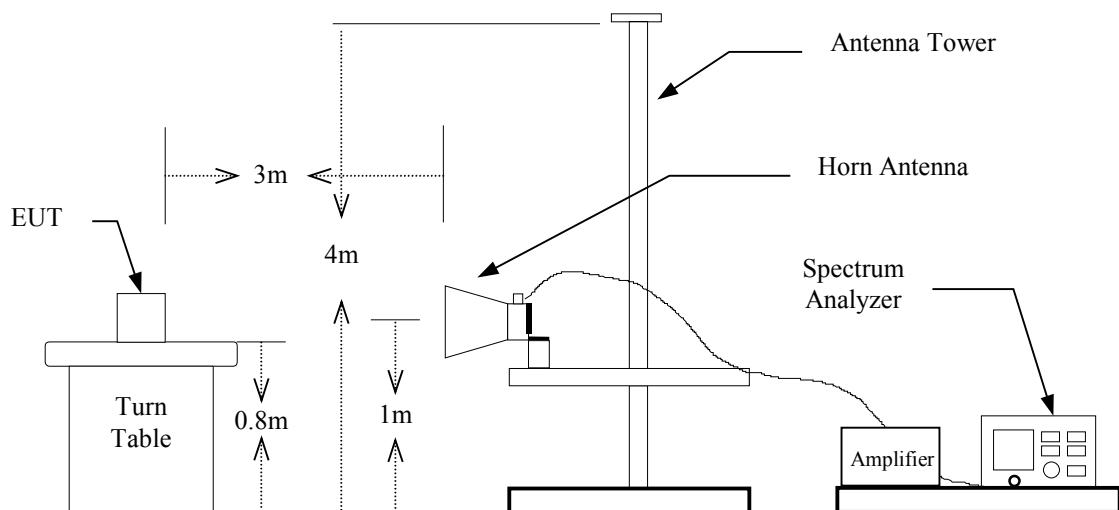


Figure 3 : Frequencies measured below 30MHz configuration

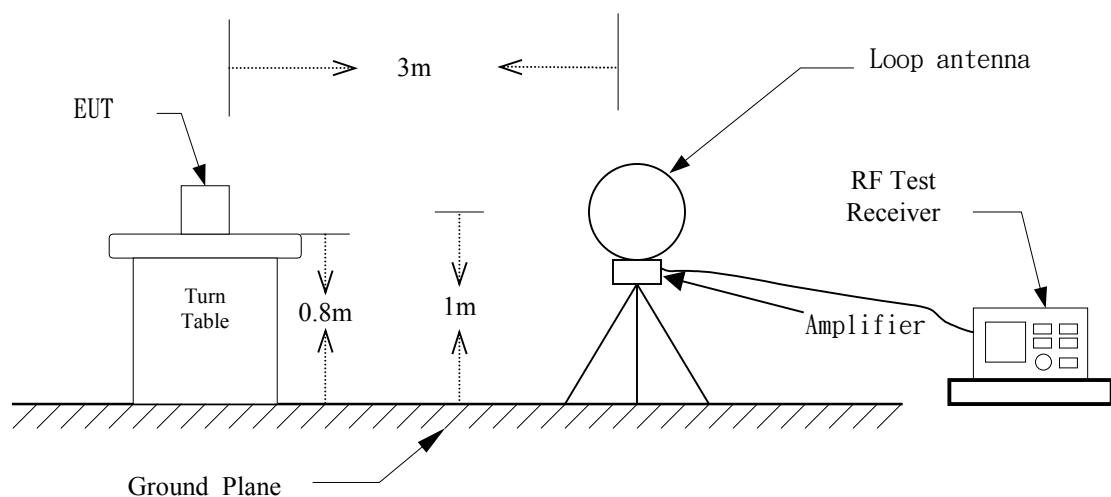

4.3 Test Data

4.3.1 Fundamental and Harmonic

Operated mode : Transmitting

Working Frequency : 433.92 MHz

Test Date :Apr. 11, 2007 Temperature : 15 °C Humidity : 80 %

Frequency (MHz)	Ant Pol H/V	Reading @3m (dBuV) Peak QP		Correct Factor (dB/m)	Duty Factor (dB)	Result @3m (dBuV/m) Peak QP AVG			Limit @3m (dBuV/m) Peak QP AVG		
Fundamental											
434.027	H	55.4	----	20.1	-6.5	75.5	----	69.0	100.8	----	80.8
434.027	V	59.1	----	20.1	-6.5	79.2	----	72.7	100.8	----	80.8
Harmonic											
868.054	H	36.2	----	25.0	-6.5	61.2	----	54.7	80.8	----	60.8
868.084	V	39.8	----	25.0	-6.5	64.8	----	58.3	80.8	----	60.8
*1302.081	H	55.6	----	-12.3	-6.5	43.3	----	36.8	74.0	----	54.0
*1302.081	V	67.9	----	-12.3	-6.5	55.6	----	49.1	74.0	----	54.0
1736.108	H	----	----	-11.0	-6.5	----	----	----	80.8	----	60.8
1736.108	V	53.5	----	-11.0	-6.5	42.5	----	36.0	74.0	----	54.0
2170.135	H	----	----	-8.7	-6.5	----	----	----	80.8	----	60.8
2170.135	V	51.2	----	-8.7	-6.5	42.5	----	36.0	80.8	----	60.8
2604.162	H/V	----	----	-6.7	-6.5	----	----	----	80.8	----	60.8
3038.189	H/V	----	----	-4.4	-6.5	----	----	----	80.8	----	60.8
3472.216	H/V	----	----	-1.2	-6.5	----	----	----	80.8	----	60.8
*3906.243	H/V	----	----	0	-6.5	----	----	----	74.0	----	54.0
*4340.270	H/V	----	----	1.8	-6.5	----	----	----	74.0	----	54.0

Note:

1. Peak Result = Peak Reading + Correct Factor
2. AVG Result = Peak Result + Duty Factor
3. If the result of peak value is under the limit of average, the average value doesn't need to be measured.
4. "*" means the frequency is in the Restricted Bands.

4.3.2 Other Emission

4.3.2.1 Operated mode : 433.92 MHz Tx**A. below 1GHz**

Frequency (MHz)	Ant Pol H/V	Reading @3m (dBuV) Q.P.	Correct Factor (dB/m)	Result @3m (dBuV/m) Q.P.	Limit @3m (dBuV/m) Q.P.	Margins (dB)
30.000	H	21.4	13.1	34.5	40.0	-5.5
30.000	V	23.1	13.1	36.2	40.0	-3.9
98.870	H	20.4	10.8	31.2	43.5	-12.3
98.870	V	27.7	10.8	38.5	43.5	-5.0
140.580	H	11.4	15.1	26.5	43.5	-17.1
144.460	V	11.6	15.1	26.7	43.5	-16.8
237.580	H	4.3	13.7	18.0	46.0	-28.0
316.150	V	4.0	17.5	21.5	46.0	-24.5
338.460	H	3.4	18.1	21.5	46.0	-24.5
621.700	V	3.1	24.5	27.6	46.0	-18.5
696.390	V	1.7	26.1	27.8	46.0	-18.2
816.670	H	2.3	27.8	30.1	46.0	-16.0

B. above 1GHz

Frequency (MHz)	Ant Pol H / V	Reading (dBuV) Peak	Correct Factor (dB)	Duty Factor (dB)	Result @3m (dBuV/m) Peak	Limit @3m (dBuV/m) Peak	Margins (dB)
Radiated emission frequencies above 1 GHz to 4.5 GHz were too low to be measured.							

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f < 1000\text{MHz}$).
 $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$).

4.3.2.2 Operated mode : 125kHz Rx

EUT : Sensor (433MHz)	Model :	Status : RX
Condition : Horizontal	Date : 2007/4/11	Temp. : 15°C Humi. : 80%

	Freq (MHz)	QP Level (dBuV)	Factor (dB/m)	QP Result (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)
1	30.000	9.0	13.1	22.1	40.0	-17.9
2	117.475	4.3	13.4	17.7	43.5	-25.8
3	272.986	2.4	15.4	17.8	46.0	-28.2
4	585.952	3.3	23.2	26.5	46.0	-19.5
5	628.717	2.7	24.1	26.8	46.0	-19.2
6	895.030	2.8	28.8	31.6	46.0	-14.4

EUT : Sensor (433MHz)	Model :	Status : RX
Condition : Vertical	Date : 2007/4/11	Temp. : 15°C Humi. : 80%

	Freq (MHz)	QP Level (dBuV)	Factor (dB/m)	QP Result (dBuV/m)	QP Limit (dBuV/m)	QP Margin (dB)
1	31.944	15.5	13.1	28.6	40.0	-11.4
2	45.551	10.5	13.2	23.7	40.0	-16.3
3	103.868	6.4	11.7	18.1	43.5	-25.4
4	543.186	4.0	22.5	26.5	46.0	-19.5
5	599.559	3.0	23.5	26.5	46.0	-19.5
6	854.208	2.4	27.9	30.3	46.0	-15.7

Note:

1. Place of Measurement: Measuring site of the ETC.
2. If the data table appeared symbol of "****" means the value was too low to be measured.
3. The estimated measurement uncertainty of the result measurement is
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f < 1000\text{MHz}$).
 $\pm 4.1\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$).

4.4 Field Strength Calculation

(a) Field Strength:

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{CORR. FACTOR}$$

where CORR. FACTOR = Antenna FACTOR + Cable FACTOR

(b) Duty Factor:

$$20\log \frac{3.144(\text{ms}) + 8 \times 0.585(\text{ms}) + 35 \times 1.130(\text{ms})}{100(\text{ms})} = -6.5 \text{ dB}$$


The plotted graph of Duty Factor please see page 15 ~ 19


4.5 Radiated Test Equipment


The following instrument are used for radiated emissions measurement :


Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
EMI Receiver	R&S	ESIB7	----	May 25, 2007
BiLog Antenna	Schaffner	CBL 6112B	2927	Jun. 11, 2007
Horn Antenna	EMCO	3115	9107-3729	Jun. 06, 2007
Spectrum Analyzer	R & S	FSU46	13040904-001	Oct. 31, 2007


Note: The standards used to perform this calibration are traceable to NML/ROC, NIST/USA and NPL.

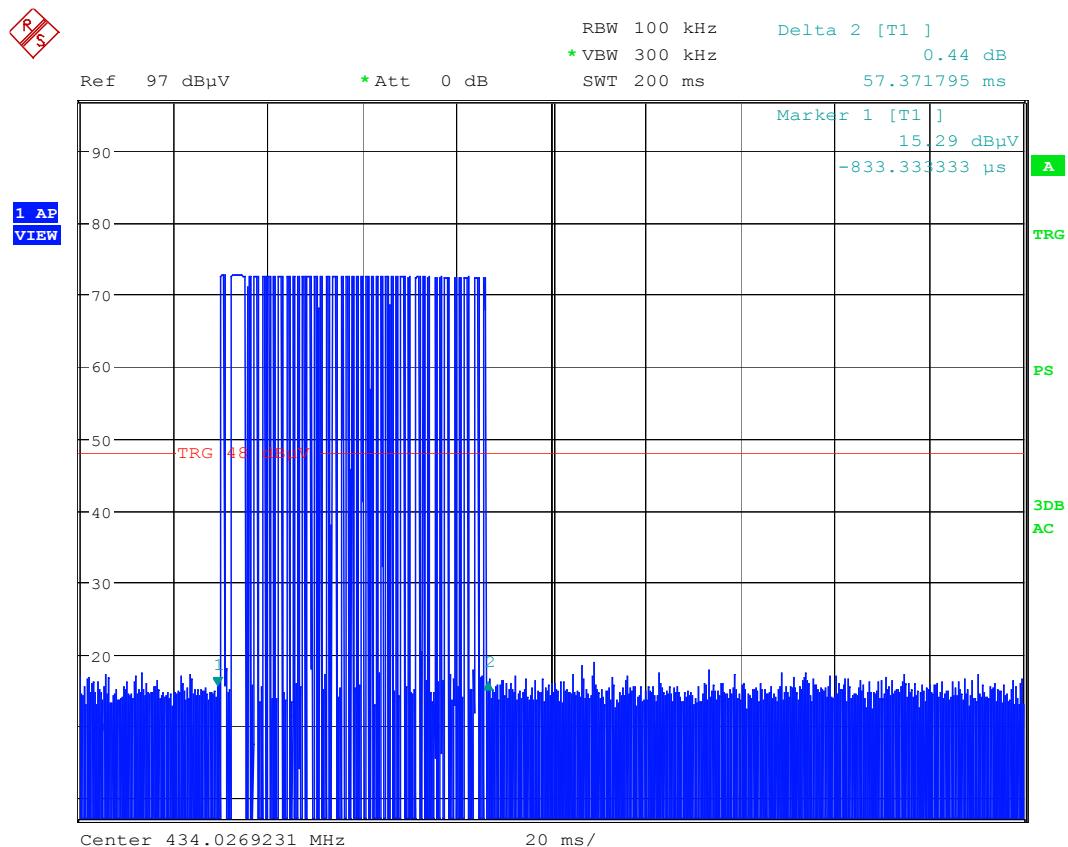

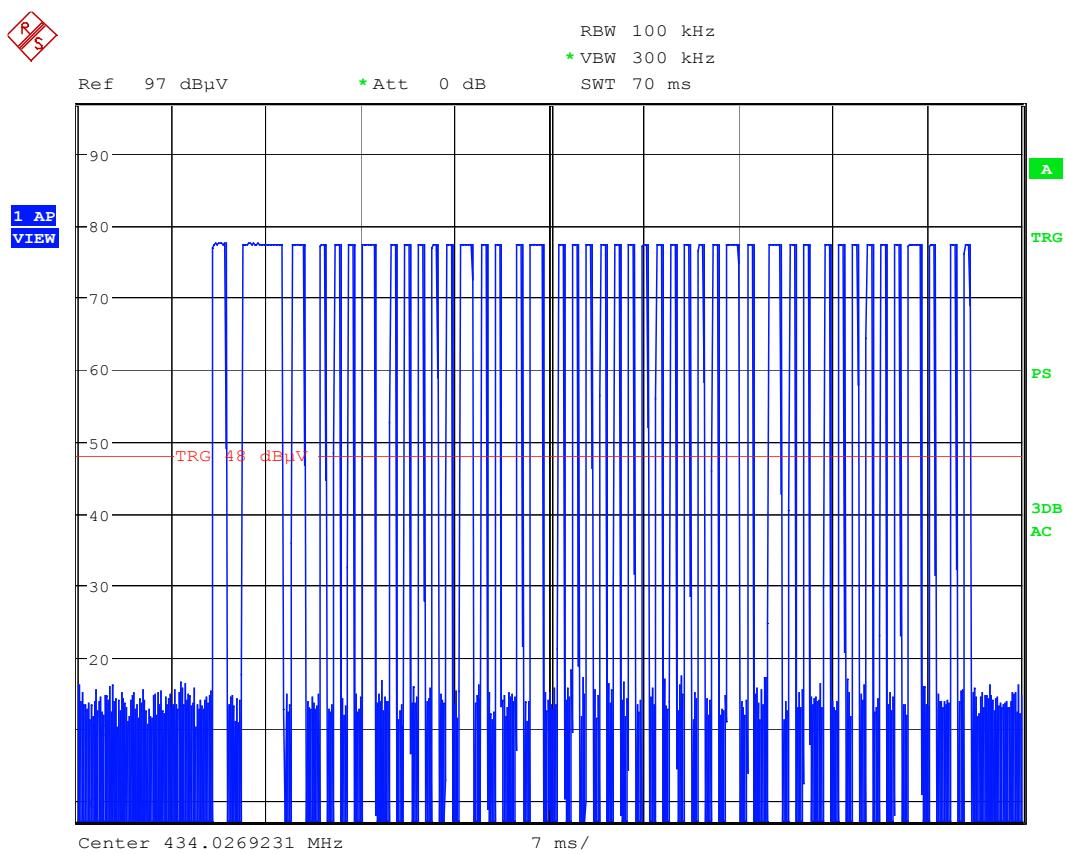

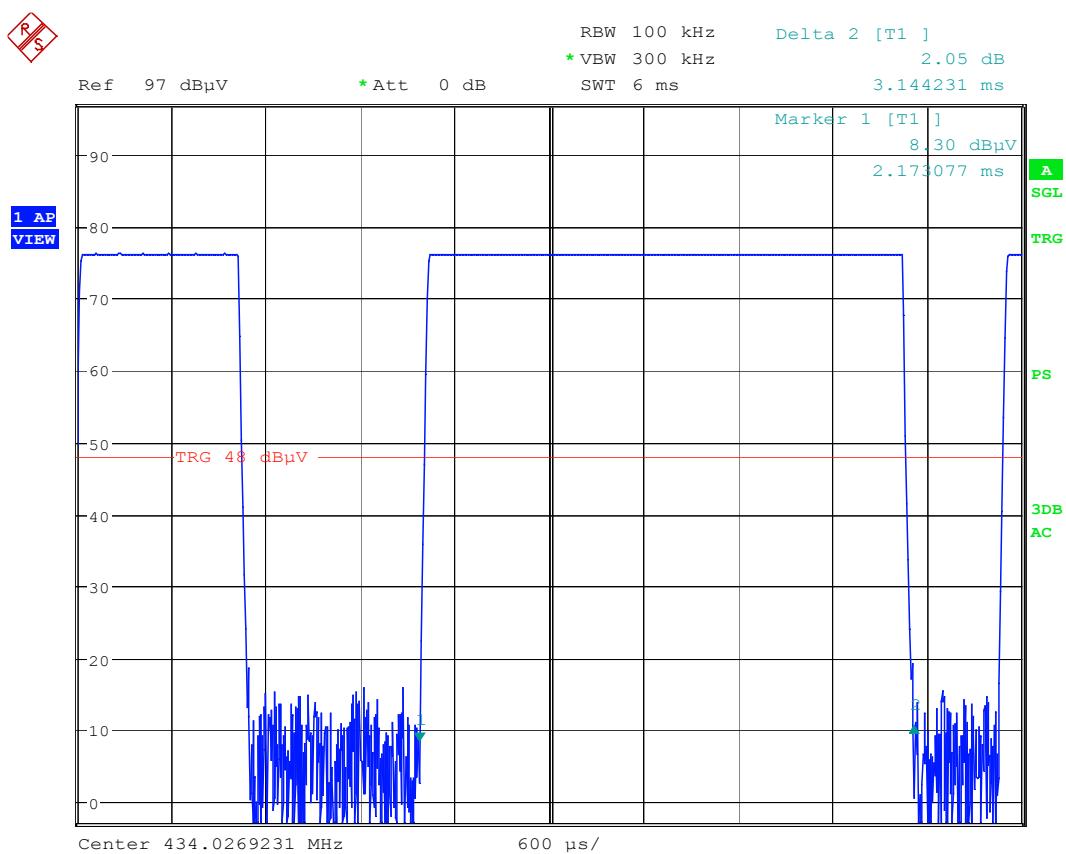

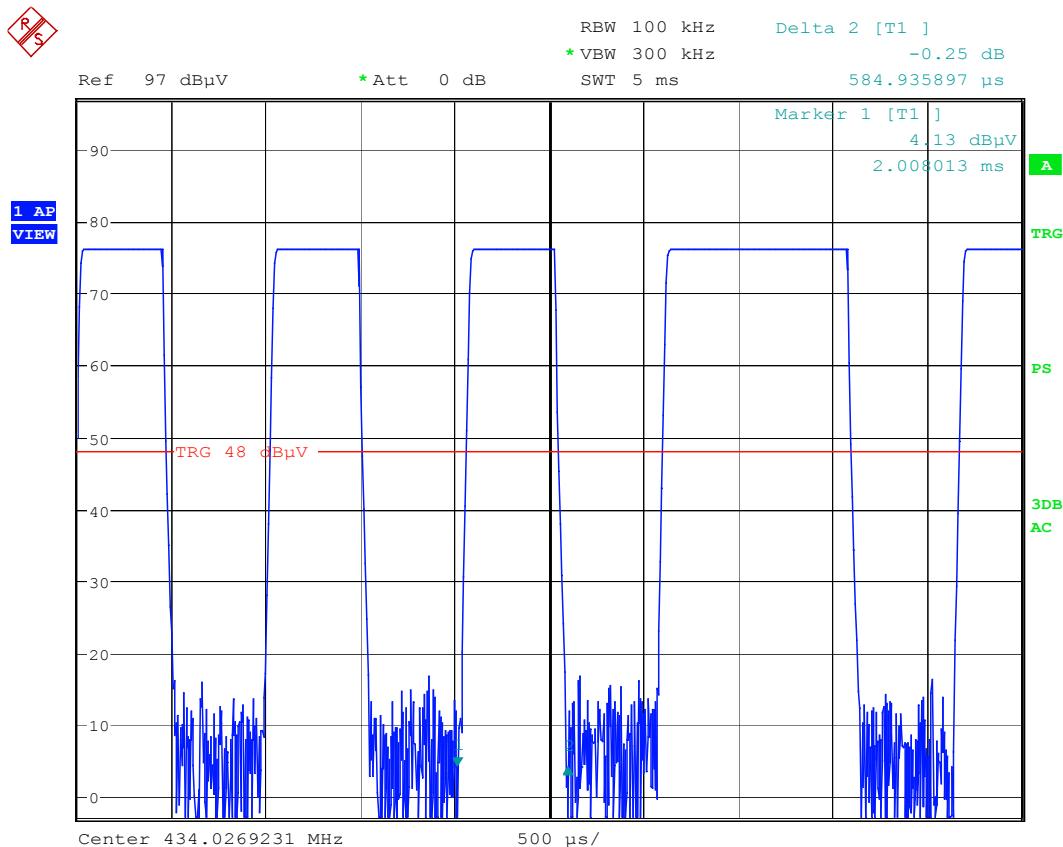

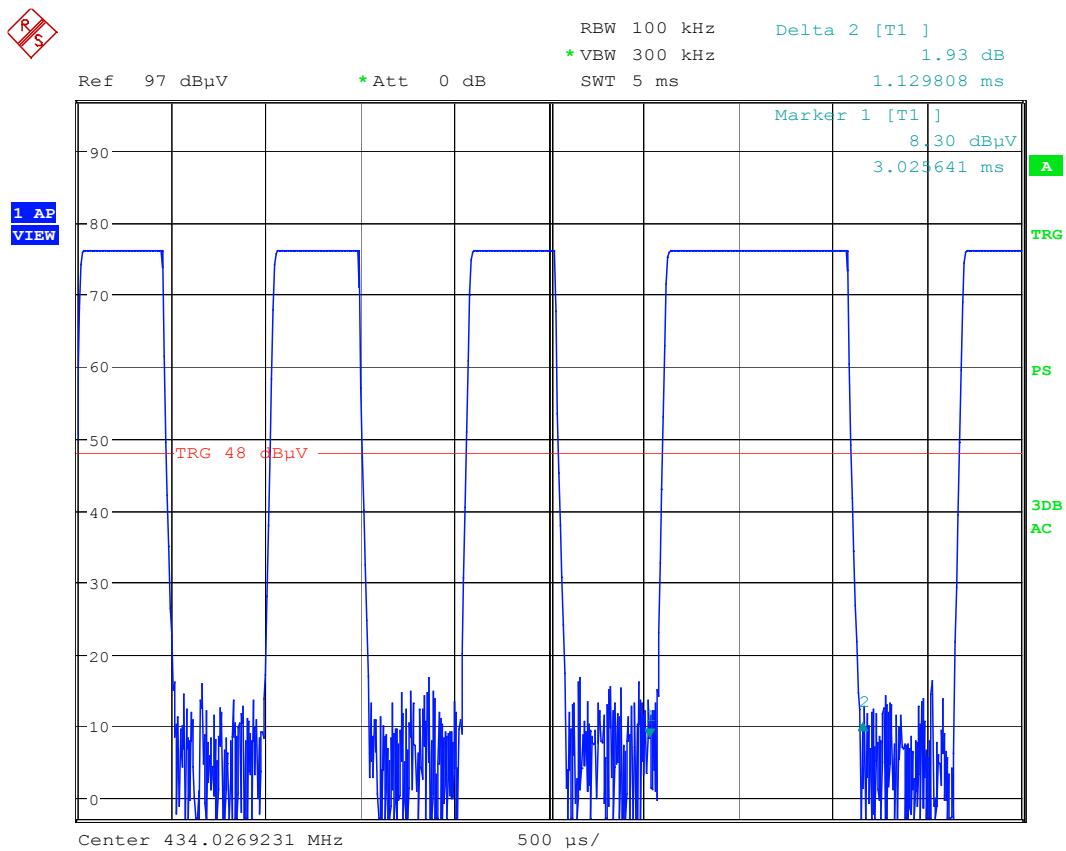

4.6 Measuring Instrument Setup

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	EMI Test Receiver	Peak	120 kHz	300 kHz
1000 to 4500	EMI Test Receiver	Peak	1 MHz	1 MHz

5. BANDWIDTH OF EMISSION

5.1 Applicable Standard Plot Graphic of Bandwidth

Per FCC rule §15.231(c), the permitted emission bandwidth is no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz.


5.2 Test Equipment

Equipment	Manufacturer	Model No.	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSU46	Oct. 31, 2007

5.3 Test Result

Test Date :Apr. 17, 2007 Temperature : 22 °C Humidity : 63 %

Center Frequency	434.027 MHz
FCC Limit	434.027 MHz × 0.25% = 1085.068 kHz
Bandwidth of Emission	306.250 kHz
Chart	Page 22
Result	PASS

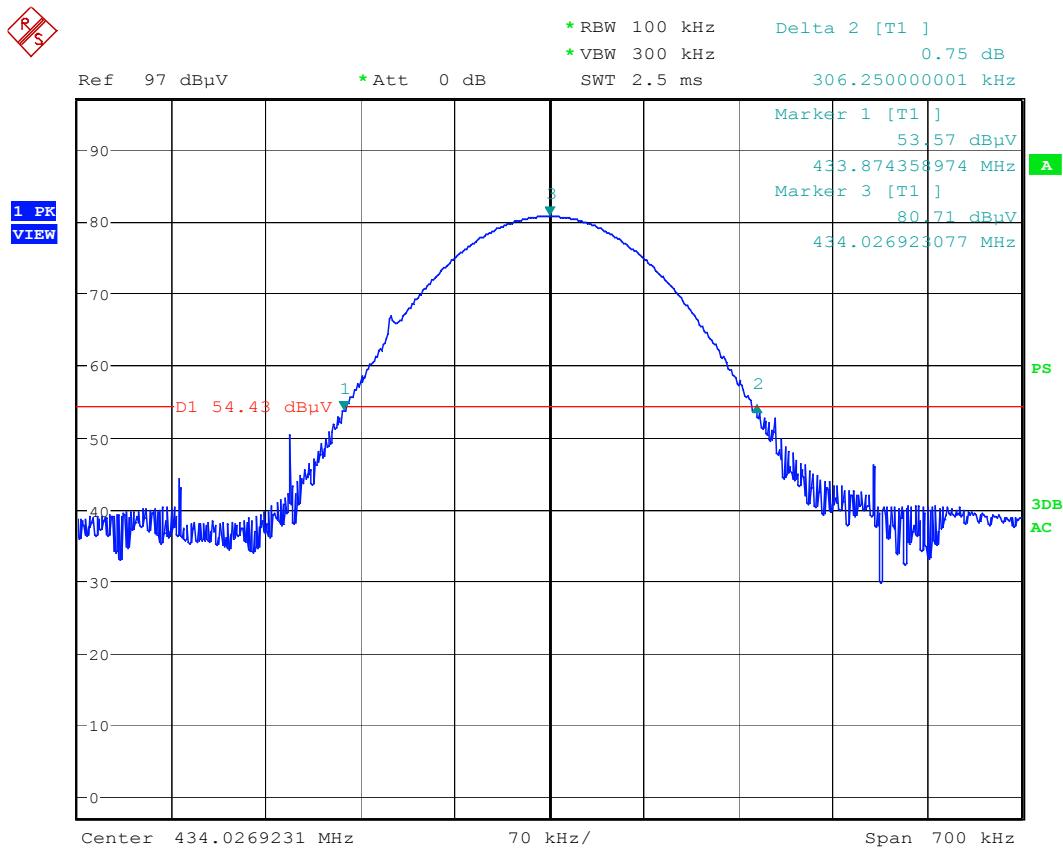

6. CONDUCTED EMISSION MEASUREMENT

This EUT is excused from investigation of conducted emission, for it is powered by battery only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

7. LIMIT OF TRANSMISSION TIME

7.1 Applicable Standard

According to 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

7.2 Active Time

This transmitter is operated by manual and active time is 0.077 second after being released.

Note : Please refer to page 25 for chart

