

FCC PART 15.227
MEASUREMENT AND TEST REPORT
FOR

SHENZHEN SIGUANTE ELECTRONICS CO., LTD.

**6F, Zonghe Building, Daliang Village 2nd Ave, Shuijin Village Committee, Buji
Town, Longgang District, Shenzhen, China**

FCC ID: VB7RF-528

Report Concerns: Original Report	Equipment Type: Wireless Optical Mouse
Model: <u>RF-528</u>	
Report No.: <u>STR07058059I</u>	
Test/Witness Engineer: <u>Lahm Peng</u>	
Test Date: <u>2007-05-24</u>	
Prepared By: Shenzhen SEM.Test Compliance Service Co., Ltd. Room 609-610, Baotong Building, Baomin 1 st Road, Baoan District, Shenzhen, Guangdong, P.R.C. (518133)	
Approved & Authorized By:  _____ Jandy So / PSQ Manager	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS	3
1.3 RELATED SUBMITTAL(S)/GRANT(S).....	3
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	4
1.6 EUT EXERCISE SOFTWARE	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.8 EUT CABLE LIST AND DETAILS.....	4
2. SUMMARY OF TEST RESULTS	5
3. §15.203 - ANTENNA REQUIREMENT	6
3.1 STANDARD APPLICABLE	6
3.2 TEST RESULT	6
4. §15.209, §15.227 (A)(B)- RADIATED EMISSION	7
4.1 MEASUREMENT UNCERTAINTY	7
4.2 STANDARD APPLICABLE	7
4.3 TEST EQUIPMENT LIST AND DETAILS	7
4.4 TEST PROCEDURE.....	8
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	8
4.6 ENVIRONMENTAL CONDITIONS	9
4.7 SUMMARY OF TEST RESULTS/PLOTS.....	9
5. §15.227(B) OUT OF BAND EMISSIONS	11
5.1 STANDARD APPLICABLE	11
5.2 TEST EQUIPMENT LIST AND DETAILS	11
5.3 TEST PROCEDURE.....	11
5.4 ENVIRONMENTAL CONDITIONS	11
5.5 SUMMARY OF TEST RESULTS/PLOTS.....	11

EXHIBITION INCLUDING:

- EXHIBIT 1- FCC ID LABELING
- EXHIBIT 2 - EUT EXTERNAL PHOTOGRAPHS
- EXHIBIT 3 - EUT INTERNAL PHOTOGRAPHS
- EXHIBIT 4 - TEST SETUP PHOTOGRAPHS
- EXHIBIT 5 - BLOCK DIARGRAM
- EXHIBIT 6 - OPERATION DESCRIPTIONS
- EXHIBIT 7 - USERS MANUAL

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Shenzhen Siguante Electronics Co., Ltd.
Address of applicant: 6F, Zonghe Building, Daliang Village 2nd Ave, Shuijin Village Committee, Buji Town, Longgang District, Shenzhen, China
Manufacturer: Shenzhen Siguante Electronics Co., Ltd.
Address of applicant: 6F, Zonghe Building, Daliang Village 2nd Ave, Shuijin Village Committee, Buji Town, Longgang District, Shenzhen, China

General Description of E.U.T

Items	Description
EUT Description:	Wireless Optical Mouse
Trade Name:	/
Model No.:	RF-528
Rated Voltage:	3.0V Battery
Output Power:	<-30 dBm
Frequency Range:	27.045MHz
Antenna Type:	Integral Antenna
Size:	8.3X5.0X2.7 cm
For more information refer to the circuit diagram form and the user's manual.	

The test data gathered are from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report of is prepared on behalf of Shenzhen Siguante Electronics Co., Ltd. in accordance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.227 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203,15.205,15.209 and 15.227 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

United States of American Federal Communications Commission (**FCC**), and the registration number is **274801**(semi anechoic chamber).

Industry Canada (**IC**), and the registration number is **IC4174**.

All measurement required was performed at laboratory of Shenzhen Academy of Metrology and Quality Inspection, Bldg. of Metrology & Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guangdong, China.

1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the EUT is on and keep transmitting.

1.7 Accessories Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Cord/Without Cord
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.203	Antenna Requirement	Compliant
§15.209	Radiated Emission Limit	Compliant
§15.227(a)	Field Strength	Compliant
§15.227(b)	Out of Band Emission	Compliant

3. §15.203 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.

4. §15.209, §15.227 (a)(b)- RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ±3.0 dB.

4.2 Standard Applicable

According to §15.227(a), the field strength of emissions from intentional radiators operated under this section shall not exceed 80dB_{uv}/m in 3 meter distance. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

According to §15.227(b), The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

4.3 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESCS30	830245/009	2007-1-26	2008-1-25
Multi_Device Controller	ETS	2090	57230	2007-1-26	2008-1-25
Receiver Antenna	ETS	2175	57337	2007-1-26	2008-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2007-1-26	2008-1-25
Triple Loop Antenna	Schwarzbeck	HXYZ9170	9124	2007-1-26	2008-1-25


Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.227(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

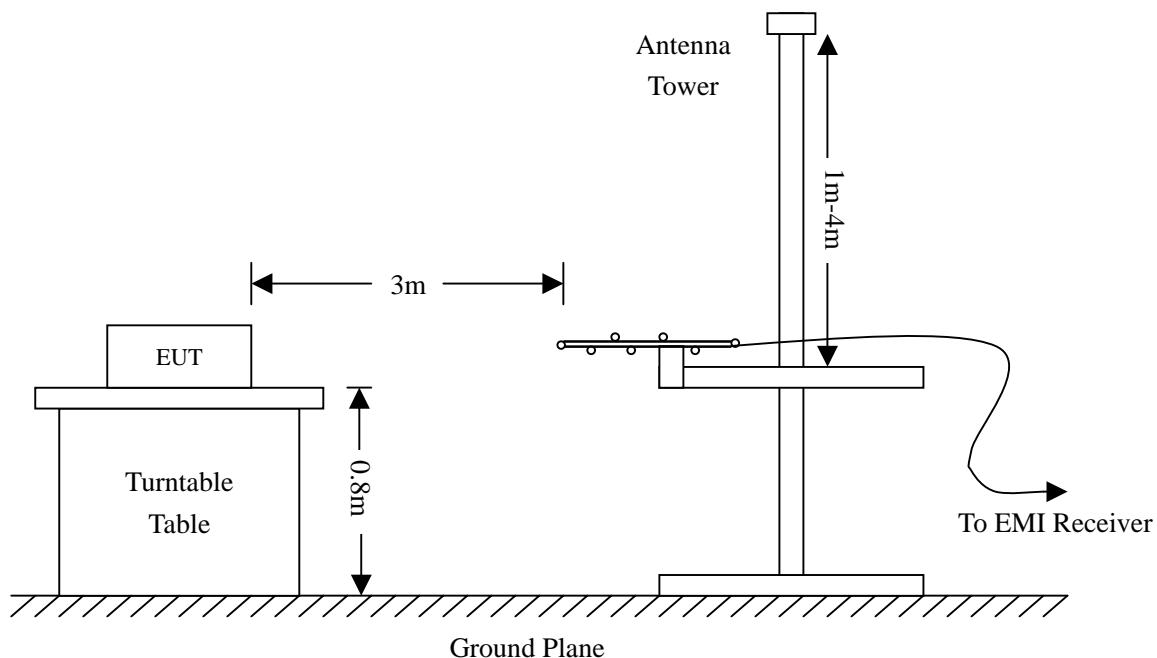

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

4.6 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

4.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.209 and 15.227 standards, and had the worst margin of:


-2.80 dB μ V at 434.10 MHz in the Vertical polarization, 30 MHz to 1 GHz, 3Meters

Test Mode: Transmitting

Frequency MHz	Meter Reading dBuV	Meter Reading PK/ AV	Detector	Direction Degree	Height Meter	Polar H / V	Antenna Loss dB	Cable loss dB	Amplifier Gain dB	FCC Part 15.227 & 15.209		
										Limit dBuV/m	Margin dB	
27.045	70.1	PK(Fun.)		45	1.0	V	24.1	0.6	26.29	68.5	100.0	31.5
27.045	77.9	PK(Fun.)		135	1.0	H	24.1	0.6	26.29	76.3	100.0	23.7
27.045	69.4	AV(Fun.)		90	1.3	V	24.1	0.6	26.29	67.8	80.0	12.2
27.045	77.4	AV(Fun.)		135	1.2	H	24.1	0.6	26.29	75.8	80.0	4.2
54.09	44.9	PK		98	1.2	H	8.5	0.7	26.24	27.8	40.0	12.2
81.14	48.8	PK		98	1.2	H	8.4	0.9	26.03	32.0	40.0	8.0
108.18	42.8	PK		43	2.0	H	11.0	1.0	25.89	28.9	43.5	14.6
135.23	41.2	PK		66	1.2	H	14.2	1.1	25.74	30.8	43.5	12.7
162.27	44.1	PK		45	1.0	H	12.7	1.1	25.43	32.5	43.5	11.0
189.32	41.3	PK		135	1.0	H	11.7	1.3	25.24	29.1	43.5	14.4
135.23	36.5	PK		90	1.3	V	14.2	1.1	25.74	26.1	43.5	17.4
162.27	40.4	PK		135	1.2	V	12.7	1.1	25.43	28.8	43.5	14.7
297.50	41.5	PK		98	1.2	V	13.8	1.6	24.64	32.3	46.0	13.7
351.59	42.7	PK		98	1.2	V	15.0	1.8	25.09	34.4	46.0	11.6
405.68	41.0	PK		43	2.0	V	16.1	2.1	25.29	33.9	46.0	12.1
459.77	39.9	PK		66	1.2	V	17.1	2.2	25.73	33.5	46.0	12.5

Note: The EUT was tested in all three orthogonal planes and frequency rang 30MHz to the tenth harmonics.

Plot of Radiation Emissions Test

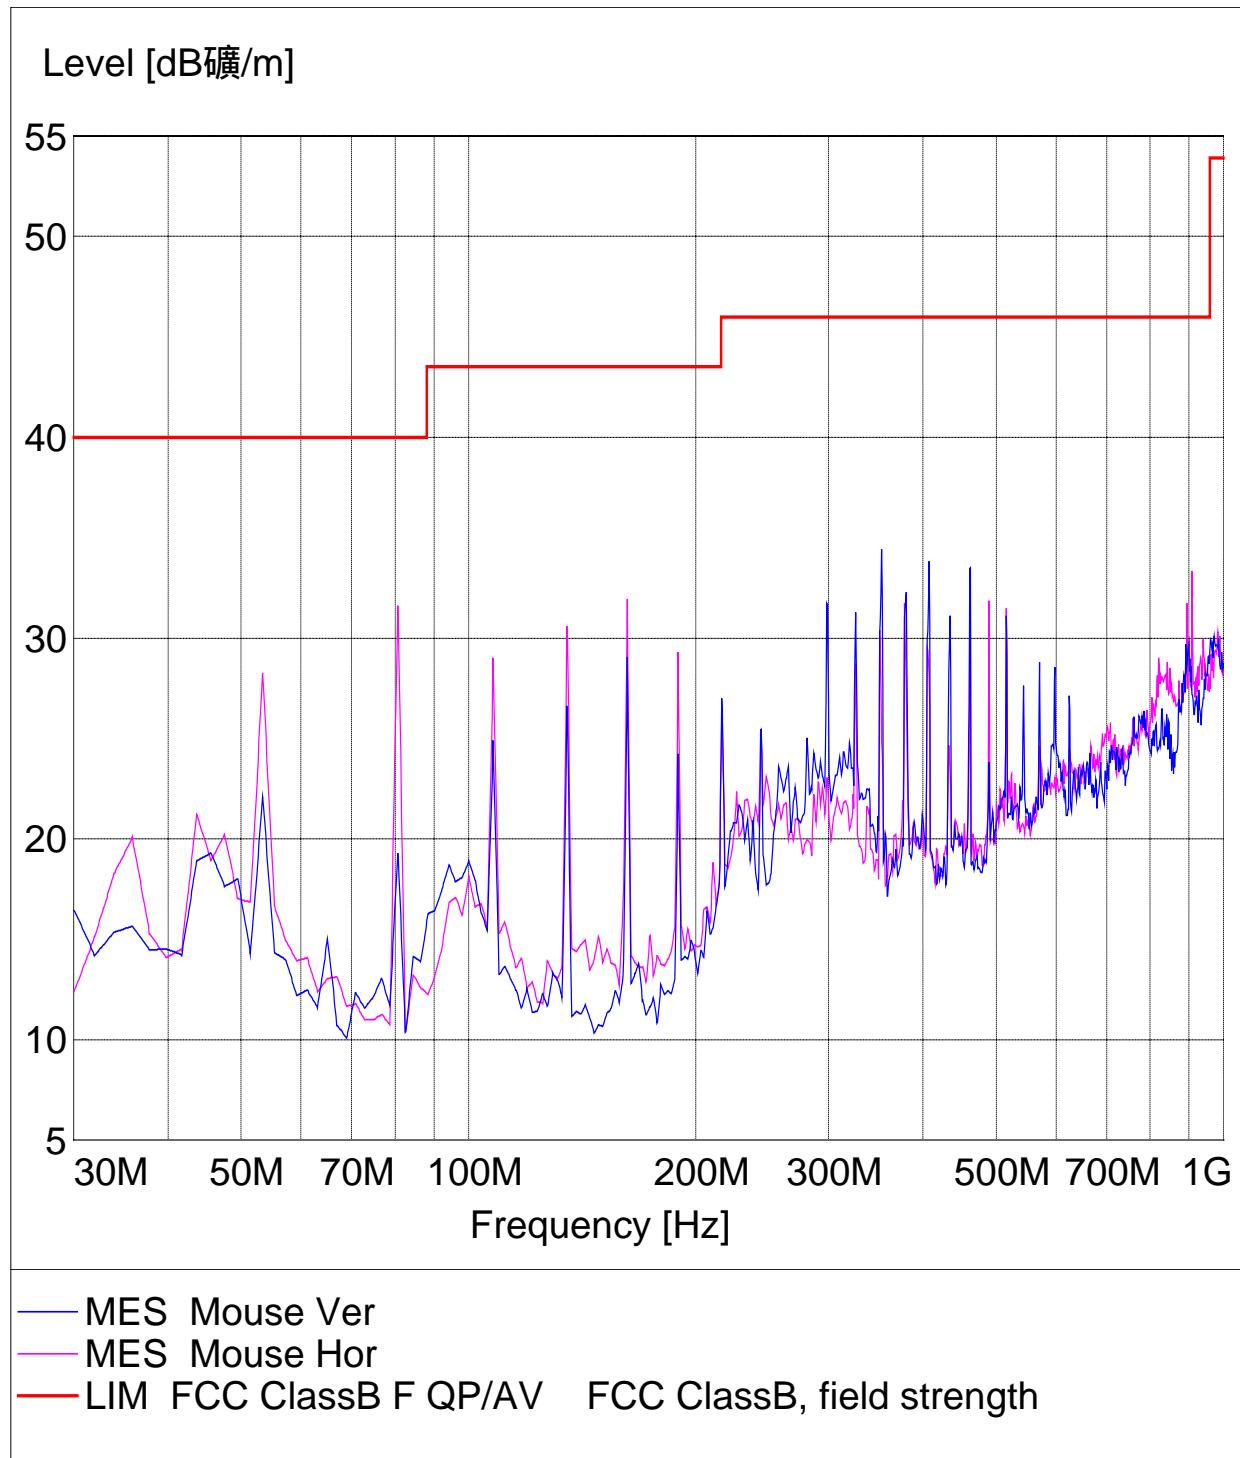

5. §15.227(b) OUT OF BAND EMISSIONS

5.1 Standard Applicable

According to §15.227(b), The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in §15.209.

5.2 Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Cal. Date	Due. Date
Agilent	Spectrum Analyzer	E4402B	US41192821	2006-06-30	2007-06-29
Receiver Antenna	ETS	2175	57337	2007-1-26	2008-1-25
50 ohm Coaxial Cable	ETS	SUCOFLEX 104	25498514	2007-1-26	2008-1-25

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

As the radiation test, set the RBW=10kHz VBW=30kHz, observed the outside band of 26.96MHz to 27.28MHz, than mark the higher-level emission for comparing with the FCC rules.

5.4 Environmental Conditions

Temperature:	26° C
Relative Humidity:	52%
ATM Pressure:	1012 mbar


5.5 Summary of Test Results/Plots

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m
26.96	30.26	49.5
27.28	26.63	49.5

Test Result Pass

Refer to the attached plots.

Lower Band edge

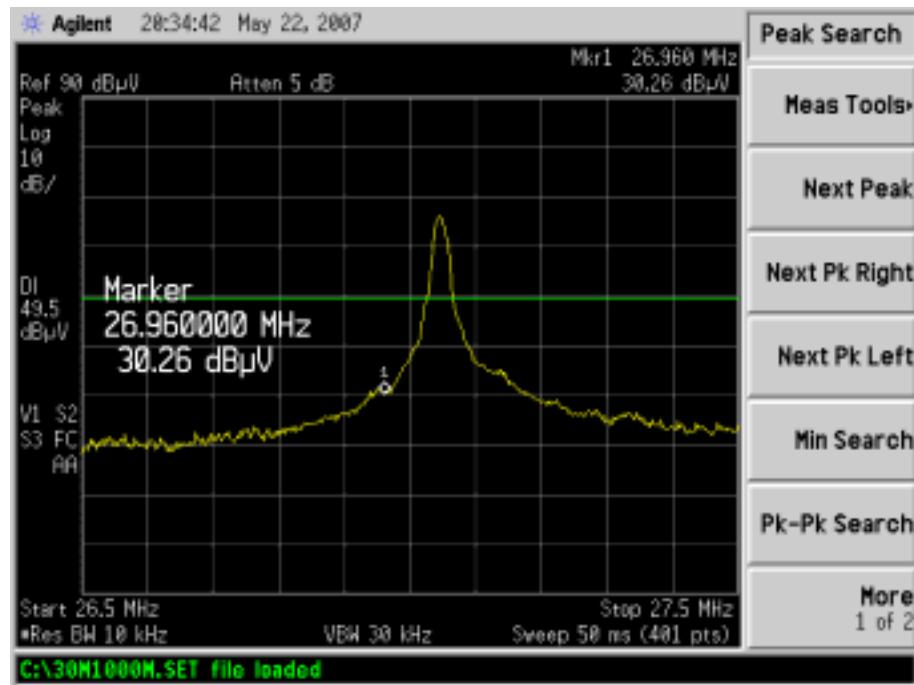

Upper Band edge

