

FCC TEST REPORT (15.407)

REPORT NO.: RF960920L04

MODEL NO.: Pixium DS 3543 pR

RECEIVED: Sep. 20, 2007

TESTED: Sep. 22 ~ Oct. 08, 2007

ISSUED: Oct. 23, 2007

APPLICANT: TRIXELL

ADDRESS: 460, rue du Pommarin 38430 MOIRANS -
FRANCE

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Kwei Shan Hsiang,
Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 52 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	14
4.2	RADIATED EMISSION MEASUREMENT	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS	18
4.2.3	TEST INSTRUMENTS	19
4.2.4	TEST PROCEDURES	20
4.2.5	DEVIATION FROM TEST STANDARD	20
4.2.6	TEST SETUP	21
4.2.7	EUT OPERATING CONDITION	21
4.2.8	TEST RESULTS	22
4.3	PEAK TRANSMIT POWER MEASUREMENT	27
4.3.1	LIMITS OF PEAK TRANSMIT POWER MEASUREMENT	27
4.3.2	TEST INSTRUMENTS	27
4.3.3	TEST PROCEDURE	27
4.3.4	DEVIATION FROM TEST STANDARD	28
4.3.5	TEST SETUP	28
4.3.6	EUT OPERATING CONDITIONS	28
4.3.7	TEST RESULTS	29
4.4	PEAK POWER EXCURSION MEASUREMENT	33
4.4.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT	33
4.4.2	TEST INSTRUMENTS	33
4.4.3	TEST PROCEDURE	33
4.4.4	DEVIATION FROM TEST STANDARD	34
4.4.5	TEST SETUP	34
4.4.6	EUT OPERATING CONDITIONS	34
4.4.7	TEST RESULTS	35
4.5	PEAK POWER SPECTRAL DENSITY MEASUREMENT	37
4.5.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT	37
4.5.2	TEST INSTRUMENTS	37
4.5.3	TEST PROCEDURES	37

4.5.4	DEVIATION FROM TEST STANDARD	37
4.5.5	TEST SETUP	38
4.5.6	EUT OPERATING CONDITIONS.....	38
4.5.7	TEST RESULTS.....	39
4.6	FREQUENCY STABILITY	41
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	41
4.6.2	TEST INSTRUMENTS	41
4.6.3	TEST PROCEDURE	41
4.6.4	DEVIATION FROM TEST STANDARD	42
4.6.5	TEST SETUP	42
4.6.6	EUT OPERATING CONDITION	42
4.6.7	TEST RESULTS.....	43
4.7	BAND EDGES MEASUREMENT	44
4.7.1	TEST INSTRUMENTS	44
4.7.2	TEST PROCEDURE	44
4.7.3	EUT OPERATING CONDITION	44
4.7.4	TEST RESULTS.....	44
4.8	ANTENNA REQUIREMENT	49
4.8.1	STANDARD APPLICABLE	49
4.8.2	ANTENNA CONNECTED CONSTRUCTION	49
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	50
6.	INFORMATION ON THE TESTING LABORATORIES.....	51
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	52

1. CERTIFICATION

PRODUCT: Docking Station

MODEL: Pixium DS 3543 pR

BRAND: TRIXELL

APPLICANT: TRIXELL

TEST SAMPLE: ENGINEERING SAMPLE

TESTED: Sep. 22 ~ Oct. 08, 2007

STANDARDS: FCC Part 15, Subpart E (Section 15.407)

ANSI C63.4-2003

The above equipment (Model: Pixium DS 3543 pR) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Andrea Hsia , **DATE:** Oct. 23, 2007
Andrea Hsia / Specialist

TECHNICAL
ACCEPTANCE : Long Chen , **DATE:** Oct. 23, 2007
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , **DATE:** Oct. 23, 2007
Gary Chang / Assistant Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.407(b)(5)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -65.48dB at 3.590MHz.
15.407(b)(1/2/3) (b)(5)	Electric Field Strength Spurious Emissions, 30MHz ~ 40000MHz	PASS	Meet the requirement of limit. Minimum passing margin is -1.01dB at 70.73MHz.
15.407(a)(1/2/3)	Peak Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	2.93 dB
	200MHz ~1000MHz	2.95 dB
	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Docking Station
MODEL NO.	Pixium DS 3543 pR
FCC ID	VPQPIXIUMDS3543PR
POWER SUPPLY	24Vdc from DC power supply
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11, 5.5, 2, 1Mbps 802.11g: 54, 48, 36, 24, 18, 12, 9, 6Mbps 802.11a: 54, 48, 36, 24, 18, 12, 9, 6Mbps
FREQUENCY RANGE	2.4GHz: 2.400 ~ 2.4835GHz 5.0GHz: 5.15 ~ 5.25GHz & 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	2.4GHz: 11 for 802.11b, 802.11g 5.0GHz: 5150 ~ 5250MHz: 4 for 802.11a 5725 ~ 5850MHz: 5 for 802.11a
OUTPUT POWER	28.708mW for 2400 ~ 2483.5MHz 24.434mW for 5150 ~ 5250MHz 25.882mW for 5725 ~ 5850MHz
ANTENNA TYPE	Patch antenna with 5.2dBi gain for 2.4 GHz Patch antenna with 8.4dBi gain for 5.0 GHz
DATA CABLE	7m non-shielded cable without core
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Power cable (1.7m shielded cable with three cores) Ground cable (2m)

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.


3.2 DESCRIPTION OF TEST MODES

Operated in 5150 ~ 5250MHz: 4 channels are provided:


CHANNEL	FREQUENCY
1	5180 MHz
2	5200 MHz
3	5220 MHz
4	5240 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

TEST MODE A

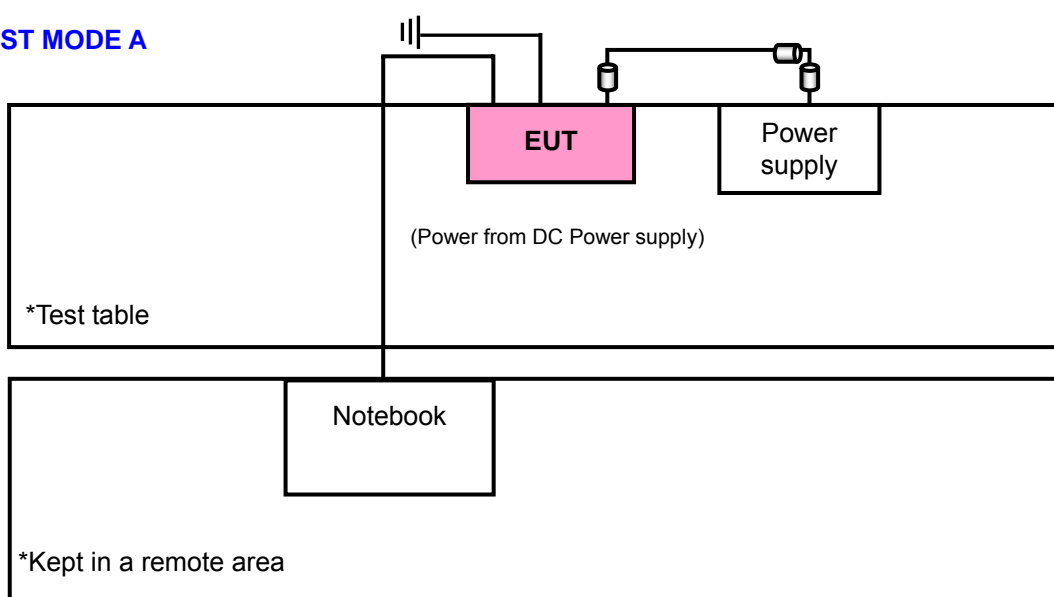

TEST MODE B

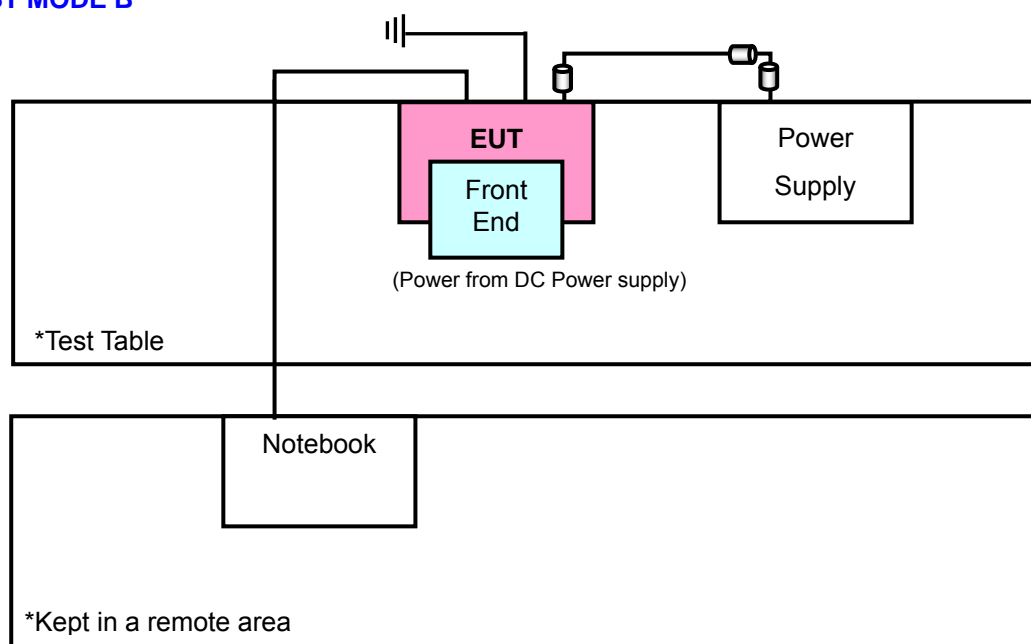

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
A	√	√	√	√	EUT only
B	√	√	-	-	EUT with Docking Station

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

"-": Means no effect.

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1	OFDM	BPSK	6
B	802.11a	1 to 4	1	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11a	1 to 4	1	OFDM	BPSK	6	X
B	802.11a	1 to 4	1	OFDM	BPSK	6	X

RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6	X

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11a	1 to 4	1, 4	OFDM	BPSK	6	X

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11a	1 to 4	1, 2, 4	OFDM	BPSK	6

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	FRONT END	TRIXELL	Pixium FE 3543 pR	NA	VPQPIXIUMFE3543PR
2	POWER SUPPLY	ISO-TECH	IPS 303DD	NA	NA
3	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.7m shielded power core with 3 cores
3	6m RJ45 UTP Cable

NOTE 1: All power cords of the above support units are non shielded (1.8m).

NOTE 2: Item 3 acted as communication partners to transfer data.

NOTE 3: Item 1 was supplied from client

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Dec. 08, 2007
RF signal cable Woken	5D-FB	Cable-HYCO3-01	Jan. 06, 2008
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 08, 2008
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 16, 2008
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Shielded Room 2.
3. The VCCI Site Registration No. is C-2047.


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

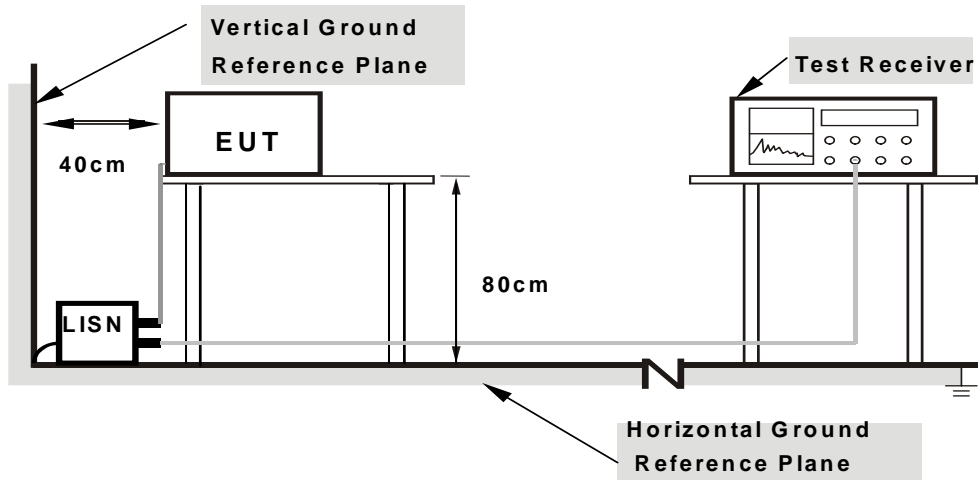

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

TEST MODE A

- a. Placed the EUT on a testing table.
- b. Prepared notebook computer and placed it outside of testing area to act as communication partner for EUT.
- c. The EUT ran a test program (provided by manufacturer) to enable all functions under transmission condition continuously at specific channel frequency.
- d. The necessary accessories enable the EUT in full functions.

TEST MODE B

- a. Place the EUT with front end on a testing table.
- b. Prepared notebook computer and placed it outside of testing area to act as communication partner for EUT.
- c. The EUT ran a test program (provided by manufacturer) to enable all functions under transmission condition continuously at specific channel frequency.
- d. The communication partner sent data to EUT by command "PING".


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TEST MODE	A	TESTED BY	Match Tsui

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	-10.62	-	-10.52	-	66.00	56.00	-76.52	-
2	0.345	0.10	-10.82	-	-10.72	-	59.07	49.07	-69.79	-
3	0.666	0.10	-11.00	-	-10.90	-	56.00	46.00	-66.90	-
4	3.113	0.25	-10.68	-	-10.43	-	56.00	46.00	-66.43	-
5	8.773	0.32	-9.00	-	-8.68	-	60.00	50.00	-68.68	-
6	22.324	0.69	-8.51	-	-7.82	-	60.00	50.00	-67.82	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

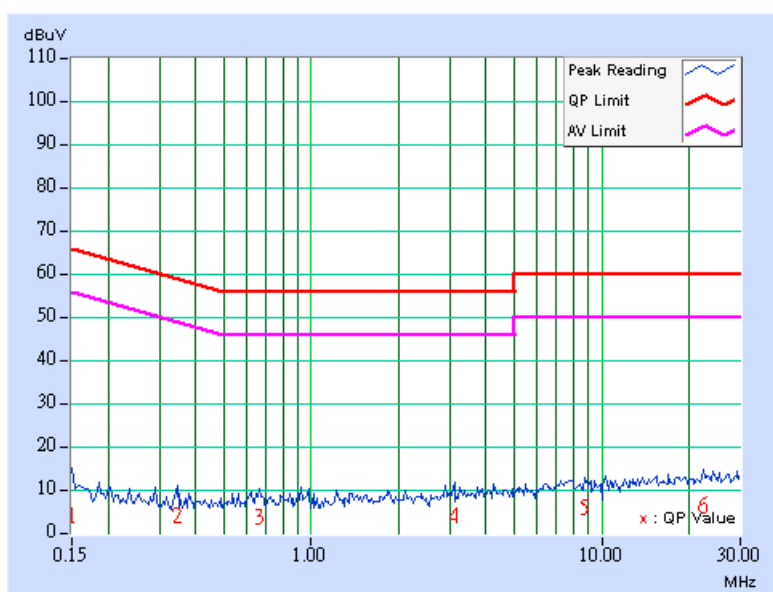

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TEST MODE	A	TESTED BY	Match Tsui

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	-10.42	-	-10.32	-	64.61	54.61	-74.93	-
2	0.291	0.10	-10.98	-	-10.88	-	60.51	50.51	-71.39	-
3	1.121	0.21	-11.09	-	-10.88	-	56.00	46.00	-66.88	-
4	2.891	0.25	-10.72	-	-10.47	-	56.00	46.00	-66.47	-
5	7.879	0.38	-8.17	-	-7.79	-	60.00	50.00	-67.79	-
6	24.188	0.70	-8.24	-	-7.54	-	60.00	50.00	-67.54	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

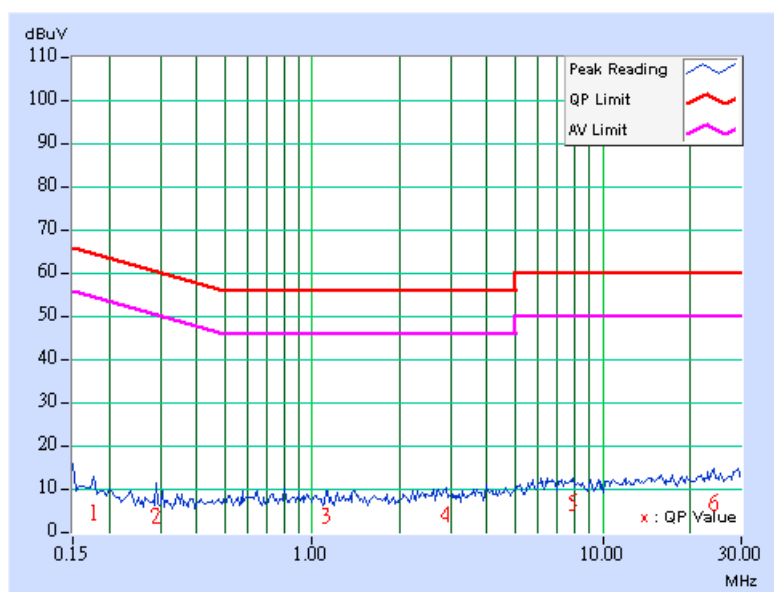

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TEST MODE	B	TESTED BY	Match Tsui

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.177	0.10	-10.18	-	-10.08	-	64.61	54.61	-74.69	-
2	0.455	0.10	-10.62	-	-10.52	-	56.79	46.79	-67.31	-
3	1.352	0.15	-11.13	-	-10.98	-	56.00	46.00	-66.98	-
4	3.590	0.27	-9.75	-	-9.48	-	56.00	46.00	-65.48	-
5	7.520	0.31	-8.03	-	-7.72	-	60.00	50.00	-67.72	-
6	14.316	0.46	-8.74	-	-8.28	-	60.00	50.00	-68.28	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

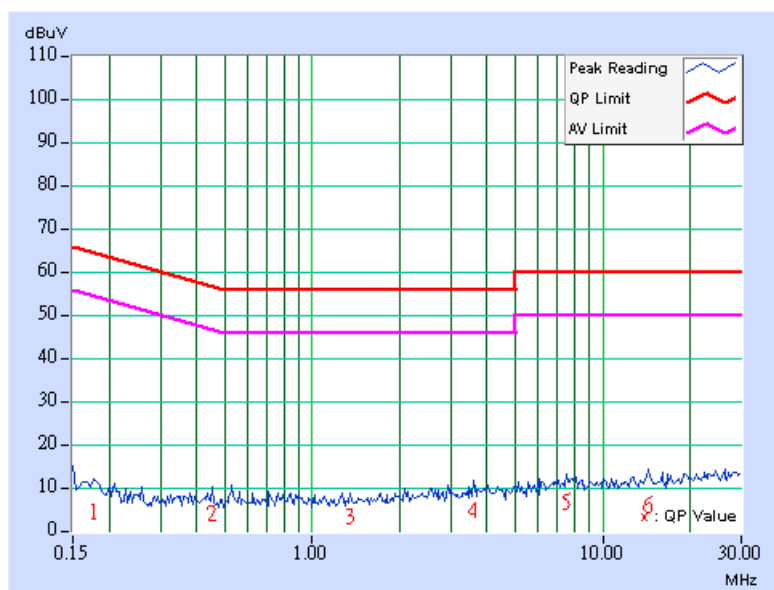

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg. C, 60%RH, 991hPa	6dB BANDWIDTH	9kHz
TEST MODE	B	TESTED BY	Match Tsui

	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
No		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.150	0.10	-10.85	-	-10.75	-	66.00	56.00	-76.75	-
2	0.295	0.10	-11.03	-	-10.93	-	60.40	50.40	-71.33	-
3	0.607	0.14	-11.03	-	-10.89	-	56.00	46.00	-66.89	-
4	3.215	0.26	-10.77	-	-10.51	-	56.00	46.00	-66.51	-
5	7.871	0.38	-8.27	-	-7.89	-	60.00	50.00	-67.89	-
6	21.246	0.61	-9.05	-	-8.44	-	60.00	50.00	-68.44	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

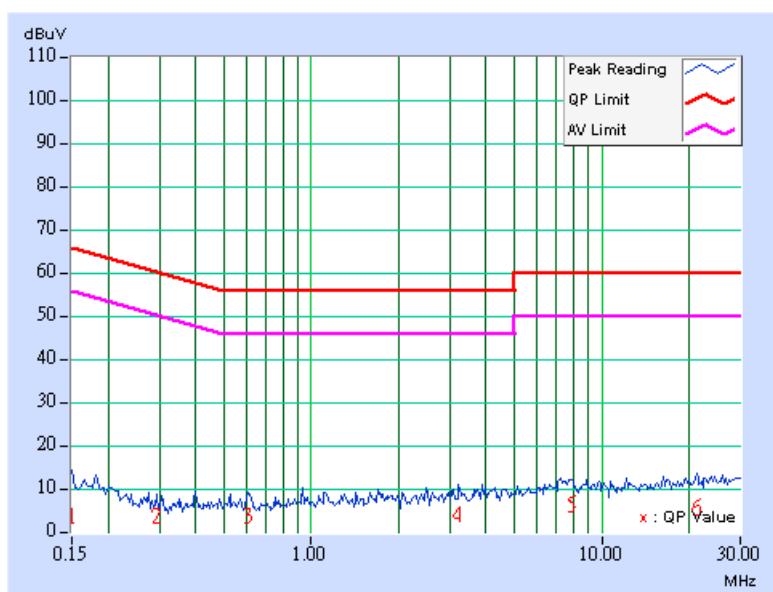

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

FREQUENCIES (MHz)	EIRP LIMIT (dBm)		EQUIVALENT FIELD STRENGTH AT 3m (dBμV/m) *NOTE 3	
	PK	AV	PK	AV
5150 ~ 5250	-7	-27	88.3	68.3
5250 ~ 5350	-7	-27	88.3	68.3
5470 ~ 5725	-7	-27	88.3	68.3

NOTE:

1. For frequencies 10MHz or greater above or below the band edge.
2. All emissions within the frequency range from the band edge to 10MHz above or below the band edge.
3. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCI	100424	Jul. 27, 2008
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100269	Aug. 05, 2008
BILOG Antenna SCHWARZBECK	VULB9168	9168-153	Jan. 04, 2008
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Jul. 30, 2008
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170242	Jan. 16, 2008
Preamplifier Agilent	8449B	3008A01910	Sep. 19, 2008
Preamplifier Agilent	8447D	2944A10638	Dec. 20, 2007
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218188/218189	Nov. 14, 2007
RF signal cable Worken	8D-FB	Cable-HYCH9-01	Aug. 09, 2008
Software	ADT_Radiated_V7.6	NA	NA
Antenna Tower EMCO	2070/2080	512.835.4684	NA
Turn Table EMCO	2087-2.03	NA	NA
Antenna Tower & Turn Table Controller EMCO	2090	NA	NA
26GHz ~ 40GHz Amplifier	EM26400	07026401	Apr. 23, 2008

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 9.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The IC Site Registration No. is IC3789B-9.

4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz.

4.2.5 DEVIATION FROM TEST STANDARD

No deviation

4.2.6 TEST SETUP

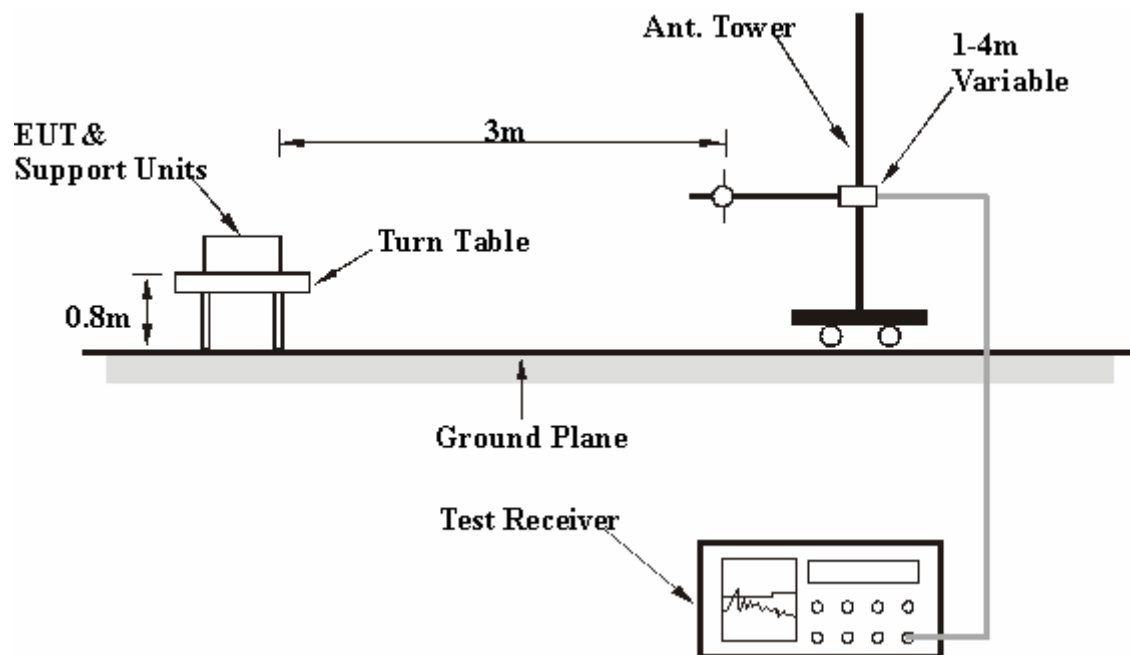

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.7 EUT OPERATING CONDITION

Same as 4.1.6

4.2.8 TEST RESULTS

BELOW 1GHz WORST-CASE DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	34.25 QP	40.00	-5.75	1.00 H	79	20.87	13.38
2	70.73	38.99 QP	40.00	-1.01	2.00 H	145	27.86	11.13
3	119.34	39.13 QP	43.50	-4.37	1.50 H	232	27.64	11.49
4	160.17	32.74 QP	43.50	-10.76	1.50 H	124	19.29	13.45
5	173.78	34.16 QP	43.50	-9.34	1.50 H	214	21.69	12.47
6	222.38	34.13 QP	46.00	-11.87	1.50 H	193	22.81	11.32
7	803.73	34.42 QP	46.00	-11.58	1.00 H	193	10.02	24.40
8	902.89	38.03 QP	46.00	-7.97	1.50 H	211	12.69	25.34
9	947.60	36.47 QP	46.00	-9.53	1.00 H	289	10.77	25.71
10	1002.04	42.67 QP	54.00	-11.33	1.00 H	118	16.76	25.91

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.12	37.37 QP	40.00	-2.63	1.00 V	91	23.98	13.38
2	72.67	38.61 QP	40.00	-1.39	1.00 V	187	28.16	10.45
3	119.34	40.77 QP	43.50	-2.73	1.50 V	277	29.28	11.49
4	129.06	31.72 QP	43.50	-11.78	1.00 V	136	19.81	11.90
5	171.83	35.11 QP	43.50	-8.39	1.00 V	166	22.50	12.61
6	902.89	40.35 QP	46.00	-5.65	1.00 V	178	15.01	25.34
7	947.60	35.96 QP	46.00	-10.04	1.00 V	211	10.25	25.71
8	1002.04	43.47 QP	54.00	-10.53	1.00 V	70	17.56	25.91

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	Below 1000MHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TEST MODE	B
TESTED BY	Dean Wang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	70.73	34.16 QP	40.00	-5.84	1.50 H	190	21.62	12.54
2	103.78	35.40 QP	43.50	-8.10	2.00 H	130	24.75	10.65
3	199.05	34.50 QP	43.50	-9.00	1.50 H	163	23.15	11.34
4	333.21	36.62 QP	46.00	-9.38	1.00 H	118	20.59	16.02
5	399.31	35.66 QP	46.00	-10.34	1.00 H	199	18.03	17.62
6	599.58	37.03 QP	46.00	-8.97	1.50 H	340	14.58	22.45
7	700.68	41.00 QP	46.00	-5.00	1.00 H	121	16.78	24.22
8	799.84	36.32 QP	46.00	-9.68	1.00 H	139	10.43	25.88

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.23	35.31 QP	40.00	-4.69	1.00 V	358	20.70	14.61
2	74.62	35.75 QP	40.00	-4.25	1.00 V	28	24.05	11.71
3	129.06	33.57 QP	43.50	-9.93	1.00 V	10	20.42	13.14
4	599.58	40.65 QP	46.00	-5.35	1.50 V	19	18.21	22.45
5	700.68	37.72 QP	46.00	-8.28	1.00 V	235	13.50	24.22
6	799.84	35.43 QP	46.00	-10.57	1.00 V	172	9.55	25.88
7	900.94	37.68 QP	46.00	-8.32	1.00 V	160	10.07	27.61

- REMARKS:** 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

ABOVE 1GHz DATA: 802.11a OFDM MODULATION:

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.00	46.33 PK	88.30	-41.97	1.18 H	339	12.49	33.84
2	3453.00	35.69 AV	68.30	-32.61	1.18 H	339	1.85	33.84
3	#5150.00	64.34 PK	74.00	-9.66	1.03 H	226	25.75	38.59
4	#5150.00	42.39 AV	54.00	-11.61	1.03 H	226	3.80	38.59
5	*5180.00	112.67 PK			1.03 H	226	74.03	38.64
6	*5180.00	101.35 AV			1.03 H	226	62.71	38.64
7	10360.00	58.88 PK	88.30	-29.42	1.18 H	126	10.18	48.70
8	10360.00	46.11 AV	68.30	-22.19	1.18 H	126	-2.59	48.70

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3453.00	45.38 PK	88.30	-42.92	1.27 V	150	11.54	33.84
2	3453.00	34.07 AV	68.30	-34.23	1.27 V	150	0.23	33.84
3	#5150.00	54.91 PK	74.00	-19.09	1.12 V	290	16.32	38.59
4	#5150.00	41.27 AV	54.00	-12.73	1.12 V	290	2.68	38.59
5	*5180.00	104.26 PK			1.12 V	290	65.62	38.64
6	*5180.00	93.36 AV			1.12 V	290	54.72	38.64
7	10360.00	57.83 PK	88.30	-30.47	1.09 V	360	9.13	48.70
8	10360.00	45.20 AV	68.30	-23.10	1.09 V	360	-3.50	48.70

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 2	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	111.93 PK			1.04 H	224	73.26	38.67
2	*5200.00	100.89 AV			1.04 H	224	62.22	38.67
3	10400.00	59.02 PK	88.30	-29.28	1.07 H	0	10.25	48.77
4	10400.00	46.08 AV	68.30	-22.22	1.07 H	0	-2.69	48.77

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5200.00	103.69 PK			1.11 V	154	65.02	38.67
2	*5200.00	92.43 AV			1.11 V	154	53.76	38.67
3	10400.00	51.15 PK	88.30	-37.15	1.14 V	360	2.38	48.77
4	10400.00	45.02 AV	68.30	-23.28	1.14 V	360	-3.75	48.77

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency falling in the restricted band.

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 4	FREQUENCY RANGE	1 ~ 40GHz
MODULATION TYPE	BPSK	INPUT POWER	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	DETECTOR FUNCTION	Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS	24deg. C, 64%RH, 991hPa	TEST MODE	A
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	112.42 PK			1.01 H	224	73.71	38.71
2	*5240.00	101.10 AV			1.01 H	224	62.39	38.71
3	#5350.00	53.01 PK	74.00	-20.99	1.01 H	224	14.20	38.81
4	#5350.00	41.57 AV	54.00	-12.43	1.01 H	224	2.76	38.81
5	10480.00	52.79 PK	88.30	-35.51	1.01 H	0	3.78	49.01
6	10480.00	45.63 AV	68.30	-22.67	1.01 H	0	-3.38	49.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5240.00	103.04 PK			1.00 V	259	64.33	38.71
2	*5240.00	91.44 AV			1.00 V	259	52.73	38.71
3	#5350.00	52.14 PK	74.00	-21.86	1.00 V	259	13.33	38.81
4	#5350.00	40.59 AV	54.00	-13.41	1.00 V	259	1.78	38.81
5	10480.00	52.79 PK	88.30	-35.51	1.04 V	0	3.78	49.01
6	10480.00	45.26 AV	68.30	-23.04	1.04 V	0	-3.75	49.01

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. “ * ”: Fundamental frequency.
6. “ # ”: The radiated frequency falling in the restricted band.

4.3 PEAK TRANSMIT POWER MEASUREMENT

4.3.1 LIMITS OF PEAK TRANSMIT POWER MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.250 ~ 5.350GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.470 ~ 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB

NOTE: Where B is the 26dB emission bandwidth in MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set span to encompass the entire emission bandwidth of the signal.
3. Set RBW to 1MHz, VBW to 300kHz.
4. Using the spectrum analyzer's channel power measurement function to measure the output power.


NOTE: The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 3 is used.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

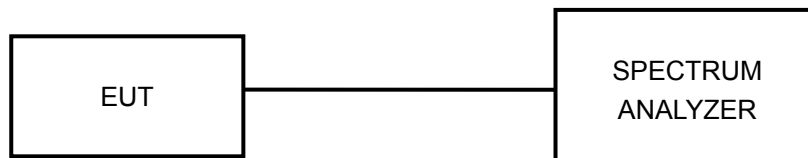

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.3.7 TEST RESULTS


PEAK POWER OUTPUT: 802.11a OFDM MODULATION:

MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen


CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS / FAIL
1	5180	24.434	13.88	14.60	PASS
2	5200	24.155	13.83	14.60	PASS
4	5240	24.210	13.84	14.60	PASS

NOTE: According to 15.407(a)(1)(2), the maximum antenna gain 8.4dBi is higher than 6dBi, so the limit of peak power shall be reduced by 2.4dB.


CH 1

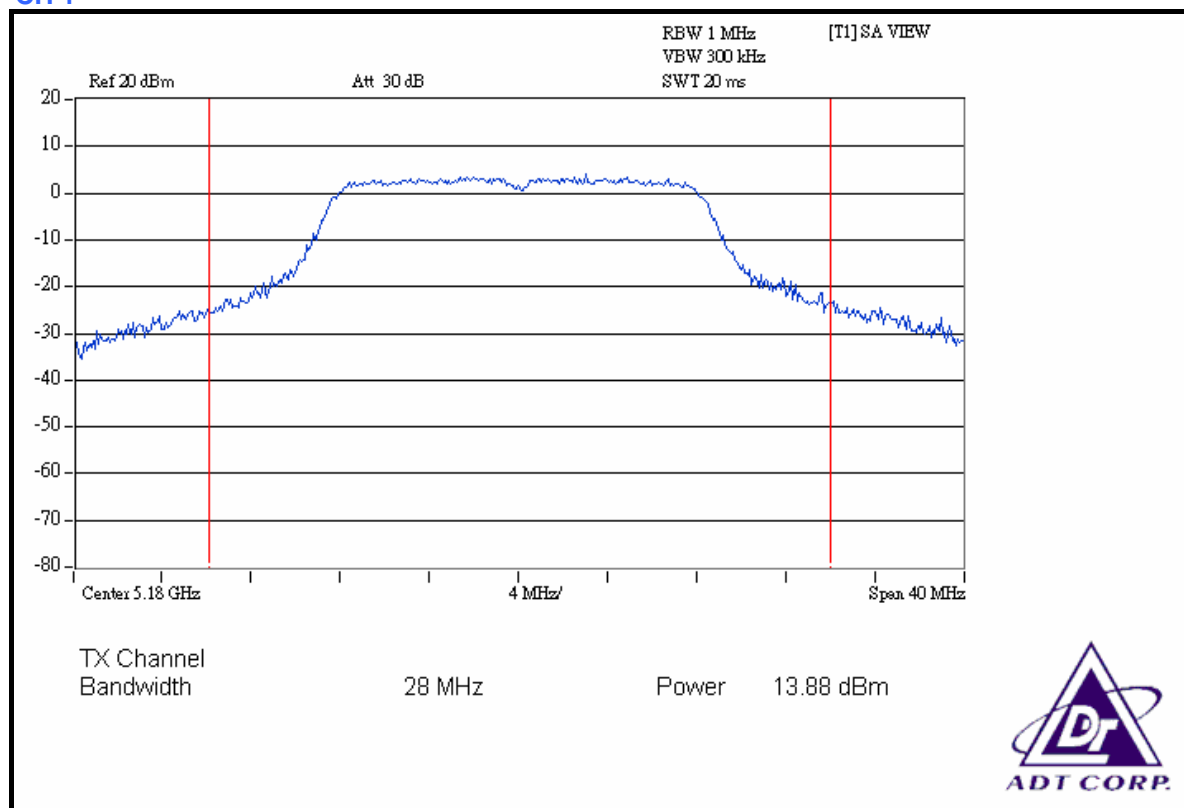

CH 2

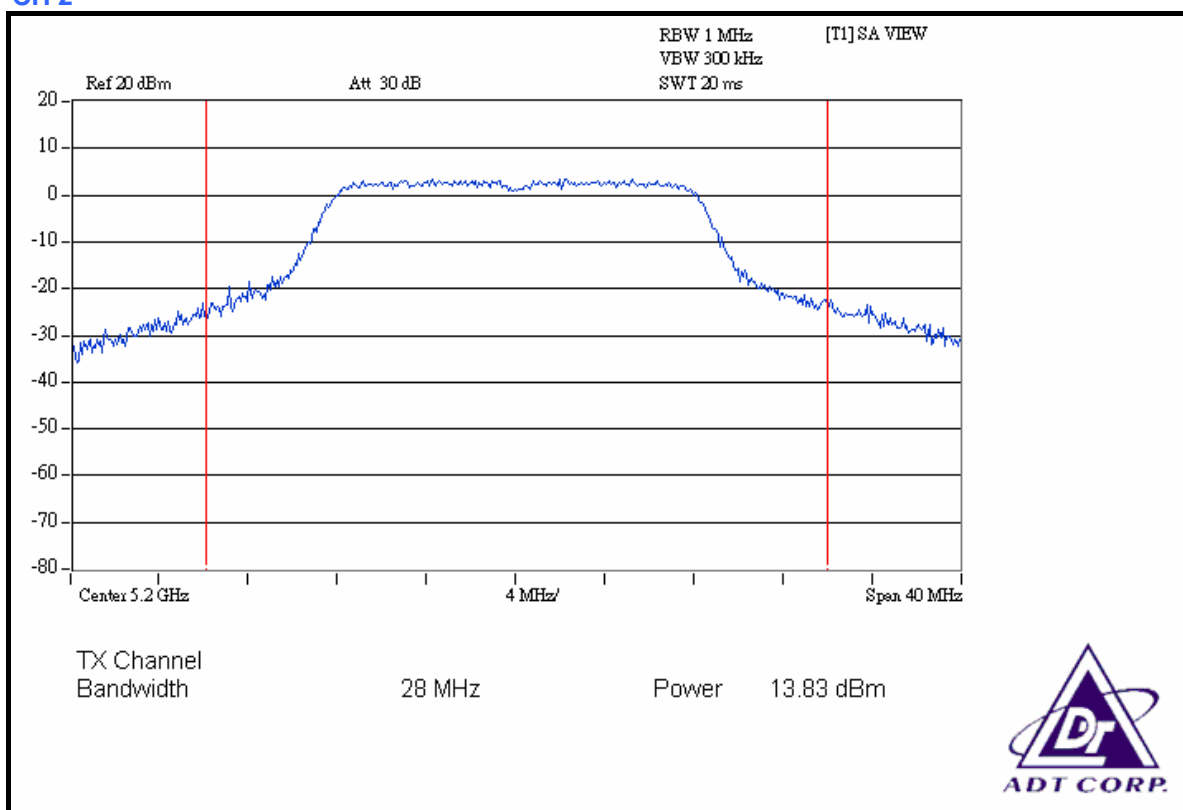

CH 4

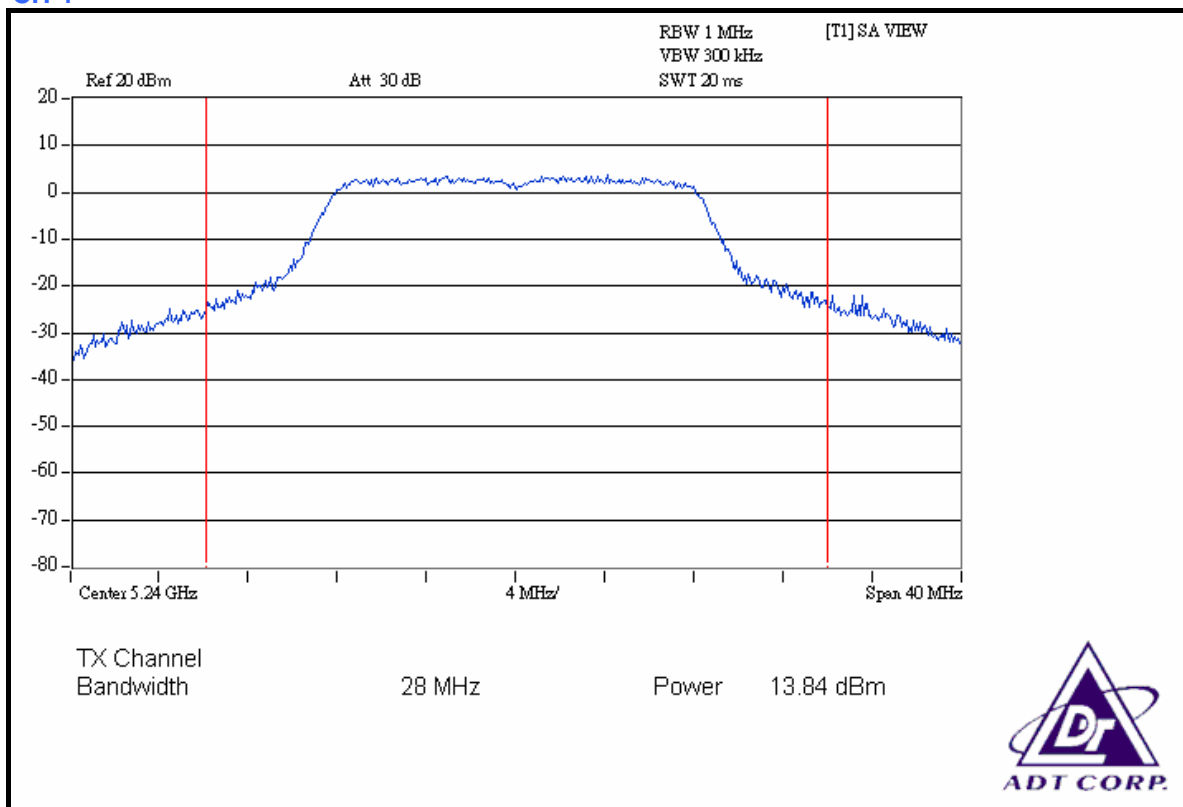


26dB OCCUPIED BANDWIDTH: 802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg.C, 67%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc OCCUPIED BANDWIDTH (MHz)	PASS / FAIL
1	5180	27.52	PASS
2	5200	27.12	PASS
4	5240	27.72	PASS


CH 1

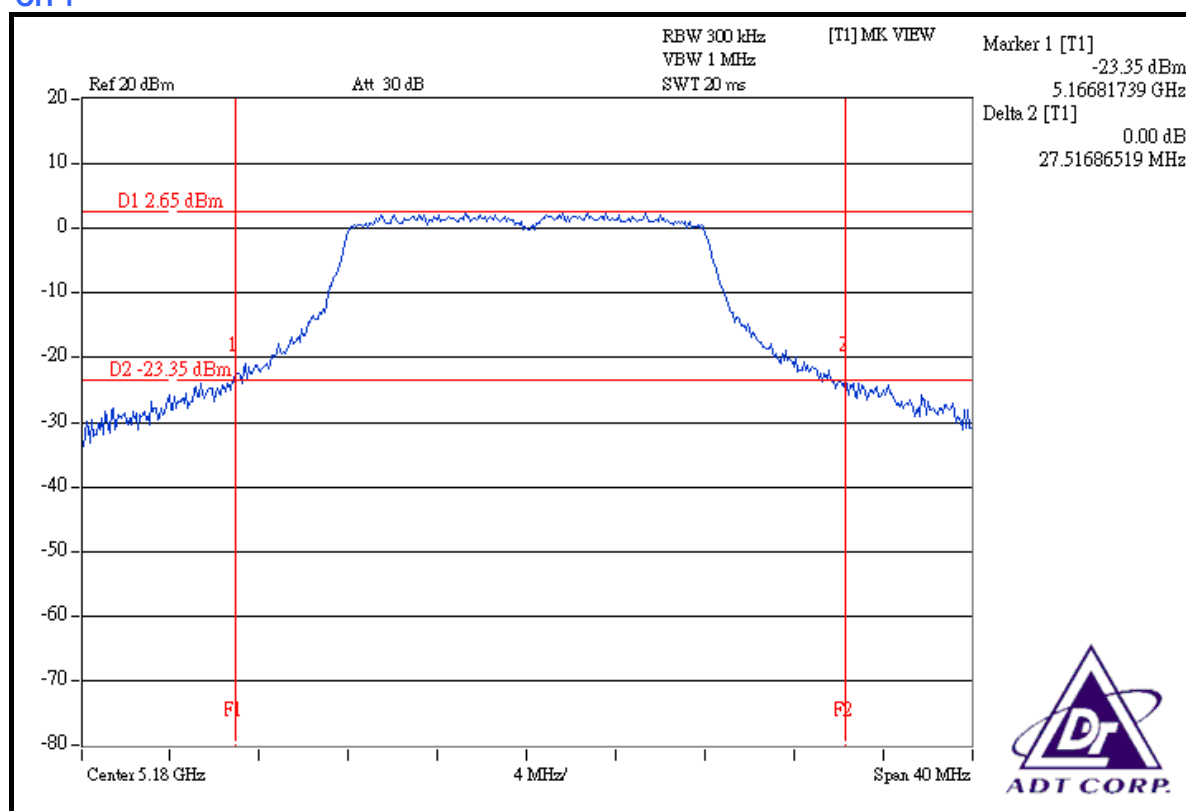

CH 2

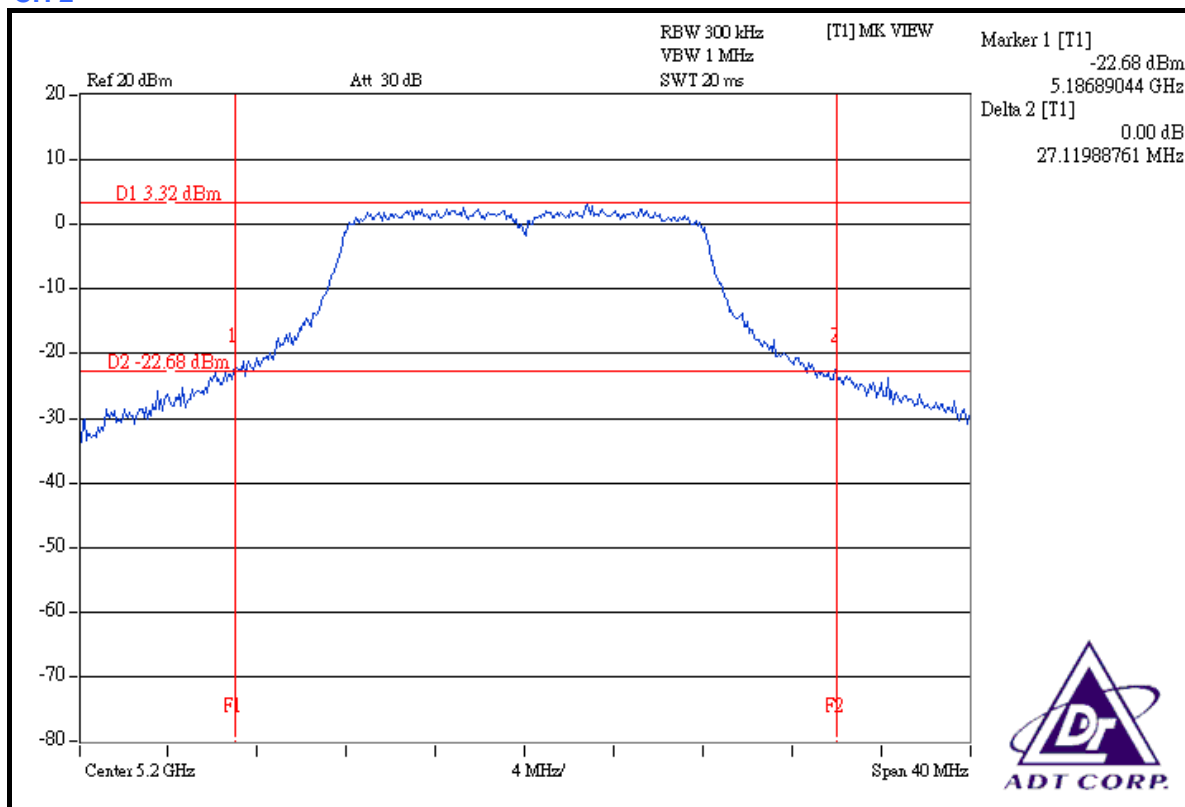

CH 4

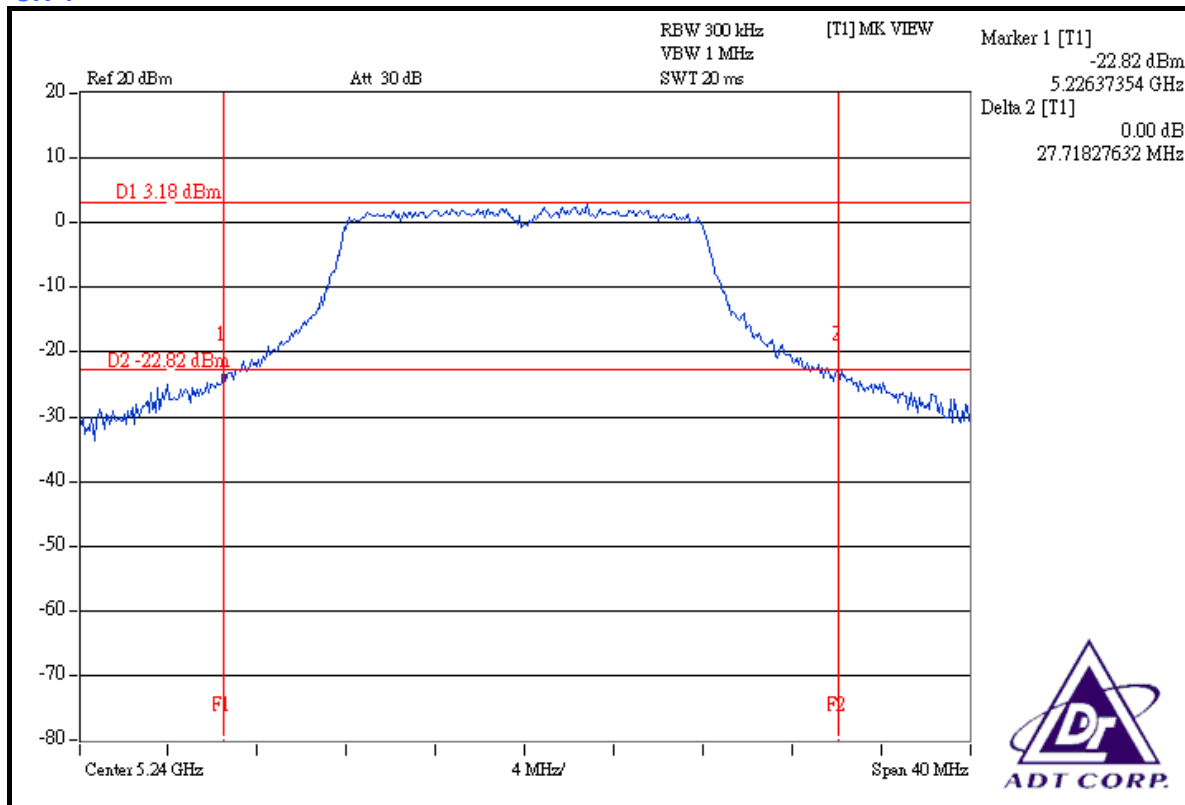

4.4 PEAK POWER EXCURSION MEASUREMENT

4.4.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	13dB
5.250 ~ 5.350GHz	13dB
5.470 ~ 5.725GHz	13dB

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.4.3 TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer.
2. Set the spectrum bandwidth span to view the entire spectrum.
3. Using peak detector and Max-hold function for Trace 1 (RB = 1MHz, VB = 3MHz) and 2 (RB = 1MHz, VB = 300kHz).
4. The largest difference between Trace 1 and Trace 2 in any 1MHz band on any frequency was recorded.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

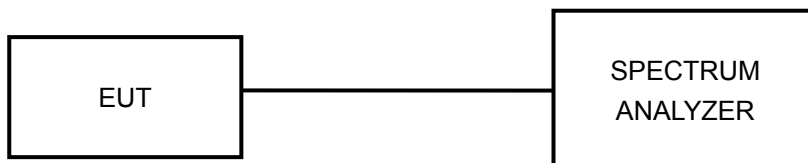

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.


4.4.7 TEST RESULTS

802.11a OFDM MODULATION:


MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER EXCURSION (dB)	PEAK TO AVERAGE EXCURSION LIMIT (dB)	PASS / FAIL
1	5180	8.86	13	PASS
2	5200	8.80	13	PASS
4	5240	9.15	13	PASS


CH 1

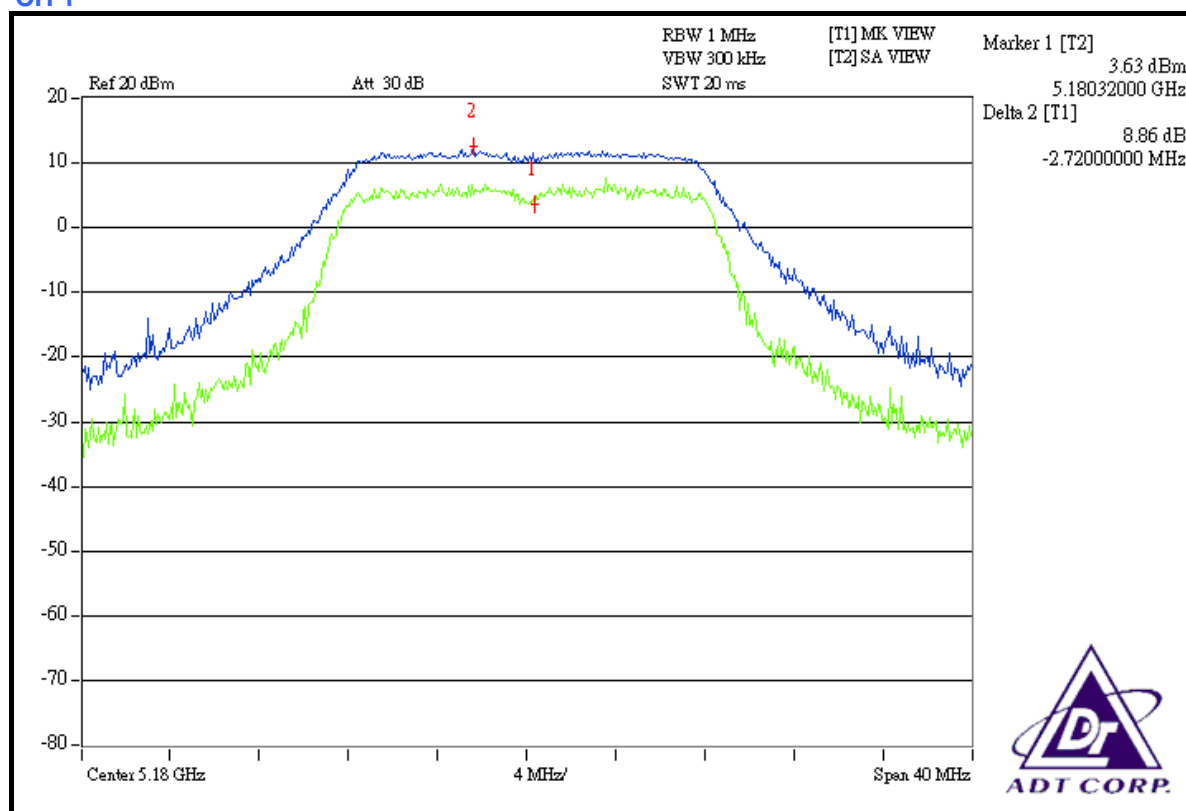

CH 2

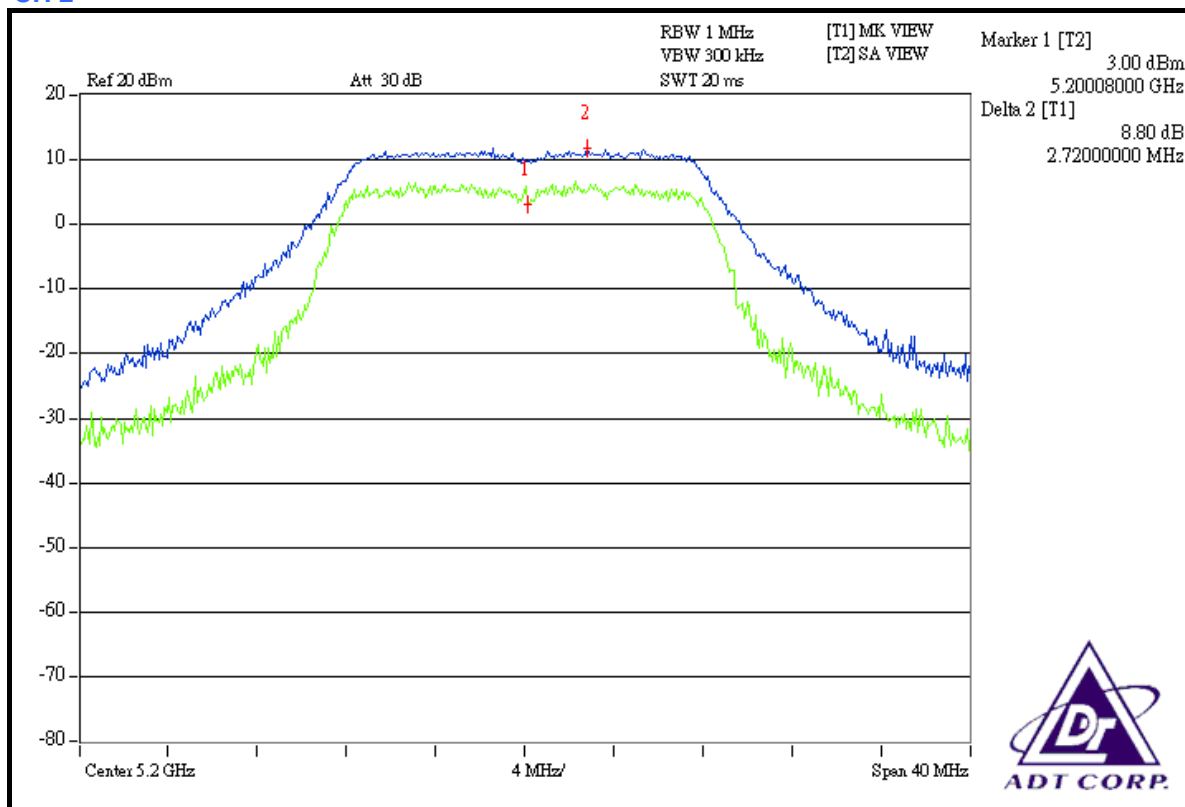

CH 4

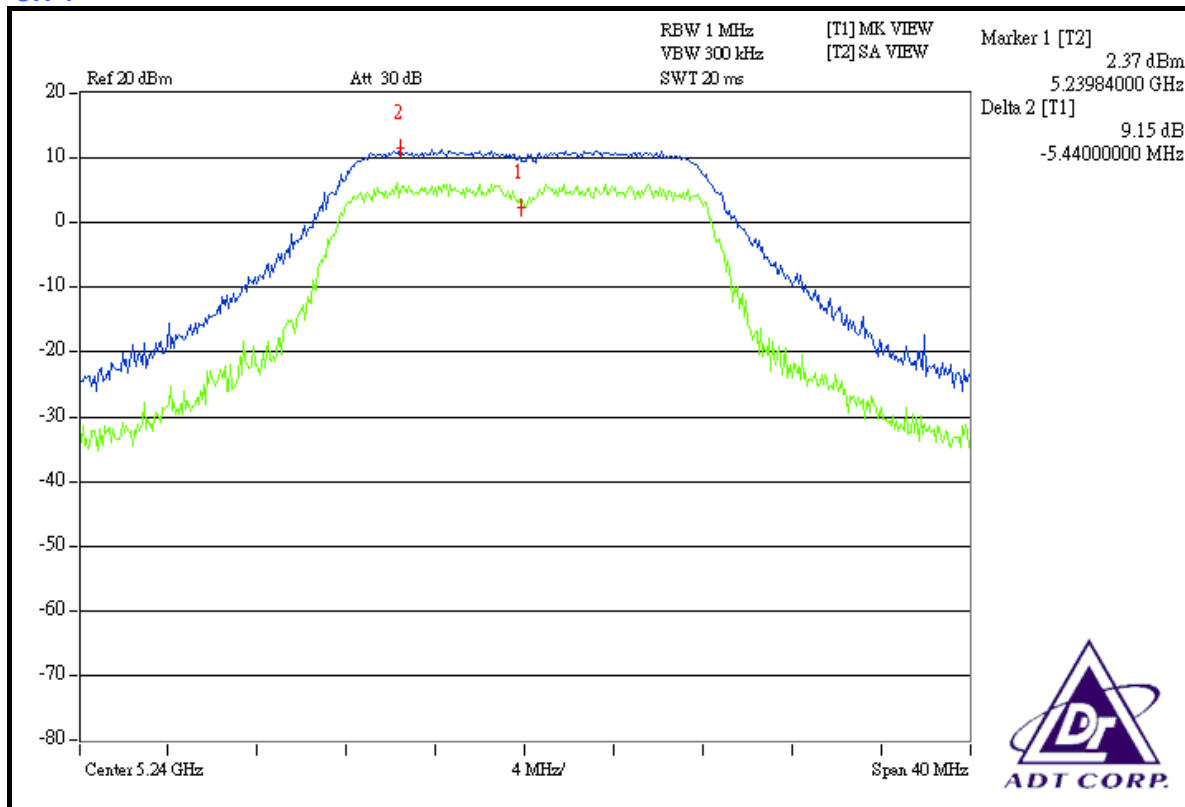

4.5 PEAK POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

FREQUENCY BAND	LIMIT
5.150 ~ 5.250GHz	4dBm
5.250 ~ 5.350GHz	11dBm
5.470 ~ 5.725GHz	11dBm

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURES

- The transmitter output was connected to the spectrum analyzer.
- Set RBW = 1MHz, VBW = 3MHz. The PPSD is the highest level found across the emission in any 1MHz band.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

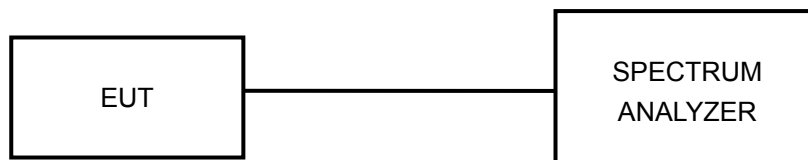

4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.5.7 TEST RESULTS


802.11a OFDM MODULATION:

MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg.C, 65%RH, 991hPa
INPUT POWER	120Vac, 60Hz	TESTED BY	Long Chen


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 1MHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS / FAIL
1	5180	-0.01	1.6	PASS
2	5200	0.01	1.6	PASS
4	5240	-0.15	1.6	PASS

NOTE: According to 15.407(a)(1)(2), the maximum antenna gain 8.4dBi is higher than 6dBi, so the limit of peak power shall be reduced by 2.4dB.


CH 1

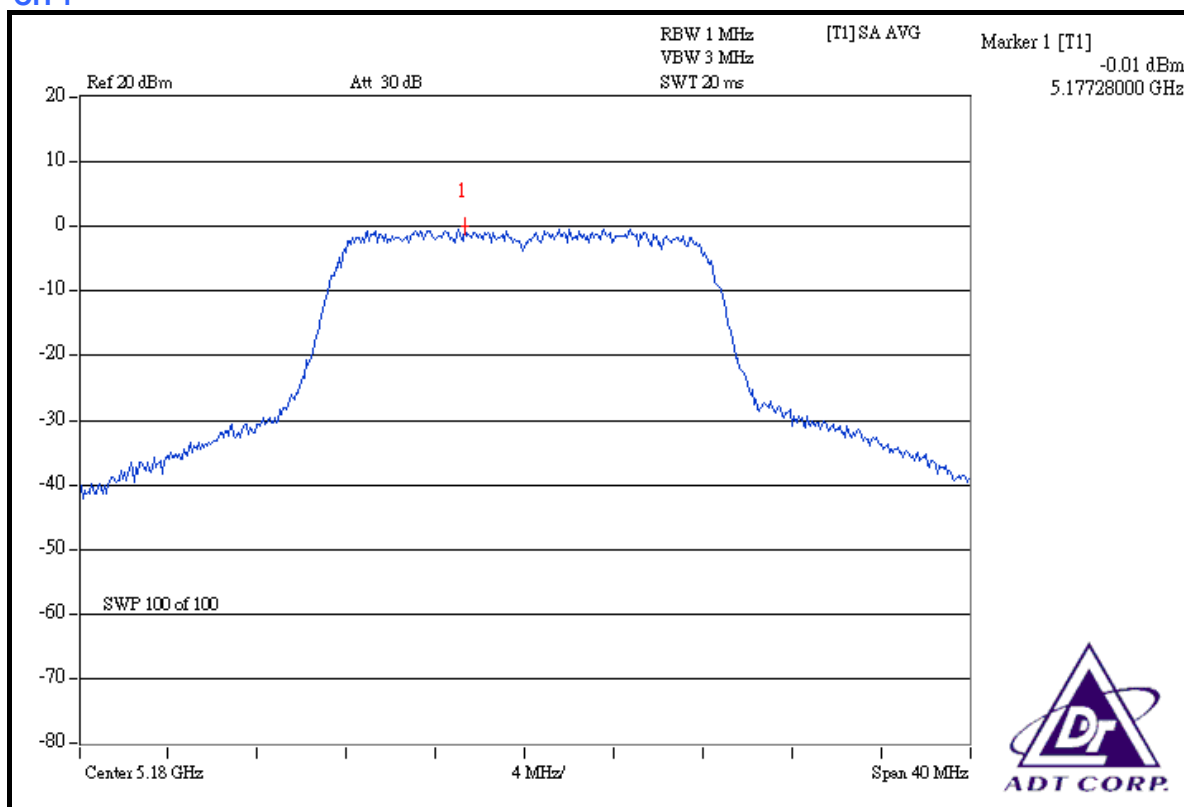

CH 2

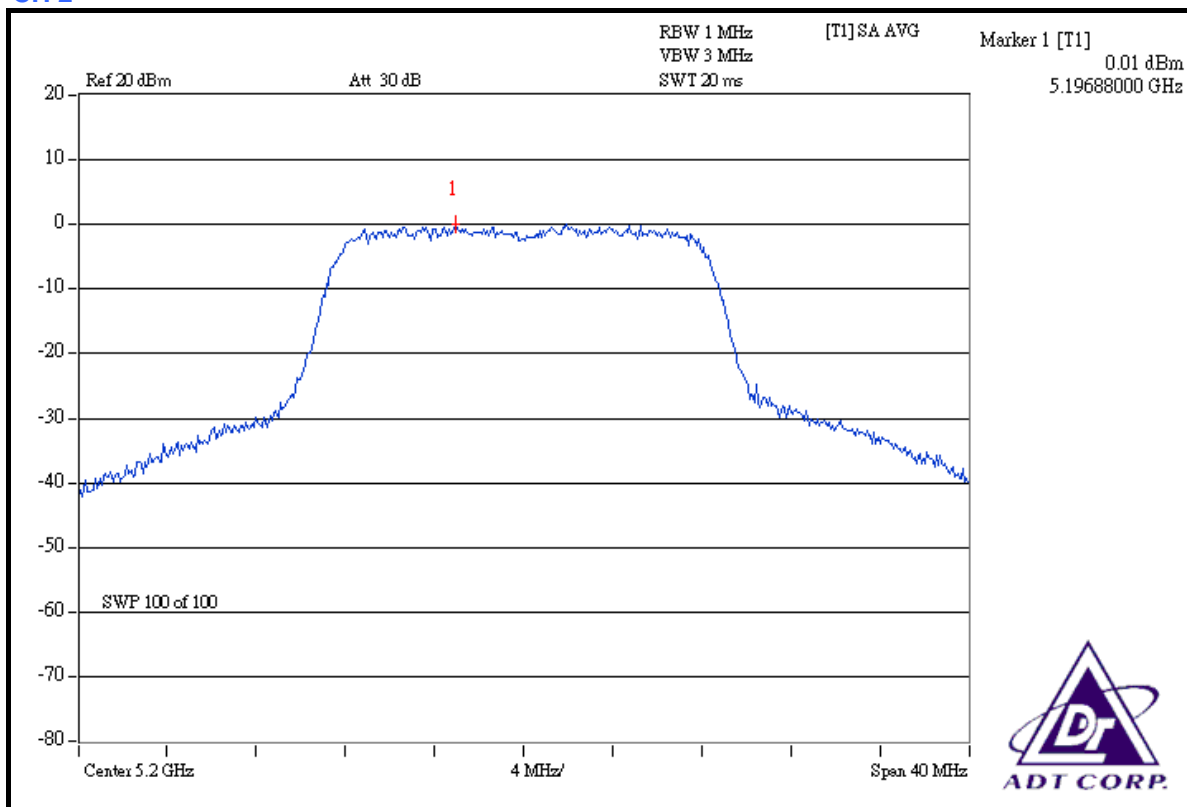

CH 4

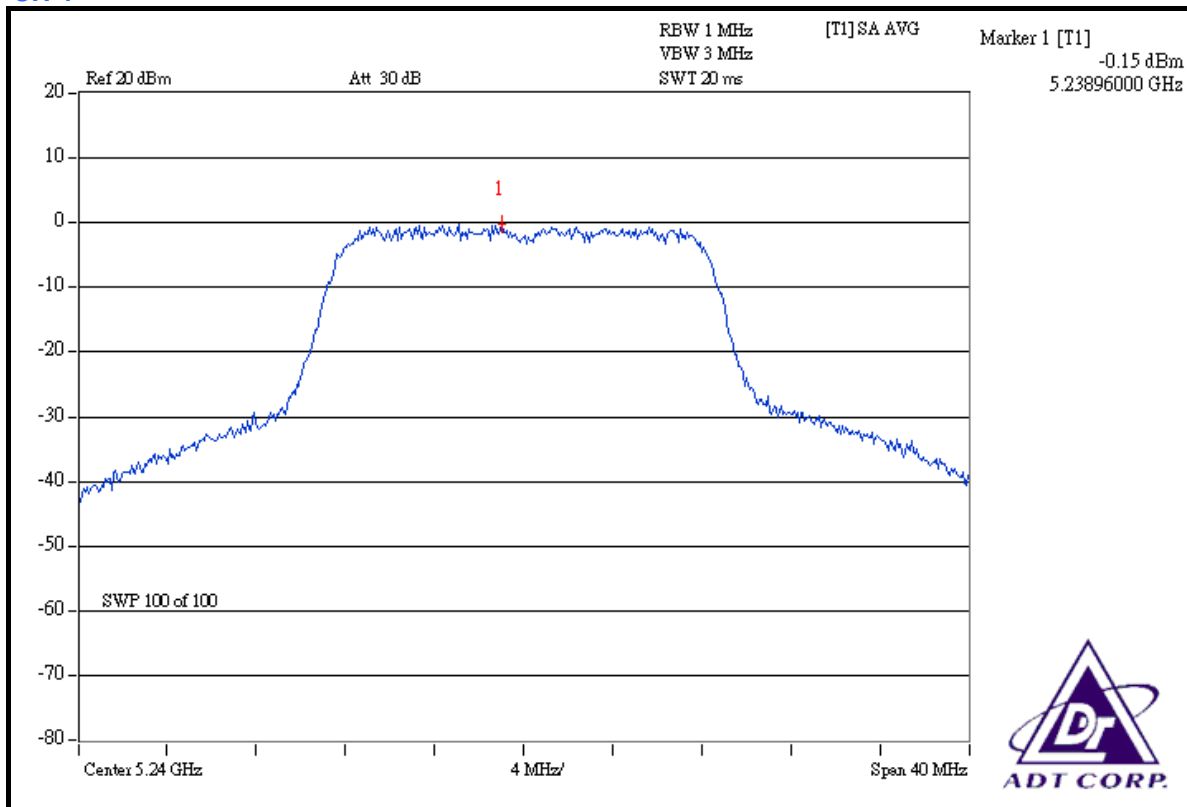

4.6 FREQUENCY STABILITY

4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.02\%$ of the operating frequency over a temperature variation of -30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ANRITSU SPECTRUM ANALYZER	MS2667C	M10281	Mar. 07, 2008
WIT STANDARD TEMPERATURE AND HUMIDITY CHAMBER	TH-4S-C	W981030	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.6.3 TEST PROCEDURE

1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at $+20$ degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

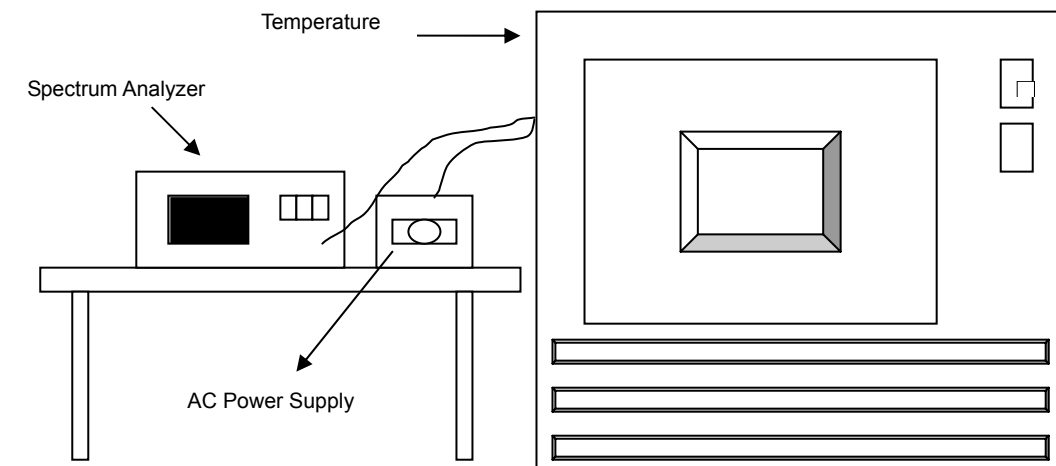

4.6.6 EUT OPERATING CONDITION

Same as Item 4.1.6

4.6.7 TEST RESULTS

OPERATING FREQUENCY: 5200MHz						LIMIT: $\pm 0.01\%$			
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		(MHz)	(%)	(MHz)	(%)	(MHz)	(%)	(MHz)	(%)
50	126.5	5199.910451	-0.0017221	5199.922743	-0.0014857	5199.946941	-0.0010204	5199.947689	-0.0010060
	110.0	5199.926451	-0.0014144	5199.934743	-0.0012549	5199.950341	-0.0009550	5199.951589	-0.0009310
	93.5	5199.929251	-0.0013605	5199.935143	-0.0012472	5199.955541	-0.0008550	5199.958789	-0.0007925
40	126.5	5199.921551	-0.0015086	5199.931743	-0.0013126	5199.951341	-0.0009358	5199.952589	-0.0009118
	110.0	5199.927751	-0.0013894	5199.940543	-0.0011434	5199.956141	-0.0008434	5199.956689	-0.0008329
	93.5	5199.939351	-0.0011663	5199.948443	-0.0009915	5199.959041	-0.0007877	5199.963289	-0.0007060
30	126.5	5199.922851	-0.0014836	5199.937843	-0.0011953	5199.957041	-0.0008261	5199.958789	-0.0007925
	110.0	5199.928651	-0.0013721	5199.953443	-0.0008953	5199.964641	-0.0006800	5199.958789	-0.0007925
	93.5	5199.946751	-0.0010240	5199.961843	-0.0007338	5199.965741	-0.0006588	5199.968989	-0.0005964
20	126.5	5199.929851	-0.0013490	5199.941743	-0.0011203	5199.960341	-0.0007627	5199.963889	-0.0006944
	110.0	5199.930151	-0.0013432	5199.959143	-0.0007857	5199.968141	-0.0006127	5199.968289	-0.0006098
	93.5	5199.954451	-0.0008759	5199.970343	-0.0005703	5199.969641	-0.0005838	5199.971689	-0.0005444
10	126.5	5199.937051	-0.0012105	5199.952543	-0.0009126	5199.967741	-0.0006204	5199.970289	-0.0005714
	110.0	5199.945651	-0.0010452	5199.963443	-0.0007030	5199.970041	-0.0005761	5199.971689	-0.0005444
	93.5	5199.960551	-0.0007586	5199.975143	-0.0004780	5199.977741	-0.0004281	5199.981689	-0.0003521
0	126.5	5199.940751	-0.0011394	5199.959543	-0.0007780	5199.971341	-0.0005511	5199.975689	-0.0004675
	110.0	5199.952251	-0.0009182	5199.968943	-0.0005972	5199.978141	-0.0004204	5199.978789	-0.0004079
	93.5	5199.966851	-0.0006375	5199.978243	-0.0004184	5199.980141	-0.0003819	5199.984389	-0.0003002
-10	126.5	5199.952851	-0.0009067	5199.965043	-0.0006722	5199.978141	-0.0004204	5199.980589	-0.0003733
	110.0	5199.959351	-0.0007817	5199.975043	-0.0004799	5199.981341	-0.0003588	5199.985489	-0.0002791
	93.5	5199.973951	-0.0005009	5199.981443	-0.0003569	5199.985041	-0.0002877	5199.988789	-0.0002156
-20	126.5	5199.957751	-0.0008125	5199.971443	-0.0005492	5199.981641	-0.0003531	5199.985689	-0.0002752
	110.0	5199.963151	-0.0007086	5199.979443	-0.0003953	5199.987841	-0.0002338	5199.988689	-0.0002175
	93.5	5199.977951	-0.0004240	5199.988843	-0.0002146	5199.989041	-0.0002108	5199.989689	-0.0001983
-30	126.5	5199.963051	-0.0007105	5199.978243	-0.0004184	5199.987941	-0.0002319	5199.988089	-0.0002291
	110.0	5199.977451	-0.0004336	5199.984543	-0.0002972	5199.990341	-0.0001858	5199.992689	-0.0001406
	93.5	5199.980551	-0.0003740	5199.994043	-0.0001146	5199.994441	-0.0001069	5199.995889	-0.0000791

4.7 BAND EDGES MEASUREMENT

4.7.1 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100040	Jun. 28, 2008

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA

4.7.2 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 1kHz and 3kHz with suitable frequency span including 1kHz bandwidth from band edge. The band edges was measured and recorded.

NOTE: The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 1kHz for Average detection (AV) at frequency above 1GHz

4.7.3 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.

4.7.4 TEST RESULTS

For signals in the restricted bands above and below the 5.15 to 5.35GHz allocated band a measurement was made of the amplitude of the spurious emissions with respect to the intentional signals. The relative amplitude, in dBc, was applied to the average and peak field strength of the intentional signal made on the OATS to calculate the field strength of the unintentional signals.

The spectrum plots (Peak RBW = 1MHz, VBW = 3MHz) are attached on the following pages.

802.11a OFDM MODULATION:

Channel 1 (5180MHz)

The band edge emission plot on the next page shows 40.36dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 112.67dBuV/m (Peak), so the maximum field strength in restrict band is $112.67 - 40.36 = 72.31\text{dBuV/m}$ which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 53.54dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 1 is 101.35dBuV/m (Average), so the maximum field strength in restrict band is $101.35 - 53.54 = 47.81\text{dBuV/m}$ which is under 54dBuV/m limit.



Channel 4 (5240MHz)

The band edge emission plot on the next second page shows 56.08dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 112.42dBuV/m (Peak), so the maximum field strength in restrict band is $112.42 - 56.08 = 56.34\text{dBuV/m}$ which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 58.21dBc between carrier maximum power and local maximum emission in restrict band. The emission of carrier strength list in the test result of channel 4 is 101.10dBuV/m (Average), so the maximum field strength in restrict band is $101.10 - 58.21 = 42.89\text{dBuV/m}$ which is under 54dBuV/m limit.



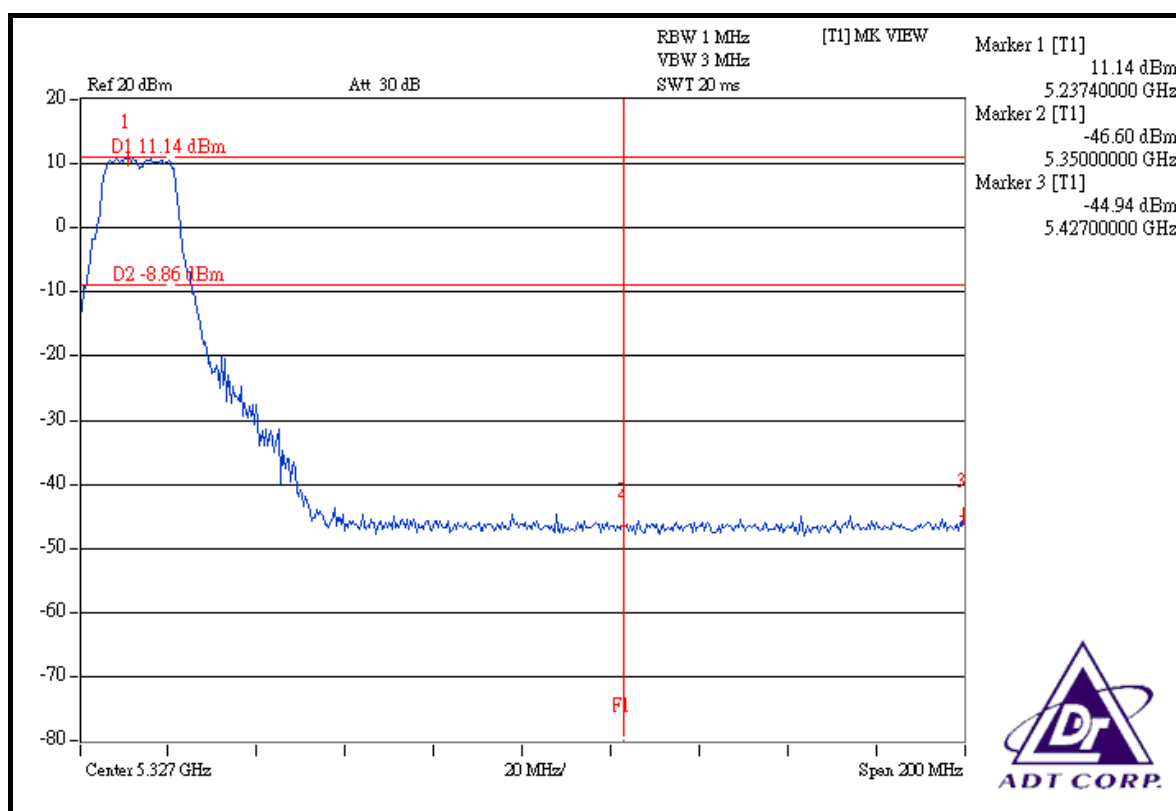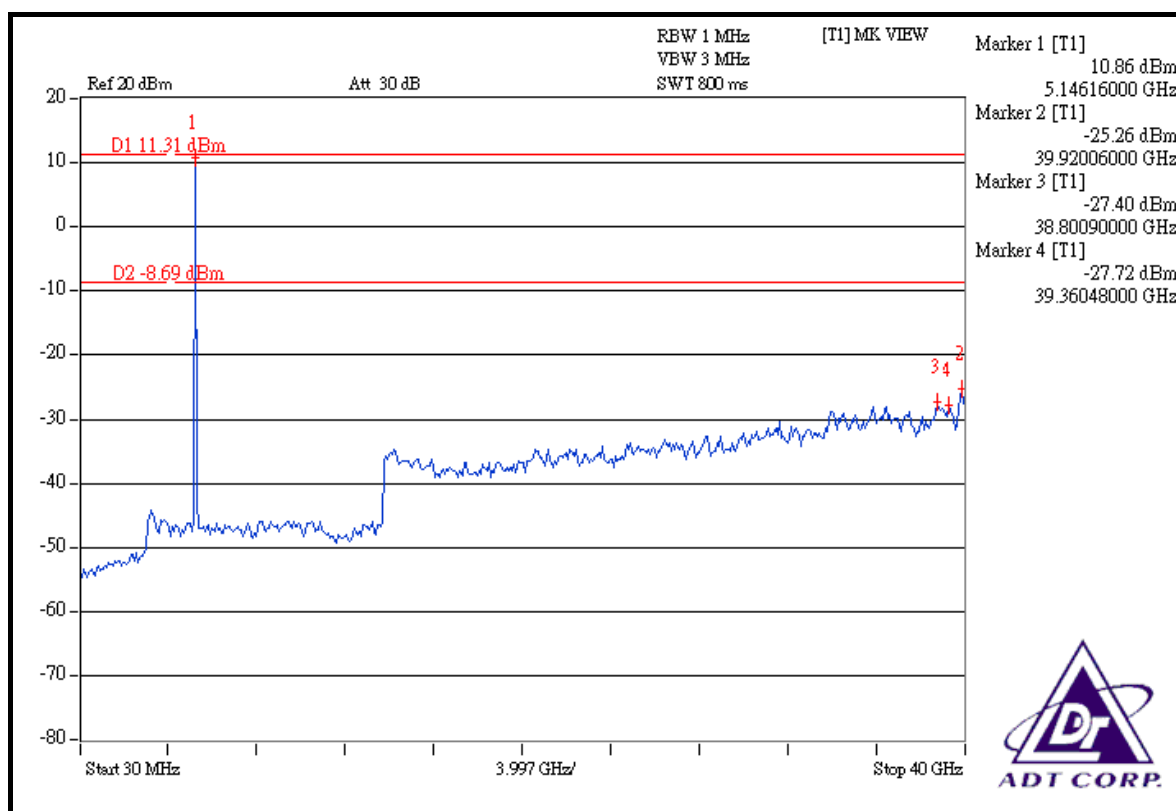

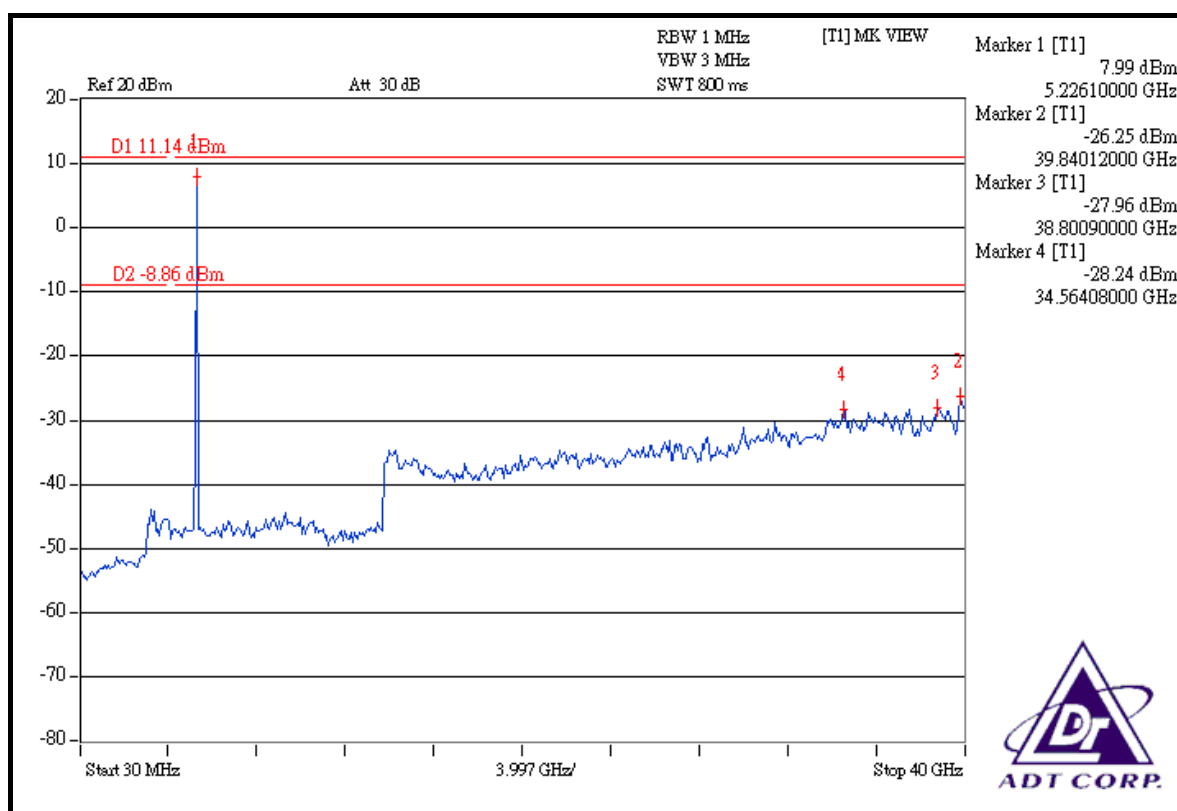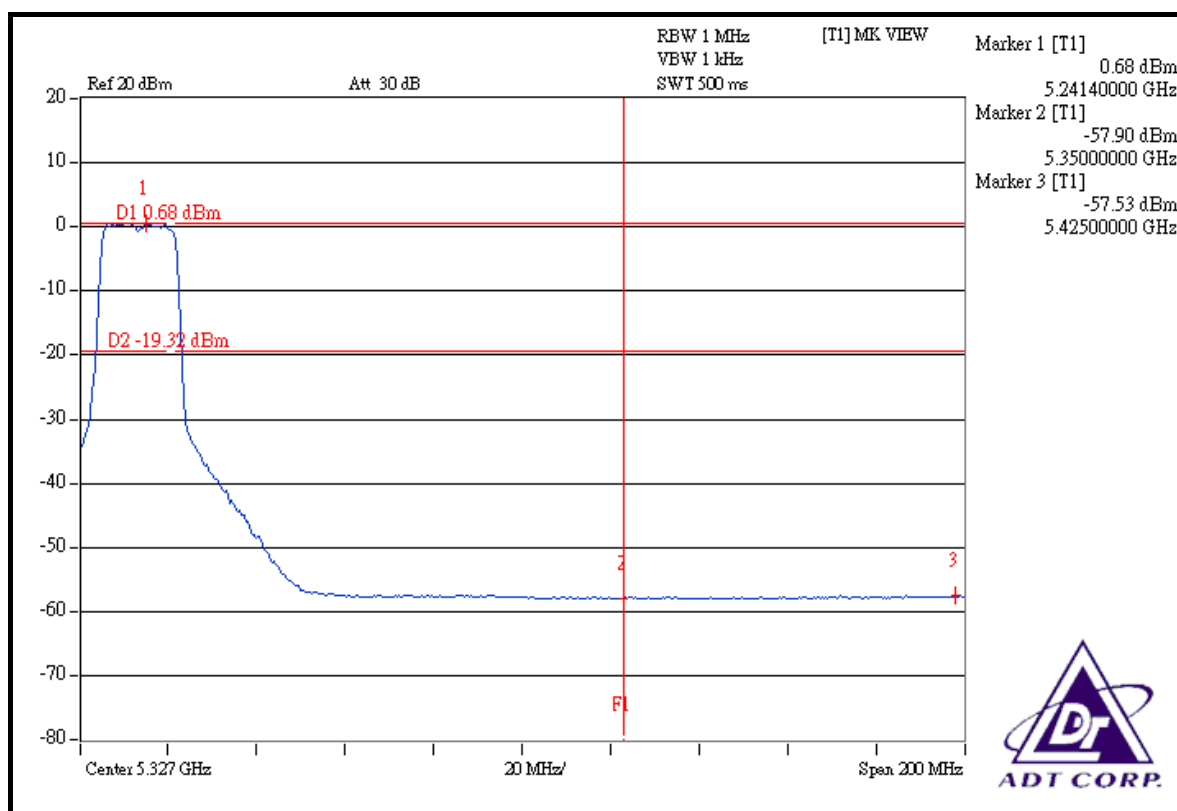

4.8 ANTENNA REQUIREMENT

4.8.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.407(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.8.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is patch antenna with UFL connector. The maximum Gain of the antenna is 8.4dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA, CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:
www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:
Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:
Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:
Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.