

FCC SAR TEST REPORT

Applicant: SPECTRA Technologies Holdings Co. Ltd.

Address: Unit 1301-09, 19-20, Tower II, Grand Century Place, Kowloon,
Hong Kong

Product Name: Android POS

FCC ID: VWZS1

Standard(s): 47 CFR Part 2(2.1093)

Report Number: KS1240221-08647E-20B

Report Date: 2024/07/11

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Mark Dong

Reviewed By: Mark Dong
Title: SAR Engineer

Brave Lu

Approved By: Brave Lu
Title: SAR Engineer

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

SAR TEST RESULTS SUMMARY

| MODE | | Max. 10g SAR Level(s) Reported(W/kg) | | Limit (W/kg) |
|---------------------|----------------|--------------------------------------|-------------|--------------|
| Body Supported Mode | GSM 850 | 1g Body SAR | 0.12 | 1.6 |
| | PCS 1900 | 1g Body SAR | 0.65 | |
| | WCDMA Band 2 | 1g Body SAR | 0.11 | |
| | WCDMA Band 5 | 1g Body SAR | 0.03 | |
| | LTE Band 7 | 1g Body SAR | 0.14 | |
| | LTE Band 12&17 | 1g Body SAR | 0.01 | |
| | LTE Band 13 | 1g Body SAR | 0.01 | |
| | LTE Band 25&2 | 1g Body SAR | 0.08 | |
| | LTE Band 26&5 | 1g Body SAR | 0.02 | |
| | LTE Band 41&38 | 1g Body SAR | 0.09 | |
| | LTE Band 66&4 | 1g Body SAR | 0.69 | |
| | LTE Band 71 | 1g Body SAR | 0.01 | |
| | WLAN 2.4G | 1g Body SAR | 0.01 | |
| | WLAN 5.2G | 1g Body SAR | 0.03 | |
| | WLAN 5.3G | 1g Body SAR | 0.01 | |
| | WLAN 5.8G | 1g Body SAR | 0.08 | |
| | Simultaneous | 1g Body SAR | 1.02 | |
| Handheld Mode | GSM 850 | 10g Extremity SAR | 0.38 | 4.0 |
| | PCS 1900 | 10g Extremity SAR | 1.59 | |
| | WCDMA Band 2 | 10g Extremity SAR | 1.04 | |
| | WCDMA Band 5 | 10g Extremity SAR | 0.14 | |
| | LTE Band 7 | 10g Extremity SAR | 0.59 | |
| | LTE Band 12&17 | 10g Extremity SAR | 0.01 | |
| | LTE Band 13 | 10g Extremity SAR | 0.03 | |
| | LTE Band 25&2 | 10g Extremity SAR | 0.56 | |
| | LTE Band 26&5 | 10g Extremity SAR | 0.08 | |
| | LTE Band 41&38 | 10g Extremity SAR | 0.27 | |
| | LTE Band 66&4 | 10g Extremity SAR | 0.74 | |
| | LTE Band 71 | 10g Extremity SAR | 0.02 | |
| | WLAN 2.4G | 10g Extremity SAR | 0.13 | |
| | WLAN 5.2G | 10g Extremity SAR | 0.56 | |
| | WLAN 5.3G | 10g Extremity SAR | 0.60 | |
| | WLAN 5.8G | 10g Extremity SAR | 0.19 | |
| | Simultaneous | 10g Extremity SAR | 2.19 | |

| | |
|---|--|
| Applicable Standards | FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices |
| | IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| | IEC 62209-2:2010+AMD1:2019 Amendment 1 - Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz) |
| | KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 248227 D01 802.11 Wi-Fi SAR v02r02 |
| Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in FCC 47 CFR part 2.1093 and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures. The results and statements contained in this report pertain only to the device(s) evaluated. | |

CONTENTS

| | |
|--|-----------|
| SAR TEST RESULTS SUMMARY | 2 |
| DOCUMENT REVISION HISTORY | 6 |
| 1. GENERAL INFORMATION | 7 |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 7 |
| 2. REFERENCE, STANDARDS, AND GUIDELINES | 9 |
| 2.1 SAR LIMITS..... | 9 |
| 2.2 TEST FACILITY | 10 |
| 3. DESCRIPTION OF TEST SYSTEM..... | 11 |
| 4. EQUIPMENT LIST AND CALIBRATION | 16 |
| 4.1 EQUIPMENTS LIST & CALIBRATION INFORMATION | 16 |
| 5. SAR MEASUREMENT SYSTEM VERIFICATION | 17 |
| 5.1 LIQUID VERIFICATION..... | 17 |
| 5.2 LIQUID VERIFICATION RESULTS | 17 |
| 5.3 SYSTEM ACCURACY VERIFICATION | 22 |
| 5.4 SYSTEM ACCURACY CHECK RESULTS..... | 22 |
| 5.5 SAR SYSTEM VALIDATION DATA | 24 |
| 6. EUT TEST STRATEGY AND METHODOLOGY | 32 |
| 6.1 TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS | 32 |
| 6.2 TEST DISTANCE FOR SAR EVALUATION | 32 |
| 6.3 SAR EVALUATION PROCEDURE | 33 |
| 7. CONDUCTED OUTPUT POWER MEASUREMENT..... | 34 |
| 7.1 TEST PROCEDURE | 34 |
| 7.2 RADIO CONFIGURATION | 34 |
| 7.3 MAXIMUM TARGET OUTPUT POWER..... | 39 |
| 7.4 TEST RESULTS:..... | 41 |
| 8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 73 |
| 8.1 ANTENNAS LOCATION: | 73 |
| 8.2 ANTENNA DISTANCE TO EDGE..... | 73 |
| 8.3 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS | 74 |
| 8.4 STANDALONE SAR ESTIMATION: | 75 |
| 8.5 SAR TEST EXCLUSION FOR THE EUT EDGE CONSIDERATIONS RESULT | 75 |
| 9. SAR MEASUREMENT RESULTS..... | 76 |
| 9.1 SAR TEST DATA | 76 |

| | |
|--|------------|
| 10. MEASUREMENT VARIABILITY | 96 |
| 11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION | 97 |
| 11.1 SIMULTANEOUS TRANSMISSION:..... | 97 |
| 11.2 SIMULTANEOUS SAR TEST EXCLUSION CONSIDERATIONS:..... | 97 |
| APPENDIX A - MEASUREMENT UNCERTAINTY | 98 |
| APPENDIX B - SAR PLOTS | 100 |
| APPENDIX C - EUT TEST POSITION PHOTOS..... | 101 |
| APPENDIX D - PROBE CALIBRATION CERTIFICATES | 102 |
| APPENDIX E - DIPOLE CALIBRATION CERTIFICATES | 103 |

DOCUMENT REVISION HISTORY

| Revision Number | Report Number | Description of Revision | Date of Revision |
|-----------------|----------------------|-------------------------|------------------|
| 1.0 | KS1240221-08647E-20B | Original Report | 2024/07/11 |

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

| | |
|--|--|
| EUT Name: | Android POS |
| EUT Model: | S1 PLUS |
| Device Type: | Portable |
| Exposure Category: | Population / Uncontrolled |
| Antenna Type(s): | Internal Antenna |
| Body-Worn Accessories: | None |
| Proximity Sensor: | None |
| Carrier Aggregation: | None |
| Operation Modes: | GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSUPA/HSDPA), FDD-LTE, TDD-LTE, WLAN, Bluetooth and NFC |
| Operation Frequency: | GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755MHz(TX) ; 2110-2155 MHz(RX) LTE Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 13:777-787 MHz(TX); 746-756 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX); 1930-1995MHz(RX) LTE Band 26: 814-849 MHz(TX); 859-894MHz(RX) LTE Band 38: 2570-2620 MHz(TX); 2570-2620 MHz(RX) LTE Band 41: 2535-2655 MHz(TX/RX) LTE Band 66: 1710-1780 MHz(TX) ; 2110-2180 MHz(RX) LTE Band 71: 663-698 MHz(TX); 617-652 MHz(RX) WLAN 2.4G: 2412-2462 MHz/2422MHz-2452 MHz(TX/RX) WLAN 5.2G: 5150 -5250 MHz(TX/RX) WLAN 5.3G: 5250-5350 MHz MHz(TX/RX) WLAN 5.6G: 5470-5725 MHz(TX/RX) WLAN 5.8G: 5725-5850 MHz(TX/RX) Bluetooth: 2402-2480MHz(TX/RX) NFC: 13.56MHz |
| Maximum Output Power (Conducted): | GSM 850: 25.93dBm; PCS 1900: 21.62dBm WCDMA Band 2: 23.32dBm; WCDMA Band 5: 24.12dBm LTE Band 2: 22.43dBm; LTE Band 4: 23.17dBm LTE Band 5: 23.45dBm; LTE Band 7: 22.46 dBm LTE Band 12: 23.93dBm; LTE Band 13: 23.57dBm LTE Band 17: 23.83dBm; LTE Band 25: 22.43dBm LTE Band 26: 23.48dBm; LTE Band 38: 23.22dBm LTE Band 41: 23.2 dBm; LTE Band 66: 23.18dBm LTE Band 71: 23.76dBm WLAN 2.4G: 13.48dBm; WLAN 5.2G: 14.51dBm; WLAN 5.3G: 14.18dBm WLAN 5.6G: 7.17dBm; WLAN 5.8G: 8.66dBm Bluetooth(BDR/EDR): 1.34dBm, BLE: -5.84dBm |
| Dimensions (L*W*H): | 185mm (L) *73mm (W) *60mm (H) |
| Rated Input Voltage: | DC3.8V from Rechargeable Battery |
| Serial Number: | 2HV8-2 |
| Normal Operation: | Body Supported and Handheld |
| EUT Received Date: | 2024/02/22 |
| Test Date: | 2024/06/20 ~ 2024/07/09 |

| | |
|-----------------------------|------|
| EUT Received Status: | Good |
|-----------------------------|------|

2. REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

2.1 SAR Limits

FCC Limit

| EXPOSURE LIMITS | SAR (W/kg) | |
|--|--|--|
| | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average (averaged over the whole body) | 0.08 | 0.4 |
| Spatial Peak (averaged over any 1 g of tissue) | 1.60 | 8.0 |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.0 | 20.0 |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg (FCC) applied to the EUT.

2.2 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.


3. DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY5 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:



DASY5 System Description

The DASY5 system for performing compliance tests consists of the following items:

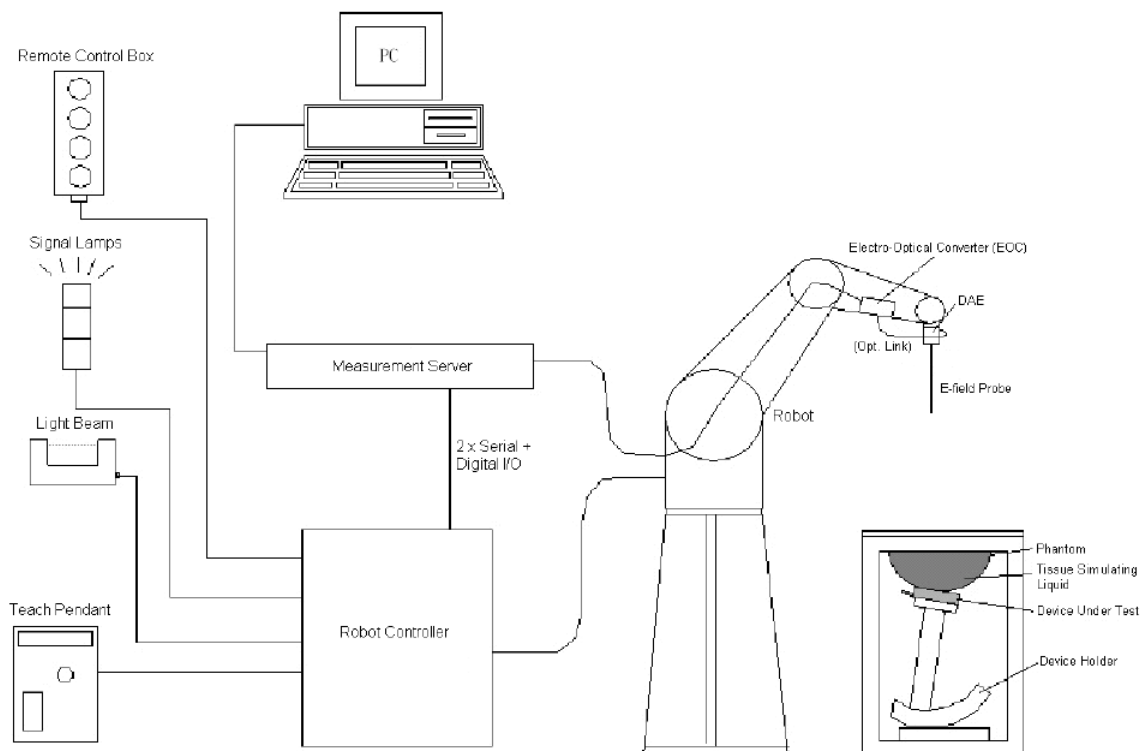

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY5 Measurement Server

The DASY5 measurement server is based on a PC/104 CPU board with a 400MHz Intel ULV Celeron, 128MB chip-disk and 128MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16 bit AD-converter system for optical detection and digital I/O interface are contained on the DASY5 I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized point out, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.



Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

| | |
|-----------------------------|---|
| Frequency | 4 MHz – 10 GHz Linearity: ± 0.2 dB (30 MHz – 10 GHz) |
| Directivity(typical) | ± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis) |
| Dynamic Range | 10 μ W/g – > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g) |
| Dimensions | Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm |
| Applications | High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%. |
| Compatibility | DASY3, DASY4, DASY52, DASY6, DASY8, EASY6, EASY4/MRI |

SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness

increases to 6 mm). The phantom has three measurement areas:

- _ Left Head
- _ Right Head
- _ Flat phantom

The phantom table for the DASY systems based on the robots have the size of 100 x 50 x 85 cm (L x W x H). For easy dislocation these tables have fork lift cut outs at the bottom.

The bottom plate contains three pairs of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids)



A white cover is provided to cover the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on top of this phantom cover are possible. Three reference marks are provided on the phantom counter. These reference marks are used to teach the absolute phantom position relative to the robot.

Robots

The DASY5 system uses the high precision industrial robot. The robot offers the same features important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The above mentioned robots are controlled by the Staubli CS7MB robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is contained on the CDs delivered along with the robot. Paper manuals are available upon request direct from Staubli.

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

| Frequency MHz | Relative permittivity ϵ_r | Conductivity (σ) S/m |
|------------------|---------------------------------------|----------------------------------|
| 300 | 45,3 | 0,87 |
| 450 | 43,5 | 0,87 |
| 750 | 41,9 | 0,89 |
| 835 | 41,5 | 0,90 |
| 900 | 41,5 | 0,97 |
| 1 450 | 40,5 | 1,20 |
| 1 500 | 40,4 | 1,23 |
| 1 640 | 40,2 | 1,31 |
| 1 750 | 40,1 | 1,37 |
| 1 800 | 40,0 | 1,40 |
| 1 900 | 40,0 | 1,40 |
| 2 000 | 40,0 | 1,40 |
| 2 100 | 39,8 | 1,49 |
| 2 300 | 39,5 | 1,67 |
| 2 450 | 39,2 | 1,80 |
| 2 600 | 39,0 | 1,96 |
| 3 000 | 38,5 | 2,40 |
| 3 500 | 37,9 | 2,91 |
| 4 000 | 37,4 | 3,43 |
| 4 500 | 36,8 | 3,94 |
| 5 000 | 36,2 | 4,45 |
| 5 200 | 36,0 | 4,66 |
| 5 400 | 35,8 | 4,86 |
| 5 600 | 35,5 | 5,07 |
| 5 800 | 35,3 | 5,27 |
| 6 000 | 35,1 | 5,48 |

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.


4. EQUIPMENT LIST AND CALIBRATION

4.1 Equipments List & Calibration Information

| Equipment | Model | S/N | Calibration Date | Calibration Due Date |
|-------------------------------------|-----------------|--------------------------------|------------------|----------------------|
| DASY5 Test Software | DASY52.10 | N/A | NCR | NCR |
| DASY5 Measurement Server | DASY5 4.5.12 | 1470 | NCR | NCR |
| Data Acquisition Electronics | DAE4 | 772 | 2024/1/23 | 2025/1/22 |
| E-Field Probe | EX3DV4 | 7839 | 2023/9/21 | 2024/9/20 |
| Mounting Device | MD4HHTV5 | SD 000 H01 KA | NCR | NCR |
| Twin SAM | Twin SAM V5.0 | 1874 | NCR | NCR |
| Dipole, 750 MHz | D750V3 | 1167 | 2022/10/31 | 2025/10/30 |
| Dipole, 835 MHz | D835V2 | 453 | 2021/8/31 | 2024/8/30 |
| Dipole, 1750 MHz | D1750V2 | 1141 | 2021/6/29 | 2024/6/28 |
| Dipole, 1900 MHz | D1900V2 | 543 | 2022/11/2 | 2025/11/1 |
| Dipole, 2450 MHz | D2450V2 | 971 | 2021/6/28 | 2024/6/27 |
| Dipole, 2600 MHz | D2600V2 | 1132 | 2022/11/1 | 2025/10/31 |
| Dipole, 5 GHz | D5GHzV2 | 1246 | 2022/11/1 | 2025/10/31 |
| Simulated Tissue Liquid Head | HBBL600-10000V6 | SL AAH U16 BC (Batch:220809-1) | Each Time | / |
| Network Analyzer | 8753C | 3033A02857 | 2023/11/18 | 2024/11/17 |
| Dielectric assessment kit | 1253 | SM DAK 040 CA | NCR | NCR |
| synthesized signal generator | 8665B | 3438a00584 | 2023/10/18 | 2024/10/17 |
| EPM Series Power Meter | E4419B | MY45103907 | 2023/10/18 | 2024/10/17 |
| USB Wideband Power Sensor | U2022XA | MY54170006 | 2023/10/18 | 2024/10/17 |
| Power Amplifier | ZHL-5W-202-S+ | 416402204 | NCR | NCR |
| Power Amplifier | ZVE-6W-83+ | 637202210 | NCR | NCR |
| Directional Coupler | 441493 | 520Z | NCR | NCR |
| Attenuator | 20dB, 100W | LN749 | NCR | NCR |
| Attenuator | 6dB, 150W | 2754 | NCR | NCR |
| Thermometer | DTM3000 | 3635 | 2023/8/11 | 2024/8/10 |
| Hygrothermograph | HTC-2 | EM072 | 2023/11/6 | 2024/11/5 |
| Wireless communication tester | 8960 | MY50266471 | 2023/10/18 | 2024/10/17 |
| Wideband Radio Communication Tester | CMW500 | 147473 | 2023/10/18 | 2024/10/17 |

5. SAR MEASUREMENT SYSTEM VERIFICATION

5.1 Liquid Verification

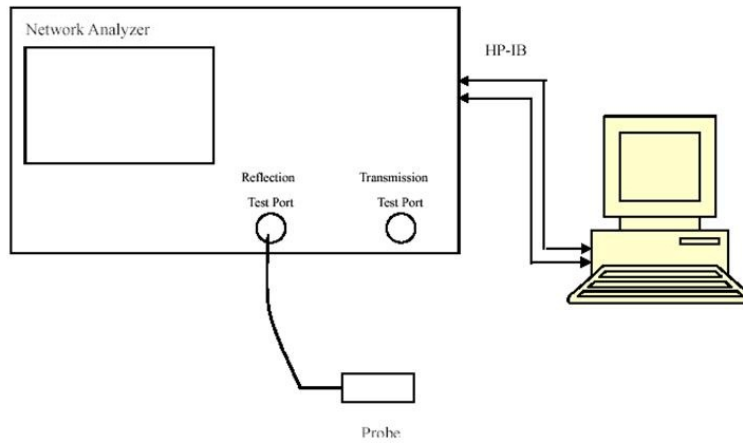

5.2 Liquid Verification Results

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 650 | Simulated Tissue Liquid Head | 43.775 | 0.848 | 42.43 | 0.88 | 3.17 | -3.64 | ± 5 |
| 660 | Simulated Tissue Liquid Head | 43.635 | 0.859 | 42.38 | 0.88 | 2.96 | -2.39 | ± 5 |
| 670 | Simulated Tissue Liquid Head | 43.089 | 0.865 | 42.33 | 0.88 | 1.79 | -1.70 | ± 5 |
| 680 | Simulated Tissue Liquid Head | 42.924 | 0.873 | 42.27 | 0.89 | 1.55 | -1.91 | ± 5 |
| 690 | Simulated Tissue Liquid Head | 42.790 | 0.880 | 42.22 | 0.89 | 1.35 | -1.12 | ± 5 |
| 700 | Simulated Tissue Liquid Head | 42.707 | 0.886 | 42.17 | 0.89 | 1.27 | -0.45 | ± 5 |
| 710 | Simulated Tissue Liquid Head | 42.482 | 0.893 | 42.11 | 0.89 | 0.88 | 0.34 | ± 5 |
| 720 | Simulated Tissue Liquid Head | 42.472 | 0.896 | 42.06 | 0.89 | 0.98 | 0.67 | ± 5 |
| 730 | Simulated Tissue Liquid Head | 42.274 | 0.903 | 42.01 | 0.89 | 0.63 | 1.46 | ± 5 |
| 740 | Simulated Tissue Liquid Head | 42.196 | 0.910 | 41.95 | 0.89 | 0.59 | 2.25 | ± 5 |
| 750 | Simulated Tissue Liquid Head | 41.996 | 0.917 | 41.90 | 0.89 | 0.23 | 3.03 | ± 5 |
| 760 | Simulated Tissue Liquid Head | 41.931 | 0.920 | 41.85 | 0.89 | 0.19 | 3.37 | ± 5 |
| 770 | Simulated Tissue Liquid Head | 41.806 | 0.927 | 41.81 | 0.89 | -0.01 | 4.16 | ± 5 |
| 780 | Simulated Tissue Liquid Head | 41.679 | 0.932 | 41.76 | 0.89 | -0.19 | 4.72 | ± 5 |
| 790 | Simulated Tissue Liquid Head | 41.565 | 0.933 | 41.71 | 0.89 | -0.35 | 4.83 | ± 5 |

*Liquid Verification above was performed on 2024/07/06.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 800 | Simulated Tissue Liquid Head | 41.484 | 0.932 | 41.66 | 0.90 | -0.42 | 3.56 | ±5 |
| 810 | Simulated Tissue Liquid Head | 41.398 | 0.941 | 41.62 | 0.90 | -0.53 | 4.56 | ±5 |
| 820 | Simulated Tissue Liquid Head | 41.194 | 0.943 | 41.57 | 0.90 | -0.90 | 4.78 | ±5 |
| 830 | Simulated Tissue Liquid Head | 41.114 | 0.939 | 41.52 | 0.90 | -0.98 | 4.33 | ±5 |
| 835 | Simulated Tissue Liquid Head | 41.050 | 0.943 | 41.50 | 0.90 | -1.08 | 4.78 | ±5 |
| 840 | Simulated Tissue Liquid Head | 40.985 | 0.947 | 41.50 | 0.91 | -1.24 | 4.07 | ±5 |
| 850 | Simulated Tissue Liquid Head | 40.807 | 0.957 | 41.50 | 0.92 | -1.67 | 4.02 | ±5 |

*Liquid Verification above was performed on 2024/07/07.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 1650 | Simulated Tissue Liquid Head | 39.489 | 1.316 | 40.19 | 1.32 | -1.74 | -0.30 | ±5 |
| 1660 | Simulated Tissue Liquid Head | 39.127 | 1.308 | 40.18 | 1.32 | -2.62 | -0.91 | ±5 |
| 1670 | Simulated Tissue Liquid Head | 39.066 | 1.300 | 40.17 | 1.33 | -2.75 | -2.26 | ±5 |
| 1680 | Simulated Tissue Liquid Head | 39.007 | 1.301 | 40.16 | 1.33 | -2.87 | -2.18 | ±5 |
| 1690 | Simulated Tissue Liquid Head | 38.952 | 1.305 | 40.15 | 1.34 | -2.98 | -2.61 | ±5 |
| 1700 | Simulated Tissue Liquid Head | 38.896 | 1.312 | 40.15 | 1.34 | -3.12 | -2.09 | ±5 |
| 1710 | Simulated Tissue Liquid Head | 38.846 | 1.312 | 40.14 | 1.35 | -3.22 | -2.81 | ±5 |
| 1720 | Simulated Tissue Liquid Head | 38.794 | 1.321 | 40.13 | 1.35 | -3.33 | -2.15 | ±5 |
| 1730 | Simulated Tissue Liquid Head | 38.758 | 1.331 | 40.12 | 1.36 | -3.39 | -2.13 | ±5 |
| 1740 | Simulated Tissue Liquid Head | 38.714 | 1.341 | 40.11 | 1.36 | -3.48 | -1.40 | ±5 |
| 1750 | Simulated Tissue Liquid Head | 38.675 | 1.351 | 40.10 | 1.37 | -3.55 | -1.39 | ±5 |
| 1760 | Simulated Tissue Liquid Head | 38.634 | 1.361 | 40.08 | 1.38 | -3.61 | -1.38 | ±5 |
| 1770 | Simulated Tissue Liquid Head | 38.588 | 1.371 | 40.06 | 1.38 | -3.67 | -0.65 | ±5 |
| 1780 | Simulated Tissue Liquid Head | 38.544 | 1.380 | 40.04 | 1.39 | -3.74 | -0.72 | ±5 |
| 1790 | Simulated Tissue Liquid Head | 38.499 | 1.390 | 40.02 | 1.39 | -3.80 | 0.00 | ±5 |
| 1800 | Simulated Tissue Liquid Head | 38.445 | 1.399 | 40.00 | 1.40 | -3.89 | -0.07 | ±5 |
| 1810 | Simulated Tissue Liquid Head | 38.420 | 1.408 | 40.00 | 1.40 | -3.95 | 0.57 | ±5 |
| 1820 | Simulated Tissue Liquid Head | 38.364 | 1.412 | 40.00 | 1.40 | -4.09 | 0.86 | ±5 |
| 1830 | Simulated Tissue Liquid Head | 38.325 | 1.416 | 40.00 | 1.40 | -4.19 | 1.14 | ±5 |
| 1840 | Simulated Tissue Liquid Head | 38.274 | 1.420 | 40.00 | 1.40 | -4.32 | 1.43 | ±5 |
| 1850 | Simulated Tissue Liquid Head | 39.231 | 1.424 | 40.00 | 1.40 | -1.92 | 1.71 | ±5 |

*Liquid Verification above was performed on 2024/06/20.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 1850 | Simulated Tissue Liquid Head | 40.368 | 1.441 | 40.00 | 1.40 | 0.92 | 2.93 | ±5 |
| 1860 | Simulated Tissue Liquid Head | 40.204 | 1.444 | 40.00 | 1.40 | 0.51 | 3.14 | ±5 |
| 1870 | Simulated Tissue Liquid Head | 40.141 | 1.448 | 40.00 | 1.40 | 0.35 | 3.43 | ±5 |
| 1880 | Simulated Tissue Liquid Head | 40.106 | 1.448 | 40.00 | 1.40 | 0.27 | 3.43 | ±5 |
| 1890 | Simulated Tissue Liquid Head | 40.123 | 1.445 | 40.00 | 1.40 | 0.31 | 3.21 | ±5 |
| 1900 | Simulated Tissue Liquid Head | 40.076 | 1.446 | 40.00 | 1.40 | 0.19 | 3.29 | ±5 |
| 1910 | Simulated Tissue Liquid Head | 39.963 | 1.445 | 40.00 | 1.40 | -0.09 | 3.21 | ±5 |
| 1920 | Simulated Tissue Liquid Head | 39.863 | 1.450 | 40.00 | 1.40 | -0.34 | 3.57 | ±5 |
| 1930 | Simulated Tissue Liquid Head | 39.895 | 1.452 | 40.00 | 1.40 | -0.26 | 3.71 | ±5 |
| 1940 | Simulated Tissue Liquid Head | 39.771 | 1.456 | 40.00 | 1.40 | -0.57 | 4.00 | ±5 |
| 1950 | Simulated Tissue Liquid Head | 39.781 | 1.457 | 40.00 | 1.40 | -0.55 | 4.07 | ±5 |
| 1960 | Simulated Tissue Liquid Head | 39.644 | 1.458 | 40.00 | 1.40 | -0.89 | 4.14 | ±5 |
| 1970 | Simulated Tissue Liquid Head | 39.677 | 1.455 | 40.00 | 1.40 | -0.81 | 3.93 | ±5 |
| 1980 | Simulated Tissue Liquid Head | 39.604 | 1.458 | 40.00 | 1.40 | -0.99 | 4.14 | ±5 |
| 1990 | Simulated Tissue Liquid Head | 39.568 | 1.462 | 40.00 | 1.40 | -1.08 | 4.43 | ±5 |
| 2000 | Simulated Tissue Liquid Head | 39.481 | 1.458 | 40.00 | 1.40 | -1.30 | 4.14 | ±5 |

*Liquid Verification above was performed on 2024/07/08.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta (%) | | Tolerance (%) |
|-----------------|------------------------------|------------------|----------------|--------------|----------------|--------------------|----------------------|---------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta\epsilon_r$ | $\Delta\sigma$ (S/m) | |
| 2400 | Simulated Tissue Liquid Head | 40.858 | 1.713 | 39.30 | 1.76 | 3.96 | -2.67 | ±5 |
| 2410 | Simulated Tissue Liquid Head | 40.827 | 1.725 | 39.28 | 1.77 | 3.94 | -2.54 | ±5 |
| 2420 | Simulated Tissue Liquid Head | 40.799 | 1.736 | 39.26 | 1.77 | 3.92 | -1.92 | ±5 |
| 2430 | Simulated Tissue Liquid Head | 40.769 | 1.747 | 39.24 | 1.78 | 3.90 | -1.85 | ±5 |
| 2440 | Simulated Tissue Liquid Head | 40.739 | 1.758 | 39.22 | 1.79 | 3.87 | -1.79 | ±5 |
| 2450 | Simulated Tissue Liquid Head | 40.696 | 1.768 | 39.20 | 1.80 | 3.82 | -1.78 | ±5 |
| 2460 | Simulated Tissue Liquid Head | 40.668 | 1.778 | 39.19 | 1.81 | 3.77 | -1.77 | ±5 |
| 2470 | Simulated Tissue Liquid Head | 40.636 | 1.790 | 39.17 | 1.82 | 3.74 | -1.65 | ±5 |
| 2480 | Simulated Tissue Liquid Head | 40.601 | 1.801 | 39.16 | 1.83 | 3.68 | -1.58 | ±5 |
| 2490 | Simulated Tissue Liquid Head | 40.563 | 1.812 | 39.15 | 1.84 | 3.61 | -1.52 | ±5 |
| 2500 | Simulated Tissue Liquid Head | 40.518 | 1.824 | 39.13 | 1.85 | 3.55 | -1.41 | ±5 |

*Liquid Verification above was performed on 2024/06/20.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta(%) | | Tolerance (%) |
|--------------------|------------------------------|---------------------|-------------------|--------------|----------------|---------------------|-----------------|------------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta \epsilon_r$ | $\Delta \sigma$ | |
| 2510 | Simulated Tissue Liquid Head | 40.618 | 1.880 | 39.13 | 1.85 | 3.80 | 1.62 | ± 5 |
| 2520 | Simulated Tissue Liquid Head | 40.552 | 1.895 | 39.12 | 1.86 | 3.66 | 1.88 | ± 5 |
| 2530 | Simulated Tissue Liquid Head | 40.486 | 1.909 | 39.11 | 1.87 | 3.52 | 2.09 | ± 5 |
| 2540 | Simulated Tissue Liquid Head | 40.420 | 1.923 | 39.09 | 1.89 | 3.40 | 1.75 | ± 5 |
| 2550 | Simulated Tissue Liquid Head | 40.353 | 1.938 | 39.08 | 1.90 | 3.26 | 2.00 | ± 5 |
| 2560 | Simulated Tissue Liquid Head | 40.303 | 1.951 | 39.07 | 1.91 | 3.16 | 2.15 | ± 5 |
| 2570 | Simulated Tissue Liquid Head | 40.189 | 1.971 | 39.05 | 1.92 | 2.92 | 2.66 | ± 5 |
| 2580 | Simulated Tissue Liquid Head | 40.170 | 1.980 | 39.04 | 1.93 | 2.89 | 2.59 | ± 5 |
| 2590 | Simulated Tissue Liquid Head | 40.217 | 1.984 | 39.03 | 1.94 | 3.04 | 2.27 | ± 5 |
| 2600 | Simulated Tissue Liquid Head | 40.096 | 2.003 | 39.01 | 1.95 | 2.78 | 2.72 | ± 5 |
| 2610 | Simulated Tissue Liquid Head | 40.096 | 2.014 | 39.00 | 1.96 | 2.81 | 2.76 | ± 5 |
| 2620 | Simulated Tissue Liquid Head | 40.066 | 2.021 | 38.99 | 1.97 | 2.76 | 2.59 | ± 5 |
| 2630 | Simulated Tissue Liquid Head | 40.035 | 2.044 | 38.98 | 1.98 | 2.71 | 3.23 | ± 5 |
| 2640 | Simulated Tissue Liquid Head | 39.954 | 2.055 | 38.96 | 1.99 | 2.55 | 3.27 | ± 5 |
| 2650 | Simulated Tissue Liquid Head | 39.930 | 2.055 | 38.95 | 2.00 | 2.52 | 2.75 | ± 5 |
| 2660 | Simulated Tissue Liquid Head | 39.935 | 2.074 | 38.94 | 2.02 | 2.56 | 2.67 | ± 5 |
| 2670 | Simulated Tissue Liquid Head | 39.900 | 2.073 | 38.93 | 2.03 | 2.49 | 2.12 | ± 5 |
| 2680 | Simulated Tissue Liquid Head | 39.949 | 2.095 | 38.91 | 2.04 | 2.67 | 2.70 | ± 5 |
| 2690 | Simulated Tissue Liquid Head | 39.862 | 2.094 | 38.90 | 2.05 | 2.47 | 2.15 | ± 5 |
| 2700 | Simulated Tissue Liquid Head | 39.803 | 2.105 | 38.89 | 2.06 | 2.35 | 2.18 | ± 5 |

*Liquid Verification above was performed on 2024/07/09.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta(%) | | Tolerance (%) |
|--------------------|------------------------------|---------------------|-------------------|--------------|----------------|---------------------|-----------------|------------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta \epsilon_r$ | $\Delta \sigma$ | |
| 5150 | Simulated Tissue Liquid Head | 36.557 | 4.534 | 36.05 | 4.61 | 1.41 | -1.65 | ± 5 |
| 5160 | Simulated Tissue Liquid Head | 36.540 | 4.552 | 36.04 | 4.62 | 1.39 | -1.47 | ± 5 |
| 5170 | Simulated Tissue Liquid Head | 36.630 | 4.551 | 36.03 | 4.63 | 1.67 | -1.71 | ± 5 |
| 5180 | Simulated Tissue Liquid Head | 36.657 | 4.574 | 36.02 | 4.64 | 1.77 | -1.42 | ± 5 |
| 5190 | Simulated Tissue Liquid Head | 36.665 | 4.589 | 36.01 | 4.65 | 1.82 | -1.31 | ± 5 |
| 5200 | Simulated Tissue Liquid Head | 36.688 | 4.577 | 36.00 | 4.66 | 1.91 | -1.78 | ± 5 |
| 5210 | Simulated Tissue Liquid Head | 36.712 | 4.600 | 35.99 | 4.67 | 2.01 | -1.50 | ± 5 |
| 5220 | Simulated Tissue Liquid Head | 36.708 | 4.606 | 35.98 | 4.68 | 2.02 | -1.58 | ± 5 |
| 5230 | Simulated Tissue Liquid Head | 36.614 | 4.626 | 35.97 | 4.69 | 1.79 | -1.36 | ± 5 |
| 5240 | Simulated Tissue Liquid Head | 36.628 | 4.647 | 35.96 | 4.70 | 1.86 | -1.13 | ± 5 |
| 5250 | Simulated Tissue Liquid Head | 36.542 | 4.650 | 35.95 | 4.71 | 1.65 | -1.27 | ± 5 |
| 5260 | Simulated Tissue Liquid Head | 36.488 | 4.644 | 35.94 | 4.72 | 1.52 | -1.61 | ± 5 |
| 5270 | Simulated Tissue Liquid Head | 36.436 | 4.681 | 35.93 | 4.73 | 1.41 | -1.04 | ± 5 |
| 5280 | Simulated Tissue Liquid Head | 36.429 | 4.672 | 35.92 | 4.74 | 1.42 | -1.43 | ± 5 |
| 5290 | Simulated Tissue Liquid Head | 36.414 | 4.670 | 35.91 | 4.75 | 1.40 | -1.68 | ± 5 |
| 5300 | Simulated Tissue Liquid Head | 36.361 | 4.699 | 35.90 | 4.76 | 1.28 | -1.28 | ± 5 |
| 5310 | Simulated Tissue Liquid Head | 36.311 | 4.719 | 35.89 | 4.77 | 1.17 | -1.07 | ± 5 |
| 5320 | Simulated Tissue Liquid Head | 36.298 | 4.710 | 35.88 | 4.78 | 1.16 | -1.46 | ± 5 |
| 5330 | Simulated Tissue Liquid Head | 36.267 | 4.719 | 35.87 | 4.79 | 1.11 | -1.48 | ± 5 |

| | | | | | | | | |
|------|------------------------------|--------|-------|-------|------|------|-------|----|
| 5340 | Simulated Tissue Liquid Head | 36.277 | 4.738 | 35.86 | 4.80 | 1.16 | -1.29 | ±5 |
| 5350 | Simulated Tissue Liquid Head | 36.214 | 4.743 | 35.85 | 4.81 | 1.02 | -1.39 | ±5 |
| 5360 | Simulated Tissue Liquid Head | 36.234 | 4.756 | 35.84 | 4.82 | 1.10 | -1.33 | ±5 |
| 5370 | Simulated Tissue Liquid Head | 36.185 | 4.778 | 35.83 | 4.83 | 0.99 | -1.08 | ±5 |
| 5380 | Simulated Tissue Liquid Head | 36.207 | 4.808 | 35.82 | 4.84 | 1.08 | -0.66 | ±5 |
| 5390 | Simulated Tissue Liquid Head | 36.160 | 4.822 | 35.81 | 4.85 | 0.98 | -0.58 | ±5 |
| 5400 | Simulated Tissue Liquid Head | 36.129 | 4.830 | 35.80 | 4.86 | 0.92 | -0.62 | ±5 |
| 5410 | Simulated Tissue Liquid Head | 36.101 | 4.846 | 35.79 | 4.87 | 0.88 | -0.51 | ±5 |
| 5420 | Simulated Tissue Liquid Head | 36.144 | 4.834 | 35.77 | 4.88 | 1.05 | -0.96 | ±5 |
| 5430 | Simulated Tissue Liquid Head | 36.097 | 4.873 | 35.76 | 4.89 | 0.96 | -0.39 | ±5 |
| 5440 | Simulated Tissue Liquid Head | 36.069 | 4.879 | 35.74 | 4.90 | 0.92 | -0.47 | ±5 |
| 5450 | Simulated Tissue Liquid Head | 36.045 | 4.889 | 35.73 | 4.91 | 0.90 | -0.49 | ±5 |
| 5460 | Simulated Tissue Liquid Head | 35.992 | 4.880 | 35.71 | 4.92 | 0.79 | -0.87 | ±5 |
| 5470 | Simulated Tissue Liquid Head | 35.997 | 4.910 | 35.70 | 4.93 | 0.85 | -0.49 | ±5 |
| 5480 | Simulated Tissue Liquid Head | 36.019 | 4.914 | 35.68 | 4.94 | 0.95 | -0.61 | ±5 |

*Liquid Verification above was performed on 2024/07/07.

| Frequency (MHz) | Liquid Type | Liquid Parameter | | Target Value | | Delta(%) | | Tolerance (%) |
|--------------------|------------------------------|---------------------|-------------------|--------------|-------------------|---------------------|-----------------|------------------|
| | | ϵ_r | σ (S/m) | ϵ_r | σ (S/m) | $\Delta \epsilon_r$ | $\Delta \sigma$ | |
| 5670 | Simulated Tissue Liquid Head | 35.508 | 5.152 | 35.43 | 5.14 | 0.22 | 0.23 | ±5 |
| 5680 | Simulated Tissue Liquid Head | 35.492 | 5.156 | 35.42 | 5.15 | 0.20 | 0.12 | ±5 |
| 5690 | Simulated Tissue Liquid Head | 35.544 | 5.153 | 35.41 | 5.16 | 0.38 | -0.14 | ±5 |
| 5700 | Simulated Tissue Liquid Head | 35.481 | 5.169 | 35.40 | 5.17 | 0.23 | -0.02 | ±5 |
| 5710 | Simulated Tissue Liquid Head | 35.471 | 5.191 | 35.39 | 5.18 | 0.23 | 0.21 | ±5 |
| 5720 | Simulated Tissue Liquid Head | 35.461 | 5.179 | 35.38 | 5.19 | 0.23 | -0.21 | ±5 |
| 5730 | Simulated Tissue Liquid Head | 35.410 | 5.202 | 35.37 | 5.20 | 0.11 | 0.04 | ±5 |
| 5740 | Simulated Tissue Liquid Head | 35.452 | 5.214 | 35.36 | 5.21 | 0.26 | 0.08 | ±5 |
| 5750 | Simulated Tissue Liquid Head | 35.396 | 5.229 | 35.35 | 5.22 | 0.13 | 0.17 | ±5 |
| 5760 | Simulated Tissue Liquid Head | 35.362 | 5.235 | 35.34 | 5.23 | 0.06 | 0.10 | ±5 |
| 5770 | Simulated Tissue Liquid Head | 35.314 | 5.247 | 35.33 | 5.24 | -0.05 | 0.13 | ±5 |
| 5780 | Simulated Tissue Liquid Head | 35.258 | 5.271 | 35.32 | 5.25 | -0.18 | 0.40 | ±5 |
| 5790 | Simulated Tissue Liquid Head | 35.302 | 5.274 | 35.31 | 5.26 | -0.02 | 0.27 | ±5 |
| 5800 | Simulated Tissue Liquid Head | 35.227 | 5.290 | 35.30 | 5.27 | -0.21 | 0.38 | ±5 |
| 5810 | Simulated Tissue Liquid Head | 35.243 | 5.338 | 35.29 | 5.28 | -0.13 | 1.10 | ±5 |
| 5820 | Simulated Tissue Liquid Head | 35.311 | 5.338 | 35.28 | 5.29 | 0.09 | 0.91 | ±5 |
| 5830 | Simulated Tissue Liquid Head | 35.334 | 5.361 | 35.27 | 5.30 | 0.18 | 1.15 | ±5 |
| 5840 | Simulated Tissue Liquid Head | 35.341 | 5.392 | 35.26 | 5.31 | 0.23 | 1.54 | ±5 |
| 5850 | Simulated Tissue Liquid Head | 35.270 | 5.400 | 35.25 | 5.32 | 0.06 | 1.50 | ±5 |

*Liquid Verification above was performed on 2024/07/07.


5.3 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

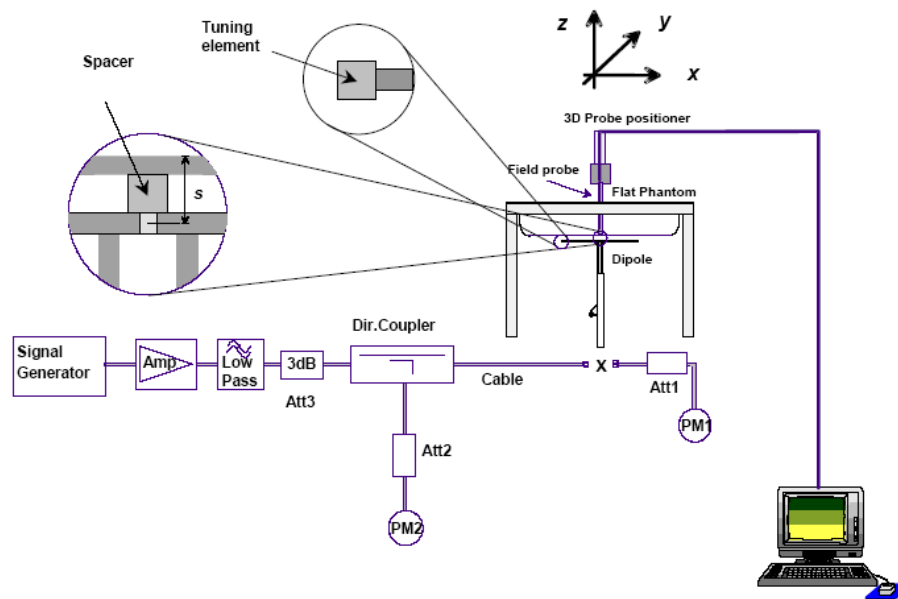

5.4 System Accuracy Check Results

| Date | Frequency Band | Liquid Type | Input Power (mW) | Measured SAR (W/kg) | | Normalized to 1W (W/kg) | Target Value (W/kg) | Delta (%) | Tolerance (%) |
|------------|----------------|------------------------------|------------------|---------------------|-------|-------------------------|---------------------|-----------|---------------|
| 2024/07/06 | 750 MHz | Simulated Tissue Liquid Head | 100 | 1g | 0.843 | 8.43 | 8.48 | -0.59 | ± 10 |
| | | | | 10g | 0.561 | 5.61 | 5.63 | -0.36 | ± 10 |
| 2024/07/07 | 835 MHz | Simulated Tissue Liquid Head | 100 | 1g | 0.955 | 9.55 | 9.33 | 2.36 | ± 10 |
| | | | | 10g | 0.602 | 6.02 | 6.03 | -0.17 | ± 10 |
| 2024/06/20 | 1750 MHz | Simulated Tissue Liquid Head | 100 | 1g | 3.43 | 34.3 | 36.1 | -4.99 | ± 10 |
| | | | | 10g | 1.78 | 17.8 | 18.7 | -4.81 | ± 10 |
| 2024/07/08 | 1900 MHz | Simulated Tissue Liquid Head | 100 | 1g | 3.76 | 37.6 | 40.2 | -6.47 | ± 10 |
| | | | | 10g | 2.22 | 22.2 | 20.9 | 6.22 | ± 10 |
| 2024/06/20 | 2450 MHz | Simulated Tissue Liquid Head | 100 | 1g | 5.57 | 55.7 | 53.5 | 4.11 | ± 10 |
| | | | | 10g | 2.52 | 25.2 | 24.2 | 4.13 | ± 10 |
| 2024/07/09 | 2600 MHz | Simulated Tissue Liquid Head | 100 | 1g | 6.02 | 60.2 | 55.8 | 7.89 | ± 10 |
| | | | | 10g | 2.57 | 25.7 | 25.4 | 1.18 | ± 10 |

*The SAR values above are normalized to 1 Watt forward power.

| Date | Frequency Band | Liquid Type | Input Power (mW) | Measured SAR (W/kg) | | Normalized to 1W (W/kg) | Target Value (W/kg) | Delta (%) | Tolerance (%) |
|------------|----------------|------------------------------|------------------|---------------------|------|-------------------------|---------------------|-----------|---------------|
| 2024/07/07 | 5250 MHz | Simulated Tissue Liquid Head | 100 | 1g | 7.12 | 71.2 | 77.5 | -8.13 | ±10 |
| | | | | 10g | 2.02 | 20.2 | 22 | -8.18 | ±10 |
| 2024/07/07 | 5750 MHz | Simulated Tissue Liquid Head | 100 | 1g | 7.23 | 72.3 | 78.4 | -7.78 | ±10 |
| | | | | 10g | 2.14 | 21.4 | 22 | -2.73 | ±10 |

*The SAR values above are normalized to 1 Watt forward power.

5.5 SAR SYSTEM VALIDATION DATA

System Performance 750 MHz Head

DUT: D750V3; Type: 750 MHz; Serial: 1167

Communication System: CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 41.996$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.95, 8.96, 8.82) @ 750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.24 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.561 W/kg

Maximum value of SAR (measured) = 0.985 W/kg

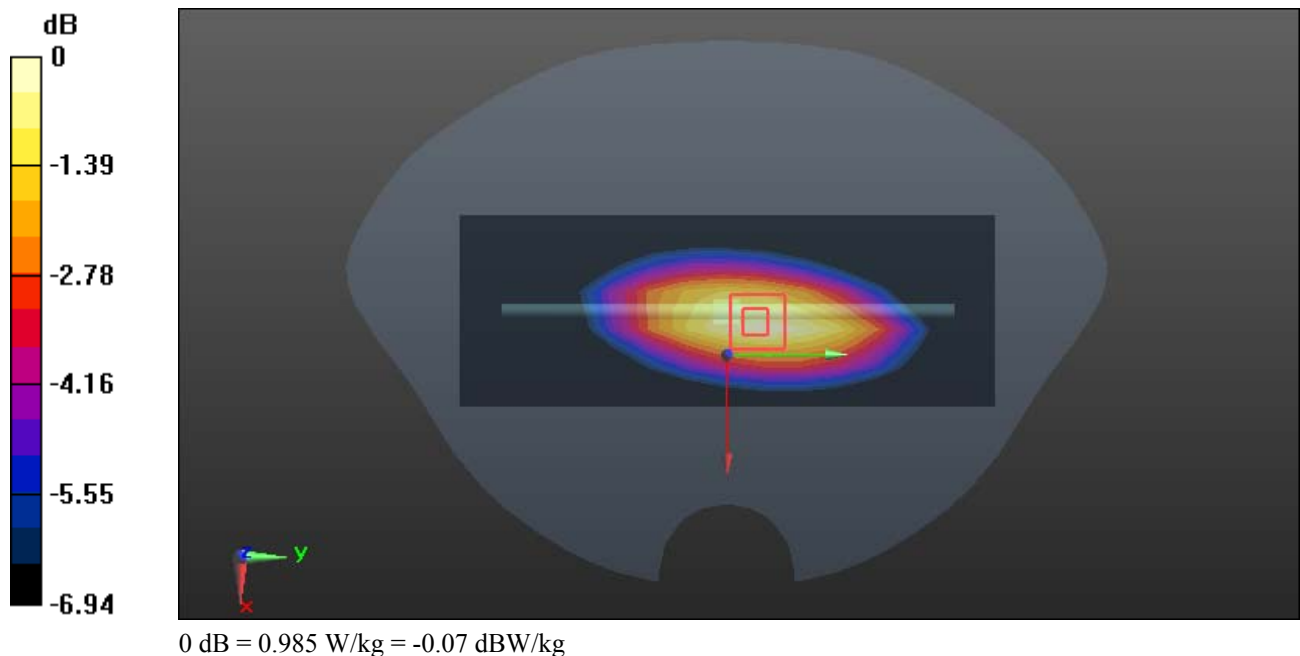

System Performance 835 MHz Head**DUT: D835V2; Type: 835 MHz; Serial: 453**


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.943 \text{ S/m}$; $\epsilon_r = 41.05$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(9.55, 8.6, 8.54) @ 835 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

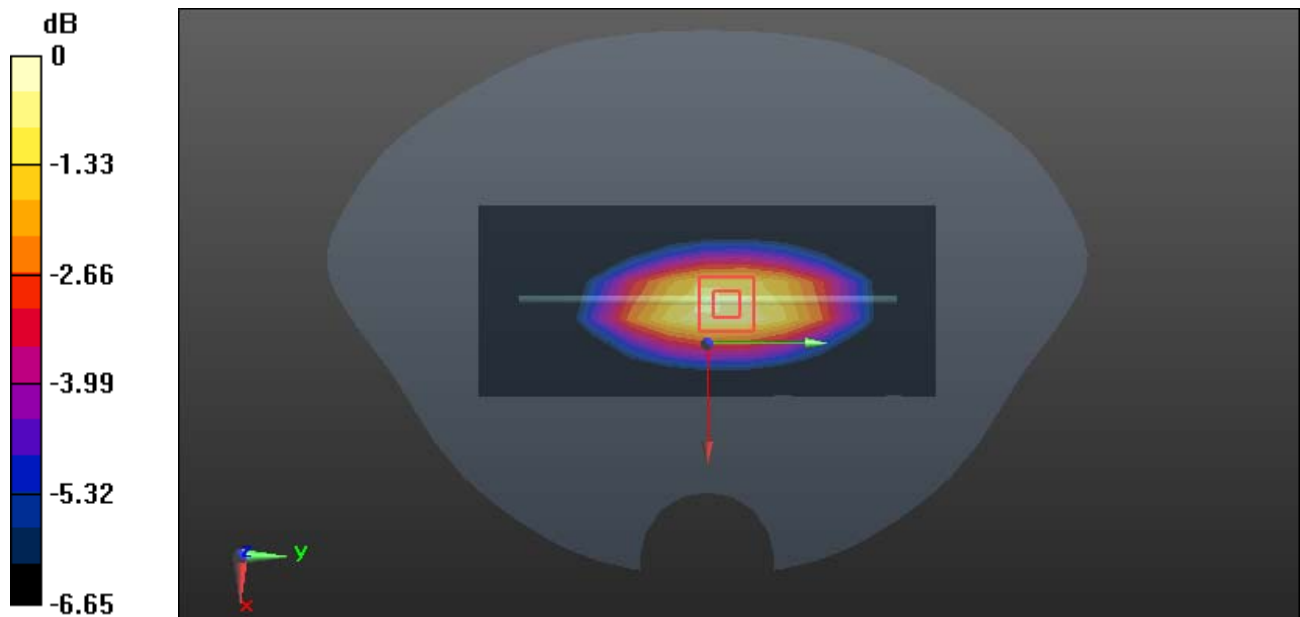Area Scan (6x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.985 W/kg **Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 27.51 V/m ; Power Drift = -0.07 dB Peak SAR (extrapolated) = 1.42 W/kg **SAR(1 g) = 0.955 W/kg ; SAR(10 g) = 0.602 W/kg** Maximum value of SAR (measured) = 0.978 W/kg 

System Performance 1750MHz Head**DUT: D1750V2; Type: 1750 MHz; Serial: 1141**

Communication System: CW ; Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 38.675$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8.54, 7.65, 7.43) @ 1750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.14 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.72 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 5.43 W/kg

SAR(1 g) = 3.43 W/kg; SAR(10 g) = 1.78 W/kg

Maximum value of SAR (measured) = 4.35 W/kg

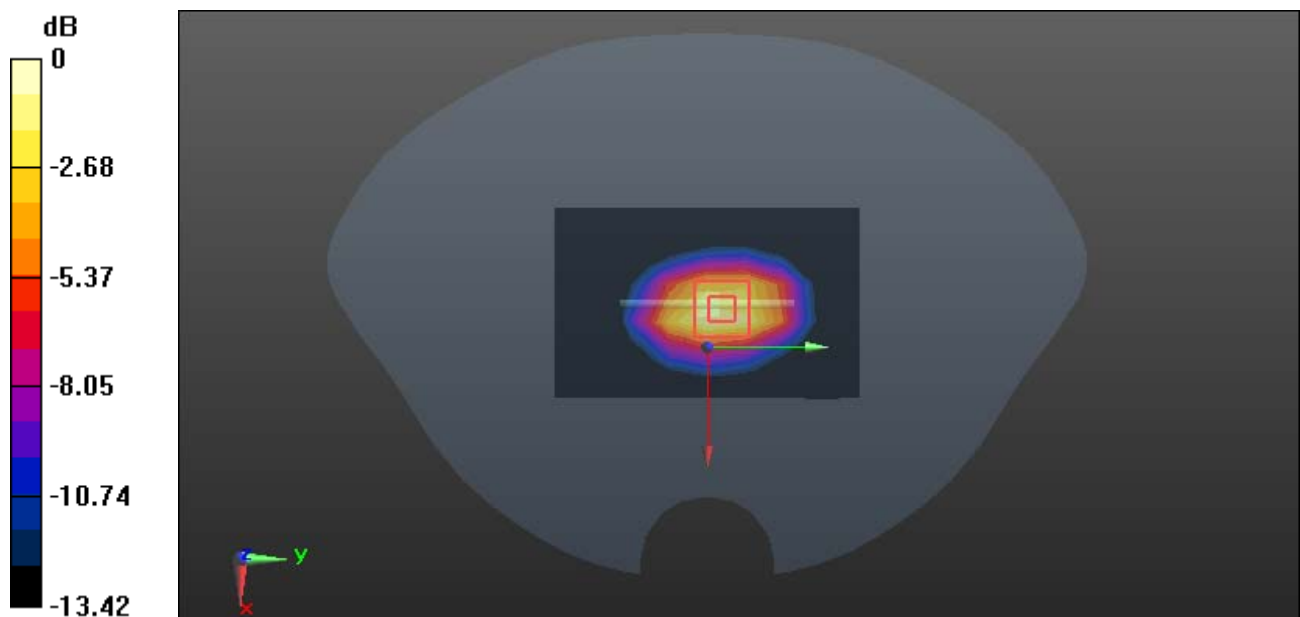

0 dB = 4.35 W/kg = 6.38 dBW/kg

System Performance 1900MHz Head**DUT: D1900V2; Type: 1900 MHz; Serial: 543**

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.446$ S/m; $\epsilon_r = 40.076$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(8, 7.27, 7.03) @ 1900 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.56 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 51.37 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 5.85 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 2.22 W/kg

Maximum value of SAR (measured) = 4.75 W/kg

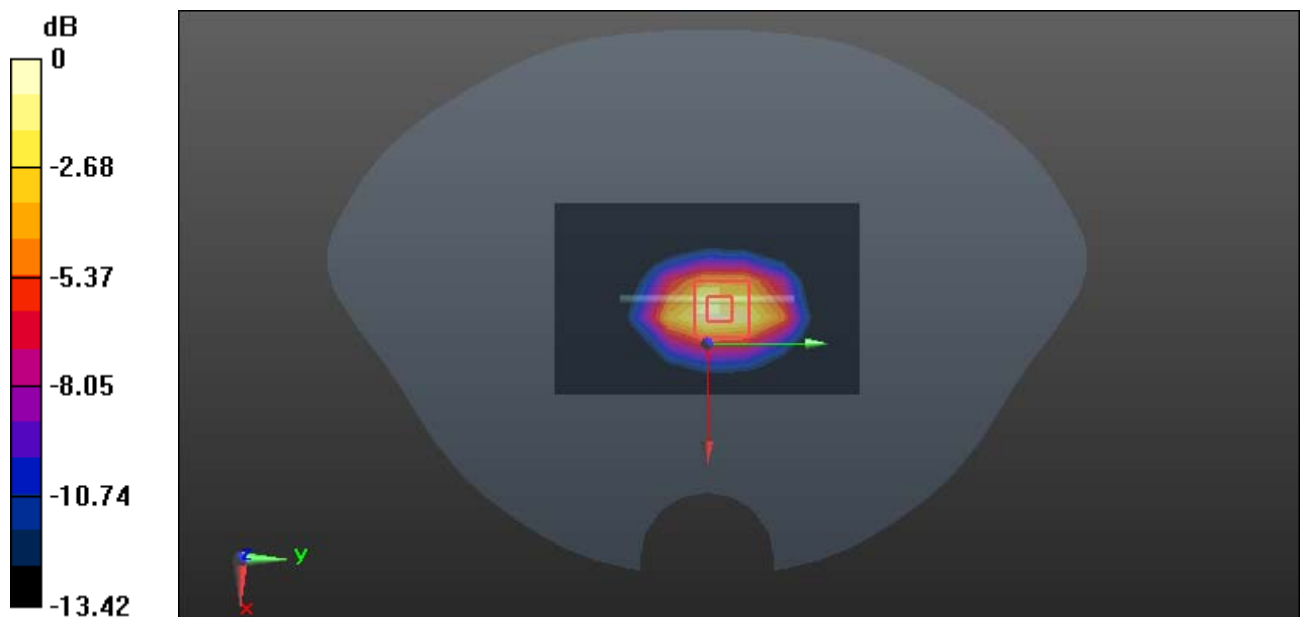

0 dB = 4.75 W/kg = 6.77 dBW/kg

System Performance 2450MHz Head**DUT: D2450V2; Type: 2450 MHz; Serial: 971**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used : $f = 2450$ MHz; $\sigma = 1.768$ S/m; $\epsilon_r = 40.696$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.49, 6.81, 6.61) @ 2450 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 7.71 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 63.37 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 12.8 W/kg

SAR(1 g) = 5.57 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 8.27 W/kg

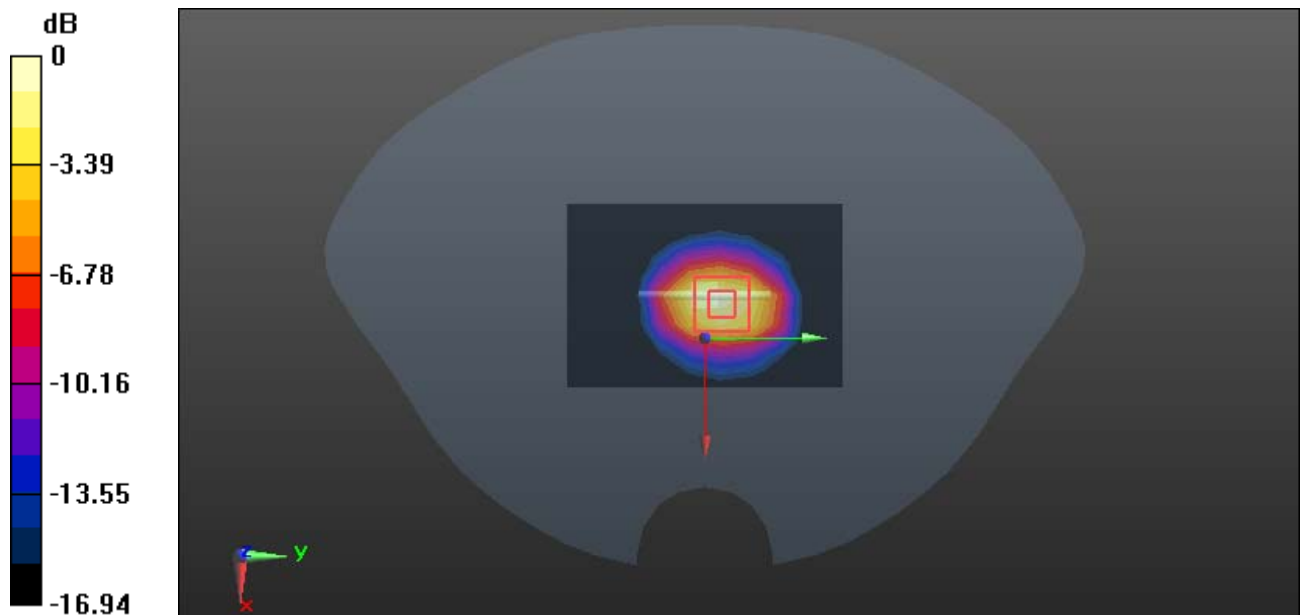

0 dB = 8.27 W/kg = 9.18 dBW/kg

System Performance 2600MHz Head**DUT: D2600V2; Type: 2600 MHz; Serial: 1132**

Communication System: CW ; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.003$ S/m; $\epsilon_r = 40.096$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(7.61, 6.94, 6.73) @ 2600 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (8x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 6.40 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 60.59 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 12.2 W/kg

SAR(1 g) = 6.02 W/kg; SAR(10 g) = 2.57 W/kg

Maximum value of SAR (measured) = 8.25 W/kg

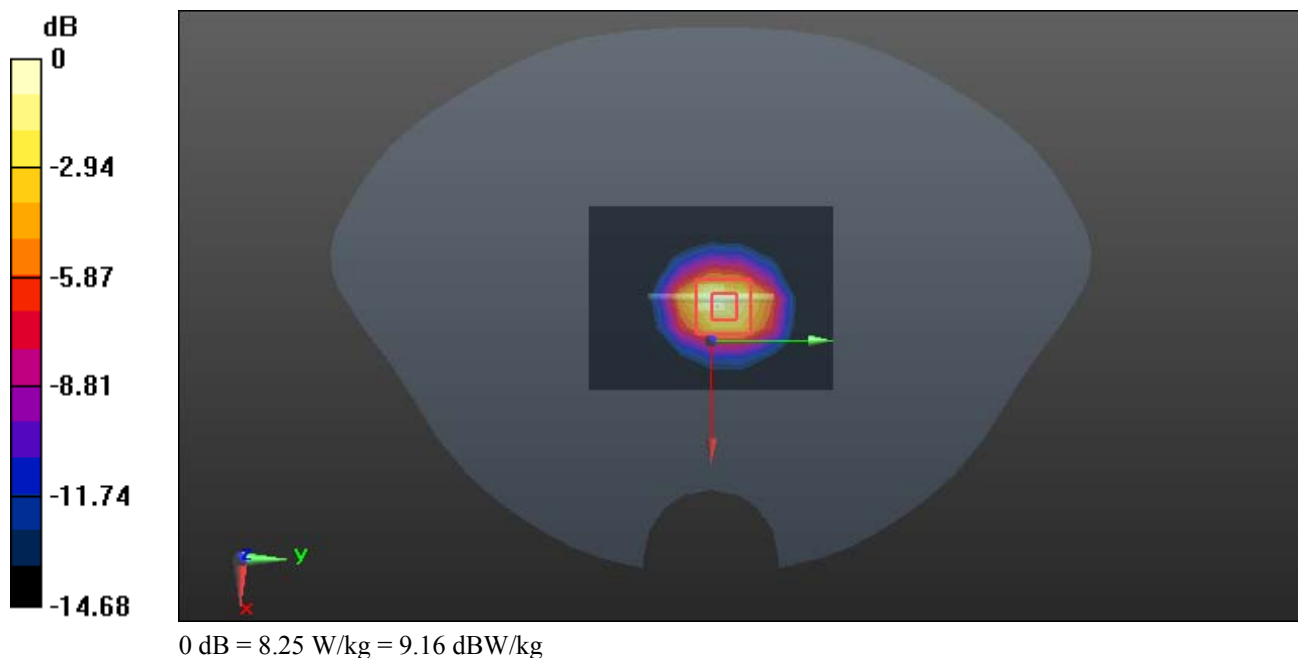

System Performance 5250 MHz Head**DUT: D5GHzV2; Type: 5250 MHz; Serial: 1246**

Communication System: CW; Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.542$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.62, 5.1, 4.97) @ 5250 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.4 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 42.57 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 25.2 W/kg

SAR(1 g) = 7.12 W/kg; SAR(10 g) = 2.02 W/kg

Maximum value of SAR (measured) = 17.6 W/kg

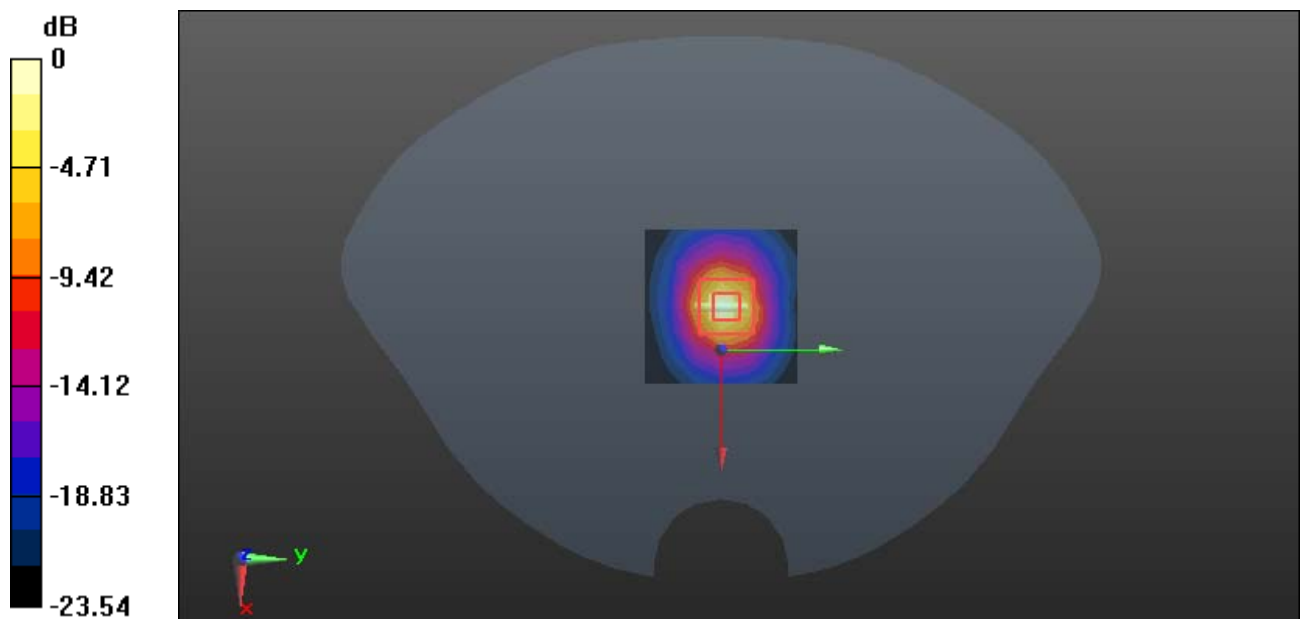

0 dB = 17.6 W/kg = 12.46 dBW/kg

System Performance 5750 MHz Head**DUT: D5GHzV2; Type: 5750 MHz; Serial: 1246**

Communication System: CW; Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5750$ MHz; $\sigma = 5.229$ S/m; $\epsilon_r = 35.396$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7839; ConvF(5.04, 4.65, 4.62) @ 5750 MHz; Calibrated: 2023/9/21
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2024/1/23
- Phantom: SAM (30deg probe tilt) with CRP v5.0_20150321; Type: QD000P40CD; Serial: TP:1874
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 18.6 W/kg


Zoom Scan (7x7x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 38.47 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 29.4 W/kg

SAR(1 g) = 7.23 W/kg; SAR(10 g) = 2.14 W/kg

Maximum value of SAR (measured) = 16.4 W/kg

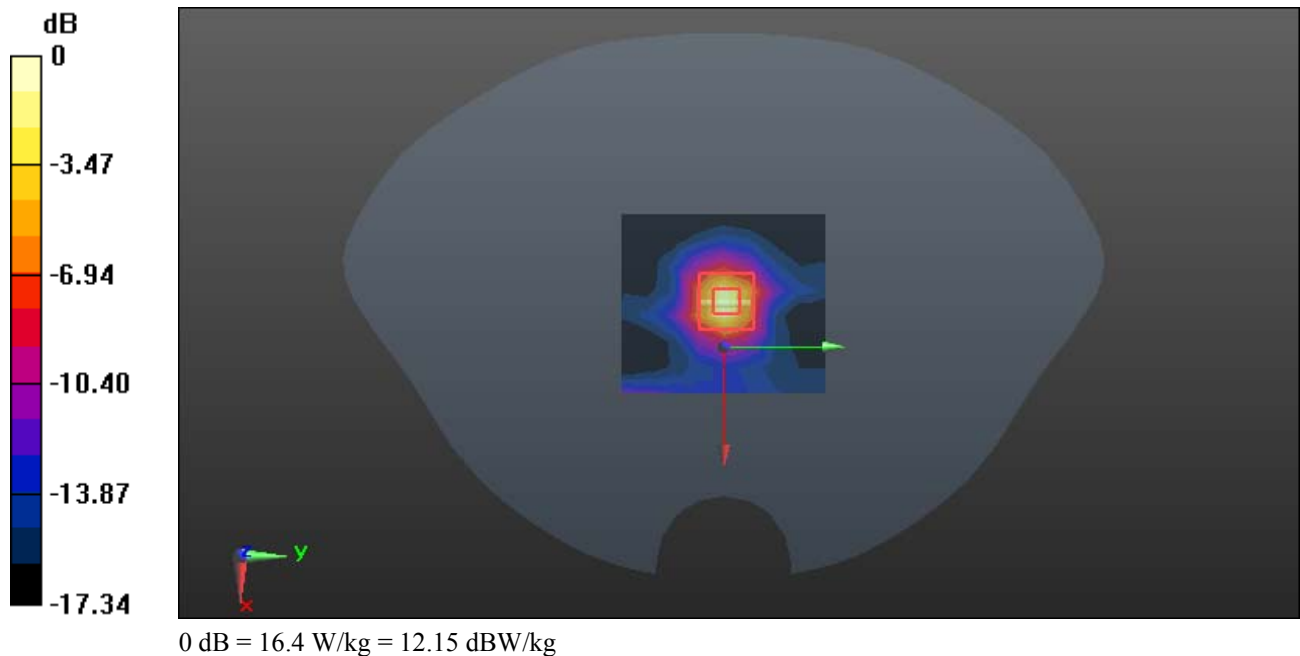

6. EUT TEST STRATEGY AND METHODOLOGY

6.1 Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

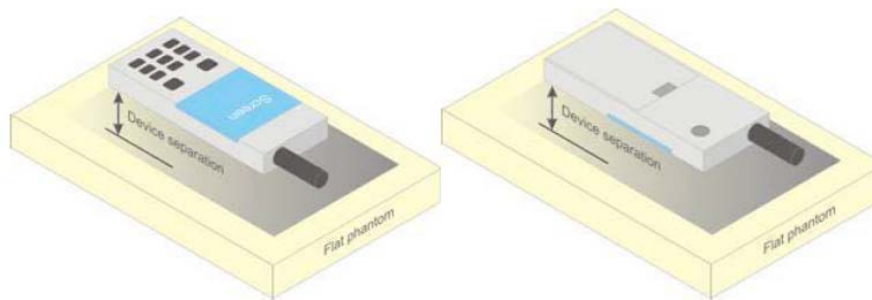


Figure 5 – Test positions for body-worn devices

6.2 Test Distance for SAR Evaluation

For Handheld mode(10g Extremity SAR) the EUT(Equipment Under Test) is set directly against the phantom, the test distance is 0mm;

For Body Supported mode(10g Body SAR) the EUT is set 5mm away from the phantom, the test distance is 5mm.

6.3 SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.


All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


7. CONDUCTED OUTPUT POWER MEASUREMENT

7.1 Test Procedure

The RF output of the transmitter was connected to the input of the Wireless Communication Test Set through Connector.

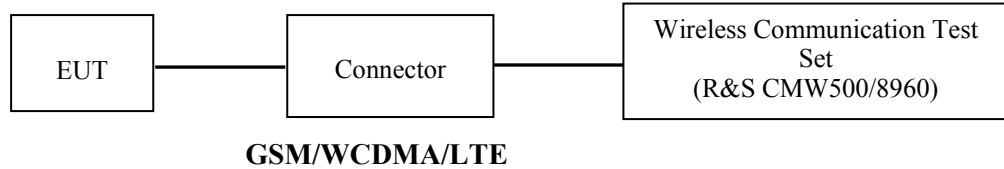

The RF output of the transmitter was connected to the input port of the USB Wideband Power Sensor through Connector.

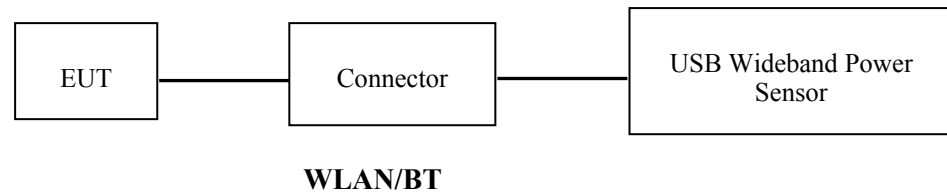

7.2 Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

| | | |
|---------------------------------------|-------------------------|--------------|
| WCDMA General Settings | Loopback Mode | Test Mode 1 |
| | Rel99 RMC | 12.2kbps RMC |
| | Power Control Algorithm | Algorithm2 |
| | β_c/β_d | 8/15 |

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification.

| | Mode | HSDPA | HSDPA | HSDPA | HSDPA |
|--|-----------------------------|--------------|-------|-------|-------|
| | Subset | 1 | 2 | 3 | 4 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | |
| | Rel99 RMC | 12.2kbps RMC | | | |
| | HSDPA FRC | H-Set1 | | | |
| | Power Control Algorithm | Algorithm2 | | | |
| | β_c | 2/15 | 12/15 | 15/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 8/15 | 4/15 |
| | $\beta_d(\text{SF})$ | 64 | | | |
| | β_c/β_d | 2/15 | 12/15 | 15/8 | 15/4 |
| | β_{hs} | 4/15 | 24/15 | 30/15 | 30/15 |
| | MPR(dB) | 0 | 0 | 0.5 | 0.5 |
| HSDPA Specific Settings | DACK | 8 | | | |
| | DNAK | 8 | | | |
| | DCQI | 8 | | | |
| | Ack-Nack repetition factor | 3 | | | |
| | CQI Feedback | 4ms | | | |
| | CQI Repetition Factor | 2 | | | |
| | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15 | | | |

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP

TS34.121-1 specification.

| | Mode | HSUPA | HSUPA | HSUPA | HSUPA | HSUPA |
|--|----------------------------------|--|--|--|-------|-------|
| | Subset | 1 | 2 | 3 | 4 | 5 |
| WCDMA General Settings | Loopback Mode | Test Mode 1 | | | | |
| | Rel99 RMC | 12.2kbps RMC | | | | |
| | HSDPA FRC | H-Set1 | | | | |
| | HSUPA Test | HSUPA Loopback | | | | |
| | Power Control Algorithm | Algorithm2 | | | | |
| | β_c | 11/15 | 6/15 | 15/15 | 2/15 | 15/15 |
| | β_d | 15/15 | 15/15 | 9/15 | 15/15 | 0 |
| | β_{ec} | 209/225 | 12/15 | 30/15 | 2/15 | 5/15 |
| | β_c/β_d | 11/15 | 6/15 | 15/9 | 2/15 | - |
| | β_{hs} | 22/15 | 12/15 | 30/15 | 4/15 | 5/15 |
| | CM(dB) | 1.0 | 3.0 | 2.0 | 3.0 | 1.0 |
| | MPR(dB) | 0 | 2 | 1 | 2 | 0 |
| HSDPA Specific Settings | DACK | 8 | | | | |
| | DNAK | 8 | | | | |
| | DCQI | 8 | | | | |
| | Ack-Nack repetition factor | 3 | | | | |
| | CQI Feedback | 4ms | | | | |
| | CQI Repetition Factor | 2 | | | | |
| | $A_{hs}=\beta_{hs}/\beta_c$ | 30/15 | | | | |
| HSUPA Specific Settings | DE-DPCCH | 6 | 8 | 8 | 5 | 7 |
| | DHARQ | 0 | 0 | 0 | 0 | 0 |
| | AG Index | 20 | 12 | 15 | 17 | 21 |
| | ETFCI | 75 | 67 | 92 | 71 | 81 |
| | Associated Max UL Data Rate kbps | 242.1 | 174.9 | 482.8 | 205.8 | 308.9 |
| | Reference E_FCI | E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27 | E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18 | E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27 | | |
| | | | | | | |

FDD-LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

| Modulation | Channel bandwidth / Transmission bandwidth (N_{RB}) | | | | | | MPR (dB) |
|------------|---|----------|----------|-----------|-----------|-----------|----------|
| | 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz | |
| QPSK | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 |
| 16 QAM | ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 |
| 16 QAM | > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 |

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4.-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

| Network Signalling value | Requirements (subclause) | E-UTRA Band | Channel bandwidth (MHz) | Resources Blocks (N_{RB}) | A-MPR (dB) |
|--------------------------|--------------------------|--------------------------|-------------------------|---|------------|
| NS_01 | 6.6.2.1.1 | Table 5.5-1 | 1.4, 3, 5, 10, 15, 20 | Table 5.6-1 | N/A |
| NS_03 | 6.6.2.2.1 | 2, 4, 10, 23, 25, 35, 36 | 3 | >5 | ≤ 1 |
| | | | 5 | >6 | ≤ 1 |
| | | | 10 | >6 | ≤ 1 |
| | | | 15 | >8 | ≤ 1 |
| | | | 20 | >10 | ≤ 1 |
| NS_04 | 6.6.2.2.2 | 41 | 5 | >6 | ≤ 1 |
| NS_05 | 6.6.3.3.1 | 1 | 10, 15, 20 | Table 6.2.4-4 | |
| NS_06 | 6.6.2.2.3 | 12, 13, 14, 17 | 10, 15, 20 | ≥ 50 | ≤ 1 |
| NS_07 | 6.6.2.2.3 | 13 | 10 | Table 6.2.4-2 | |
| NS_08 | 6.6.3.3.2 | | | Table 6.2.4-2 | |
| NS_09 | 6.6.3.3.3 | 19 | 10, 15 | > 44 | ≤ 3 |
| NS_10 | 6.6.3.3.4 | 21 | 10, 15 | > 40 | ≤ 1 |
| | | | | > 55 | ≤ 2 |
| NS_11 | 6.6.2.2.1 | 20 | 15, 20 | Table 6.2.4-3 | |
| NS_12 | 6.6.2.2.1 | 23 | 1.4, 3, 5, 10, 15, 20 | Table 6.2.4-5 | |
| NS_13 | 6.6.3.3.5 | 26 | 1.4, 3, 5 | Table 6.2.4-6 | |
| NS_14 | 6.6.3.3.6 | 26 | 5 | Table 6.2.4-7 | |
| NS_15 | 6.6.3.3.7 | 26 | 10, 15 | Table 6.2.4-8 | |
| NS_16 | 6.6.3.3.8 | 26 | 1.4, 3, 5, 10, 15 | Table 6.2.4-9 Table 6.2.4-10 | |
| NS_17 | 6.6.3.3.9 | 27 | 3, 5, 10 | Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13 | |
| NS_18 | 6.6.3.3.10 | 28 | 5, 10 | Table 5.6-1 | N/A |
| NS_19 | 6.6.3.3.11 | 28 | 5 | ≥ 2 | ≤ 1 |
| | | | 10, 15, 20 | ≥ 1 | ≤ 4 |
| NS_20 | 6.6.3.3.12 | 44 | 10, 15, 20 | Table 6.2.4-14 | |
| NS_21 | 6.2.2 | 23 | 5, 10, 15, 20 | Table 6.2.4-15 | |
| NS_22 | 6.6.2.2.1 | | | | |
| NS_23 | 6.6.3.2 | | | | |
| ... | | | | | |
| NS_32 | - | - | - | - | - |

TDD-LTE

P TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

| Special subframe configuration | Normal cyclic prefix in downlink | | | Extended cyclic prefix in downlink | | |
|--------------------------------|----------------------------------|--------------------------------|----------------------------------|------------------------------------|--------------------------------|----------------------------------|
| | DwPTS | UpPTS | | DwPTS | UpPTS | |
| | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink | | Normal cyclic prefix in uplink | Extended cyclic prefix in uplink |
| 0 | $6592 \cdot T_s$ | $2192 \cdot T_s$ | $2560 \cdot T_s$ | $7680 \cdot T_s$ | $2192 \cdot T_s$ | $2560 \cdot T_s$ |
| 1 | $19760 \cdot T_s$ | | | $20480 \cdot T_s$ | | |
| 2 | $21952 \cdot T_s$ | | | $23040 \cdot T_s$ | | |
| 3 | $24144 \cdot T_s$ | | | $25600 \cdot T_s$ | | |
| 4 | $26336 \cdot T_s$ | | | $7680 \cdot T_s$ | | |
| 5 | $6592 \cdot T_s$ | $4384 \cdot T_s$ | $5120 \cdot T_s$ | $20480 \cdot T_s$ | $4384 \cdot T_s$ | $5120 \cdot T_s$ |
| 6 | $19760 \cdot T_s$ | | | $23040 \cdot T_s$ | | |
| 7 | $21952 \cdot T_s$ | | | $12800 \cdot T_s$ | | |
| 8 | $24144 \cdot T_s$ | | | - | - | - |
| 9 | $13168 \cdot T_s$ | | | - | - | - |

Table 4.2-2: Uplink-downlink configurations.

| Uplink-downlink configuration | Downlink-to-Uplink Switch-point periodicity | Subframe number | | | | | | | | | |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0 | 5 ms | D | S | U | U | U | D | S | U | U | U |
| 1 | 5 ms | D | S | U | U | D | D | S | U | U | D |
| 2 | 5 ms | D | S | U | D | D | D | S | U | D | D |
| 3 | 10 ms | D | S | U | U | U | D | D | D | D | D |
| 4 | 10 ms | D | S | U | U | D | D | D | D | D | D |
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D |
| 6 | 5 ms | D | S | U | U | U | D | S | U | U | D |

Calculated Duty Cycle

| Uplink-Downlink Configuration | Downlink-to-Uplink Switch-point Periodicity | Subframe Number | | | | | | | | | | Calculated Duty Cycle (%) |
|-------------------------------|---|-----------------|---|---|---|---|---|---|---|---|---|---------------------------|
| | | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 0 | 5 ms | D | S | U | U | U | D | S | U | U | U | 63.33 |
| 1 | 5 ms | D | S | U | U | D | D | S | U | U | D | 43.33 |
| 2 | 5 ms | D | S | U | D | D | D | S | U | D | D | 23.33 |
| 3 | 10 ms | D | S | U | U | U | D | D | D | D | D | 31.67 |
| 4 | 10 ms | D | S | U | U | D | D | D | D | D | D | 21.67 |
| 5 | 10 ms | D | S | U | D | D | D | D | D | D | D | 11.67 |
| 6 | 5 ms | D | S | U | U | U | D | S | U | U | D | 53.33 |

We used configuration 0 for LTE Band 41 SAR test, that is 63.33%(1:1.58) for duty cycle.

7.3 Maximum Target Output Power

| Mode/Band | Max Target Power(dBm) | | |
|---------------------------|-----------------------|--------|------|
| | Channel | | |
| | Low | Middle | High |
| GSM 850 GPRS 1 TX Slot | 26 | 26 | 26 |
| GSM 850 GPRS 2 TX Slot | 25 | 25 | 25 |
| GSM 850 GPRS 3 TX Slot | 23 | 23 | 23 |
| GSM 850 GPRS 4 TX Slot | 21 | 21 | 21 |
| GSM 850 EDGE 1 TX Slot | 25.5 | 25.5 | 25.5 |
| GSM 850 EDGE 2 TX Slot | 24.5 | 24.5 | 24.5 |
| GSM 850 EDGE 3 TX Slot | 22.5 | 22.5 | 22.5 |
| GSM 850 EDGE 4 TX Slot | 20.5 | 20.5 | 20.5 |
| PCS 1900 GPRS 1 TX Slot | 22 | 22 | 22 |
| PCS 1900 GPRS 2 TX Slot | 21 | 21 | 21 |
| PCS 1900 GPRS 3 TX Slot | 19 | 19 | 19 |
| PCS 1900 GPRS 4 TX Slot | 17 | 17 | 17 |
| PCS 1900 EDGE 1 TX Slot | 21.5 | 21.5 | 21.5 |
| PCS 1900 EDGE 2 TX Slot | 20.5 | 20.5 | 20.5 |
| PCS 1900 EDGE 3 TX Slot | 18.5 | 18.5 | 18.5 |
| PCS 1900 EDGE 4 TX Slot | 16 | 16 | 16 |
| WCDMA Band 2 | 23.5 | 23.5 | 23.5 |
| HSDPA | 21.2 | 21.2 | 21.2 |
| HSUPA | 20.8 | 20.8 | 20.8 |
| WCDMA Band 5 | 24.3 | 24.3 | 24.3 |
| HSDPA | 22 | 22 | 22 |
| HSUPA | 22 | 22 | 22 |
| LTE Band 2(20M) | 22.5 | 22.5 | 22.5 |
| LTE Band 4(20M) | 23.2 | 23.2 | 23.2 |
| LTE Band 5(10M) | 23.6 | 23.6 | 23.6 |
| LTE Band 7(20M) | 22.5 | 22.5 | 22.5 |
| LTE Band 12(10M) | 24 | 24 | 24 |
| LTE Band 13(10M) | 23.7 | 23.7 | 23.7 |
| LTE Band 17(10M) | 24 | 24 | 24 |
| LTE Band 25(20M) | 22.5 | 22.5 | 22.5 |
| LTE Band 26(15M) | 23.6 | 23.6 | 23.6 |
| LTE Band 38(20M) | 23.3 | 23.3 | 23.3 |
| LTE Band 41(20M) | 23.3 | 23.3 | 23.3 |
| LTE Band 66(20M) | 23.2 | 23.2 | 23.2 |
| LTE Band 71(20M) | 23.8 | 23.8 | 23.8 |
| Wi-Fi 2.4G(802.11b) | 9.2 | 9.2 | 9.2 |
| Wi-Fi 2.4G (802.11g) | 13.5 | 13.5 | 13.5 |
| Wi-Fi 2.4G (802.11n ht20) | 12 | 12 | 12 |
| Wi-Fi 2.4G (802.11n ht40) | 11.3 | 11.3 | 11.3 |

| Max Target Power(dBm) | | | |
|-------------------------|---------|--------|------|
| Mode/Band | Channel | | |
| | Low | Middle | High |
| Wi-Fi 5.2G(802.11a) | 14.6 | 14.6 | 14.6 |
| Wi-Fi 5.2G (802.11n20) | 14 | 14 | 14 |
| Wi-Fi 5.2G (802.11n40) | 12.1 | / | 12.1 |
| Wi-Fi 5.2G (802.11ac20) | 14 | 14 | 14 |
| Wi-Fi 5.2G (802.11ac40) | 12.1 | / | 12.1 |
| Wi-Fi 5.2G (802.11ac80) | / | 9 | / |
| Wi-Fi 5.3G(802.11a) | 13.8 | 13.8 | 13.8 |
| Wi-Fi 5.3G (802.11n20) | 14.2 | 14.2 | 14.2 |
| Wi-Fi 5.3G (802.11n40) | 14 | / | 14 |
| Wi-Fi 5.3G (802.11ac20) | 14.2 | 14.2 | 14.2 |
| Wi-Fi 5.3G (802.11ac40) | 14 | / | 14 |
| Wi-Fi 5.3G (802.11ac80) | / | 9.1 | / |
| Wi-Fi 5.6G(802.11a) | 6 | 6 | 6 |
| Wi-Fi 5.6G (802.11n20) | 7 | 7 | 7 |
| Wi-Fi 5.6G (802.11n40) | 7.2 | 7.2 | 7.2 |
| Wi-Fi 5.6G (802.11ac20) | 7 | 7 | 7 |
| Wi-Fi 5.6G (802.11ac40) | 7.2 | 7.2 | 7.2 |
| Wi-Fi 5.6G (802.11ac80) | 7 | 7 | 7 |
| Wi-Fi 5.8G(802.11a) | 7 | 7 | 7 |
| Wi-Fi 5.8G (802.11n20) | 7.8 | 7.8 | 7.8 |
| Wi-Fi 5.8G (802.11n40) | 8.8 | / | 8.8 |
| Wi-Fi 5.8G (802.11ac20) | 7.8 | 7.8 | 7.8 |
| Wi-Fi 5.8G (802.11ac40) | 8.8 | / | 8.8 |
| Wi-Fi 5.8G (802.11ac80) | / | 8.5 | / |
| Bluetooth BDR | 0.5 | 1.5 | -2 |
| Bluetooth EDR | 0.5 | 1.5 | -2 |
| BLE 1M | -6 | -5 | -9 |

7.4 Test Results:**GPRS:**

| Band | Channel No. | Frequency (MHz) | RF Output Power (dBm) | | | |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
| | | | 1 slot | 2 slots | 3 slots | 4 slots |
| GSM 850 | 128 | 824.2 | 25.86 | 24.76 | 22.72 | 20.72 |
| | 190 | 836.6 | 25.93 | 24.71 | 22.65 | 20.55 |
| | 251 | 848.8 | 25.91 | 24.65 | 22.67 | 20.64 |
| PCS 1900 | 512 | 1850.2 | 21.62 | 20.52 | 18.43 | 16.62 |
| | 661 | 1880 | 21.56 | 20.67 | 18.65 | 16.68 |
| | 810 | 1909.8 | 21.42 | 20.29 | 18.29 | 16.27 |

EDGE:

| Band | Channel No. | Frequency (MHz) | RF Output Power (dBm) | | | |
|----------|-------------|-----------------|-----------------------|---------|---------|---------|
| | | | 1 slot | 2 slots | 3 slots | 4 slots |
| GSM 850 | 128 | 824.2 | 25.36 | 24.08 | 22.26 | 20.23 |
| | 190 | 836.6 | 25.39 | 24.33 | 22.43 | 20.27 |
| | 251 | 848.8 | 25.37 | 24.26 | 22.19 | 20.26 |
| PCS 1900 | 512 | 1850.2 | 21.12 | 19.77 | 17.88 | 15.99 |
| | 661 | 1880 | 21.19 | 20.06 | 18.16 | 15.97 |
| | 810 | 1909.8 | 21.12 | 19.97 | 17.97 | 15.99 |

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

| Number of Time slot | 1 | 2 | 3 | 4 |
|--|-------|-------|----------|-------|
| Duty Cycle | 1:8 | 1:4 | 1:2.66 | 1:2 |
| Time based Ave. power compared to slotted Ave. power | -9 dB | -6 dB | -4.25 dB | -3 dB |
| Crest Factor | 8 | 4 | 2.66 | 2 |

The time based average power for GPRS

| Band | Channel No. | Frequency (MHz) | Time based average Power (dBm) | | | |
|----------|-------------|-----------------|--------------------------------|--------------|---------|---------|
| | | | 1 slot | 2 slot | 3 slots | 4 slots |
| GSM 850 | 128 | 824.2 | 16.86 | 18.76 | 18.47 | 17.72 |
| | 190 | 836.6 | 16.93 | 18.71 | 18.4 | 17.55 |
| | 251 | 848.8 | 16.91 | 18.65 | 18.42 | 17.64 |
| PCS 1900 | 512 | 1850.2 | 12.62 | 14.52 | 14.18 | 13.62 |
| | 661 | 1880 | 12.56 | 14.67 | 14.4 | 13.68 |
| | 810 | 1909.8 | 12.42 | 14.29 | 14.04 | 13.27 |

The time based average power for EDGE

| Band | Channel No. | Frequency (MHz) | Time based average Power (dBm) | | | |
|----------|-------------|-----------------|--------------------------------|--------|---------|---------|
| | | | 1 slot | 2 slot | 3 slots | 4 slots |
| GSM 850 | 128 | 824.2 | 16.36 | 18.08 | 18.01 | 17.23 |
| | 190 | 836.6 | 16.39 | 18.33 | 18.18 | 17.27 |
| | 251 | 848.8 | 16.37 | 18.26 | 17.94 | 17.26 |
| PCS 1900 | 512 | 1850.2 | 12.12 | 13.77 | 13.63 | 12.99 |
| | 661 | 1880 | 12.19 | 14.06 | 13.91 | 12.97 |
| | 810 | 1909.8 | 12.12 | 13.97 | 13.72 | 12.99 |

Note:

1. Agilent Technologies Communication Tester (8960) was used for the measurement of GSM peak and average output power for active timeslots.
2. For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
3. For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA:
Results (12.2kbps RMC)

| Band | Frequency (MHz) | RF Output Power (dBm) |
|--------------|-----------------|-----------------------|
| WCDMA Band 2 | 1852.4 | 23.32 |
| | 1880 | 23.27 |
| | 1907.6 | 23.01 |
| WCDMA Band 5 | 826.4 | 23.8 |
| | 836.6 | 24.12 |
| | 846.6 | 23.81 |

Results (HSDPA)

| Band | Frequency (MHz) | RF Output Power (dBm) | | | |
|--------------|-----------------|-----------------------|--------------|----------|----------|
| | | Subset 1 | Subset 2 | Subset 3 | Subset 4 |
| WCDMA Band 2 | 1852.4 | 20.74 | 21.08 | 20.73 | 20.78 |
| | 1880 | 20.9 | 20.97 | 20.92 | 20.93 |
| | 1907.6 | 20.93 | 20.94 | 21.03 | 20.87 |
| WCDMA Band 5 | 826.4 | 21.62 | 21.53 | 21.73 | 21.82 |
| | 836.6 | 21.79 | 21.6 | 21.73 | 21.64 |
| | 846.6 | 21.81 | 21.86 | 21.83 | 21.73 |

Results (HSUPA)

| Band | Frequency (MHz) | RF Output Power (dBm) | | | | |
|--------------|-----------------|-----------------------|--------------|----------|--------------|----------|
| | | Subset 1 | Subset 2 | Subset 3 | Subset 4 | Subset 5 |
| WCDMA Band 2 | 1852.4 | 20.49 | 20.47 | 20.31 | 20.62 | 20.39 |
| | 1880 | 20.56 | 20.49 | 20.58 | 20.36 | 20.66 |
| | 1907.6 | 20.47 | 20.48 | 20.62 | 20.68 | 20.42 |
| WCDMA Band 5 | 826.4 | 21.86 | 21.87 | 21.6 | 21.55 | 21.73 |
| | 836.6 | 21.82 | 21.89 | 21.85 | 21.73 | 21.84 |
| | 846.6 | 21.84 | 21.74 | 21.79 | 21.88 | 21.57 |

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/DC-HSDPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

LTE Band 2:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 22.38 | 22.4 | 22.26 |
| | | RB1#3 | 0 | 0 | 22.43 | 22.39 | 22.36 |
| | | RB1#5 | 0 | 0 | 22.42 | 22.28 | 22.27 |
| | | RB3#0 | 1 | 1 | 21.77 | 21.9 | 21.82 |
| | | RB3#3 | 1 | 1 | 21.9 | 21.81 | 21.9 |
| | | RB6#0 | 1 | 1 | 21.87 | 21.77 | 21.87 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.47 | 21.41 | 21.4 |
| | | RB1#3 | 1 | 1 | 21.42 | 21.43 | 21.49 |
| | | RB1#5 | 2 | 2 | 21.34 | 21.43 | 21.38 |
| | | RB3#0 | 2 | 2 | 20.93 | 20.97 | 20.99 |
| | | RB3#3 | 2 | 2 | 20.97 | 20.94 | 20.81 |
| | | RB6#0 | 2 | 2 | 20.97 | 20.97 | 20.97 |
| 3M | QPSK | RB1#0 | 0 | 0 | 21.73 | 21.82 | 21.76 |
| | | RB1#8 | 0 | 0 | 21.83 | 21.84 | 21.7 |
| | | RB1#14 | 0 | 0 | 21.76 | 21.72 | 21.7 |
| | | RB6#0 | 1 | 1 | 21.18 | 21.18 | 21.23 |
| | | RB6#9 | 1 | 1 | 21.2 | 21.35 | 21.21 |
| | | RB15#0 | 1 | 1 | 21.23 | 21.27 | 21.18 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.51 | 21.51 | 21.59 |
| | | RB1#8 | 1 | 1 | 21.65 | 21.54 | 21.57 |
| | | RB1#14 | 1 | 1 | 21.53 | 21.6 | 21.65 |
| | | RB6#0 | 2 | 2 | 21.1 | 21.17 | 21.16 |
| | | RB6#9 | 2 | 2 | 21.01 | 21.14 | 21.01 |
| | | RB15#0 | 2 | 2 | 21.12 | 21.11 | 21.16 |
| 5M | QPSK | RB1#0 | 0 | 0 | 22.19 | 22.1 | 22.19 |
| | | RB1#13 | 0 | 0 | 22.1 | 22.27 | 22.16 |
| | | RB1#24 | 0 | 0 | 22.24 | 22.28 | 22.19 |
| | | RB15#0 | 1 | 1 | 21.65 | 21.61 | 21.68 |
| | | RB15#10 | 1 | 1 | 21.73 | 21.76 | 21.79 |
| | | RB25#0 | 1 | 1 | 21.72 | 21.68 | 21.79 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.1 | 21.06 | 21.08 |
| | | RB1#13 | 1 | 1 | 21.1 | 21.15 | 21.05 |
| | | RB1#24 | 1 | 1 | 21.22 | 21.09 | 21.18 |
| | | RB15#0 | 2 | 2 | 20.78 | 20.72 | 20.7 |
| | | RB15#10 | 2 | 2 | 20.78 | 20.72 | 20.7 |
| | | RB25#0 | 2 | 2 | 20.78 | 20.6 | 20.74 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 22.12 | 22.21 | 22.24 |
| | | RB1#25 | 0 | 0 | 22.24 | 22.13 | 22.15 |
| | | RB1#49 | 1 | 1 | 22.15 | 22.2 | 22.28 |
| | | RB25#0 | 1 | 1 | 21.59 | 21.67 | 21.62 |
| | | RB25#25 | 1 | 1 | 21.61 | 21.7 | 21.6 |
| | | RB50#0 | 1 | 1 | 21.7 | 21.58 | 21.71 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.79 | 21.74 | 21.7 |
| | | RB1#25 | 1 | 1 | 21.82 | 21.78 | 21.66 |
| | | RB1#49 | 1 | 1 | 21.77 | 21.8 | 21.67 |
| | | RB25#0 | 2 | 2 | 21.29 | 21.13 | 21.09 |
| | | RB25#25 | 2 | 2 | 21.17 | 21.14 | 21.15 |
| | | RB50#0 | 2 | 2 | 21.29 | 21.25 | 21.28 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.02 | 22.17 | 22.16 |
| | | RB1#38 | 0 | 0 | 21.99 | 22.05 | 21.92 |
| | | RB1#74 | 1 | 1 | 22.01 | 22.09 | 22.04 |
| | | RB36#0 | 1 | 1 | 21.49 | 21.59 | 21.49 |
| | | RB36#39 | 1 | 1 | 21.51 | 21.59 | 21.52 |
| | | RB75#0 | 1 | 1 | 21.49 | 21.48 | 21.48 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.75 | 21.54 | 21.59 |
| | | RB1#38 | 1 | 1 | 21.64 | 21.75 | 21.56 |
| | | RB1#74 | 2 | 2 | 21.74 | 21.56 | 21.71 |
| | | RB36#0 | 2 | 2 | 21.04 | 21.14 | 21.12 |
| | | RB36#39 | 2 | 2 | 21.12 | 21.02 | 21.06 |
| | | RB75#0 | 2 | 2 | 21.04 | 21.11 | 21.03 |
| 20M | QPSK | RB1#0 | 0 | 0 | 22.1 | 22.2 | 22.23 |
| | | RB1#50 | 0 | 0 | 22.22 | 22.16 | 22.09 |
| | | RB1#99 | 0 | 0 | 22.13 | 22.25 | 22.25 |
| | | RB50#0 | 1 | 1 | 21.58 | 21.78 | 21.73 |
| | | RB50#50 | 1 | 1 | 21.7 | 21.66 | 21.69 |
| | | RB100#0 | 1 | 1 | 21.71 | 21.71 | 21.73 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.51 | 21.5 | 21.62 |
| | | RB1#50 | 1 | 1 | 21.57 | 21.61 | 21.55 |
| | | RB1#99 | 2 | 2 | 21.46 | 21.42 | 21.43 |
| | | RB50#0 | 2 | 2 | 21.01 | 21.11 | 21.16 |
| | | RB50#50 | 2 | 2 | 21.01 | 21.04 | 21.07 |
| | | RB100#0 | 2 | 2 | 21.05 | 20.98 | 21.05 |

LTE Band 4:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 23.09 | 23.02 | 23.06 |
| | | RB1#3 | 0 | 0 | 23.13 | 23.17 | 23.15 |
| | | RB1#5 | 0 | 0 | 23.16 | 23.15 | 23.17 |
| | | RB3#0 | 1 | 1 | 22.62 | 22.66 | 22.53 |
| | | RB3#3 | 1 | 1 | 22.61 | 22.57 | 22.58 |
| | | RB6#0 | 1 | 1 | 22.6 | 22.53 | 22.66 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.85 | 21.79 | 21.68 |
| | | RB1#3 | 1 | 1 | 21.83 | 21.73 | 21.75 |
| | | RB1#5 | 2 | 2 | 21.76 | 21.74 | 21.82 |
| | | RB3#0 | 2 | 2 | 21.29 | 21.26 | 21.31 |
| | | RB3#3 | 2 | 2 | 21.22 | 21.21 | 21.28 |
| | | RB6#0 | 2 | 2 | 21.27 | 21.25 | 21.19 |
| 3M | QPSK | RB1#0 | 0 | 0 | 22.96 | 23.09 | 22.97 |
| | | RB1#8 | 0 | 0 | 22.95 | 23.08 | 22.93 |
| | | RB1#14 | 0 | 0 | 22.92 | 23.02 | 23.03 |
| | | RB6#0 | 1 | 1 | 22.44 | 22.41 | 22.53 |
| | | RB6#9 | 1 | 1 | 22.57 | 22.48 | 22.5 |
| | | RB15#0 | 1 | 1 | 22.55 | 22.56 | 22.49 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.91 | 21.76 | 21.87 |
| | | RB1#8 | 1 | 1 | 21.89 | 21.85 | 21.9 |
| | | RB1#14 | 1 | 1 | 21.75 | 21.83 | 21.76 |
| | | RB6#0 | 2 | 2 | 21.39 | 21.24 | 21.41 |
| | | RB6#9 | 2 | 2 | 21.35 | 21.39 | 21.25 |
| | | RB15#0 | 2 | 2 | 21.4 | 21.31 | 21.42 |
| 5M | QPSK | RB1#0 | 0 | 0 | 22.84 | 22.93 | 22.92 |
| | | RB1#13 | 0 | 0 | 22.85 | 22.83 | 22.93 |
| | | RB1#24 | 0 | 0 | 22.97 | 22.82 | 22.87 |
| | | RB15#0 | 1 | 1 | 22.46 | 22.42 | 22.35 |
| | | RB15#10 | 1 | 1 | 22.48 | 22.36 | 22.43 |
| | | RB25#0 | 1 | 1 | 22.45 | 22.43 | 22.45 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.62 | 21.81 | 21.69 |
| | | RB1#13 | 1 | 1 | 21.64 | 21.62 | 21.74 |
| | | RB1#24 | 1 | 1 | 21.8 | 21.75 | 21.68 |
| | | RB15#0 | 2 | 2 | 21.33 | 21.28 | 21.23 |
| | | RB15#10 | 2 | 2 | 21.29 | 21.25 | 21.32 |
| | | RB25#0 | 2 | 2 | 21.27 | 21.35 | 21.27 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 23.13 | 23.17 | 23.06 |
| | | RB1#25 | 0 | 0 | 23.17 | 23.09 | 23.06 |
| | | RB1#49 | 1 | 1 | 23.06 | 22.97 | 23.06 |
| | | RB25#0 | 1 | 1 | 22.65 | 22.47 | 22.57 |
| | | RB25#25 | 1 | 1 | 22.46 | 22.51 | 22.52 |
| | | RB50#0 | 1 | 1 | 22.58 | 22.47 | 22.46 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.15 | 22.15 | 22.11 |
| | | RB1#25 | 1 | 1 | 22.04 | 22.15 | 21.98 |
| | | RB1#49 | 1 | 1 | 22.05 | 22.09 | 22.18 |
| | | RB25#0 | 2 | 2 | 21.54 | 21.49 | 21.54 |
| | | RB25#25 | 2 | 2 | 21.57 | 21.63 | 21.55 |
| | | RB50#0 | 2 | 2 | 21.67 | 21.58 | 21.63 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.81 | 22.81 | 22.84 |
| | | RB1#38 | 0 | 0 | 22.84 | 22.8 | 22.86 |
| | | RB1#74 | 1 | 1 | 22.75 | 22.86 | 22.76 |
| | | RB36#0 | 1 | 1 | 22.24 | 22.22 | 22.35 |
| | | RB36#39 | 1 | 1 | 22.28 | 22.3 | 22.29 |
| | | RB75#0 | 1 | 1 | 22.29 | 22.33 | 22.27 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.32 | 22.28 | 22.26 |
| | | RB1#38 | 1 | 1 | 22.3 | 22.45 | 22.46 |
| | | RB1#74 | 2 | 2 | 22.36 | 22.4 | 22.47 |
| | | RB36#0 | 2 | 2 | 21.79 | 21.78 | 21.85 |
| | | RB36#39 | 2 | 2 | 21.77 | 21.8 | 21.76 |
| | | RB75#0 | 2 | 2 | 21.79 | 21.88 | 21.92 |
| 20M | QPSK | RB1#0 | 0 | 0 | 22.81 | 23 | 22.93 |
| | | RB1#50 | 0 | 0 | 22.91 | 22.88 | 22.84 |
| | | RB1#99 | 0 | 0 | 22.82 | 22.85 | 22.87 |
| | | RB50#0 | 1 | 1 | 22.35 | 22.42 | 22.41 |
| | | RB50#50 | 1 | 1 | 22.38 | 22.39 | 22.27 |
| | | RB100#0 | 1 | 1 | 22.38 | 22.45 | 22.46 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.14 | 22.13 | 22.09 |
| | | RB1#50 | 1 | 1 | 21.96 | 22.13 | 22.12 |
| | | RB1#99 | 2 | 2 | 22.14 | 22.06 | 22.03 |
| | | RB50#0 | 2 | 2 | 21.63 | 21.66 | 21.68 |
| | | RB50#50 | 2 | 2 | 21.63 | 21.57 | 21.64 |
| | | RB100#0 | 2 | 2 | 21.57 | 21.51 | 21.5 |

LTE Band 5:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 23.28 | 23.38 | 23.45 |
| | | RB1#3 | 0 | 0 | 23.33 | 23.42 | 23.29 |
| | | RB1#5 | 0 | 0 | 23.36 | 23.37 | 23.3 |
| | | RB3#0 | 1 | 1 | 22.93 | 22.79 | 22.82 |
| | | RB3#3 | 1 | 1 | 22.89 | 22.88 | 22.92 |
| | | RB6#0 | 1 | 1 | 22.93 | 22.91 | 22.83 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.44 | 22.49 | 22.42 |
| | | RB1#3 | 1 | 1 | 22.45 | 22.48 | 22.3 |
| | | RB1#5 | 2 | 2 | 22.43 | 22.42 | 22.37 |
| | | RB3#0 | 2 | 2 | 21.81 | 21.83 | 21.98 |
| | | RB3#3 | 2 | 2 | 21.84 | 21.95 | 21.95 |
| | | RB6#0 | 2 | 2 | 21.9 | 21.95 | 21.85 |
| 3M | QPSK | RB1#0 | 0 | 0 | 23.28 | 23.37 | 23.3 |
| | | RB1#8 | 0 | 0 | 23.28 | 23.29 | 23.23 |
| | | RB1#14 | 1 | 1 | 23.19 | 23.17 | 23.33 |
| | | RB6#0 | 1 | 1 | 22.72 | 22.85 | 22.69 |
| | | RB6#9 | 1 | 1 | 22.7 | 22.76 | 22.8 |
| | | RB15#0 | 1 | 1 | 22.86 | 22.76 | 22.78 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.87 | 22.94 | 22.84 |
| | | RB1#8 | 1 | 1 | 22.93 | 22.79 | 22.79 |
| | | RB1#14 | 2 | 2 | 22.88 | 22.88 | 22.89 |
| | | RB6#0 | 2 | 2 | 22.33 | 22.39 | 22.31 |
| | | RB6#9 | 2 | 2 | 22.4 | 22.36 | 22.4 |
| | | RB15#0 | 2 | 2 | 22.36 | 22.39 | 22.38 |
| 5M | QPSK | RB1#0 | 0 | 0 | 23.25 | 23.35 | 23.38 |
| | | RB1#13 | 0 | 0 | 23.28 | 23.24 | 23.31 |
| | | RB1#24 | 0 | 0 | 23.26 | 23.23 | 23.32 |
| | | RB15#0 | 1 | 1 | 22.8 | 22.76 | 22.78 |
| | | RB15#10 | 1 | 1 | 22.83 | 22.7 | 22.74 |
| | | RB25#0 | 1 | 1 | 22.73 | 22.76 | 22.75 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.46 | 22.61 | 22.54 |
| | | RB1#13 | 1 | 1 | 22.57 | 22.52 | 22.54 |
| | | RB1#24 | 1 | 1 | 22.51 | 22.5 | 22.53 |
| | | RB15#0 | 2 | 2 | 22.02 | 22.15 | 22.16 |
| | | RB15#10 | 2 | 2 | 22.14 | 22.18 | 22.03 |
| | | RB25#0 | 2 | 2 | 22.1 | 22.14 | 22.12 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 23.35 | 23.38 | 23.44 |
| | | RB1#25 | 0 | 0 | 23.3 | 23.36 | 23.39 |
| | | RB1#49 | 1 | 1 | 23.38 | 23.44 | 23.45 |
| | | RB25#0 | 1 | 1 | 22.9 | 22.84 | 22.93 |
| | | RB25#25 | 1 | 1 | 22.91 | 22.82 | 22.88 |
| | | RB50#0 | 1 | 1 | 22.81 | 22.88 | 22.94 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.7 | 22.72 | 22.77 |
| | | RB1#25 | 1 | 1 | 22.75 | 22.69 | 22.73 |
| | | RB1#49 | 2 | 2 | 22.71 | 22.71 | 22.83 |
| | | RB25#0 | 2 | 2 | 22.3 | 22.25 | 22.2 |
| | | RB25#25 | 2 | 2 | 22.16 | 22.14 | 22.29 |
| | | RB50#0 | 2 | 2 | 22.19 | 22.29 | 22.26 |

LTE Band 7:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 22.18 | 22.27 | 22.32 |
| | | RB1#13 | 0 | 0 | 22.18 | 22.3 | 22.25 |
| | | RB1#24 | 0 | 0 | 22.28 | 22.28 | 22.27 |
| | | RB15#0 | 1 | 1 | 21.72 | 21.65 | 21.79 |
| | | RB15#10 | 1 | 1 | 21.79 | 21.76 | 21.64 |
| | | RB25#0 | 1 | 1 | 21.72 | 21.74 | 21.83 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.07 | 21.09 | 21.11 |
| | | RB1#13 | 1 | 1 | 21.07 | 21.06 | 21.01 |
| | | RB1#24 | 1 | 1 | 21.01 | 20.98 | 21.15 |
| | | RB15#0 | 2 | 2 | 20.62 | 20.53 | 20.5 |
| | | RB15#10 | 2 | 2 | 20.5 | 20.6 | 20.49 |
| | | RB25#0 | 2 | 2 | 20.63 | 20.54 | 20.52 |
| 10M | QPSK | RB1#0 | 0 | 0 | 22.32 | 22.46 | 22.34 |
| | | RB1#25 | 0 | 0 | 22.41 | 22.36 | 22.32 |
| | | RB1#49 | 0 | 0 | 22.41 | 22.41 | 22.31 |
| | | RB25#0 | 1 | 1 | 21.8 | 21.93 | 21.9 |
| | | RB25#25 | 1 | 1 | 21.94 | 21.84 | 21.88 |
| | | RB50#0 | 1 | 1 | 21.78 | 21.91 | 21.83 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.26 | 21.23 | 21.2 |
| | | RB1#25 | 1 | 1 | 21.24 | 21.24 | 21.36 |
| | | RB1#49 | 1 | 1 | 21.28 | 21.32 | 21.35 |
| | | RB25#0 | 2 | 2 | 20.81 | 20.73 | 20.87 |
| | | RB25#25 | 2 | 2 | 20.68 | 20.82 | 20.76 |
| | | RB50#0 | 2 | 2 | 20.87 | 20.86 | 20.79 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.25 | 22.23 | 22.17 |
| | | RB1#38 | 0 | 0 | 22.26 | 22.14 | 22.29 |
| | | RB1#74 | 0 | 0 | 22.23 | 22.33 | 22.17 |
| | | RB36#0 | 1 | 1 | 21.72 | 21.73 | 21.8 |
| | | RB36#39 | 1 | 1 | 21.77 | 21.78 | 21.66 |
| | | RB75#0 | 1 | 1 | 21.8 | 21.76 | 21.83 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.28 | 21.34 | 21.24 |
| | | RB1#38 | 1 | 1 | 21.36 | 21.33 | 21.33 |
| | | RB1#74 | 1 | 1 | 21.4 | 21.32 | 21.32 |
| | | RB36#0 | 2 | 2 | 20.9 | 20.82 | 20.92 |
| | | RB36#39 | 2 | 2 | 20.94 | 20.91 | 20.85 |
| | | RB75#0 | 2 | 2 | 20.81 | 20.94 | 20.83 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M | QPSK | RB1#0 | 0 | 0 | 22.23 | 22.21 | 22.25 |
| | | RB1#50 | 0 | 0 | 22.23 | 22.24 | 22.19 |
| | | RB1#99 | 0 | 0 | 22.17 | 22.12 | 22.31 |
| | | RB50#0 | 1 | 1 | 21.66 | 21.65 | 21.65 |
| | | RB50#50 | 1 | 1 | 21.65 | 21.8 | 21.67 |
| | | RB100#0 | 1 | 1 | 21.78 | 21.69 | 21.73 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.75 | 21.63 | 21.76 |
| | | RB1#50 | 1 | 1 | 21.68 | 21.69 | 21.63 |
| | | RB1#99 | 1 | 1 | 21.82 | 21.86 | 21.73 |
| | | RB50#0 | 2 | 2 | 21.24 | 21.24 | 21.28 |
| | | RB50#50 | 2 | 2 | 21.16 | 21.18 | 21.18 |
| | | RB100#0 | 2 | 2 | 21.3 | 21.19 | 21.12 |

LTE Band 12:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 23.76 | 23.77 | 23.83 |
| | | RB1#3 | 0 | 0 | 23.74 | 23.8 | 23.79 |
| | | RB1#5 | 0 | 0 | 23.8 | 23.78 | 23.67 |
| | | RB3#0 | 1 | 1 | 23.14 | 23.16 | 23.21 |
| | | RB3#3 | 1 | 1 | 23.22 | 23.32 | 23.22 |
| | | RB6#0 | 1 | 1 | 23.25 | 23.17 | 23.26 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.8 | 22.68 | 22.72 |
| | | RB1#3 | 1 | 1 | 22.8 | 22.62 | 22.79 |
| | | RB1#5 | 1 | 1 | 22.78 | 22.75 | 22.82 |
| | | RB3#0 | 2 | 2 | 22.23 | 22.21 | 22.3 |
| | | RB3#3 | 2 | 2 | 22.13 | 22.25 | 22.16 |
| | | RB6#0 | 2 | 2 | 22.25 | 22.2 | 22.14 |
| 3M | QPSK | RB1#0 | 0 | 0 | 23.66 | 23.65 | 23.63 |
| | | RB1#8 | 0 | 0 | 23.69 | 23.73 | 23.7 |
| | | RB1#14 | 0 | 0 | 23.58 | 23.68 | 23.54 |
| | | RB6#0 | 1 | 1 | 23.14 | 23.17 | 23.24 |
| | | RB6#9 | 1 | 1 | 23.13 | 23.07 | 23.06 |
| | | RB15#0 | 1 | 1 | 23.23 | 23.21 | 23.15 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.54 | 22.65 | 22.59 |
| | | RB1#8 | 1 | 1 | 22.54 | 22.7 | 22.54 |
| | | RB1#14 | 1 | 1 | 22.66 | 22.63 | 22.51 |
| | | RB6#0 | 2 | 2 | 22.19 | 22.11 | 22.05 |
| | | RB6#9 | 2 | 2 | 22.03 | 22.1 | 22.02 |
| | | RB15#0 | 2 | 2 | 22.09 | 22.1 | 22.19 |
| 5M | QPSK | RB1#0 | 0 | 0 | 23.72 | 23.72 | 23.7 |
| | | RB1#13 | 0 | 0 | 23.7 | 23.68 | 23.75 |
| | | RB1#24 | 0 | 0 | 23.84 | 23.76 | 23.82 |
| | | RB15#0 | 1 | 1 | 23.33 | 23.31 | 23.19 |
| | | RB15#10 | 1 | 1 | 23.34 | 23.23 | 23.19 |
| | | RB25#0 | 1 | 1 | 23.28 | 23.18 | 23.29 |
| | 16-QAM | RB1#0 | 1 | 1 | 23.02 | 22.96 | 22.95 |
| | | RB1#13 | 1 | 1 | 22.97 | 22.87 | 22.87 |
| | | RB1#24 | 1 | 1 | 22.87 | 22.93 | 22.86 |
| | | RB15#0 | 2 | 2 | 22.49 | 22.47 | 22.51 |
| | | RB15#10 | 2 | 2 | 22.54 | 22.44 | 22.58 |
| | | RB25#0 | 2 | 2 | 22.45 | 22.48 | 22.59 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 23.73 | 23.88 | 23.9 |
| | | RB1#25 | 0 | 0 | 23.87 | 23.73 | 23.77 |
| | | RB1#49 | 0 | 0 | 23.93 | 23.73 | 23.86 |
| | | RB25#0 | 1 | 1 | 23.35 | 23.38 | 23.4 |
| | | RB25#25 | 1 | 1 | 23.27 | 23.35 | 23.33 |
| | | RB50#0 | 1 | 1 | 23.27 | 23.31 | 23.22 |
| | 16-QAM | RB1#0 | 1 | 1 | 23.45 | 23.26 | 23.45 |
| | | RB1#25 | 1 | 1 | 23.36 | 23.29 | 23.31 |
| | | RB1#49 | 1 | 1 | 23.3 | 23.44 | 23.35 |
| | | RB25#0 | 2 | 2 | 22.76 | 22.79 | 22.9 |
| | | RB25#25 | 2 | 2 | 22.76 | 22.81 | 22.9 |
| | | RB50#0 | 2 | 2 | 22.88 | 22.76 | 22.82 |

LTE Band 13:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 23.52 | / | 23.41 |
| | | RB1#13 | 0 | 0 | 23.41 | / | 23.5 |
| | | RB1#24 | 0 | 0 | 23.46 | / | 23.57 |
| | | RB15#0 | 1 | 1 | 23.02 | / | 23.01 |
| | | RB15#10 | 1 | 1 | 23.08 | / | 23.01 |
| | | RB25#0 | 1 | 1 | 22.92 | / | 23.05 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.71 | / | 22.73 |
| | | RB1#13 | 1 | 1 | 22.61 | / | 22.74 |
| | | RB1#24 | 1 | 1 | 22.73 | / | 22.65 |
| | | RB15#0 | 2 | 2 | 22.23 | / | 22.22 |
| | | RB15#10 | 2 | 2 | 22.15 | / | 22.1 |
| | | RB25#0 | 2 | 2 | 22.18 | / | 22.25 |
| 10M | QPSK | RB1#0 | 0 | 0 | / | 23.65 | / |
| | | RB1#25 | 0 | 0 | / | 23.62 | / |
| | | RB1#49 | 1 | 1 | / | 23.56 | / |
| | | RB25#0 | 1 | 1 | / | 23.14 | / |
| | | RB25#25 | 1 | 1 | / | 23.03 | / |
| | | RB50#0 | 1 | 1 | / | 23.14 | / |
| | 16-QAM | RB1#0 | 1 | 1 | / | 22.62 | / |
| | | RB1#25 | 1 | 1 | / | 22.48 | / |
| | | RB1#49 | 1 | 1 | / | 22.47 | / |
| | | RB25#0 | 2 | 2 | / | 22.11 | / |
| | | RB25#25 | 2 | 2 | / | 22.03 | / |
| | | RB50#0 | 2 | 2 | / | 22.03 | / |

LTE Band 17:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 23.72 | 23.71 | 23.75 |
| | | RB1#13 | 0 | 0 | 23.81 | 23.73 | 23.73 |
| | | RB1#24 | 0 | 0 | 23.74 | 23.8 | 23.83 |
| | | RB15#0 | 1 | 1 | 23.21 | 23.19 | 23.14 |
| | | RB15#10 | 1 | 1 | 23.2 | 23.19 | 23.16 |
| | | RB25#0 | 1 | 1 | 23.23 | 23.3 | 23.2 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.77 | 22.74 | 22.71 |
| | | RB1#13 | 1 | 1 | 22.75 | 22.71 | 22.74 |
| | | RB1#24 | 1 | 1 | 22.63 | 22.63 | 22.69 |
| | | RB15#0 | 2 | 2 | 22.25 | 22.21 | 22.13 |
| | | RB15#10 | 2 | 2 | 22.15 | 22.16 | 22.21 |
| | | RB25#0 | 2 | 2 | 22.27 | 22.15 | 22.27 |
| 10M | QPSK | RB1#0 | 0 | 0 | 23.69 | 23.68 | 23.63 |
| | | RB1#25 | 0 | 0 | 23.64 | 23.69 | 23.59 |
| | | RB1#49 | 1 | 1 | 23.66 | 23.61 | 23.64 |
| | | RB25#0 | 1 | 1 | 23.18 | 23.2 | 23.15 |
| | | RB25#25 | 1 | 1 | 23.22 | 23.23 | 23.11 |
| | | RB50#0 | 1 | 1 | 23.14 | 23.21 | 23.14 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.61 | 22.58 | 22.63 |
| | | RB1#25 | 1 | 1 | 22.64 | 22.67 | 22.66 |
| | | RB1#49 | 1 | 1 | 22.51 | 22.53 | 22.53 |
| | | RB25#0 | 2 | 2 | 22.03 | 22.15 | 22.02 |
| | | RB25#25 | 2 | 2 | 22.12 | 22.07 | 22.03 |
| | | RB50#0 | 2 | 2 | 22.07 | 22.05 | 22.1 |

LTE Band 25:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 22.39 | 22.4 | 22.34 |
| | | RB1#3 | 0 | 0 | 22.42 | 22.4 | 22.43 |
| | | RB1#5 | 0 | 0 | 22.26 | 22.31 | 22.29 |
| | | RB3#0 | 1 | 1 | 21.82 | 21.92 | 21.94 |
| | | RB3#3 | 1 | 1 | 21.83 | 21.93 | 21.78 |
| | | RB6#0 | 1 | 1 | 21.9 | 21.93 | 21.92 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.39 | 21.4 | 21.5 |
| | | RB1#3 | 1 | 1 | 21.43 | 21.33 | 21.43 |
| | | RB1#5 | 2 | 2 | 21.38 | 21.37 | 21.38 |
| | | RB3#0 | 2 | 2 | 20.91 | 20.97 | 20.9 |
| | | RB3#3 | 2 | 2 | 21.01 | 20.82 | 20.87 |
| | | RB6#0 | 2 | 2 | 20.9 | 20.92 | 20.87 |
| 3M | QPSK | RB1#0 | 0 | 0 | 21.76 | 21.69 | 21.84 |
| | | RB1#8 | 0 | 0 | 21.7 | 21.7 | 21.84 |
| | | RB1#14 | 0 | 0 | 21.85 | 21.86 | 21.77 |
| | | RB6#0 | 1 | 1 | 21.21 | 21.29 | 21.19 |
| | | RB6#9 | 1 | 1 | 21.26 | 21.23 | 21.27 |
| | | RB15#0 | 1 | 1 | 21.21 | 21.26 | 21.31 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.49 | 21.54 | 21.62 |
| | | RB1#8 | 1 | 1 | 21.58 | 21.53 | 21.6 |
| | | RB1#14 | 1 | 1 | 21.49 | 21.54 | 21.54 |
| | | RB6#0 | 2 | 2 | 21.08 | 21.18 | 21.09 |
| | | RB6#9 | 2 | 2 | 21.02 | 21 | 21.01 |
| | | RB15#0 | 2 | 2 | 21.17 | 21.15 | 21.04 |
| 5M | QPSK | RB1#0 | 0 | 0 | 22.23 | 22.12 | 22.1 |
| | | RB1#13 | 0 | 0 | 22.26 | 22.15 | 22.13 |
| | | RB1#24 | 0 | 0 | 22.18 | 22.17 | 22.23 |
| | | RB15#0 | 1 | 1 | 21.76 | 21.64 | 21.69 |
| | | RB15#10 | 1 | 1 | 21.65 | 21.73 | 21.79 |
| | | RB25#0 | 1 | 1 | 21.68 | 21.72 | 21.76 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.12 | 21.24 | 21.2 |
| | | RB1#13 | 1 | 1 | 21.22 | 21.23 | 21.23 |
| | | RB1#24 | 1 | 1 | 21.21 | 21.22 | 21.15 |
| | | RB15#0 | 2 | 2 | 20.63 | 20.66 | 20.59 |
| | | RB15#10 | 2 | 2 | 20.66 | 20.69 | 20.77 |
| | | RB25#0 | 2 | 2 | 20.74 | 20.77 | 20.64 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 22.19 | 22.13 | 22.23 |
| | | RB1#25 | 0 | 0 | 22.18 | 22.11 | 22.19 |
| | | RB1#49 | 1 | 1 | 22.3 | 22.18 | 22.3 |
| | | RB25#0 | 1 | 1 | 21.77 | 21.76 | 21.6 |
| | | RB25#25 | 1 | 1 | 21.73 | 21.7 | 21.67 |
| | | RB50#0 | 1 | 1 | 21.76 | 21.7 | 21.63 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.79 | 21.75 | 21.73 |
| | | RB1#25 | 1 | 1 | 21.69 | 21.73 | 21.76 |
| | | RB1#49 | 1 | 1 | 21.72 | 21.77 | 21.72 |
| | | RB25#0 | 2 | 2 | 21.12 | 21.14 | 21.18 |
| | | RB25#25 | 2 | 2 | 21.21 | 21.13 | 21.19 |
| | | RB50#0 | 2 | 2 | 21.12 | 21.13 | 21.27 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.05 | 22.02 | 22.1 |
| | | RB1#38 | 0 | 0 | 22.06 | 22.01 | 22.07 |
| | | RB1#74 | 1 | 1 | 22.09 | 22.08 | 22 |
| | | RB36#0 | 1 | 1 | 21.53 | 21.57 | 21.54 |
| | | RB36#39 | 1 | 1 | 21.61 | 21.51 | 21.61 |
| | | RB75#0 | 1 | 1 | 21.44 | 21.48 | 21.49 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.58 | 21.53 | 21.65 |
| | | RB1#38 | 1 | 1 | 21.58 | 21.74 | 21.72 |
| | | RB1#74 | 2 | 2 | 21.76 | 21.75 | 21.63 |
| | | RB36#0 | 2 | 2 | 21.1 | 21.06 | 21.02 |
| | | RB36#39 | 2 | 2 | 21.18 | 21.15 | 21.16 |
| | | RB75#0 | 2 | 2 | 21.13 | 21.04 | 21.11 |
| 20M | QPSK | RB1#0 | 0 | 0 | 22.15 | 22.14 | 22.27 |
| | | RB1#50 | 0 | 0 | 22.27 | 22.08 | 22.25 |
| | | RB1#99 | 0 | 0 | 22.25 | 22.33 | 22.29 |
| | | RB50#0 | 1 | 1 | 21.71 | 21.67 | 21.76 |
| | | RB50#50 | 1 | 1 | 21.64 | 21.66 | 21.76 |
| | | RB100#0 | 1 | 1 | 21.65 | 21.72 | 21.76 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.62 | 21.64 | 21.5 |
| | | RB1#50 | 1 | 1 | 21.59 | 21.44 | 21.59 |
| | | RB1#99 | 2 | 2 | 21.6 | 21.48 | 21.57 |
| | | RB50#0 | 2 | 2 | 20.99 | 21.07 | 20.98 |
| | | RB50#50 | 2 | 2 | 21.01 | 21.06 | 21.06 |
| | | RB100#0 | 2 | 2 | 21.04 | 21.01 | 21.12 |

LTE Band 26:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 23.37 | 23.34 | 23.3 |
| | | RB1#3 | 0 | 0 | 23.35 | 23.4 | 23.28 |
| | | RB1#5 | 0 | 0 | 23.29 | 23.41 | 23.36 |
| | | RB3#0 | 1 | 1 | 22.78 | 22.83 | 22.92 |
| | | RB3#3 | 1 | 1 | 22.88 | 22.95 | 22.94 |
| | | RB6#0 | 1 | 1 | 22.8 | 22.93 | 22.9 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.46 | 22.43 | 22.36 |
| | | RB1#3 | 1 | 1 | 22.47 | 22.41 | 22.39 |
| | | RB1#5 | 2 | 2 | 22.43 | 22.42 | 22.36 |
| | | RB3#0 | 2 | 2 | 21.92 | 21.88 | 21.82 |
| | | RB3#3 | 2 | 2 | 21.87 | 21.83 | 21.95 |
| | | RB6#0 | 2 | 2 | 21.96 | 21.84 | 21.87 |
| 3M | QPSK | RB1#0 | 0 | 0 | 23.33 | 23.35 | 23.19 |
| | | RB1#8 | 0 | 0 | 23.31 | 23.34 | 23.22 |
| | | RB1#14 | 0 | 0 | 23.33 | 23.28 | 23.24 |
| | | RB6#0 | 1 | 1 | 22.8 | 22.86 | 22.77 |
| | | RB6#9 | 1 | 1 | 22.77 | 22.85 | 22.8 |
| | | RB15#0 | 1 | 1 | 22.81 | 22.76 | 22.7 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.88 | 22.9 | 22.82 |
| | | RB1#8 | 1 | 1 | 22.86 | 22.85 | 22.79 |
| | | RB1#14 | 1 | 1 | 22.96 | 22.93 | 22.82 |
| | | RB6#0 | 2 | 2 | 22.35 | 22.38 | 22.4 |
| | | RB6#9 | 2 | 2 | 22.33 | 22.38 | 22.41 |
| | | RB15#0 | 2 | 2 | 22.34 | 22.35 | 22.38 |
| 5M | QPSK | RB1#0 | 0 | 0 | 23.36 | 23.19 | 23.31 |
| | | RB1#13 | 0 | 0 | 23.35 | 23.35 | 23.22 |
| | | RB1#24 | 0 | 0 | 23.33 | 23.2 | 23.34 |
| | | RB15#0 | 1 | 1 | 22.71 | 22.73 | 22.69 |
| | | RB15#10 | 1 | 1 | 22.73 | 22.73 | 22.84 |
| | | RB25#0 | 1 | 1 | 22.73 | 22.78 | 22.74 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.52 | 22.58 | 22.63 |
| | | RB1#13 | 1 | 1 | 22.57 | 22.63 | 22.63 |
| | | RB1#24 | 1 | 1 | 22.48 | 22.57 | 22.61 |
| | | RB15#0 | 2 | 2 | 22.06 | 22.1 | 22.13 |
| | | RB15#10 | 2 | 2 | 22 | 22.02 | 22.03 |
| | | RB25#0 | 2 | 2 | 22.03 | 22.13 | 22.15 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 23.37 | 23.42 | 23.34 |
| | | RB1#25 | 0 | 0 | 23.48 | 23.35 | 23.41 |
| | | RB1#49 | 1 | 1 | 23.32 | 23.43 | 23.39 |
| | | RB25#0 | 1 | 1 | 22.93 | 22.83 | 22.89 |
| | | RB25#25 | 1 | 1 | 22.87 | 22.77 | 22.8 |
| | | RB50#0 | 1 | 1 | 22.92 | 22.78 | 22.9 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.71 | 22.69 | 22.87 |
| | | RB1#25 | 1 | 1 | 22.69 | 22.63 | 22.72 |
| | | RB1#49 | 1 | 1 | 22.66 | 22.78 | 22.81 |
| | | RB25#0 | 2 | 2 | 22.13 | 22.25 | 22.22 |
| | | RB25#25 | 2 | 2 | 22.23 | 22.31 | 22.26 |
| | | RB50#0 | 2 | 2 | 22.25 | 22.23 | 22.23 |
| 15M | QPSK | RB1#0 | 0 | 0 | 23.16 | 23.19 | 23.18 |
| | | RB1#38 | 0 | 0 | 23.25 | 23.22 | 23.07 |
| | | RB1#74 | 1 | 1 | 23.18 | 23.07 | 23.21 |
| | | RB36#0 | 1 | 1 | 22.61 | 22.66 | 22.73 |
| | | RB36#39 | 1 | 1 | 22.67 | 22.66 | 22.61 |
| | | RB75#0 | 1 | 1 | 22.69 | 22.67 | 22.55 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.76 | 22.63 | 22.74 |
| | | RB1#38 | 1 | 1 | 22.75 | 22.71 | 22.67 |
| | | RB1#74 | 2 | 2 | 22.72 | 22.69 | 22.73 |
| | | RB36#0 | 2 | 2 | 22.21 | 22.23 | 22.29 |
| | | RB36#39 | 2 | 2 | 22.13 | 22.1 | 22.22 |
| | | RB75#0 | 2 | 2 | 22.09 | 22.23 | 22.2 |

LTE Band 38:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 22.76 | 22.75 | 22.83 |
| | | RB1#13 | 0 | 0 | 22.88 | 22.87 | 22.79 |
| | | RB1#24 | 0 | 0 | 22.8 | 22.84 | 22.82 |
| | | RB15#0 | 1 | 1 | 22.25 | 22.26 | 22.26 |
| | | RB15#10 | 1 | 1 | 22.36 | 22.39 | 22.44 |
| | | RB25#0 | 1 | 1 | 22.27 | 22.28 | 22.26 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.93 | 21.92 | 21.85 |
| | | RB1#13 | 1 | 1 | 21.84 | 21.81 | 21.95 |
| | | RB1#24 | 1 | 1 | 21.9 | 21.85 | 21.9 |
| | | RB15#0 | 2 | 2 | 21.41 | 21.42 | 21.32 |
| | | RB15#10 | 2 | 2 | 21.47 | 21.34 | 21.32 |
| | | RB25#0 | 2 | 2 | 21.3 | 21.29 | 21.32 |
| 10M | QPSK | RB1#0 | 0 | 0 | 23.15 | 23.16 | 23.18 |
| | | RB1#25 | 0 | 0 | 23.14 | 23.22 | 23.2 |
| | | RB1#49 | 0 | 0 | 23.18 | 23.13 | 23.2 |
| | | RB25#0 | 1 | 1 | 22.57 | 22.72 | 22.71 |
| | | RB25#25 | 1 | 1 | 22.66 | 22.66 | 22.63 |
| | | RB50#0 | 1 | 1 | 22.63 | 22.58 | 22.71 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.13 | 22.16 | 22.2 |
| | | RB1#25 | 1 | 1 | 22.26 | 22.1 | 22.17 |
| | | RB1#49 | 1 | 1 | 22.18 | 22.18 | 22.17 |
| | | RB25#0 | 2 | 2 | 21.6 | 21.78 | 21.76 |
| | | RB25#25 | 2 | 2 | 21.76 | 21.79 | 21.64 |
| | | RB50#0 | 2 | 2 | 21.65 | 21.75 | 21.6 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.88 | 23.01 | 22.97 |
| | | RB1#38 | 0 | 0 | 22.93 | 22.9 | 22.93 |
| | | RB1#74 | 0 | 0 | 22.92 | 22.86 | 22.87 |
| | | RB36#0 | 1 | 1 | 22.43 | 22.44 | 22.49 |
| | | RB36#39 | 1 | 1 | 22.46 | 22.46 | 22.35 |
| | | RB75#0 | 1 | 1 | 22.43 | 22.49 | 22.35 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.11 | 22.14 | 22.03 |
| | | RB1#38 | 1 | 1 | 22.11 | 22.14 | 22.06 |
| | | RB1#74 | 1 | 1 | 22.06 | 22.06 | 21.99 |
| | | RB36#0 | 2 | 2 | 21.64 | 21.53 | 21.56 |
| | | RB36#39 | 2 | 2 | 21.67 | 21.65 | 21.55 |
| | | RB75#0 | 2 | 2 | 21.65 | 21.58 | 21.63 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M | QPSK | RB1#0 | 0 | 0 | 22.92 | 23.08 | 23 |
| | | RB1#50 | 0 | 0 | 22.91 | 22.86 | 22.97 |
| | | RB1#99 | 0 | 0 | 23.02 | 22.93 | 22.97 |
| | | RB50#0 | 1 | 1 | 22.43 | 22.46 | 22.38 |
| | | RB50#50 | 1 | 1 | 22.53 | 22.35 | 22.53 |
| | | RB100#0 | 1 | 1 | 22.45 | 22.53 | 22.37 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.94 | 21.98 | 21.9 |
| | | RB1#50 | 1 | 1 | 21.89 | 21.96 | 21.96 |
| | | RB1#99 | 1 | 1 | 21.84 | 21.99 | 22.05 |
| | | RB50#0 | 2 | 2 | 21.35 | 21.34 | 21.31 |
| | | RB50#50 | 2 | 2 | 21.31 | 21.47 | 21.5 |
| | | RB100#0 | 2 | 2 | 21.36 | 21.43 | 21.36 |

LTE Band 41:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | 2570 MHz (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 22.9 | 22.77 | 22.93 | 22.76 |
| | | RB1#13 | 0 | 0 | 22.89 | 22.75 | 22.83 | 22.93 |
| | | RB1#24 | 1 | 1 | 22.9 | 22.81 | 22.85 | 22.87 |
| | | RB15#0 | 1 | 1 | 22.42 | 22.29 | 22.25 | 22.38 |
| | | RB15#10 | 1 | 1 | 22.37 | 22.26 | 22.4 | 22.4 |
| | | RB25#0 | 1 | 1 | 22.29 | 22.37 | 22.37 | 22.38 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.98 | 21.8 | 21.95 | 21.95 |
| | | RB1#13 | 1 | 1 | 21.84 | 21.8 | 21.88 | 21.94 |
| | | RB1#24 | 1 | 1 | 21.8 | 21.85 | 21.81 | 21.9 |
| | | RB15#0 | 2 | 2 | 21.28 | 21.38 | 21.35 | 21.44 |
| | | RB15#10 | 2 | 2 | 21.47 | 21.42 | 21.32 | 21.43 |
| | | RB25#0 | 2 | 2 | 21.44 | 21.44 | 21.39 | 21.46 |
| 10M | QPSK | RB1#0 | 0 | 0 | 23.19 | 23.2 | 23.17 | 23.14 |
| | | RB1#25 | 0 | 0 | 23.12 | 23.15 | 23.12 | 23.18 |
| | | RB1#49 | 1 | 1 | 23.14 | 23.07 | 23.14 | 23.11 |
| | | RB25#0 | 1 | 1 | 22.56 | 22.62 | 22.56 | 22.61 |
| | | RB25#25 | 1 | 1 | 22.67 | 22.72 | 22.71 | 22.65 |
| | | RB50#0 | 1 | 1 | 22.6 | 22.57 | 22.57 | 22.66 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.16 | 22.12 | 22.2 | 22.15 |
| | | RB1#25 | 1 | 1 | 22.17 | 22.2 | 22.21 | 22.23 |
| | | RB1#49 | 2 | 2 | 22.21 | 22.22 | 22.18 | 22.16 |
| | | RB25#0 | 2 | 2 | 21.65 | 21.78 | 21.71 | 21.73 |
| | | RB25#25 | 2 | 2 | 21.75 | 21.62 | 21.72 | 21.66 |
| | | RB50#0 | 2 | 2 | 21.72 | 21.7 | 21.76 | 21.62 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.96 | 22.83 | 23 | 22.87 |
| | | RB1#38 | 0 | 0 | 22.9 | 22.98 | 23 | 23.02 |
| | | RB1#74 | 1 | 1 | 22.94 | 22.97 | 22.87 | 23.01 |
| | | RB36#0 | 1 | 1 | 22.45 | 22.5 | 22.42 | 22.46 |
| | | RB36#39 | 1 | 1 | 22.34 | 22.39 | 22.53 | 22.52 |
| | | RB75#0 | 1 | 1 | 22.51 | 22.41 | 22.52 | 22.47 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.02 | 22.13 | 22.05 | 22 |
| | | RB1#38 | 1 | 1 | 22 | 22.07 | 22.13 | 22.13 |
| | | RB1#74 | 1 | 1 | 22.1 | 22.09 | 22.13 | 22.17 |
| | | RB36#0 | 2 | 2 | 21.68 | 21.54 | 21.55 | 21.52 |
| | | RB36#39 | 2 | 2 | 21.56 | 21.54 | 21.55 | 21.56 |
| | | RB75#0 | 2 | 2 | 21.53 | 21.56 | 21.55 | 21.63 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | 2570 MHz (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------|----------------------|--------------------|
| 20M | QPSK | RB1#0 | 0 | 0 | 22.89 | 23.03 | 22.97 | 22.9 |
| | | RB1#50 | 0 | 0 | 22.95 | 22.99 | 22.97 | 23.08 |
| | | RB1#99 | 1 | 1 | 23.07 | 23 | 23.03 | 23.01 |
| | | RB50#0 | 1 | 1 | 22.34 | 22.39 | 22.48 | 22.49 |
| | | RB50#50 | 1 | 1 | 22.37 | 22.53 | 22.44 | 22.45 |
| | | RB100#0 | 1 | 1 | 22.41 | 22.35 | 22.52 | 22.4 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.87 | 21.92 | 21.99 | 21.93 |
| | | RB1#50 | 1 | 1 | 22.01 | 21.85 | 21.92 | 21.96 |
| | | RB1#99 | 2 | 2 | 21.92 | 21.91 | 22.04 | 21.86 |
| | | RB50#0 | 2 | 2 | 21.49 | 21.41 | 21.44 | 21.46 |
| | | RB50#50 | 2 | 2 | 21.4 | 21.45 | 21.48 | 21.5 |
| | | RB100#0 | 2 | 2 | 21.5 | 21.5 | 21.49 | 21.47 |

LTE Band 66:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 1.4M | QPSK | RB1#0 | 0 | 0 | 23.18 | 23.15 | 23.1 |
| | | RB1#3 | 0 | 0 | 23.05 | 23.18 | 23 |
| | | RB1#5 | 0 | 0 | 23.17 | 23 | 23.01 |
| | | RB3#0 | 1 | 1 | 22.59 | 22.55 | 22.55 |
| | | RB3#3 | 1 | 1 | 22.5 | 22.51 | 22.66 |
| | | RB6#0 | 1 | 1 | 22.69 | 22.66 | 22.57 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.78 | 21.8 | 21.69 |
| | | RB1#3 | 1 | 1 | 21.66 | 21.69 | 21.75 |
| | | RB1#5 | 1 | 1 | 21.74 | 21.79 | 21.8 |
| | | RB3#0 | 2 | 2 | 21.18 | 21.32 | 21.22 |
| | | RB3#3 | 2 | 2 | 21.27 | 21.17 | 21.25 |
| | | RB6#0 | 2 | 2 | 21.27 | 21.27 | 21.28 |
| 3M | QPSK | RB1#0 | 0 | 0 | 23.02 | 23.03 | 23.03 |
| | | RB1#8 | 0 | 0 | 23.01 | 23.01 | 23.06 |
| | | RB1#14 | 0 | 0 | 22.94 | 22.97 | 22.97 |
| | | RB6#0 | 1 | 1 | 22.55 | 22.43 | 22.58 |
| | | RB6#9 | 1 | 1 | 22.55 | 22.47 | 22.53 |
| | | RB15#0 | 1 | 1 | 22.41 | 22.45 | 22.44 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.86 | 21.93 | 21.84 |
| | | RB1#8 | 1 | 1 | 21.78 | 21.89 | 21.89 |
| | | RB1#14 | 1 | 1 | 21.84 | 21.87 | 21.79 |
| | | RB6#0 | 2 | 2 | 21.27 | 21.32 | 21.26 |
| | | RB6#9 | 2 | 2 | 21.38 | 21.42 | 21.31 |
| | | RB15#0 | 2 | 2 | 21.36 | 21.38 | 21.38 |
| 5M | QPSK | RB1#0 | 0 | 0 | 22.99 | 22.9 | 22.82 |
| | | RB1#13 | 0 | 0 | 22.97 | 22.89 | 22.93 |
| | | RB1#24 | 0 | 0 | 22.92 | 22.87 | 22.88 |
| | | RB15#0 | 1 | 1 | 22.43 | 22.31 | 22.44 |
| | | RB15#10 | 1 | 1 | 22.39 | 22.36 | 22.48 |
| | | RB25#0 | 1 | 1 | 22.42 | 22.46 | 22.49 |
| | 16-QAM | RB1#0 | 1 | 1 | 21.71 | 21.71 | 21.63 |
| | | RB1#13 | 1 | 1 | 21.75 | 21.65 | 21.72 |
| | | RB1#24 | 1 | 1 | 21.66 | 21.66 | 21.8 |
| | | RB15#0 | 2 | 2 | 21.25 | 21.33 | 21.37 |
| | | RB15#10 | 2 | 2 | 21.33 | 21.17 | 21.34 |
| | | RB25#0 | 2 | 2 | 21.19 | 21.22 | 21.3 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 10M | QPSK | RB1#0 | 0 | 0 | 23 | 23.07 | 23.05 |
| | | RB1#25 | 0 | 0 | 23.03 | 23.01 | 23.06 |
| | | RB1#49 | 0 | 0 | 23.01 | 23 | 23.09 |
| | | RB25#0 | 1 | 1 | 22.54 | 22.5 | 22.52 |
| | | RB25#25 | 1 | 1 | 22.63 | 22.46 | 22.5 |
| | | RB50#0 | 1 | 1 | 22.6 | 22.51 | 22.52 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.18 | 22.16 | 22.12 |
| | | RB1#25 | 1 | 1 | 22.13 | 22.09 | 22.01 |
| | | RB1#49 | 1 | 1 | 22.05 | 22.1 | 22.12 |
| | | RB25#0 | 2 | 2 | 21.54 | 21.67 | 21.57 |
| | | RB25#25 | 2 | 2 | 21.65 | 21.53 | 21.51 |
| | | RB50#0 | 2 | 2 | 21.53 | 21.52 | 21.56 |
| 15M | QPSK | RB1#0 | 0 | 0 | 22.69 | 22.8 | 22.83 |
| | | RB1#38 | 0 | 0 | 22.77 | 22.68 | 22.77 |
| | | RB1#74 | 0 | 0 | 22.86 | 22.85 | 22.87 |
| | | RB36#0 | 1 | 1 | 22.26 | 22.27 | 22.23 |
| | | RB36#39 | 1 | 1 | 22.34 | 22.31 | 22.34 |
| | | RB75#0 | 1 | 1 | 22.22 | 22.36 | 22.19 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.43 | 22.33 | 22.41 |
| | | RB1#38 | 1 | 1 | 22.34 | 22.47 | 22.46 |
| | | RB1#74 | 1 | 1 | 22.4 | 22.44 | 22.45 |
| | | RB36#0 | 2 | 2 | 21.79 | 21.88 | 21.89 |
| | | RB36#39 | 2 | 2 | 21.79 | 21.83 | 21.82 |
| | | RB75#0 | 2 | 2 | 21.85 | 21.82 | 21.9 |
| 20M | QPSK | RB1#0 | 0 | 0 | 22.97 | 23 | 23 |
| | | RB1#50 | 0 | 0 | 22.86 | 22.93 | 22.83 |
| | | RB1#99 | 0 | 0 | 22.84 | 22.89 | 22.93 |
| | | RB50#0 | 1 | 1 | 22.39 | 22.29 | 22.29 |
| | | RB50#50 | 1 | 1 | 22.45 | 22.39 | 22.33 |
| | | RB100#0 | 1 | 1 | 22.38 | 22.42 | 22.41 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.18 | 22.17 | 22.08 |
| | | RB1#50 | 1 | 1 | 21.96 | 22.09 | 22.05 |
| | | RB1#99 | 1 | 1 | 22.02 | 22.06 | 22.02 |
| | | RB50#0 | 2 | 2 | 21.61 | 21.62 | 21.58 |
| | | RB50#50 | 2 | 2 | 21.56 | 21.66 | 21.57 |
| | | RB100#0 | 2 | 2 | 21.51 | 21.61 | 21.63 |

LTE Band 71:

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 5M | QPSK | RB1#0 | 0 | 0 | 23.6 | 23.71 | 23.57 |
| | | RB1#13 | 0 | 0 | 23.67 | 23.56 | 23.66 |
| | | RB1#24 | 1 | 1 | 23.63 | 23.55 | 23.67 |
| | | RB15#0 | 1 | 1 | 23.14 | 23.17 | 23.13 |
| | | RB15#10 | 1 | 1 | 23.12 | 23.05 | 23.09 |
| | | RB25#0 | 1 | 1 | 23.23 | 23.06 | 23.05 |
| | 16-QAM | RB1#0 | 1 | 1 | 22.83 | 22.87 | 22.91 |
| | | RB1#13 | 1 | 1 | 22.98 | 22.82 | 22.97 |
| | | RB1#24 | 1 | 1 | 22.94 | 22.87 | 22.85 |
| | | RB15#0 | 2 | 2 | 22.45 | 22.43 | 22.31 |
| | | RB15#10 | 2 | 2 | 22.45 | 22.42 | 22.36 |
| | | RB25#0 | 2 | 2 | 22.45 | 22.33 | 22.43 |
| 10M | QPSK | RB1#0 | 0 | 0 | 23.49 | 23.68 | 23.62 |
| | | RB1#25 | 0 | 0 | 23.6 | 23.56 | 23.61 |
| | | RB1#49 | 1 | 1 | 23.5 | 23.58 | 23.6 |
| | | RB25#0 | 1 | 1 | 23.13 | 23.04 | 23.05 |
| | | RB25#25 | 1 | 1 | 23.06 | 23.14 | 23.02 |
| | | RB50#0 | 1 | 1 | 23.15 | 23.14 | 23 |
| | 16-QAM | RB1#0 | 1 | 1 | 23.15 | 23.06 | 23.15 |
| | | RB1#25 | 1 | 1 | 23.07 | 23.17 | 23.08 |
| | | RB1#49 | 2 | 2 | 23.14 | 23.11 | 23.02 |
| | | RB25#0 | 2 | 2 | 22.54 | 22.61 | 22.6 |
| | | RB25#25 | 2 | 2 | 22.66 | 22.69 | 22.54 |
| | | RB50#0 | 2 | 2 | 22.6 | 22.61 | 22.66 |
| 15M | QPSK | RB1#0 | 0 | 0 | 23.61 | 23.63 | 23.54 |
| | | RB1#38 | 0 | 0 | 23.68 | 23.67 | 23.62 |
| | | RB1#74 | 1 | 1 | 23.58 | 23.55 | 23.68 |
| | | RB36#0 | 1 | 1 | 23.02 | 23.02 | 23.1 |
| | | RB36#39 | 1 | 1 | 23.12 | 23.12 | 23.09 |
| | | RB75#0 | 1 | 1 | 23.12 | 23.09 | 23.14 |
| | 16-QAM | RB1#0 | 1 | 1 | 23.09 | 23.06 | 23.09 |
| | | RB1#38 | 1 | 1 | 23.03 | 23.05 | 23.12 |
| | | RB1#74 | 1 | 1 | 23.01 | 23.01 | 22.95 |
| | | RB36#0 | 2 | 2 | 22.5 | 22.54 | 22.68 |
| | | RB36#39 | 2 | 2 | 22.52 | 22.69 | 22.64 |
| | | RB75#0 | 2 | 2 | 22.57 | 22.57 | 22.69 |

| Test Bandwidth | Test Modulation | Resource Block & RB offset | Target MPR | Meas MPR | Low Channel (dBm) | Middle Channel (dBm) | High Channel (dBm) |
|----------------|-----------------|----------------------------|------------|----------|-------------------|----------------------|--------------------|
| 20M | QPSK | RB1#0 | 0 | 0 | 23.65 | 23.72 | 23.76 |
| | | RB1#50 | 0 | 0 | 23.65 | 23.67 | 23.59 |
| | | RB1#99 | 1 | 1 | 23.7 | 23.73 | 23.63 |
| | | RB50#0 | 1 | 1 | 23.22 | 23.2 | 23.05 |
| | | RB50#50 | 1 | 1 | 23.21 | 23.1 | 23.08 |
| | | RB100#0 | 1 | 1 | 23.15 | 23.17 | 23.13 |
| | 16-QAM | RB1#0 | 1 | 1 | 23.15 | 23.1 | 23.12 |
| | | RB1#50 | 1 | 1 | 23.23 | 23.17 | 23.22 |
| | | RB1#99 | 2 | 2 | 23.21 | 23.18 | 23.25 |
| | | RB50#0 | 2 | 2 | 22.64 | 22.68 | 22.74 |
| | | RB50#50 | 2 | 2 | 22.6 | 22.61 | 22.59 |
| | | RB100#0 | 2 | 2 | 22.7 | 22.75 | 22.69 |

WLAN 2.4G:

| Mode | Channel frequency (MHz) | Data Rate | Duty Cycle (%) | Conducted Average Output Power(dBm) |
|--------------|-------------------------|-----------|----------------|-------------------------------------|
| 802.11b | 2412 | 1Mbps | 99.45 | 9.09 |
| | 2437 | | | 9.07 |
| | 2462 | | | 9.01 |
| 802.11g | 2412 | 6Mbps | 96.87 | 13.48 |
| | 2437 | | | 13.29 |
| | 2462 | | | 13.39 |
| 802.11n ht20 | 2412 | MCS0 | 96.58 | 11.77 |
| | 2437 | | | 11.87 |
| | 2462 | | | 11.58 |
| 802.11n ht40 | 2422 | MCS0 | 93.50 | 11.03 |
| | 2437 | | | 11.22 |
| | 2452 | | | 11.09 |

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00C.

Wi-Fi 5.2G:

| Mode | Channel frequency (MHz) | Data Rate | Duty Cycle (%) | Max Average Output Power(dBm) |
|------------|-------------------------|-----------|----------------|-------------------------------|
| 802.11a | 5180 | 6Mbps | 100 | 14.24 |
| | 5200 | | | 14.51 |
| | 5240 | | | 14.39 |
| 802.11n20 | 5180 | MCS0 | 100 | 13.7 |
| | 5200 | | | 13.99 |
| | 5240 | | | 13.64 |
| 802.11n40 | 5190 | MCS0 | 100 | 11.93 |
| | 5230 | | | 11.92 |
| 802.11ac20 | 5180 | MCS0 | 100 | 13.41 |
| | 5200 | | | 13.28 |
| | 5240 | | | 13.32 |
| 802.11ac40 | 5190 | MCS0 | 100 | 11.62 |
| | 5230 | | | 11.51 |
| 802.11ac80 | 5210 | MCS0 | 100 | 8.88 |

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.3G:

| Mode | Channel frequency (MHz) | Data Rate | Duty Cycle (%) | Max Average Output Power(dBm) |
|------------|-------------------------|-----------|----------------|-------------------------------|
| 802.11a | 5260 | 6Mbps | 100 | 13.69 |
| | 5280 | | | 13.67 |
| | 5320 | | | 13.44 |
| 802.11n20 | 5260 | MCS0 | 100 | 14.18 |
| | 5280 | | | 13.99 |
| | 5320 | | | 13.9 |
| 802.11n40 | 5270 | MCS0 | 100 | 13.72 |
| | 5310 | | | 13.56 |
| 802.11ac20 | 5260 | MCS0 | 100 | 13.61 |
| | 5280 | | | 13.53 |
| | 5320 | | | 13.79 |
| 802.11ac40 | 5270 | MCS0 | 100 | 13.55 |
| | 5310 | | | 13.34 |
| 802.11ac80 | 5290 | MCS0 | 100 | 9.03 |

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.6G:

| Mode | Channel frequency (MHz) | Data Rate | Duty Cycle (%) | Max Average Output Power(dBm) |
|------------|-------------------------|-----------|----------------|-------------------------------|
| 802.11a | 5500 | 6Mbps | 100 | 5.87 |
| | 5580 | | | 5.72 |
| | 5700 | | | 5.66 |
| | 5720 | | | 5.04 |
| 802.11n20 | 5500 | MCS0 | 100 | 6.58 |
| | 5580 | | | 6.56 |
| | 5700 | | | 6.72 |
| | 5720 | | | 6.88 |
| 802.11n40 | 5510 | MCS0 | 100 | 7.17 |
| | 5590 | | | 6.93 |
| | 5670 | | | 7.07 |
| | 5710 | | | 6.76 |
| 802.11ac20 | 5500 | MCS0 | 100 | 6.27 |
| | 5580 | | | 6.12 |
| | 5700 | | | 6.08 |
| | 5720 | | | 6.11 |
| 802.11ac40 | 5510 | MCS0 | 100 | 6.75 |
| | 5590 | | | 6.55 |
| | 5670 | | | 6.71 |
| | 5710 | | | 6.65 |
| 802.11ac80 | 5530 | MCS0 | 100 | 6.76 |
| | 5610 | | | 6.93 |
| | 5690 | | | 6.92 |

Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Wi-Fi 5.8G:

| Mode | Channel frequency (MHz) | Data Rate | Duty Cycle (%) | Max Average Output Power(dBm) |
|------------|-------------------------|-----------|----------------|-------------------------------|
| 802.11a | 5745 | 6Mbps | 100 | 6.97 |
| | 5785 | | | 6.87 |
| | 5825 | | | 6.71 |
| 802.11n20 | 5745 | MCS0 | 100 | 7.64 |
| | 5785 | | | 7.57 |
| | 5825 | | | 7.4 |
| 802.11n40 | 5755 | MCS0 | 100 | 8.66 |
| | 5795 | | | 8.54 |
| 802.11ac20 | 5745 | MCS0 | 100 | 7.41 |
| | 5785 | | | 7.22 |
| | 5825 | | | 7.31 |
| 802.11ac40 | 5755 | MCS0 | 100 | 8.43 |
| | 5795 | | | 8.19 |
| 802.11ac80 | 5775 | MCS0 | 100 | 8.46 |


Note: The duty cycle plots, please refer to the radio report: KS1240221-08647E-RF-00D.

Bluetooth:

| Mode | Channel frequency (MHz) | RF Output Power (dBm) |
|----------------------|-------------------------|-----------------------|
| BDR(GFSK) | 2402 | 0.42 |
| | 2441 | 1.34 |
| | 2480 | -2.85 |
| EDR($\pi/4$ -DQPSK) | 2402 | -0.41 |
| | 2441 | 0.59 |
| | 2480 | -3.44 |
| EDR(8DPSK) | 2402 | -0.49 |
| | 2441 | 0.52 |
| | 2480 | -3.43 |
| Bluetooth LE | 2402 | -6.65 |
| | 2440 | -5.84 |
| | 2480 | -9.6 |

8. STANDALONE SAR TEST EXCLUSION CONSIDERATIONS

8.1 Antennas Location:

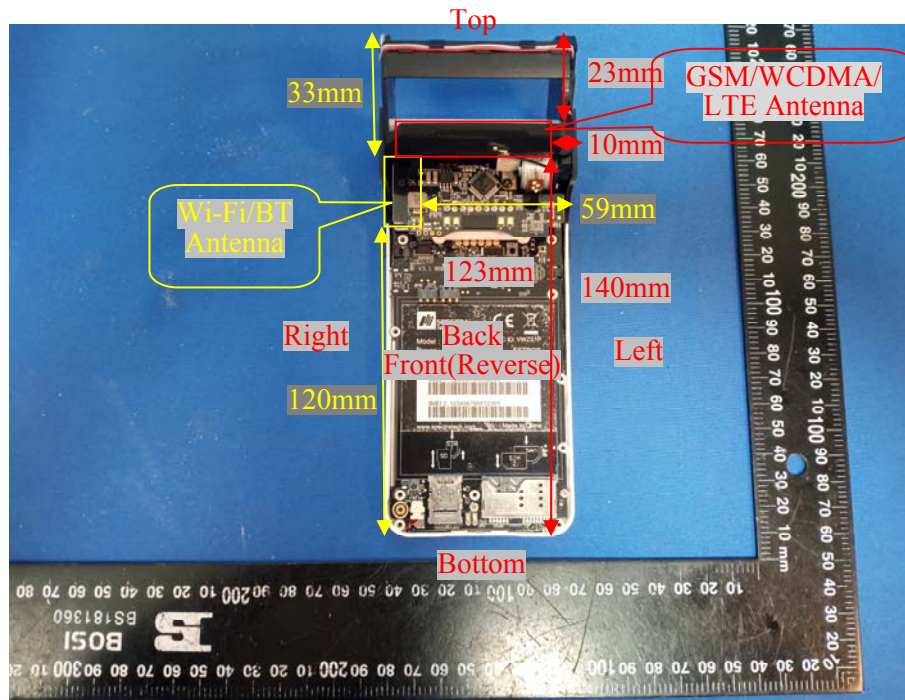

8.2 Antenna Distance To Edge

| Antenna Distance To Edge(mm) | | | | | | |
|------------------------------|------|-------|------|-------|-----|--------|
| Antenna | Back | Front | Left | Right | Top | Bottom |
| WWAN (GSM/WCDMA/LTE) Antenna | < 5 | < 5 | 10 | < 5 | 23 | 140 |
| Wi-Fi/BT Antenna | < 5 | < 5 | 59 | < 5 | 33 | 120 |

8.3 Standalone SAR test exclusion considerations

| Mode | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Distance (mm) | Calculated value | Threshold (1-g) | SAR Test Exclusion |
|------------|-----------------|--------------------|-------------------|---------------|------------------|-----------------|--------------------|
| WLAN 2.4G | 2462 | 13.5 | 22.39 | 0 | 7.0 | 3 | NO |
| Wi-Fi 5.2G | 5240 | 14.6 | 28.84 | 0 | 13.2 | 3 | NO |
| Wi-Fi 5.3G | 5320 | 14.2 | 26.3 | 0 | 12.1 | 3 | NO |
| Wi-Fi 5.6G | 5720 | 7.2 | 5.25 | 0 | 2.5 | 3 | YES |
| Wi-Fi 5.8G | 5825 | 8.8 | 7.59 | 0 | 3.7 | 3 | NO |
| Bluetooth | 2480 | 1.5 | 1.41 | 0 | 0.4 | 3 | YES |

Note: The WLAN based average power for calculation. and bluetooth based peak output power for calculation. The Bluetooth SAR was seleted to test.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

According to KDB447498 D01 General RF Exposure Guidance v06: 4.3. General SAR test exclusion guidance
c) For frequencies below 100 MHz, the following may be considered for SAR test exclusion (also illustrated in Appendix C):

1) For test separation distances > 50 mm and < 200 mm, the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by $[1 + \log(100/f(\text{MHz}))]$

2) For test separation distances ≤ 50 mm, the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by $\frac{1}{2}$

3) SAR measurement procedures are not established below 100 MHz

Measurement Result:

For NFC, the power of EUT: E Field@3m is 75.33 dBuV/m = -19.87dBm (0.01mW)

Note: $E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2$ for $d = 3$ m.

SAR test exclusion threshold for NFC(13.56MHz) separation distance < 50 mm

$$=[474 \cdot (1 + \log(100/f(\text{MHz})))]/2$$

$$= 443\text{mW}$$

$$> 0.01\text{mW}$$

Conclusion:

The NFC SAR evaluation can be exempted.

8.4 Standalone SAR estimation:

| Mode | Frequency (MHz) | Output Power (dBm) | Output Power (mW) | Distance (mm) | Estimated SAR (W/kg) |
|----------------------|-----------------|--------------------|-------------------|---------------|----------------------|
| BT Body | 2480 | 1.5 | 1.41 | 5 | 0.06 (1g) |
| BT Extremity | 2480 | 1.5 | 1.41 | 0 | 0.02 (10g) |
| Wi-Fi 5.6G Body | 5720 | 7.2 | 5.25 | 5 | 0.33 (1g) |
| Wi-Fi 5.6G Extremity | 5720 | 7.2 | 5.25 | 0 | 0.13 (10g) |

Note: The bluetooth based peak power for calculation, and the Wi-Fi based average power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})} / x]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR and $x = 18.75$ for 10-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

8.5 SAR test exclusion for the EUT edge considerations Result

| Mode | Back | Front | Left | Right | Top | Bottom |
|---------------------|----------|----------|-----------|----------|-----------|-----------|
| WLAN | Required | Required | Exclusion | Required | Exclusion | Exclusion |
| WWAN(GSM/WCDMA/LTE) | Required | Required | Required | Required | Required | Exclusion |

Note:

Required: The distance to Edge is less than 25mm, testing is required.

Exclusion: The distance to Edge is more than 25 mm, testing is not required.

9. SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

9.1 SAR Test Data

Environmental Conditions

| | | | | | |
|---------------------------|--------------|--------------|--------------|--------------|--------------|
| Temperature: | 22.5-23.6 °C | 22.5-23.2 °C | 22.2-22.7 °C | 22.7-23.4 °C | 22.7-23.4 °C |
| Relative Humidity: | 35 % | 41% | 48 % | 45 % | 45 % |
| ATM Pressure: | 100.6 kPa | 100.1 kPa | 100.3 kPa | 100.2 kPa | 100.9 kPa |
| Test Date: | 2024/06/20 | 2024/07/06 | 2024/07/07 | 2024/07/08 | 2024/07/09 |

Testing was performed by Rain Yu, Wen Wang, Mark Dong.

GSM 850:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.11 | 0.12 | 1# |
| | 848.8 | GPRS | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.357 | 0.38 | 2# |
| | 848.8 | GPRS | / | / | / | / | / | / |
| Handheld Front (0mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.021 | 0.02 | / |
| | 848.8 | GPRS | / | / | / | / | / | / |
| Handheld Left (0mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.221 | 0.24 | / |
| | 848.8 | GPRS | / | / | / | / | / | / |
| Handheld Right (0mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.219 | 0.23 | / |
| | 848.8 | GPRS | / | / | / | / | / | / |
| Handheld Top (0mm) | 824.2 | GPRS | / | / | / | / | / | / |
| | 836.6 | GPRS | 24.71 | 25 | 1.069 | 0.014 | 0.01 | / |
| | 848.8 | GPRS | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

PCS 1900:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|------------|------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 0.603 | 0.65 | 3# |
| | 1909.8 | GPRS | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|------------|------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 1.47 | 1.59 | 4# |
| | 1909.8 | GPRS | / | / | / | / | / | / |
| Handheld Front (0mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 0.032 | 0.03 | / |
| | 1909.8 | GPRS | / | / | / | / | / | / |
| Handheld Left (0mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 0.481 | 0.52 | / |
| | 1909.8 | GPRS | / | / | / | / | / | / |
| Handheld Right (0mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 0.326 | 0.35 | / |
| | 1909.8 | GPRS | / | / | / | / | / | / |
| Handheld Top (0mm) | 1850.2 | GPRS | / | / | / | / | / | / |
| | 1880 | GPRS | 20.67 | 21 | 1.079 | 0.021 | 0.02 | / |
| | 1909.8 | GPRS | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same GSM antenna while testing SAR.
3. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
4. When the maximum output power variation across the required test channels is > 0.5 dB, instead of the middle channel, the highest output power channel must be used.
5. The Multi-slot Classes of EUT is Class 12 which has maximum 4 Downlink slots and 4 Uplink slots, the maximum active slots is 5, when perform the multiple slots scan, 3DL+2UL is the worst case.

WCDMA Band 2:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.105 | 0.11 | 5# |
| | 1907.6 | RMC | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.991 | 1.04 | 6# |
| | 1907.6 | RMC | / | / | / | / | / | / |
| Handheld Front (0mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.023 | 0.02 | / |
| | 1907.6 | RMC | / | / | / | / | / | / |
| Handheld Left (0mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.115 | 0.12 | / |
| | 1907.6 | RMC | / | / | / | / | / | / |
| Handheld Right (0mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.021 | 0.02 | / |
| | 1907.6 | RMC | / | / | / | / | / | / |
| Handheld Top (0mm) | 1852.4 | RMC | / | / | / | / | / | / |
| | 1880 | RMC | 23.27 | 23.50 | 1.054 | 0.01 | 0.01 | / |
| | 1907.6 | RMC | / | / | / | / | / | / |

WCDMA Band 5:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.025 | 0.03 | 7# |
| | 846.6 | RMC | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|-----------|
| | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.13 | 0.14 | 8# |
| | 846.6 | RMC | / | / | / | / | / | / |
| Handheld Front (0mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.00399 | 0.01 | / |
| | 846.6 | RMC | / | / | / | / | / | / |
| Handheld Left (0mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.055 | 0.06 | / |
| | 846.6 | RMC | / | / | / | / | / | / |
| Handheld Right (0mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.063 | 0.07 | / |
| | 846.6 | RMC | / | / | / | / | / | / |
| Handheld Top (0mm) | 826.4 | RMC | / | / | / | / | / | / |
| | 836.6 | RMC | 24.12 | 24.30 | 1.042 | 0.00724 | 0.01 | / |
| | 846.6 | RMC | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. The EUT transmit and receive through the same antenna while testing SAR.
3. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model.
4. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.
5. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

LTE Band 7:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|-----------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.127 | 0.13 | / |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.115 | 0.14 | 9# |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.517 | 0.55 | / |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.436 | 0.51 | / |
| Handheld Front (0mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.16 | 0.17 | / |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.13 | 0.15 | / |
| Handheld Left (0mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.552 | 0.59 | 10# |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.465 | 0.55 | / |
| Handheld Right (0mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.057 | 0.06 | / |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.048 | 0.06 | / |
| Handheld Top (0mm) | 2510 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 1RB | 22.24 | 22.5 | 1.062 | 0.063 | 0.07 | / |
| | 2560 | 20 | 1RB | / | / | / | / | / | / |
| | 2535 | 20 | 50%RB | 21.8 | 22.5 | 1.175 | 0.052 | 0.06 | / |

LTE Band 12&17:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.00358 | 0.01 | 11# |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.00246 | 0.01 | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.011 | 0.01 | / |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.012 | 0.01 | 12# |
| Handheld Front (0mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.00248 | 0.01 | / |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.00125 | 0.01 | / |
| Handheld Left (0mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.00435 | 0.01 | / |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.00321 | 0.01 | / |
| Handheld Right (0mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.00202 | 0.01 | / |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.00148 | 0.01 | / |
| Handheld Top (0mm) | 704 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 1RB | 23.88 | 24 | 1.028 | 0.000511 | 0.01 | / |
| | 711 | 10 | 1RB | / | / | / | / | / | / |
| | 707.5 | 10 | 50%RB | 23.38 | 24 | 1.153 | 0.000429 | 0.01 | / |

Note: The E-UTRA Operating Band 17 is a subset of band 12, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 13:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.00431 | 0.01 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.00461 | 0.01 | 13# |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.022 | 0.02 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.024 | 0.03 | 14# |
| Handheld Front (0mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.00151 | 0.01 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.00359 | 0.01 | / |
| Handheld Left (0mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.00533 | 0.01 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.0028 | 0.01 | / |
| Handheld Right (0mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.00989 | 0.01 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.00908 | 0.01 | / |
| Handheld Top (0mm) | 782 | 10 | 1RB | 23.65 | 23.7 | 1.012 | 0.00106 | 0.01 | / |
| | 782 | 10 | 50%RB | 23.14 | 23.7 | 1.138 | 0.000821 | 0.01 | / |

LTE Band 25&2:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.062 | 0.06 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.066 | 0.08 | 15# |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.52 | 0.54 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.464 | 0.56 | 16# |
| Handheld Front (0mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.00988 | 0.01 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.01 | 0.01 | / |
| Handheld Left (0mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.124 | 0.13 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.122 | 0.15 | / |
| Handheld Right (0mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.02 | 0.02 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.026 | 0.03 | / |
| Handheld Top (0mm) | 1860 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 1RB | 22.33 | 22.5 | 1.04 | 0.00764 | 0.01 | / |
| | 1905 | 20 | 1RB | / | / | / | / | / | / |
| | 1882.5 | 20 | 50%RB | 21.67 | 22.5 | 1.211 | 0.012 | 0.01 | / |

Note: The E-UTRA Operating Band 2 is a subset of band 25, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 26&5:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.02 | 0.02 | 17# |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.017 | 0.02 | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.073 | 0.08 | 18# |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.068 | 0.08 | / |
| Handheld Front (0mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.00392 | 0.01 | / |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.00264 | 0.01 | / |
| Handheld Left (0mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.043 | 0.05 | / |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.029 | 0.04 | / |
| Handheld Right (0mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.053 | 0.06 | / |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.04 | 0.05 | / |
| Handheld Top (0mm) | 821.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 1RB | 23.22 | 23.6 | 1.091 | 0.00512 | 0.01 | / |
| | 841.5 | 15 | 1RB | / | / | / | / | / | / |
| | 831.5 | 15 | 50%RB | 22.66 | 23.6 | 1.242 | 0.00378 | 0.01 | / |

Note: The E-UTRA Operating Band 5 is a subset of band 26, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 41&38:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.083 | 0.09 | 19# |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.057 | 0.07 | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.226 | 0.24 | / |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.195 | 0.24 | / |
| Handheld Front (0mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.069 | 0.07 | / |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.058 | 0.07 | / |
| Handheld Left (0mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.225 | 0.24 | / |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.222 | 0.27 | 20# |
| Handheld Right (0mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.028 | 0.03 | / |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.024 | 0.03 | / |
| Handheld Top (0mm) | 2545 | 20 | 1RB | / | / | / | / | / | / |
| | 2570 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 1RB | 23.03 | 23.3 | 1.064 | 0.021 | 0.02 | / |
| | 2645 | 20 | 1RB | / | / | / | / | / | / |
| | 2595 | 20 | 50%RB | 22.48 | 23.3 | 1.208 | 0.019 | 0.02 | / |

Note:

1. The frequency range of LTE Band 41 is 2535~ 2655MHz. Per KDB 447498 D01, according to the following formula Calculate N_c is 4.

KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.¹⁴

$$N_c = \text{Round} \left\{ \left[100(f_{\text{high}} - f_{\text{low}}) / f_c \right]^{0.5} \times (f_c / 100)^{0.2} \right\},$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- f_{high} and f_{low} are the highest and lowest channel frequencies within the transmission band,
- f_c is the mid-band channel frequency,
- all frequencies are in MHz.

2. The power class 3 used for LTE Band 41 SAR testing.

3. The E-UTRA Operating Band 38 is a subset of band 41, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 66&4:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.651 | 0.68 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.573 | 0.69 | 21# |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.69 | 0.72 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.618 | 0.74 | 22# |
| Handheld Front (0mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.059 | 0.06 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.05 | 0.06 | / |
| Handheld Left (0mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.059 | 0.06 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.055 | 0.07 | / |
| Handheld Right (0mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.345 | 0.36 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.299 | 0.36 | / |
| Handheld Top (0mm) | 1720 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 1RB | 23 | 23.2 | 1.047 | 0.017 | 0.02 | / |
| | 1770 | 20 | 1RB | / | / | / | / | / | / |
| | 1745 | 20 | 50%RB | 22.39 | 23.2 | 1.205 | 0.015 | 0.02 | / |

Note: The E-UTRA Operating Band 4 is a subset of band 66, and they are same in modulation type and rated output power, therefore, they were considered as one frequency band during SAR measurement.

LTE Band 71:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | |
|-----------------|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.00668 | 0.01 | 23# |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.0057 | 0.01 | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Bandwidth (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg), Limit=4.0W/kg | | | |
|----------------------|-----------------|-----------------|-----------|------------------------|------------------------|-------------------------------|-----------|-------------|------------|
| | | | | | | Scaled Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.023 | 0.02 | 24# |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.017 | 0.02 | / |
| Handheld Front (0mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.00131 | 0.01 | / |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.000578 | 0.01 | / |
| Handheld Left (0mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.0068 | 0.01 | / |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.0059 | 0.01 | / |
| Handheld Right (0mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.000564 | 0.01 | / |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.000611 | 0.01 | / |
| Handheld Top (0mm) | 673 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 1RB | 23.73 | 23.8 | 1.016 | 0.000347 | 0.01 | / |
| | 688 | 20 | 1RB | / | / | / | / | / | / |
| | 680.5 | 20 | 50%RB | 23.2 | 23.8 | 1.148 | 0.000243 | 0.01 | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. SAR for LTE band exposure configurations is measured according to the procedures of KDB 941225 D05 SAR for LTE Devices v02.
3. KDB941225D05-SAR for higher order modulation is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg
4. KDB941225D05-For QPSK with 100% RB allocation, when the reported SAR measured for the Highest output power channel is < 1.45 W/kg, tests for the remaining required test channels are optional.
5. KDB941225D05- For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
6. KDB941225D05- Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power among RB offset the upper edge, middle and lower edge of each required test channel.
7. KDB941225D05- other channel bandwidths SAR test is required when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is > 0.5 dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.
8. Worst case SAR for 50% RB allocation is selected to be tested.

WLAN 2.4G:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.07 | 9.20 | 1.03 | 1.006 | 0.0067 | 0.01 | 25# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg) | | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.07 | 9.20 | 1.03 | 1.006 | 0.09 | 0.09 | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Handheld Front (0mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.07 | 9.20 | 1.03 | 1.006 | 0.013 | 0.01 | / |
| | 2462 | 802.11b | / | / | / | / | / | / | / |
| Handheld Right (0mm) | 2412 | 802.11b | / | / | / | / | / | / | / |
| | 2437 | 802.11b | 9.07 | 9.20 | 1.03 | 1.006 | 0.13 | 0.13 | 26# |
| | 2462 | 802.11b | / | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**Body Supported Mode**

| Mode | Target Output Power (dBm) | Target Output Power (mW) | Reported SAR(W/kg) | Adjusted SAR(W/kg) | Limit(W/kg) | SAR Test Exclusion |
|--------------------|---------------------------|--------------------------|--------------------|--------------------|-------------|--------------------|
| 802.11b(DSSS) | 9.2 | 8.32 | 0.01 | / | / | / |
| 802.11g(OFDM) | 13.5 | 22.39 | / | 0.03 | 1.2 | Yes |
| 802.11n ht20(OFDM) | 12 | 15.85 | / | 0.02 | 1.2 | Yes |
| 802.11n ht40(OFDM) | 11.3 | 13.49 | / | 0.02 | 1.2 | Yes |

Handheld Mode

| Mode | Target Output Power (dBm) | Target Output Power (mW) | Reported SAR(W/kg) | Adjusted SAR(W/kg) | Limit(W/kg) | SAR Test Exclusion |
|--------------------|---------------------------|--------------------------|--------------------|--------------------|-------------|--------------------|
| 802.11b(DSSS) | 9.2 | 8.32 | 0.13 | / | / | / |
| 802.11g(OFDM) | 13.5 | 22.39 | / | 0.35 | 1.2 | Yes |
| 802.11n ht20(OFDM) | 12 | 15.85 | / | 0.25 | 1.2 | Yes |
| 802.11n ht40(OFDM) | 11.3 | 13.49 | / | 0.21 | 1.2 | Yes |

Per KDB 248227 D01, When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (see 5.3, including subclauses). SAR is not required for the following 2.4 GHz OFDM conditions.

- When KDB Publication 447498 D01 SAR test exclusion applies to the OFDM configuration.
- When the highest *reported* SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

WLAN 5.2G:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 5180 | 802.11a | / | / | / | / | / | / | / |
| | 5200 | 802.11a | 14.51 | 14.60 | 1.021 | 1 | 0.028 | 0.03 | 27# |
| | 5240 | 802.11a | / | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg) | | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 5180 | 802.11a | / | / | / | / | / | / | / |
| | 5200 | 802.11a | 14.51 | 14.60 | 1.021 | 1 | 0.098 | 0.1 | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Handheld Front (0mm) | 5180 | 802.11a | / | / | / | / | / | / | / |
| | 5200 | 802.11a | 14.51 | 14.60 | 1.021 | 1 | 0.039 | 0.04 | / |
| | 5240 | 802.11a | / | / | / | / | / | / | / |
| Handheld Right (0mm) | 5180 | 802.11a | / | / | / | / | / | / | / |
| | 5200 | 802.11a | 14.51 | 14.60 | 1.021 | 1 | 0.547 | 0.56 | 28# |
| | 5240 | 802.11a | / | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11a mode power is the largest among 802.11a/n/ac, 802.11 a mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.3G:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 5260 | 802.11n20 | / | / | / | / | / | / | / |
| | 5280 | 802.11n20 | 13.99 | 14.20 | 1.05 | 1 | 0.013 | 0.01 | 29# |
| | 5320 | 802.11n20 | / | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg) | | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 5260 | 802.11n20 | / | / | / | / | / | / | / |
| | 5280 | 802.11n20 | 13.99 | 14.20 | 1.05 | 1 | 0.077 | 0.08 | / |
| | 5320 | 802.11n20 | / | / | / | / | / | / | / |
| Handheld Front (0mm) | 5260 | 802.11n20 | / | / | / | / | / | / | / |
| | 5280 | 802.11n20 | 13.99 | 14.20 | 1.05 | 1 | 0.033 | 0.03 | / |
| | 5320 | 802.11n20 | / | / | / | / | / | / | / |
| Handheld Right (0mm) | 5260 | 802.11n20 | / | / | / | / | / | / | / |
| | 5280 | 802.11n20 | 13.99 | 14.20 | 1.05 | 1 | 0.574 | 0.60 | 30# |
| | 5320 | 802.11n20 | / | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11n20 mode power is the largest among 802.11a/n/ac, 802.11 n20 mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

WLAN 5.8G:**Body Supported Mode**

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 1g SAR (W/kg) | | | | |
|-----------------|-----------------|-----------|------------------------|------------------------|---------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Body Back (5mm) | 5755 | 802.11n40 | 8.66 | 8.80 | 1.033 | 1 | 0.075 | 0.08 | 31# |
| | 5795 | 802.11n40 | / | / | / | / | / | / | / |

Handheld Mode

| EUT Position | Frequency (MHz) | Test Mode | Max. Meas. Power (dBm) | Max. Rated Power (dBm) | 10g SAR (W/kg) | | | | |
|----------------------|-----------------|-----------|------------------------|------------------------|----------------|-------------------|-----------|-------------|------------|
| | | | | | Scaled Factor | Duty cycle Factor | Meas. SAR | Scaled SAR | Plot |
| Handheld Back (0mm) | 5755 | 802.11n40 | 8.66 | 8.80 | 1.033 | 1 | 0.049 | 0.05 | / |
| | 5795 | 802.11n40 | / | / | / | / | / | / | / |
| Handheld Front (0mm) | 5755 | 802.11n40 | 8.66 | 8.80 | 1.033 | 1 | 0.017 | 0.02 | / |
| | 5795 | 802.11n40 | / | / | / | / | / | / | / |
| Handheld Right (0mm) | 5755 | 802.11n40 | 8.66 | 8.80 | 1.033 | 1 | 0.183 | 0.19 | 32# |
| | 5795 | 802.11n40 | / | / | / | / | / | / | / |

Note:

1. When the SAR value is less than half of the limit, testing for low and high channel is optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. For 802.11n40 mode power is the largest among 802.11a/n/ac, 802.11 n40 mode as initial test configuration is selected to test.
4. According 2016 Oct. TCB, for SAR testing of 5G WIFI 802.11a signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".

10. MEASUREMENT VARIABILITY

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz v01. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Note: The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

The Highest Measured SAR Configuration in Each Frequency Band

Body

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) | | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
| | | | | Original | Repeated | |
| / | / | / | / | / | / | / |

Handheld

| SAR probe calibration point | Frequency Band | Freq.(MHz) | EUT Position | Meas. SAR (W/kg) | | Largest to Smallest SAR Ratio |
|-----------------------------|----------------|------------|--------------|------------------|----------|-------------------------------|
| | | | | Original | Repeated | |
| / | / | / | / | / | / | / |

Note:

1. Second Repeated Measurement is not required since the ratio of the largest to smallest SAR for the original and first repeated measurement is not > 1.20 .
2. The measured SAR results **do not** have to be scaled to the maximum tune-up tolerance to determine if repeated measurements are required.
3. SAR measurement variability must be assessed for each frequency band, which is determined by the **SAR probe calibration point and tissue-equivalent medium** used for the device measurements.

11. SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

11.1 Simultaneous Transmission:

| Description of Simultaneous Transmit Capabilities | |
|---|---------------|
| Transmitter Combination | Simultaneous? |
| WWAN(GSM/WCDMA/LTE)Antenna + WLAN 2.4G/5G + NFC | √ |
| WWAN(GSM/WCDMA/LTE) Antenna + Bluetooth + NFC | √ |
| 2.4G WLAN + BT | × |
| 2.4G WLAN + 5G WLAN | × |
| 5G WLAN + BT | × |

11.2 Simultaneous SAR test exclusion considerations:

| Mode(SAR1+SAR2) | Position | Reported SAR(W/kg) | | Σ SAR < 1.6W/kg |
|---------------------------------------|----------|--------------------|------|------------------------|
| | | SAR1 | SAR2 | |
| MAX.WWAN(GSM/WCDMA/LTE)+Bluetooth | Body | 0.69 | 0.06 | 0.75 |
| MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 2.4G | Body | 0.69 | 0.01 | 0.70 |
| MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 5G | Body | 0.69 | 0.33 | 1.02 |

Conclusion:

Sum of SAR: Σ SAR ≤ 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

| Mode(SAR1+SAR2) | Position | Reported SAR(W/kg) | | Σ SAR < 4.0W/kg |
|---------------------------------------|----------|--------------------|------|------------------------|
| | | SAR1 | SAR2 | |
| MAX.WWAN(GSM/WCDMA/LTE)+Bluetooth | Handheld | 1.59 | 0.02 | 1.61 |
| MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 2.4G | Handheld | 1.59 | 0.13 | 1.72 |
| MAX.WWAN(GSM/WCDMA/LTE)+ WLAN 5G | Handheld | 1.59 | 0.60 | 2.19 |

Note:

For the EIRP of NFC is 0.01mW, per KDB447498 D01 clause 4.3, the estimated SAR is so lower, so the NFC almost have no influence on the results of simultaneous transmission.

Conclusion:

Sum of SAR: Σ SAR ≤ 4.0 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A - MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

| Uncertainty component | Tolerance/ uncertainty ± % | Probability distribution | Divisor | ci (1 g) | ci (10 g) | Standard uncertainty ± %, (1 g) | Standard uncertainty ± %, (10 g) |
|---|----------------------------------|-----------------------------|------------|--------------|--------------|---------------------------------------|--|
| Measurement system | | | | | | | |
| Probe calibration(k=1) | 6.55 | N | 1 | 1 | 1 | 6.6 | 6.6 |
| Axial isotropy | 4.7 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 1.9 | 1.9 |
| Hemispherical isotropy | 9.6 | R | $\sqrt{3}$ | $\sqrt{0.5}$ | $\sqrt{0.5}$ | 3.9 | 3.9 |
| Boundary effect | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Linearity | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| System detection limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Modulation response | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| Readout electronics | 0.3 | N | 1 | 1 | 1 | 0.3 | 0.3 |
| Response time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| Integration time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| RF ambient conditions-noise | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| RF ambient conditions-reflections | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Probe positioner mech. tolerance | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 |
| Probe positioning with respect to phantom shell | 6.7 | R | $\sqrt{3}$ | 1 | 1 | 3.9 | 3.9 |
| Extrapolation, interpolation, and integrations algorithms for max. SAR evaluation | 2.0 | R | $\sqrt{3}$ | 1 | 1 | 1.2 | 1.2 |
| Test sample related | | | | | | | |
| Test sample positioning | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 |
| Device holder uncertainty | 4.7 | N | 1 | 1 | 1 | 4.7 | 4.7 |
| Output power variation – SAR draft measurement | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 |
| SAR scaling | 2.8 | R | $\sqrt{3}$ | 1 | 1 | 1.6 | 1.6 |
| Phantom and tissue parameters | | | | | | | |
| Phantom shell uncertainty – shape, thickness and permittivity | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 |
| Uncertainty in SAR correction for deviations in permittivity and conductivity | 1.9 | N | 1 | 1 | 0.84 | 1.9 | 1.6 |
| Liquid conductivity meas. | 2.5 | N | 1 | 0.78 | 0.71 | 2.0 | 1.8 |
| Liquid permittivity meas. | 2.5 | N | 1 | 0.23 | 0.26 | 0.6 | 0.7 |
| Liquid conductivity – temperature uncertainty | 1.7 | R | $\sqrt{3}$ | 0.78 | 0.71 | 0.8 | 0.7 |
| Liquid permittivity – temperature uncertainty | 0.3 | R | $\sqrt{3}$ | 0.23 | 0.26 | 0.0 | 0.0 |
| Combined standard uncertainty | | RSS | | | | 12.1 | 12.0 |
| Expanded uncertainty (95 % confidence interval) | | k=2 | | | | 24.2 | 24.0 |

Measurement uncertainty evaluation for IEC62209-2 SAR test

| Source of uncertainty | Tolerance/ Uncertainty value ± % | Probability Distribution | Divisor | ci (1 g) | ci (10 g) | Standard uncertainty ± %, (1 g) | Standard uncertainty ± %, (10 g) |
|--|---|-----------------------------|------------|-------------|--------------|---------------------------------------|--|
| Measurement system | | | | | | | |
| Probe calibration | 6.55 | N | 1 | 1 | 1 | 6.6 | 6.6 |
| Isotropy | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| Linearity | 4.7 | R | $\sqrt{3}$ | 1 | 1 | 2.7 | 2.7 |
| Probe modulation response | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| Detection limits | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Boundary effect | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Readout electronics | 0.3 | N | 1 | 1 | 1 | 0.3 | 0.3 |
| Response time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| Integration time | 0.0 | R | $\sqrt{3}$ | 1 | 1 | 0.0 | 0.0 |
| RF ambient conditions – noise | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| RF ambient conditions – reflections | 1.0 | R | $\sqrt{3}$ | 1 | 1 | 0.6 | 0.6 |
| Probe positioner mech. restrictions | 0.8 | R | $\sqrt{3}$ | 1 | 1 | 0.5 | 0.5 |
| Probe positioning with respect to phantom shell | 6.7 | R | $\sqrt{3}$ | 1 | 1 | 3.9 | 3.9 |
| Post-processing | 2.0 | R | $\sqrt{3}$ | 1 | 1 | 1.2 | 1.2 |
| Test sample related | | | | | | | |
| Device holder uncertainty | 4.7 | N | 1 | 1 | 1 | 4.7 | 4.7 |
| Test sample positioning | 3.3 | N | 1 | 1 | 1 | 3.3 | 3.3 |
| Power scaling | 4.5 | R | $\sqrt{3}$ | 1 | 1 | 2.6 | 2.6 |
| Drift of output power (measured SAR drift) | 5.0 | R | $\sqrt{3}$ | 1 | 1 | 2.9 | 2.9 |
| Phantom and set-up | | | | | | | |
| Phantom uncertainty (shape and thickness tolerances) | 4.0 | R | $\sqrt{3}$ | 1 | 1 | 2.3 | 2.3 |
| Algorithm for correcting SAR for deviations in permittivity and conductivity | 1.9 | N | 1 | 1 | 0.84 | 1.9 | 1.6 |
| Liquid conductivity (meas.) | 2.5 | N | 1 | 0.78 | 0.71 | 2.0 | 1.8 |
| Liquid permittivity (meas.) | 2.5 | N | 1 | 0.23 | 0.26 | 0.6 | 0.7 |
| Liquid conductivity – temperature uncertainty | 1.7 | R | $\sqrt{3}$ | 0.78 | 0.71 | 0.8 | 0.7 |
| Liquid permittivity – temperature uncertainty | 0.3 | R | $\sqrt{3}$ | 0.23 | 0.26 | 0.0 | 0.0 |
| Combined standard uncertainty | | RSS | | | | 11.8 | 11.7 |
| Expanded uncertainty (95 % confidence interval) | | | | | | 23.6 | 23.4 |

APPENDIX B - SAR PLOTS

Please refer to the attachment.

APPENDIX C - EUT TEST POSITION PHOTOS

Please refer to the attachment.

APPENDIX D - PROBE CALIBRATION CERTIFICATES

Please refer to the attachment.

APPENDIX E - DIPOLE CALIBRATION CERTIFICATES

Please refer to the attachment.

===== END OF REPORT =====