

TEST REPORT For FCC

Test Report No. : 2009090035
Date of Issue : September 22, 2009
FCC ID : W3MSP430BL1
Model/Type No. : SP430BL
Kind of Product : Navigation
Applicant : POINTFIVE CO., LTD.
Applicant Address : 2th, 91-11, Samjun-Dong, Songpa-Gu, Seoul, Korea
Manufacturer : POINTFIVE CO., LTD.
Manufacturer Address : 2th, 91-11, Samjun-Dong, Songpa-Gu, Seoul, Korea
Contact Person : Tommy Oh / CEO
Telephone : +82-70-7516-8197
Received Date : September 15, 2009
Test period : Start : September 15, 2009 End : September 22, 2009
Test Results : ☒ In Compliance ☐ Not in Compliance

The test results presented in this report relate only to the object tested.

Tested by



Eun-Won, Lee
Test Engineer
Date: September 22, 2009

Reviewed by



Young-Joon, Park
Technical Manager
Date: September 22, 2009



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

REPORT REVISION HISTORY

Date	Revision	Page No
September 22, 2009	Issued (2009090035)	All

This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

TABLE OF CONTENTS

REPORT REVISION HISTORY	2
1.0 General Product Description	4
1.1 Tested Frequency	4
1.2 Tested Mode	4
1.3 Model Differences	5
1.4 Device Modifications	5
1.5 Peripheral Devices	5
1.6 Calibration Details of Equipment Used for Measurement	6
1.7 Test Facility.....	6
1.8 Laboratory Accreditations and Listings	6
2.0 Summary of tests	7
2.1 Technical Characteristic Test.....	8
2.1.1 Carrier Frequency Separation	8
2.1.2 Number of Hopping Frequencies	10
2.1.3 20 dB bandwidth	12
2.1.4 Time of Occupancy (Dwell Time)	14
2.1.5 Maximum peak Conducted Output Power.....	17
2.1.6 Band-edge.....	22
2.1.7 Field Strength of Emissions	33
2.1.8 AC Conducted Emissions.....	38
APPENDIX A – Test Equipment Used For Tests	41



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

1.0 General Product Description

Equipment model name : SP430BL
Serial number : Prototype
EUT condition : Pre-production, not damaged
Antenna type : Chip antenna Gain 3.91dBi
Frequency Range : 2402 ~ 2480 MHz(Bluetooth)
RF output power : -4.09 dBm Peak Conducted (GFSK)
Number of channels : 79(Bluetooth)
Type of Modulation(Data Rate) : GFSK
Power Source : Li-Polymer Battery (DC 3.7V), DC 12V

1.1 Tested Frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

1.2 Tested Mode

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Tested Ch	Modulation Technology	Modulation Type	Packet Type
Low, Mid, High	FHSS	GFSK	DH5


1.3 Model Differences

Not applicable

1.4 Device Modifications

The following modifications were necessary for compliance:

- The following modifications was applied by the applicant.

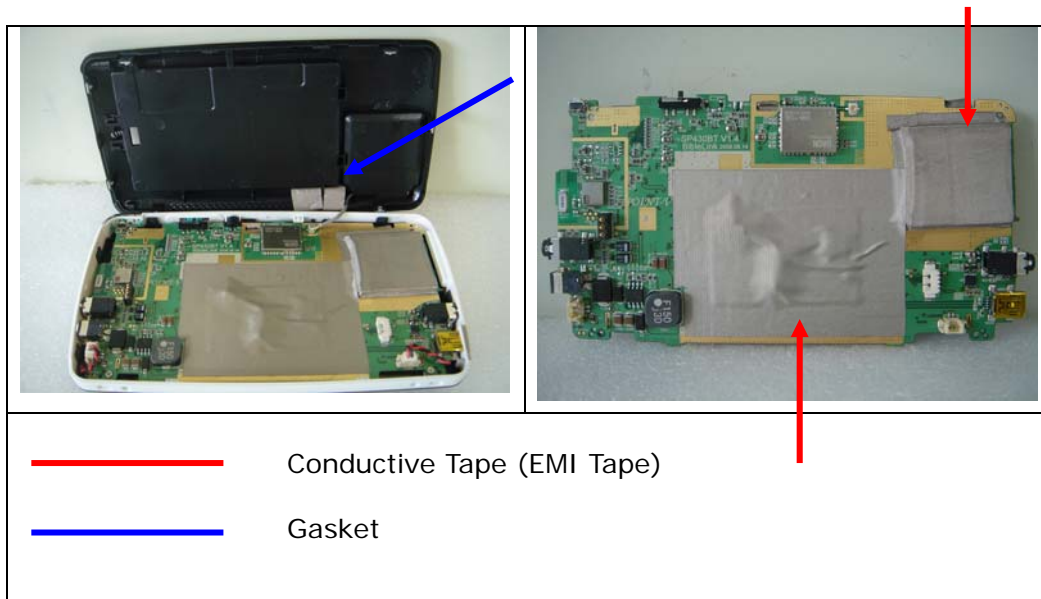

1.5 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Adaptor (for EUT)	KUANTECH CO., LTD.	KSAC1200100W1US	-
Personal Computer	SAMSUNG	DM-V55	516H96AL900727B
LCD Monitor	Lite-ON Technology Corp.	VS17	CNN5130QMC
Keyboard (PS/2)	HEWLETT-PACKARD COMPANY	5219	BN50702141
Mouse (PS/2)	KYE SYSTEMS CORP.	N3+ Optical	K045205991
Notebook	TOSHIBA CORPORATION	PSL48K-00L00K	Z7037782R
DC POWER SUPPLY	Agilent Technologies	E3632A	MY40000004
Notebook PC	TOSHIBA	PSL48K-00L00K	Z7037782R
AC/DC ADAPTOR (for PC)	DELTA ELECTRONICS	ADP-75SB BB	T8W0746330531






1.6 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

1.7 Test Facility

The measurement facility is located at 386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.8 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3 & 10 meter Open Area Test Sites and one conducted site to perform FCC Part 15/18 measurements.	 93250
JAPAN	VCCI	10 meter Open Area Test Site and one conducted site.	 R-948, C-986
KOREA	KCC	EMI (10 meter Open Area Test Site and two conducted sites) EMS (ESD, RS, EFT/Burst, Surge, CS, Magnetic, Dips and interruptions)	 No. 51, KR0025
International	KOLAS	EMC	 KOLAS TESTING NO. 119
Europe	GLAS	EMC EN 55011, EN 55022, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-6-1, EN 61000-6-2, EN 50130-4, EN 55024, EN 61204-3, EN 60601-1-2, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11	 TÜV No.13000796-02



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

2.0 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 75 hops		C
15.247(a)	20 dB Bandwidth	< 1 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 1Watt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	Radiated	C
15.207	AC Conducted Emissions	EN 55022	Line Conducted	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

The sample was tested according to the following specification:
- FCC Part 15.247, ANSI C63.4-2003

2.1 Technical Characteristic Test

2.1.1 Carrier Frequency Separation

Test Location

RF Test Room

Test Procedures

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.
After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 30 kHz ($\geq 1\%$ of the span) Sweep = auto

VBW = 30 kHz (\geq RBW) Detector function = peak

Trace = max hold




Figure 1 : Measurement setup for the carrier frequency separation

Limit

The EUT shall have hopping channel carrier frequencies separated minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Test Results

DC 3.7V

Channel	Adjacent Hopping Channel Separation (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	996.0	25	Complies

DC 12V

Channel	Adjacent Hopping Channel Separation (kHz)	Minimum Bandwidth (kHz)	Result
2441MHz	996.0	25	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855


www.e-ctk.com

Carrier Frequency Separation

DC 3.7V

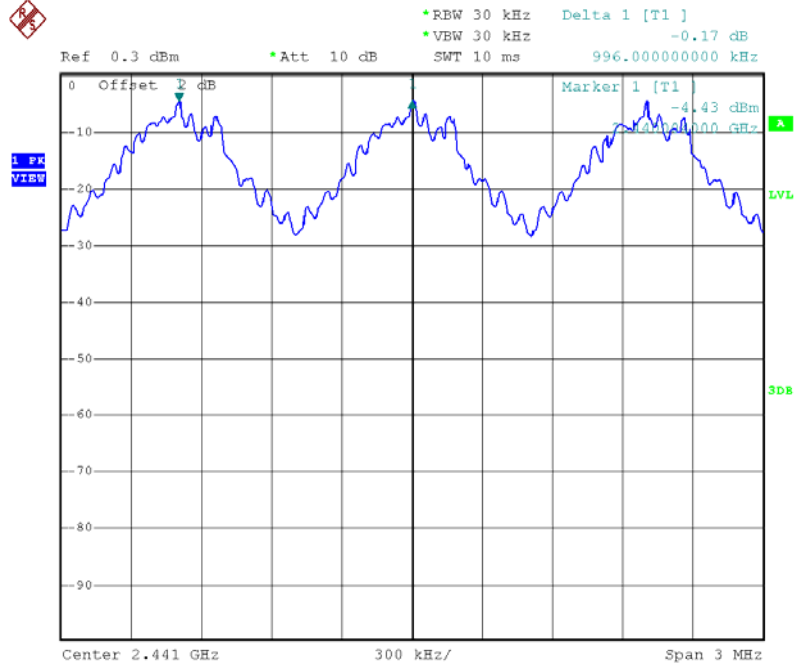

DC12V

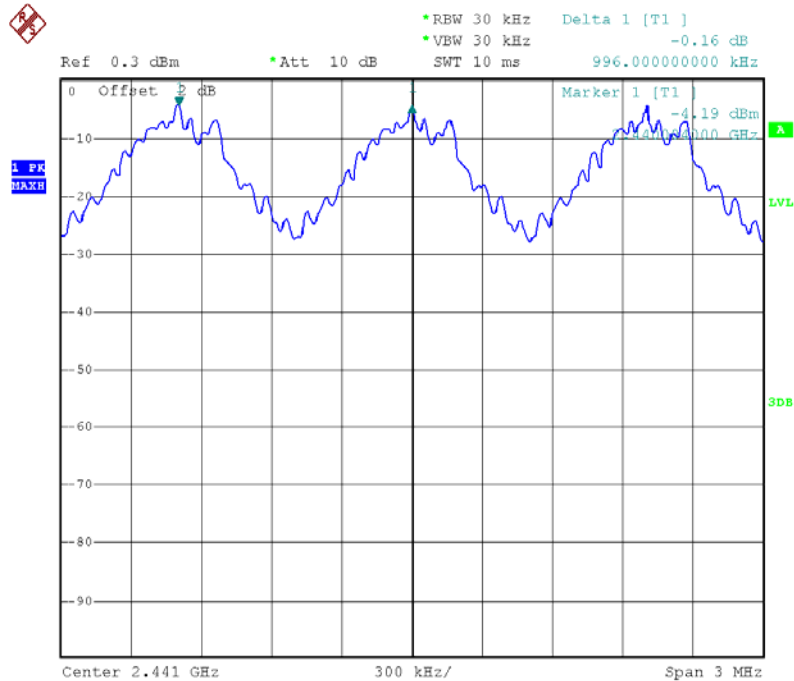

2.1.2 Number of Hopping Frequencies

Test Location

RF Test Room


Test Procedures

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Frequency range 1: Start = 2389.5 MHz, Stop = 2439.5 MHz
 2: Start = 2439.5 MHz, Stop = 2489.5 MHz

Span = 50 MHz
RBW = 300 kHz ($\geq 1\%$ of the span)
VBW = 300 kHz (\geq RBW)
Trace = max hold
Sweep = auto
Detector function = peak

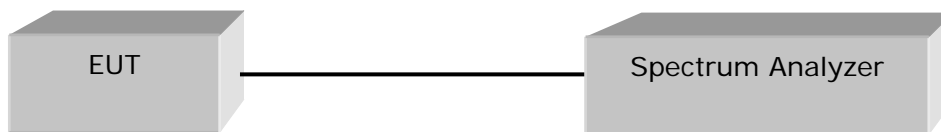

Limit

The EUT in the 2400-2483.5 MHz band shall use at least 75 channels.

Test Results

Total number of Hopping Channels	Result
79	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Number of Hopping Frequencies

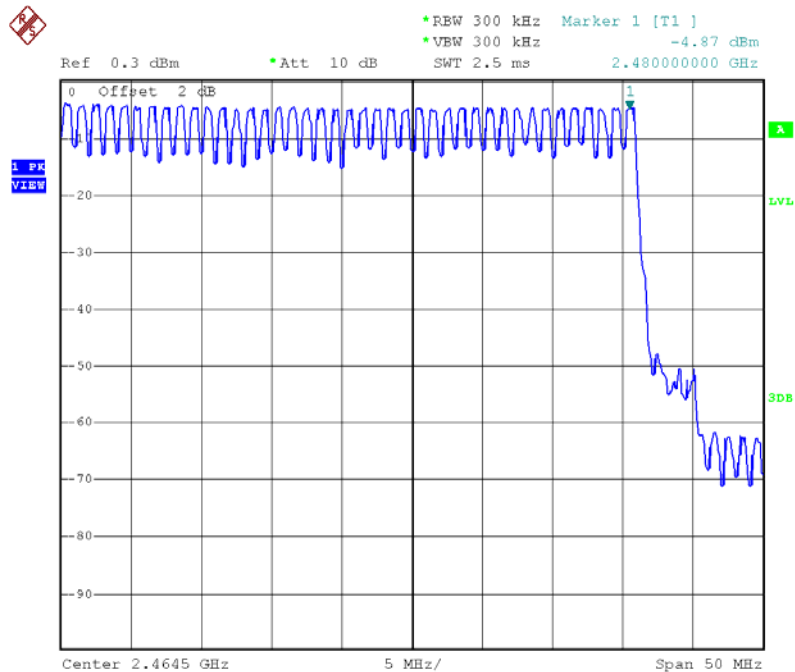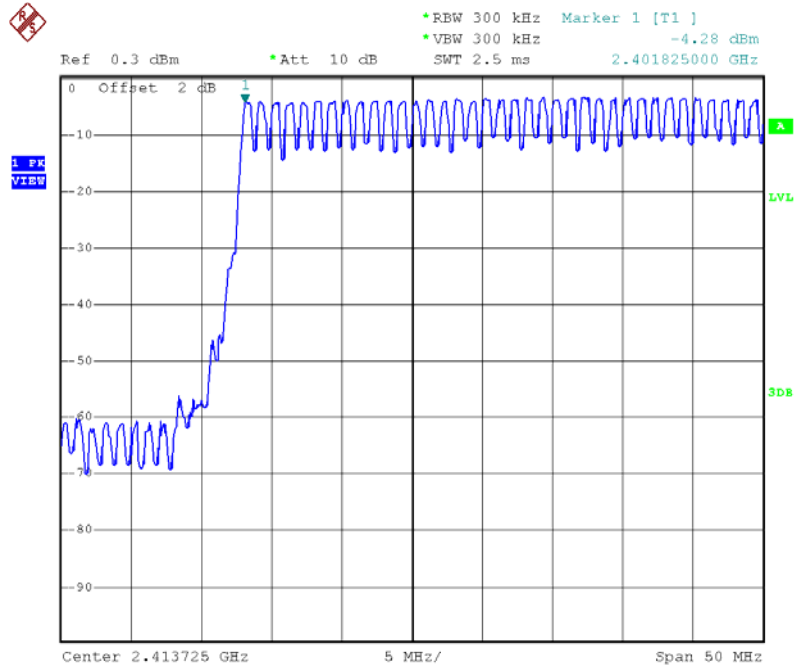

2.1.3 20 dB bandwidth

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels. After the trace being stable, Use the marker-to peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 2 MHz (approximately 2 or 3 times of the 20 dB bandwidth)


RBW = 30 kHz ($\geq 1\%$ of the span)

Sweep = auto

VBW = 30 kHz (\geq RBW)

Detector function = peak

Trace = max hold

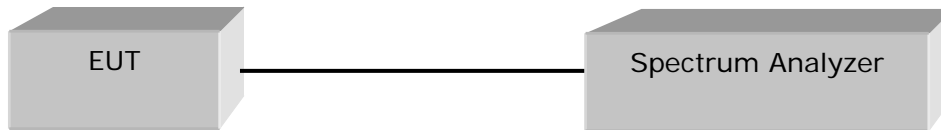

Limit

The Transmitter shall have a maximum 20 dB bandwidth of 1 MHz.

Test Results

DC 3.7V

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2441	39	0.936	Complies

DC 12V

Frequency (MHz)	Channel Number.	Measured Bandwidth (MHz)	Result
2441	39	0.936	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855


www.e-ctk.com

20 dB Bandwidth

DC 3.7V



DC 12V

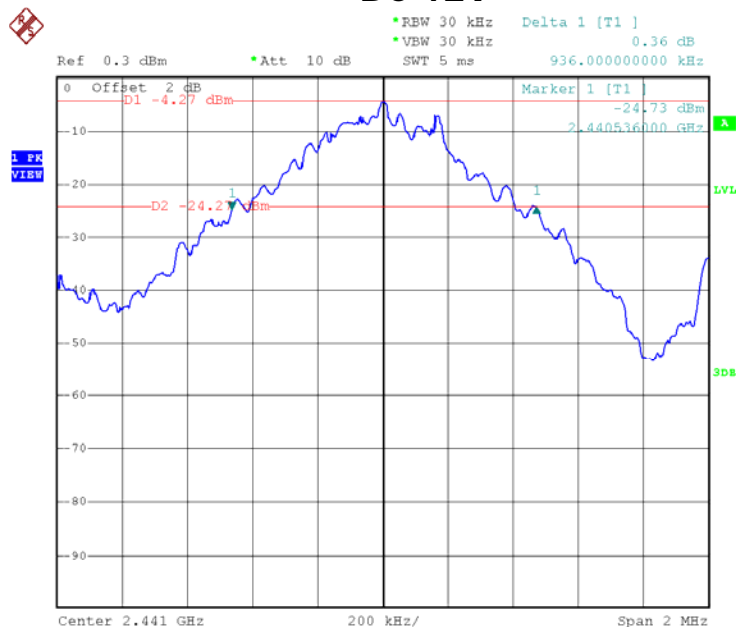

2.1.4 Time of Occupancy (Dwell Time)

Test Location

RF Test Room

Test Procedures

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = zero


RBW = 1 MHz

Trace = max hold

VBW = 1 MHz (\geq RBW)

Detector function = peak

Sweep = as necessary to capture the entire dwell time per hopping channel

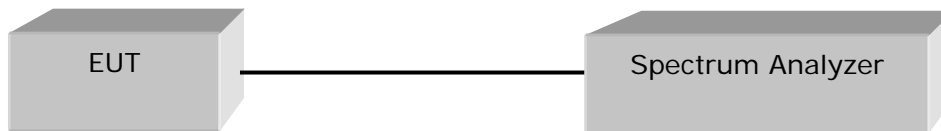

Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Test Results

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results	
			Dwell Time (ms)	Result
39	2441	DH 1	124.84	Complies
		DH 3	265.91	Complies
		DH 5	308.82	Complies

See next pages for actual measured spectrum plots.




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Time of Occupancy for PACKET Type DH 1

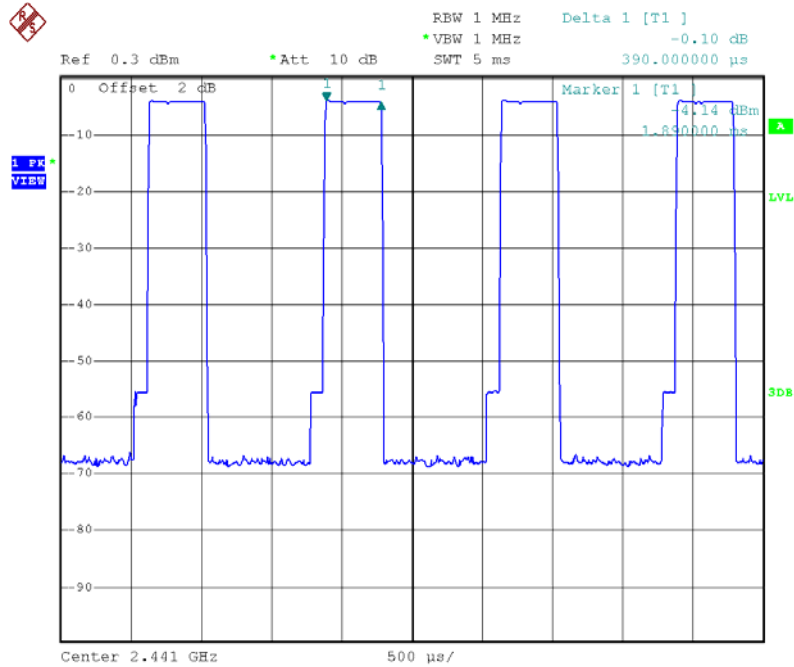

Time of Occupancy for PACKET Type DH 3

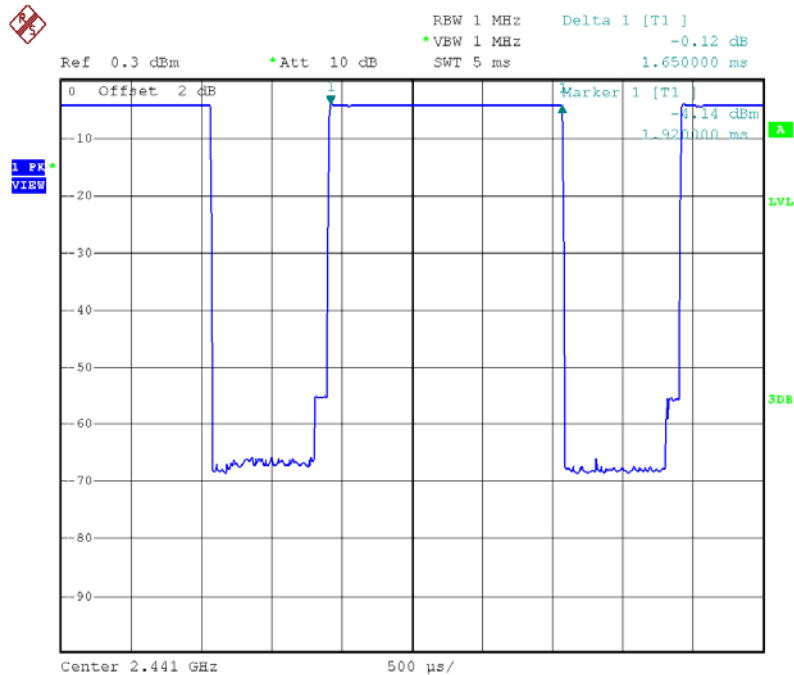



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance


CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Time of Occupancy for PACKET Type DH 5

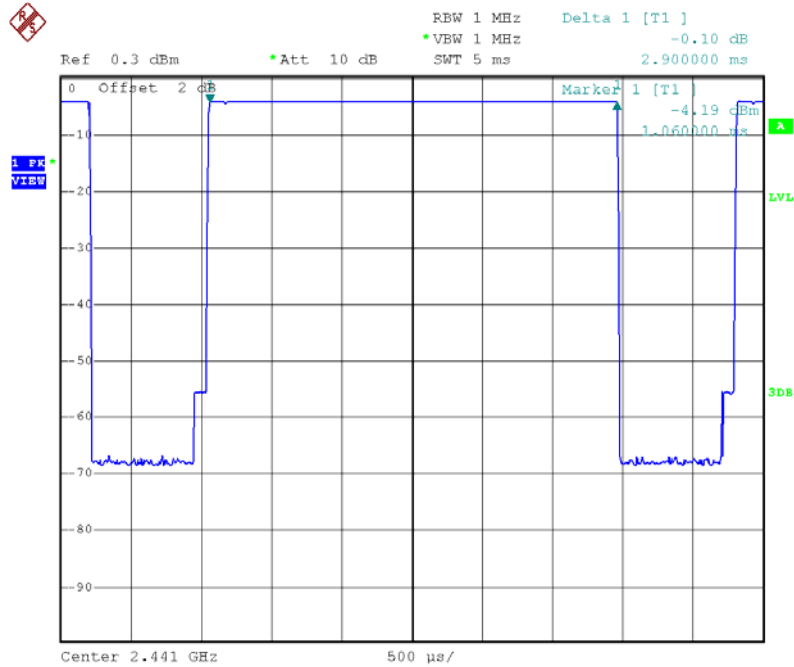

2.1.5 Maximum peak Conducted Output Power

Test Location

RF Test Room

Test Procedures

The maximum peak conducted output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

Span = 5 MHz (approximately 5 times of the 20 dB bandwidth)


RBW = 1 MHz (greater than the 20 dB bandwidth of the emission being measured)

VBW = 1 MHz (\geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto



Limit

< 1 W

Test Results

DC 3.7V

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	-4.26	0.375	Complies
2441	39	-4.35	0.367	Complies
2480	78	-4.49	0.356	Complies

DC 12V

Frequency (MHz)	Channel No.	Peak output power(dBm)	Peak output power(mW)	Result
2402	0	-4.47	0.357	Complies
2441	39	-4.09	0.390	Complies
2480	78	-4.42	0.361	Complies

See next pages for actual measured spectrum plots.



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

DC 3.7V Maximum peak Conducted Output Power

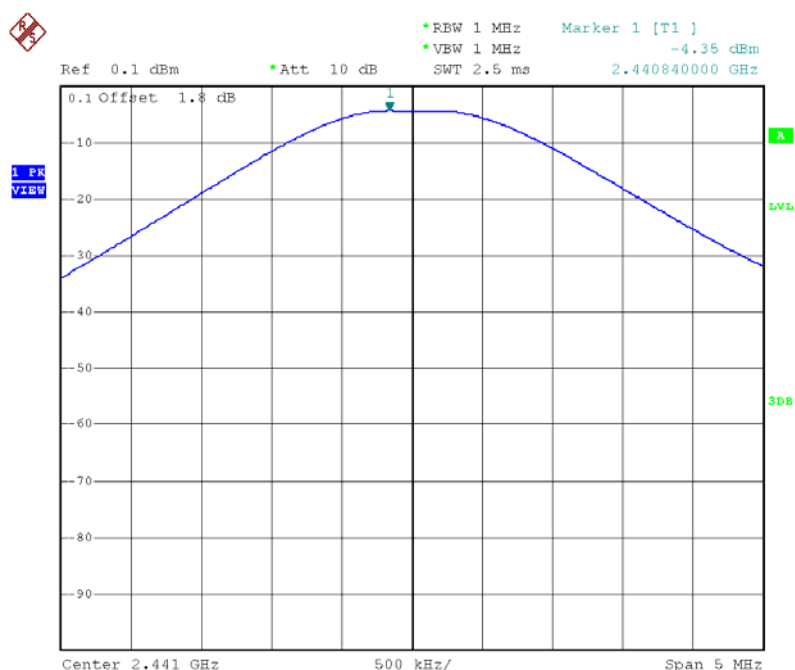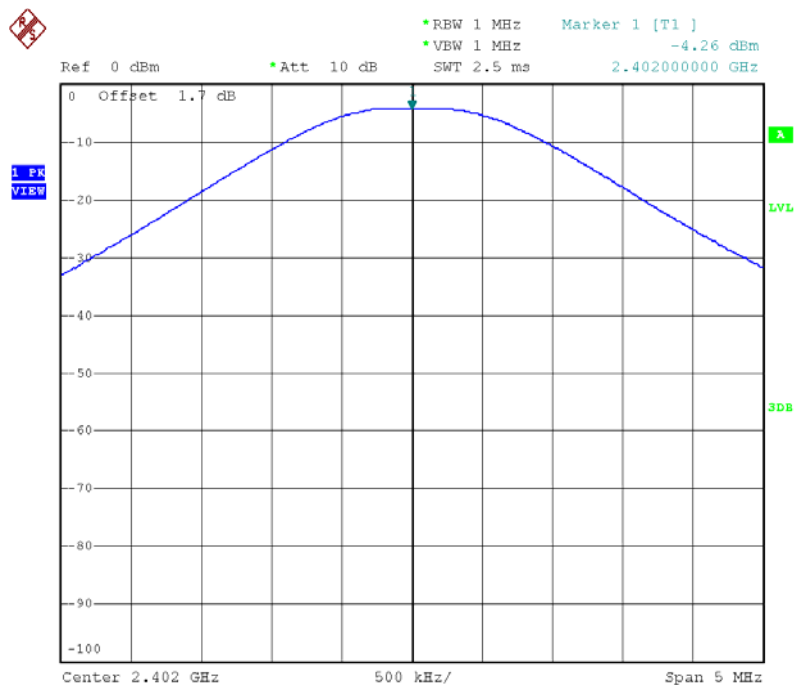



CTK Co., Ltd.


The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

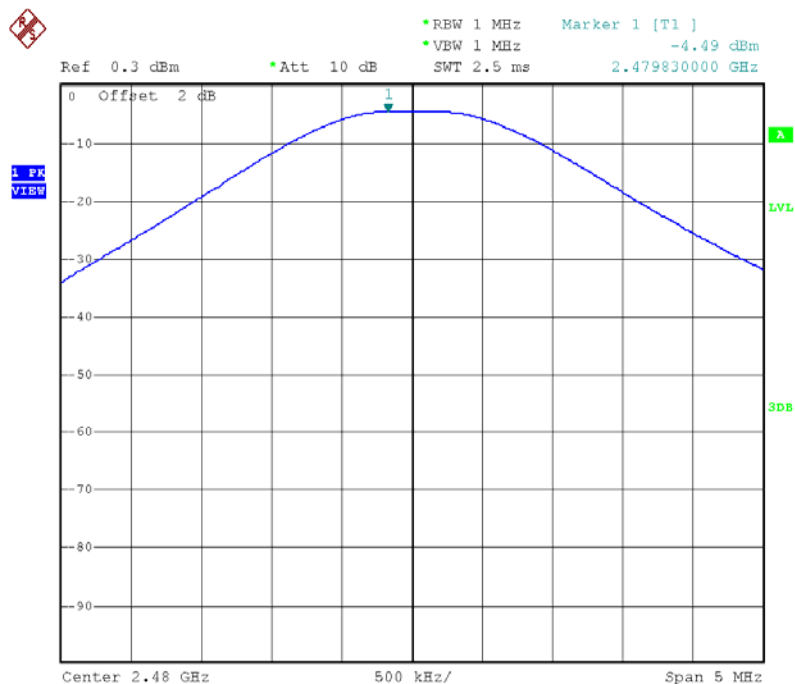





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

DC 12V Maximum peak Conducted Output Power

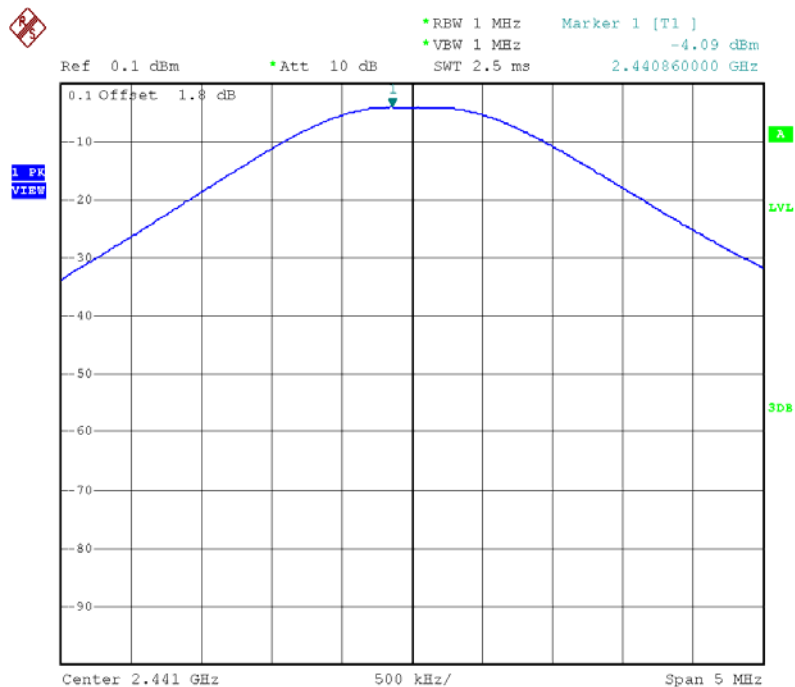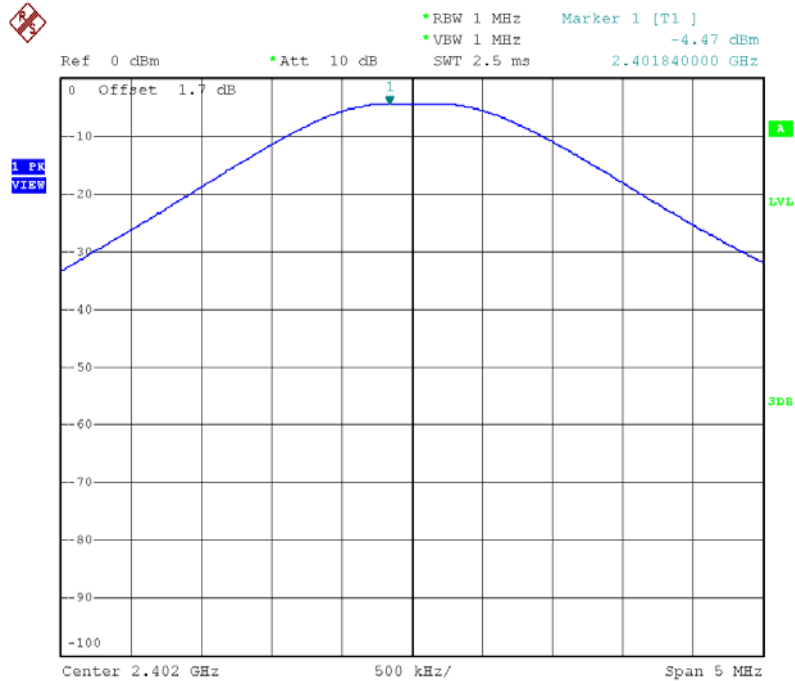




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

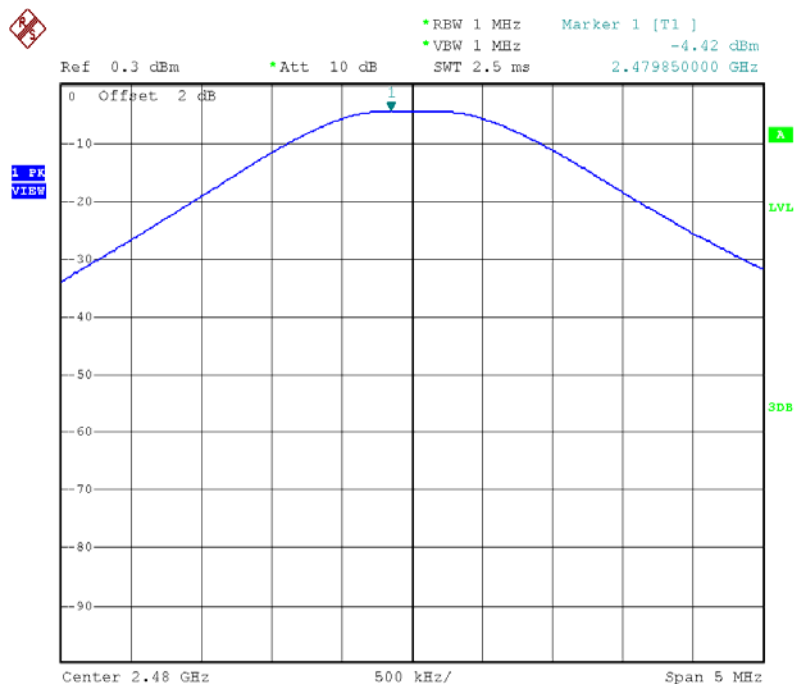

2.1.6 Band-edge

Test Location

RF Test Room

Test Procedures

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT has its hopping function disabled at the highest, middle and the lowest available channels.

The spectrum analyzer is set to:

Center frequency = the highest, middle, and the lowest channels

RBW = 100 kHz


VBW = 100 kHz (\geq RBW)

Span = 100 MHz

Trace = max hold

Detector function = peak

Sweep = auto



Limit

> 20 dBc

Test Results

All conducted emission in any 100 kHz bandwidth outside of the spectrum band was at least 20 dB lower than the highest inband spectral density.
Therefore the applying equipment meets the requirement.
See next pages for actual measured spectrum plots.





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

DC 3.7V Band – edge (With Hopping)

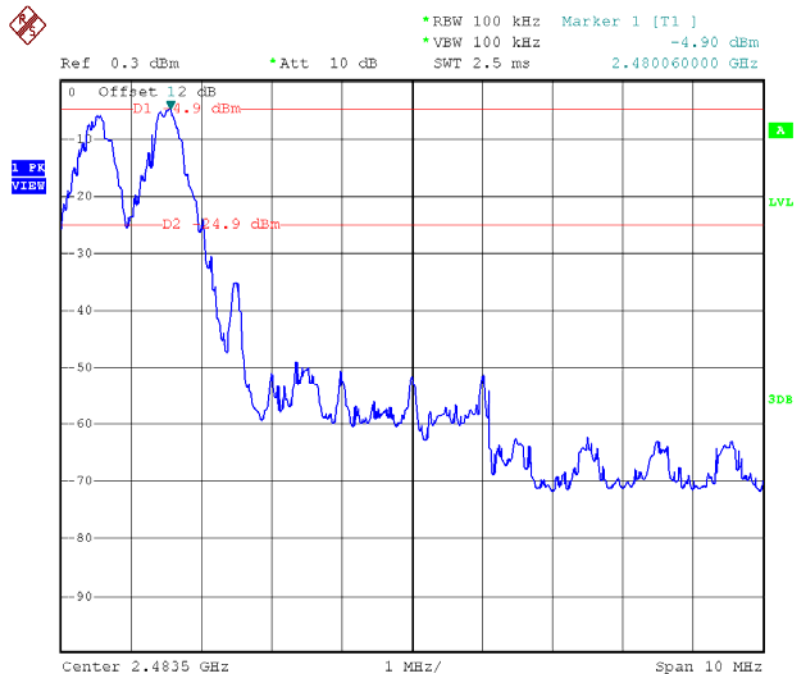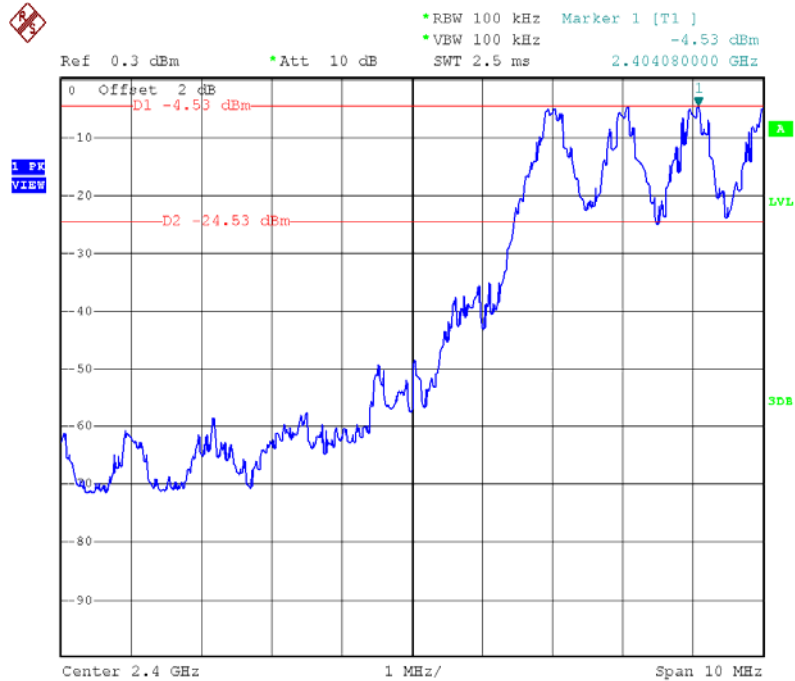




CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (Without Hopping)

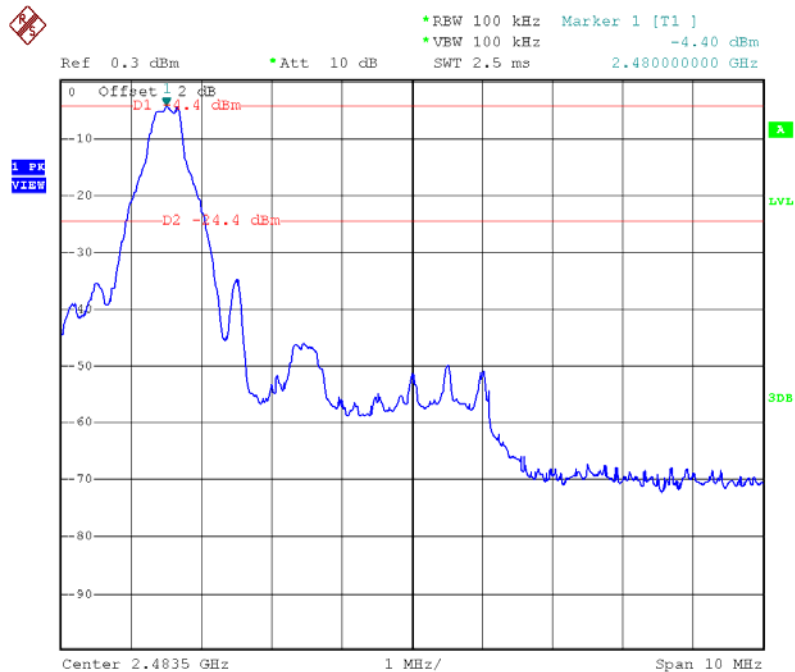



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz ~ 10th harmonic

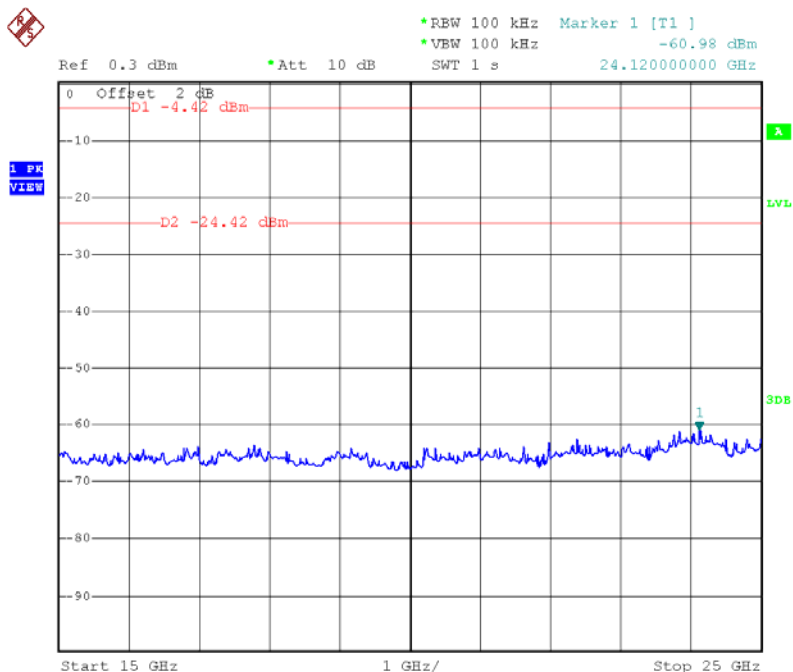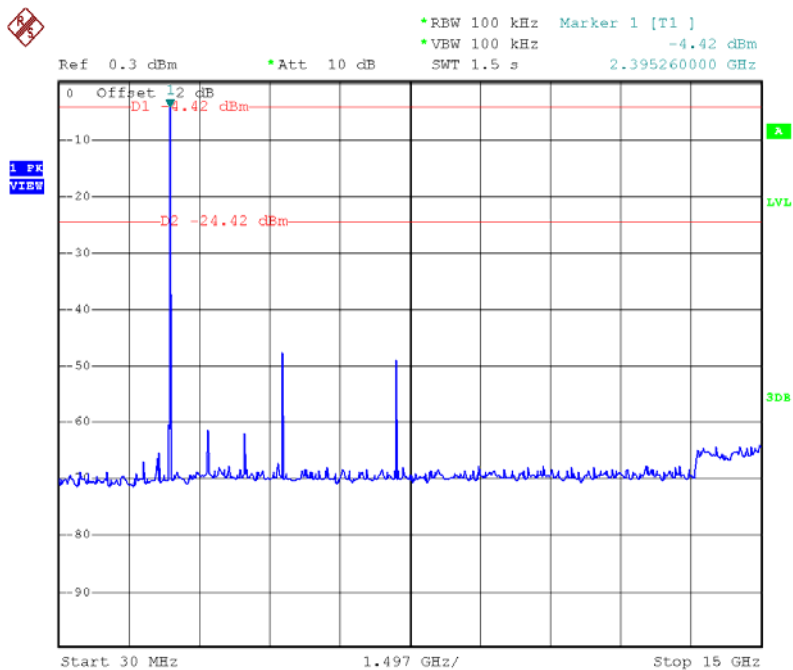





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – Mid channel Frequency Range = 30 MHz ~ 10th harmonic

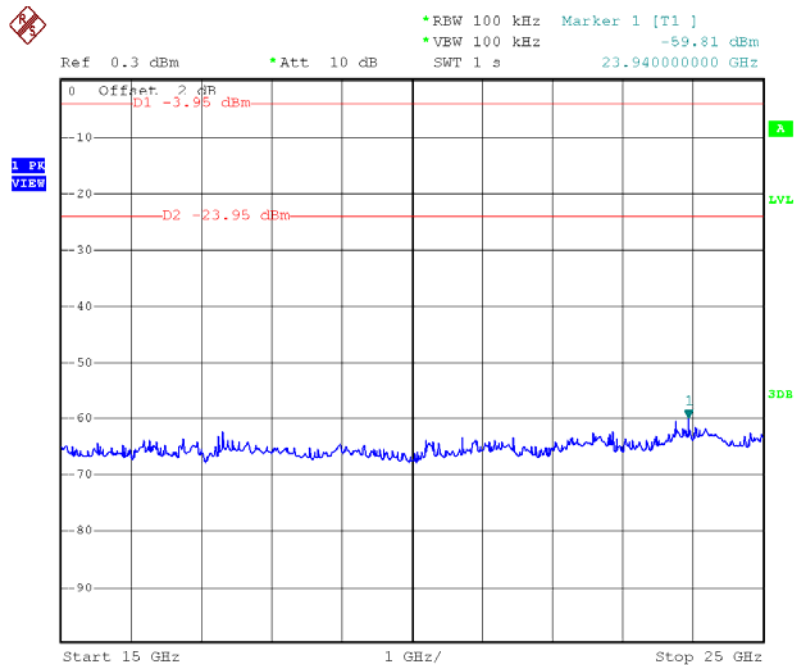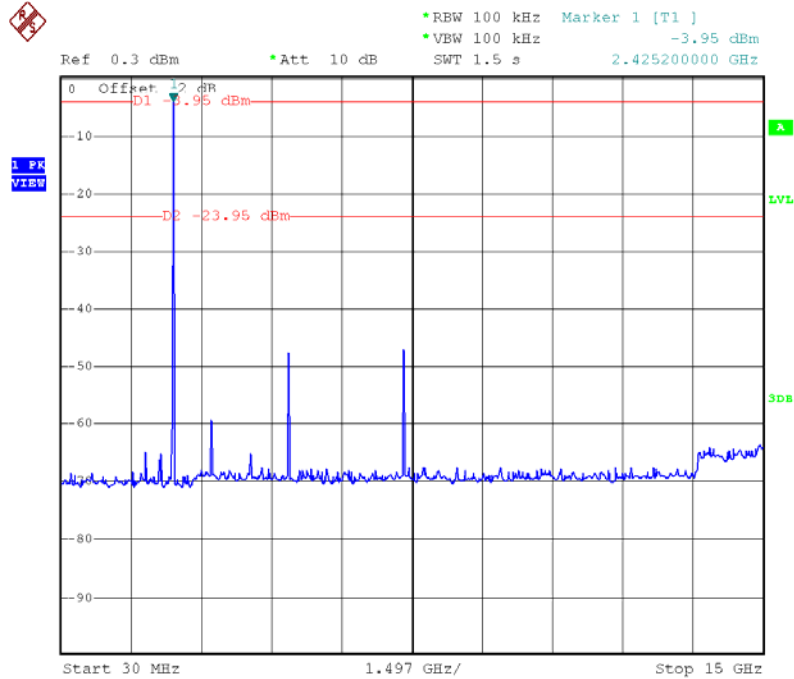





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic

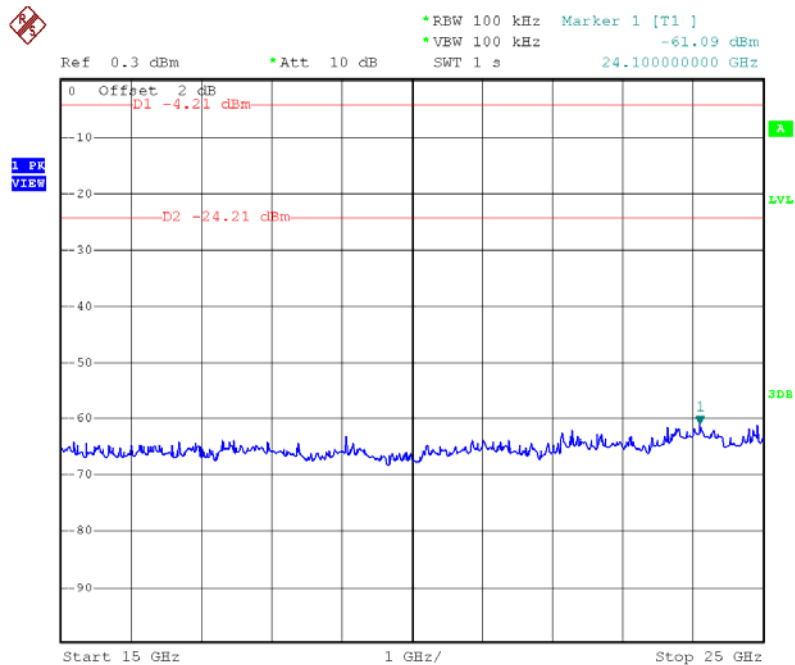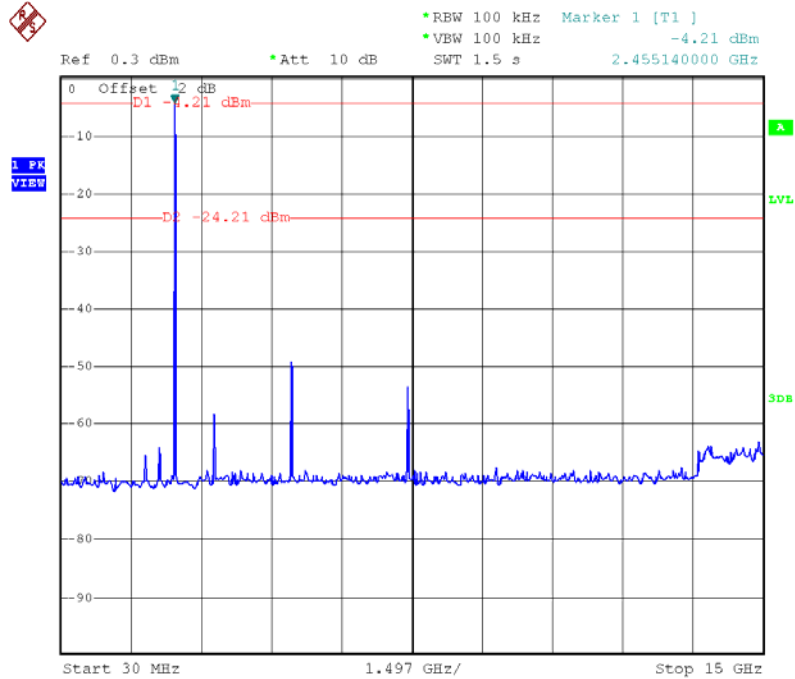



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

DC 12V Band – edge (With Hopping)

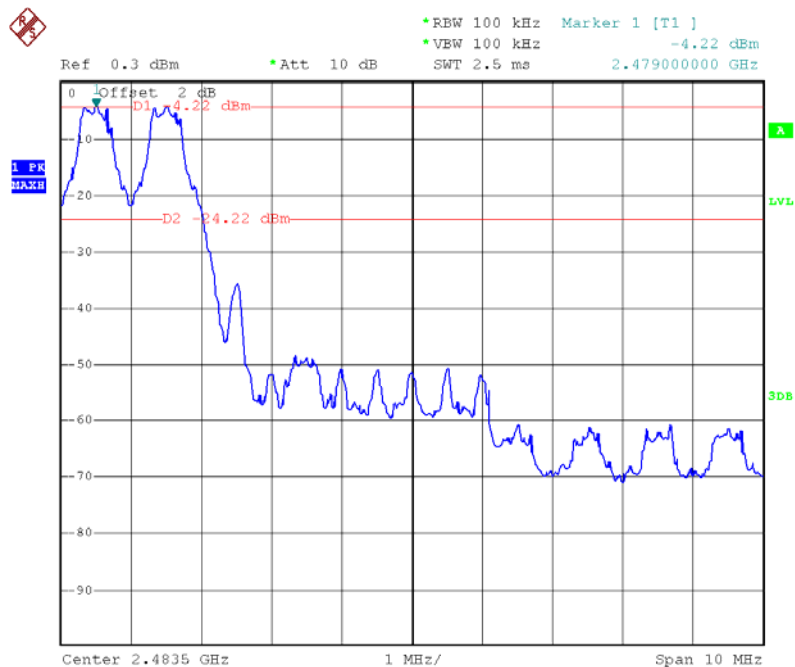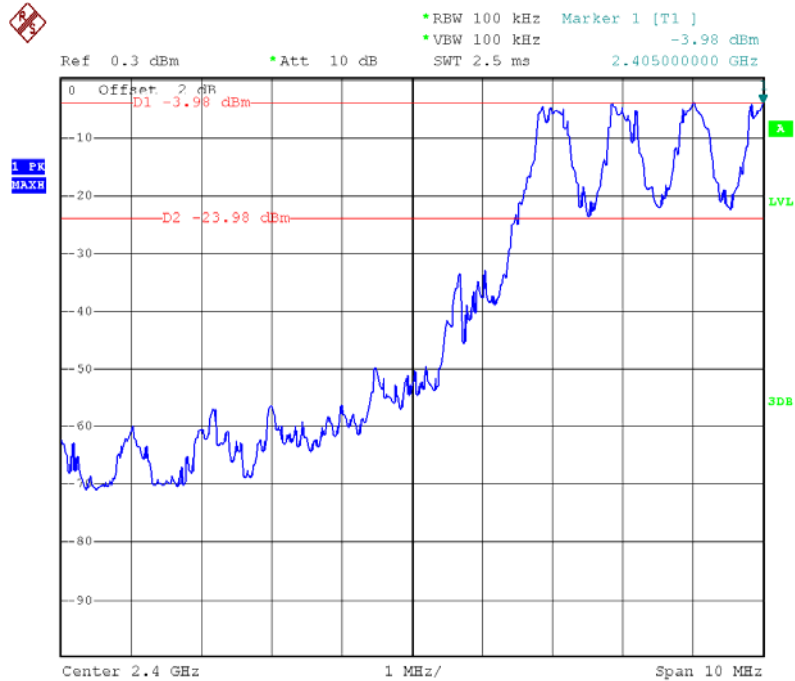



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance



CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea



Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com



Band – edge (Without Hopping)

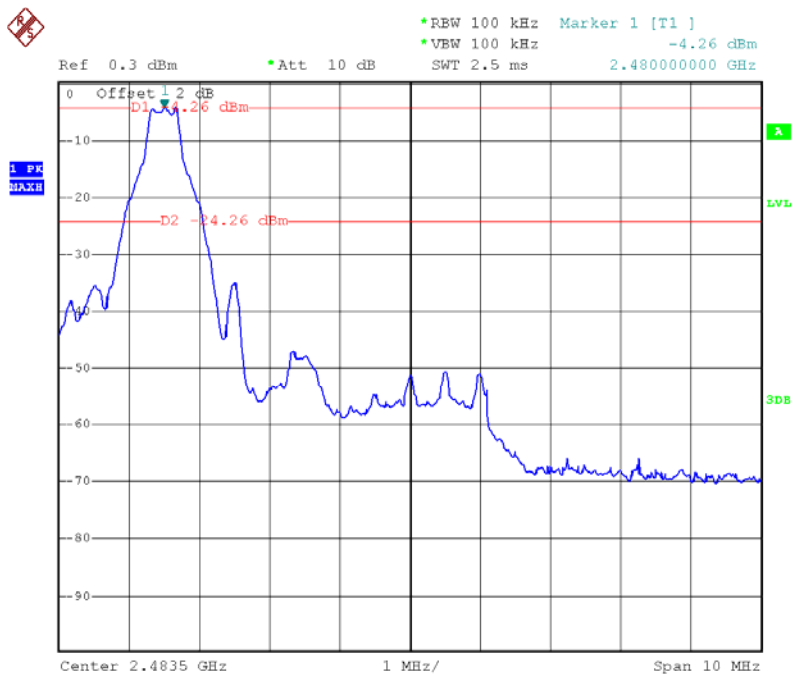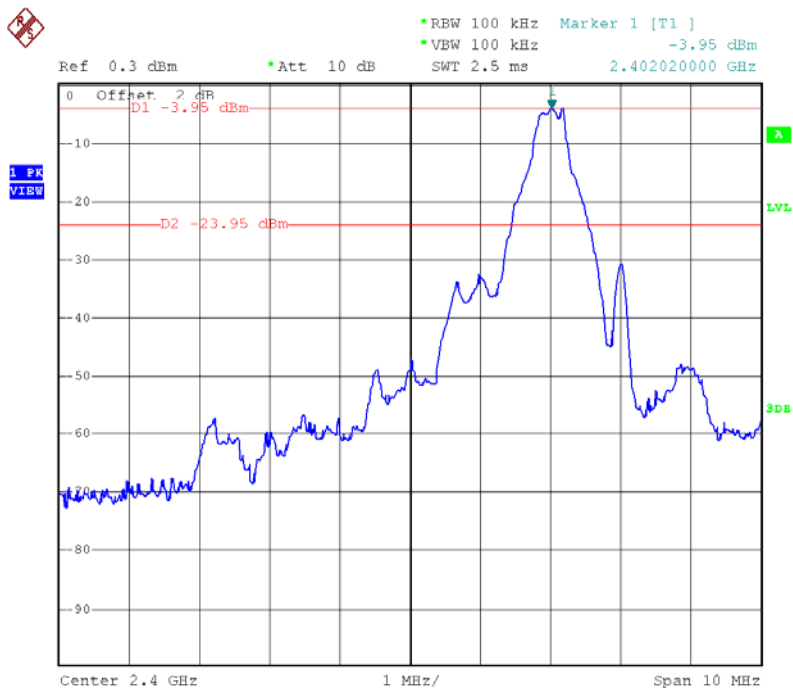

Band – edge (at 20 dB blow) – Low channel Frequency Range = 30 MHz ~ 10th harmonic

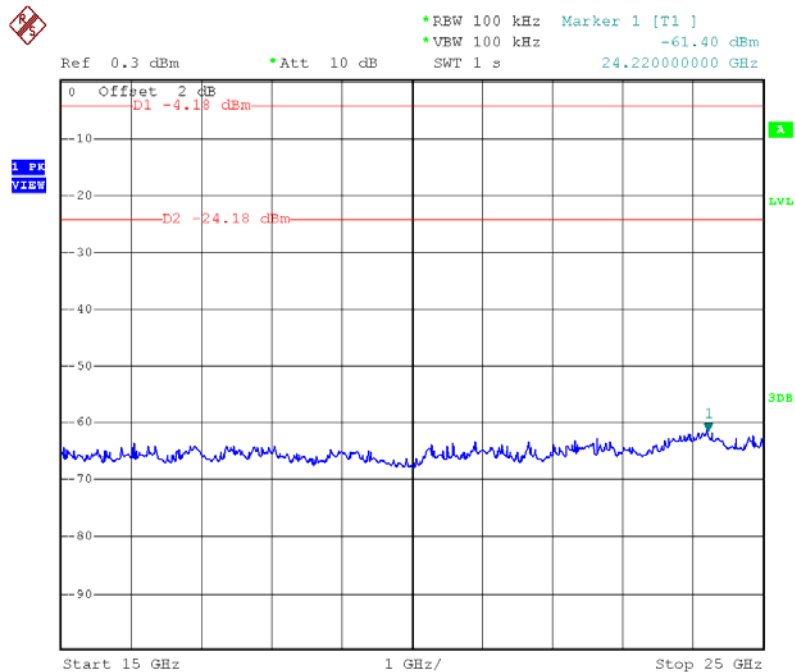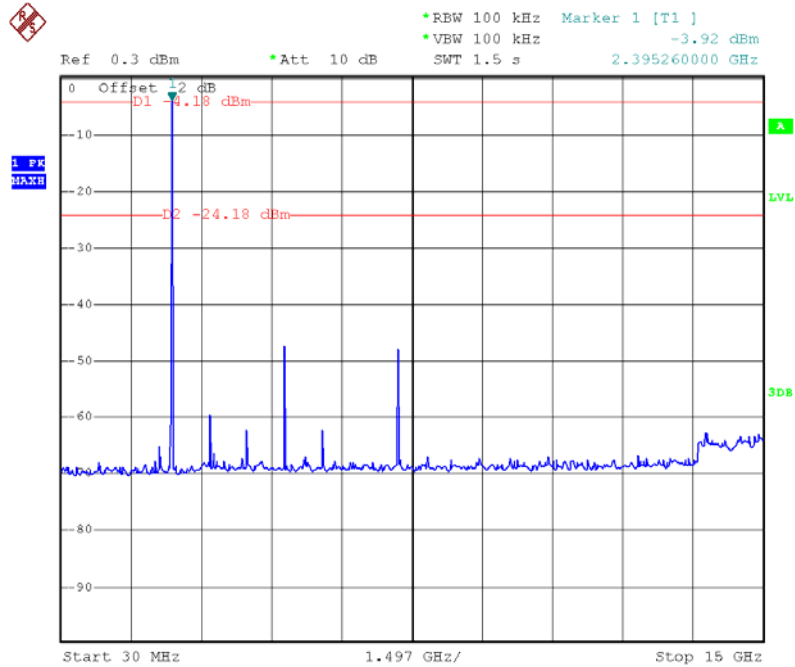

Band – edge (at 20 dB blow) – Mid channel
Frequency Range = 30 MHz ~ 10th harmonic

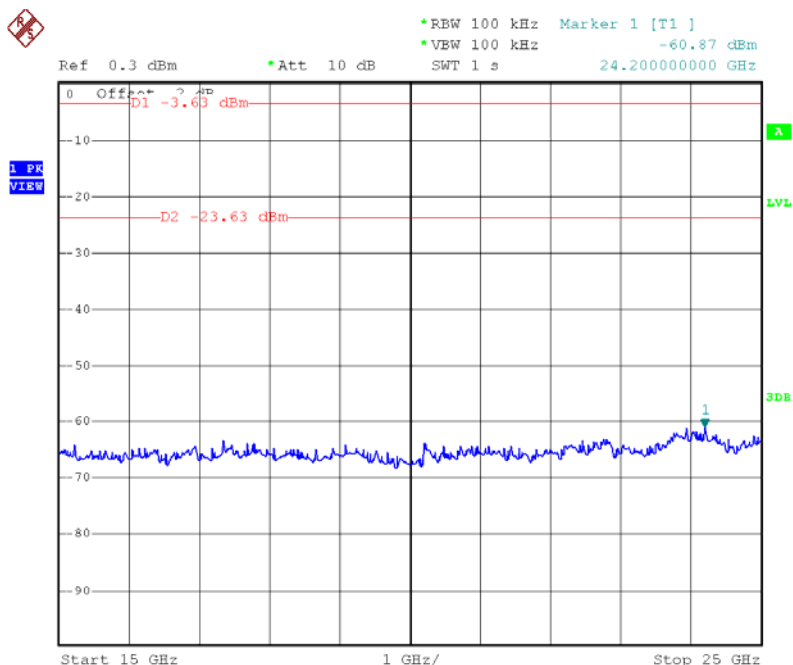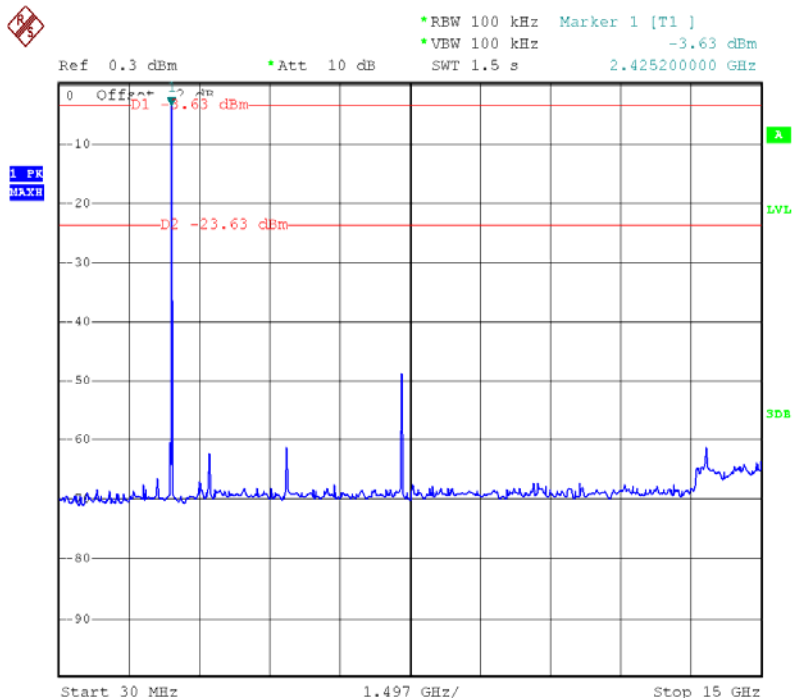





CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Band – edge (at 20 dB blow) – High channel Frequency Range = 30 MHz ~ 10th harmonic

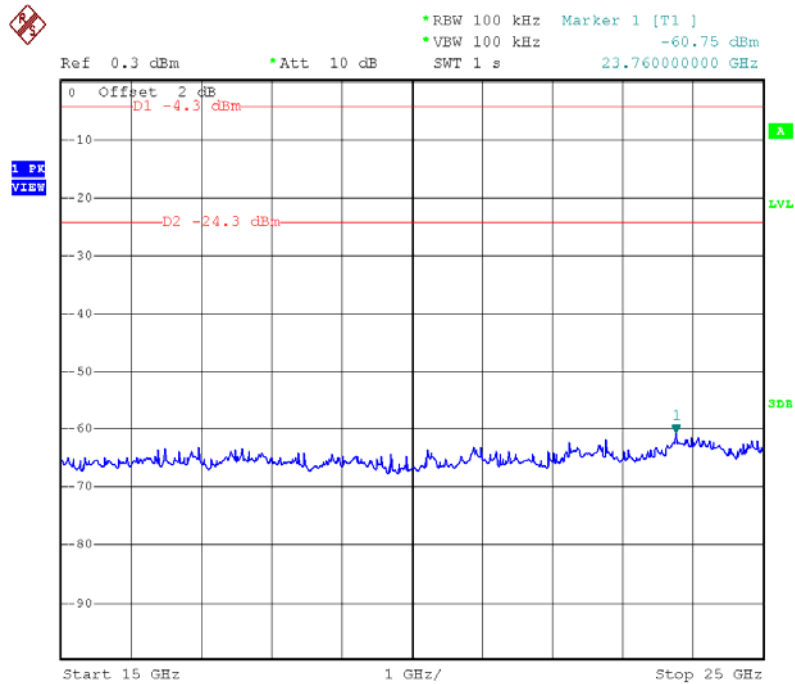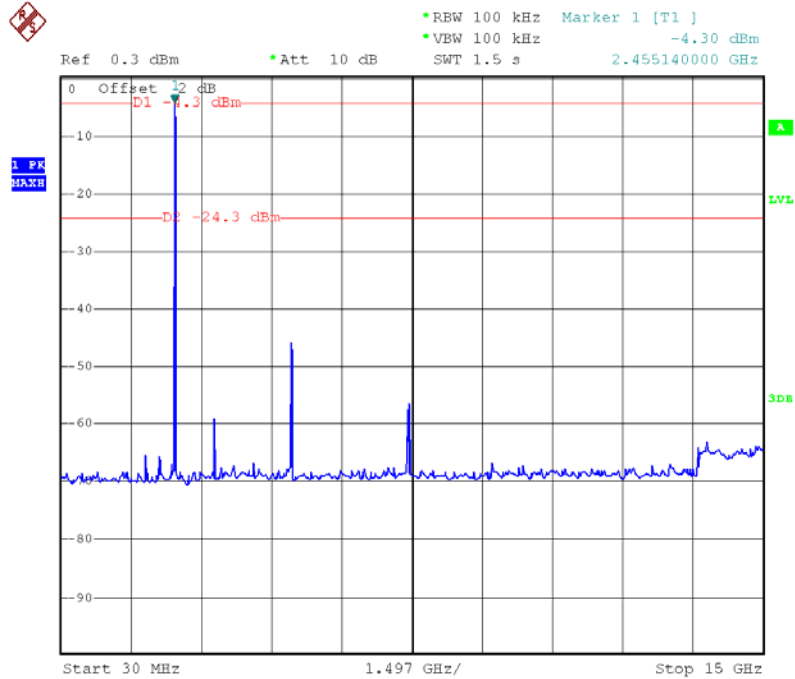

2.1.7 Field Strength of Emissions

Test Location

☒ Testing was performed at a test distance of 3 meter Open Area Test Site

Test Procedures

The height of the measuring antenna was varied between 1 to 4 m and the table was rotated a full revolution in order to obtain maximum values of the electric field intensity. The measurement was made in both the vertical and horizontal polarization, and the maximum value is presented in the report.

The spectrum analyzer is set to:

Below 1GHz :


RBW=100KHz/VBW=300KHz/Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz/Sweep=AUTO

(b) AVERAGE: RBW=1MHz/VBW=10Hz/Sweep=AUTO

Below 1 GHz

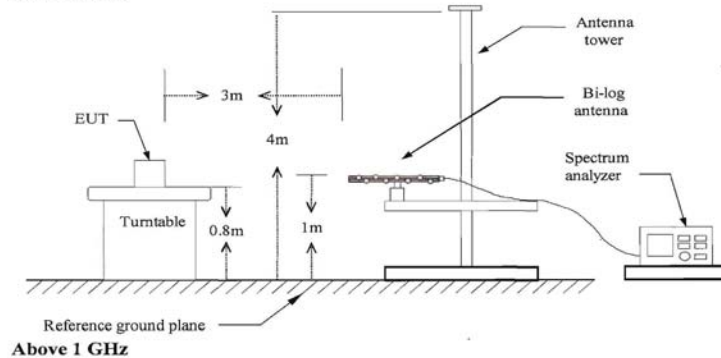

Above 1 GHz

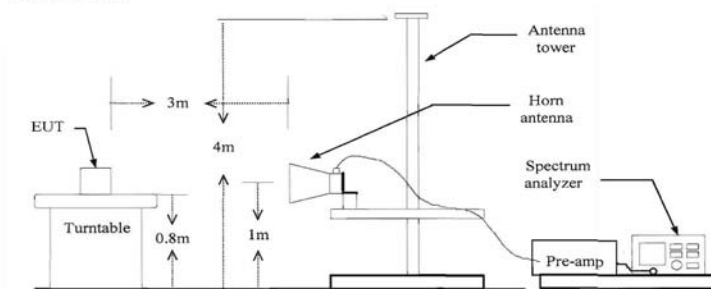

Limit

- 15.209(a)

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m
30-88	100**	40
88-216	150**	43.5
216-960	200**	46
Above 960	500	54

** Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Test Results

EUT	Navigation	Measurement Detail	
Model	SP430BL	Frequency Range	Below 1000MHz
Channel	Normal linking	Detector function	Quasi-Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
720.00	42.8	3.2	Quasi-Peak

Test Data

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor		Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Cable			
323.05	22.7	V	2.0	11.6	2.5	46.0	36.8	9.2
352.25	23.0	V	1.5	12.4	2.6	46.0	38.0	8.0
384.15	20.5	V	1.5	13.0	2.7	46.0	36.2	9.8
534.21	16.9	V	2.1	16.0	3.6	46.0	36.5	9.5
635.79	17.4	V	1.1	17.9	3.9	46.0	39.2	6.8
720.00	19.9	V	1.0	18.9	4.0	46.0	42.8	3.2

H : Horizontal, V : Vertical

Test Results

EUT	Navigation	Measurement Detail	
Model	SP430BL	Frequency Range	1-25GHz
Channel	Channel 0	Detector function	Average/Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
7060.50	52.67	1.33	Average/Peak

Test Data

DC 3.7V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4803.92	43.93/50.85	V	1	33.7	32.7	7.3	54.0 /74.0	52.23/59.15
7060.50	36.37/44.92	V	1	37.7	32.6	11.2	54.0 /74.0	52.67/61.22

DC 12V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4804.02	40.57/54.45	V	1	33.7	32.7	7.3	54.0 /74.0	48.87/62.75
7206.07	33.39/51.56	V	1	37.7	32.6	11.5	54.0 /74.0	49.99/68.16

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Navigation	Measurement Detail	
Model	SP430BL	Frequency Range	1-25GHz
Channel	Channel 39	Detector function	Average/Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
7323.05	52.13	1.67	Average/Peak

Test Data

DC 3.7V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4882.03	39.58/53.06	V	1	33.7	32.7	7.9	54.0 /74.0	48.48/61.96
7323.05	34.63/48.38	V	1	38.4	32.6	11.7	54.0 /74.0	52.13/65.88

DC 12V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4882.03	33.61/48.37	V	1	33.7	32.7	7.3	54.0 /74.0	41.91/56.67
7323.00	31.77/49.13	V	1	38.4	32.6	11.7	54.0 /74.0	49.27/66.63

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin [dB]
				Antenna	Amp. Gain	Cable			
No emissions were detected at a level greater than 20dB below limit.									



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

Test Results

EUT	Navigation	Measurement Detail	
Model	SP430BL	Frequency Range	1-25GHz
Channel	Channel 78	Detector function	Average/Peak

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
7440.05	50.85	3.15	Average/Peak

Test Data

DC 3.7V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4960.02	39.97/47.14	V	1	33.7	32.7	7.3	54.0 /74.0	48.27/55.44
7440.05	33.35/41.97	V	1	38.4	32.6	11.7	54.0 /74.0	50.85/57.47

DC 12V

Frequency [MHz]	Reading A/P [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits/ Detector A/P [dBuV/m]	Result A/P [dBuV/m]
				Antenna	Amp.Gain	Cable		
4960.02	30.98/47.34	V	1	33.7	32.7	7.3	54.0 /74.0	39.28/55.64
7440.05	31.26/44.21	V	1	38.4	32.6	11.7	54.0 /74.0	48.76/61.71

Restricted band edge test data

Measured frequency range : 2310-2390 MHz, 2483.5-2500 MHz

Frequency [MHz]	Reading [dBuV/m]	Pol.	Height [m]	Correction Factor			Limits [dBuV/m]	Result [dBuV/m]	Margin
				Antenna	Amp. Gain	Cable			[dB]
No emissions were detected at a level greater than 20dB below limit.									

2.1.8 AC Conducted Emissions

Test Location

Shielded Room

Frequency Range of Measurement

150 kHz to 30 MHz

Instrument Settings

IF Band Width: 9 kHz

Test Procedures

The EUT was placed on a non-metallic table 0.8m above the metallic, grounded floor and 0.4m from the reference ground plane wall. The distance to other metallic surfaces was at least 0.8m.

Amplitude measurements were performed with a quasi-peak detector and an average detector.

Limit

- 15.207(a)

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56*	56 to 46*
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

The requirements are:

☒ Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
5.72	53.2	6.8	Quasi-peak



CTK Co., Ltd.
The Power Leader of Global Regulatory Compliance

CTK Co., Ltd.


386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea
Tel: +82-31-339-9970 Fax: +82-31-339-9855
www.e-ctk.com

Test Data


Frequency [MHz]	Correction Factor		Line	Quasi-peak				Average			
				Limit	Reading	Result	Margin	Limit	Reading	Result	Margin
	LISN	Cable		[dBuV]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dB]
1.53	0.1	0.4	H	56.0	45.1	45.6	10.4	46.0	24.4	24.9	21.1
1.89	0.1	0.4	N	56.0	43.3	43.8	12.2	46.0	26.8	27.3	18.7
1.98	0.1	0.4	N	56.0	43.2	43.7	12.3	46.0	27.0	27.5	18.5
5.67	0.2	0.4	N	60.0	51.4	52.0	8.0	50.0	39.7	40.3	9.7
5.72	0.2	0.4	N	60.0	52.6	53.2	6.8	50.0	39.6	40.2	9.8
5.77	0.2	0.4	N	60.0	51.5	52.1	7.9	50.0	38.2	38.8	11.2

H : HOT, N : NEUTRAL

[HOT]

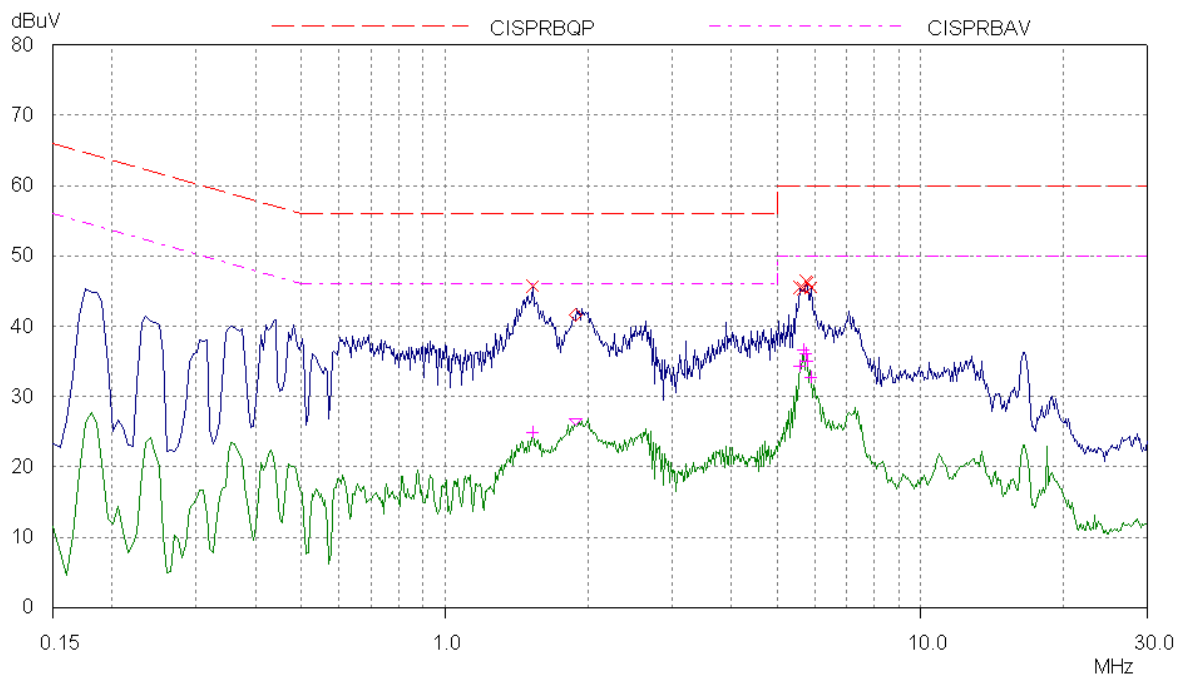

[NEUTRAL]

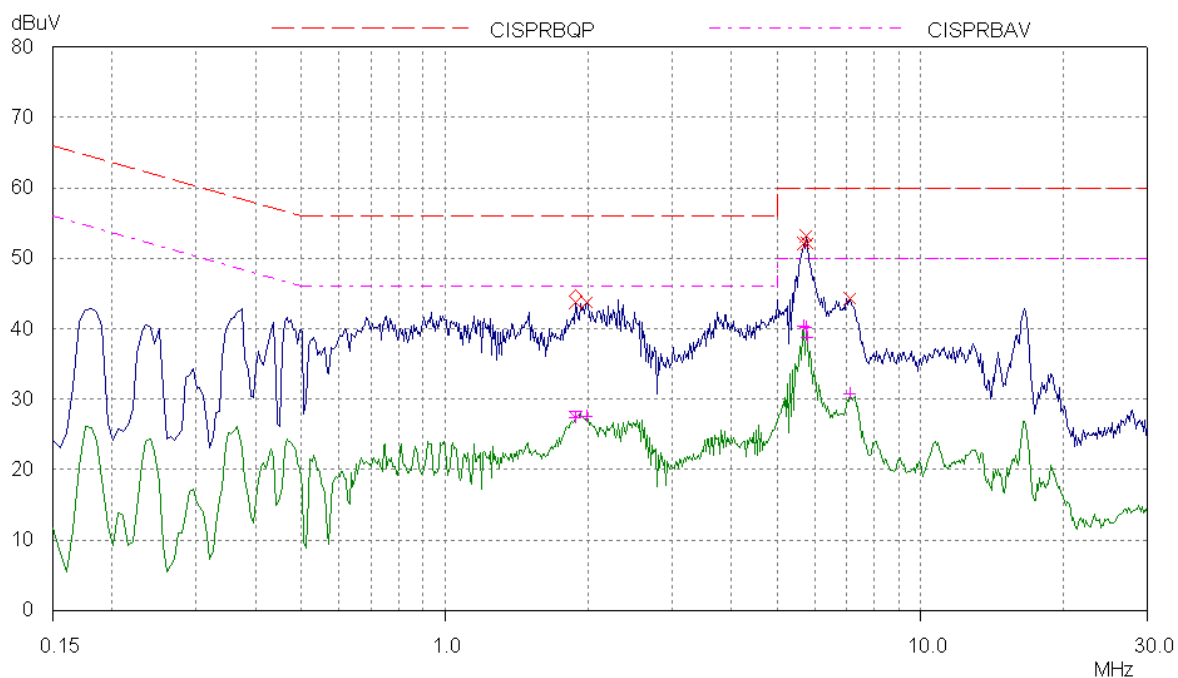



CTK Co., Ltd.

CTK Co., Ltd.

386-1, Ho-dong, Cheoin-gu, Yongin-si, Gyeonggi-do, 449-100, Korea

Tel: +82-31-339-9970 Fax: +82-31-339-9855

www.e-ctk.com

APPENDIX A – Test Equipment Used For Tests

	Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
1	Signal Analyzer	Agilent	N9020A	MY48011598	2009-10-29
2	Spectrum Analyzer	Rohde & Schwarz	FSP-30	100994	2009-10-31
3	EMI Test Receiver	Rohde & Schwarz	ESVS30	826638/008	2010-06-10
4	ULTRA Broadband Antenna	Rohde & Schwarz	HL562	361324/014	2010-06-12
5	LOOP ANTENNA	EMCO	6502	9107-2652	2010-10-17
6	LOOP ANTENNA	EMCO	6502	9607-3020	2010-03-06
7	System Power Supply	HP	6032A	3440A-10521	2010-07-07
8	EPM Series Power Meter	HP	E4418A	GB38272734	2009-10-31
9	Power Sensor	HP	8481A	331BA92056	2009-10-31
10	Audio Analyzer	HP	8903B	2747A03432	2009-11-03
11	ESG-D Series Signal Generator	Agilent	E4432B	US40054094	2009-10-31
12	SYNTHESIZED SWEEPER	HP	8341B	2819A01563	2009-10-31
13	Modulation Analyzer	HP	8901B	3438A05228	2009-11-03
14	Attenuator	HP	8494A	3308A33351	2009-10-31
15	Temp&Humi Chamber	Kunpoong	KP-1000	2002KP050041	2010-01-29
16	Temp&Humi Chamber	Kunpoong	KP-RC2000	2002KP650042	2010-01-29
17	EMC Analyzer	Agilent	E7405A	MY45110859	2010-01-21
18	Horn Antenna	ETS-Lindgren	3115	00078894	2010-11-29
19	Horn Antenna	ETS-Lindgren	3115	00078895	2010-11-29
20	Horn Antenna	ETS-Lindgren	3116	00062504	2010-11-27
21	Horn Antenna	ETS-Lindgren	3116	00062916	2010-11-27
22	Dipole Antenna	SCHWARZBECK	VHA 9103	VHA91032557	2009-11-27
23	Dipole Antenna	SCHWARZBECK	UHA 9105	UHA91052417	2009-11-27
24	OPT H64 AMPLIFIER	HP	8447F	3113A06814	2010-04-09
25	PREAMPLIFIER	Agilent	8449B	3008A02307	2009-10-31
26	Radio Communication Tester	Rohde & Schwarz	CMU200	106765	2010-02-19
27	Band Reject Filter	Wainwright Instruments	WRCG824	-	2010-04-09
28	Band Reject Filter	Wainwright Instruments	WRCG1750	-	2010-04-09
29	Field Strength Meter	Rohde & Schwarz	ESHS30	862024/001	2010-03-04
30	LISN	Rohde & Schwarz	ESH3-Z5	100207	2009-12-20
31	LISN	EMCO	3825/2	9206-1971	2009-12-20
32	DC POWER SUPPLY	Agilent	E3632A	MY40011638	2009-11-05