



---

FCC 47 CFR PART 15 SUBPART C

**TEST REPORT**

**For**

**Intercom Share**

**Model: Shareeasys, Shareeasyr**

**Brand: AGV**

**Test Report Number:**

**C131022Z03-RP1**

*Prepared for*

**AGV S.p.A. Italy**

**Strada Savonesa, 12 15057 Rivalta Scrivia (AL) ITALY**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.**  
**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,**  
**Guan Lan Town, Baoan District, Shenzhen China**

**TEL: 86-755-28055000**

**FAX: 86-755-28055221**

**Issued Date: November 4, 2013**



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.



## Revision History

Rev.	Issue No.	Revisions	Effect Page	Revised By
00	C131022Z03-RP1	Initial Issue	ALL	Nancy Fu

**TABLE OF CONTENTS**

<b>1. TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY.....</b>	<b>6</b>
3.1 DESCRIPTION OF TEST MODES.....	6
<b>4. FACILITIES AND ACCREDITATIONS .....</b>	<b>7</b>
4.1 FACILITIES.....	7
4.2 ACCREDITATIONS .....	7
4.3 MEASUREMENT UNCERTAINTY .....	7
<b>5. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1 SETUP CONFIGURATION OF EUT .....	8
5.2 SUPPORT EQUIPMENT .....	8
<b>6. FCC PART 15.247 REQUIREMENTS .....</b>	<b>9</b>
6.1 20dB BANDWIDTH.....	9
6.2 PEAK POWER.....	13
6.3 PEAK POWER SPECTRAL DENSITY .....	15
6.4 BAND EDGES MEASUREMENT .....	16
6.5 FREQUENCY SEPARATION .....	26
6.6 NUMBER OF HOPPING FREQUENCY .....	29
6.7 TIME OF OCCUPANCY (DWELL TIME).....	32
6.8 SPURIOUS EMISSIONS .....	39
6.9 POWERLINE CONDUCTED EMISSIONS .....	57



## 1. TEST RESULT CERTIFICATION

<b>Product</b>	Intercom Share
<b>Model</b>	Shareeasys, Shareeasyr
<b>Brand</b>	AGV
<b>Tested</b>	October 22~November 1, 2013
<b>Applicant</b>	<b>AGV S.p.A. Italy</b> Strada Savonesa, 12 15057 Rivalta Scrivia (AL) ITALY
<b>Manufacturer</b>	<b>Dellking Industrial Co., Limited</b> 2F, Building D, Zhongxing Science Park, No 3, Ganli 2nd Road, Gankeng Community, Buji, Longgang District, Shenzhen, China

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**

---

**Tom Gan**  
Supervisor of EMC Dept.  
Compliance Certification Service Inc.

**Reviewed by:**

---

**Ruby Zhang**  
Supervisor of Report Dept.  
Compliance Certification Service Inc.



## 2. EUT DESCRIPTION

<b>Product</b>	Intercom Share
<b>Model Number</b>	Shareeasys, Shareeasyr
<b>Brand</b>	AGV
<b>Model Discrepancy</b>	The two models differs by microphone and cable length.
<b>Identify Number</b>	C131022Z03-RP1
<b>Power Supply</b>	DC5V supplied by the adapter or DC3.7V supplied by the battery
<b>Adapter Manufacturer / Model No.</b>	GOLDEN PROFIT ELECTRONICS LTD./ GPE053B-050100-Z Input: 100-240V,50/60Hz, 0.2A Output: DC5V, 1000mA
<b>USB In Cable</b>	Unshielded, 0.95m
<b>Line in Cable</b>	Unshielded, 0.95m
<b>Received Date</b>	October 22, 2013
<b>Frequency Range</b>	2402 ~ 2480 MHz
<b>Transmit Power</b>	GFSK : 5.7dBm 8DPSK : 5.0dBm
<b>Modulation Technique</b>	FHSS (GFSK for 1Mbps, $\pi/4$ -DQPSK for 2Mbps, 8DPSK for 3Mbps)
<b>Number of Channels</b>	79 Channels
<b>Antenna Specification</b>	Built-in Antenna with 2dBi gain(Max)
<b>Temperature Range</b>	-10°C ~ +45°C

**Note:** This submittal(s) (test report) is intended for FCC ID: X9NSHAREEASY filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



### **3. TEST METHODOLOGY**

#### **3.1 DESCRIPTION OF TEST MODES**

The EUT has been tested under operating condition.

Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

The following test mode(s) were scanned during the preliminary test below 1G:

Test Item	Test mode	Worse mode
Conducted Emission	Mode 1: FM	<input type="checkbox"/>
	Mode 2: BT with adapter	<input checked="" type="checkbox"/>
Radiated Emission	Mode 1: TX	<input checked="" type="checkbox"/>

Above 1G, Channel Low (2402MHz)、Mid (2441MHz) and High (2480MHz) were chosen for full testing for GFSK and 8DPSK.



## 4. FACILITIES AND ACCREDITATIONS

### 4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10-1, Mingkeda Logistics Park, No.18, Huanguan South Rd.,  
Guan Lan Town, Baoan District, Shenzhen, China**

The sites are constructed in conformance with the requirements of ANSI C63.4:2009, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 4.2 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

<b>USA</b>	A2LA
<b>China</b>	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

<b>USA</b>	FCC
<b>Japan</b>	VCCI(C-3478, R-3135, T-652, G-624)
<b>Canada</b>	INDUSTRY CANADA
<b>Taiwan</b>	BSMI
<b>Norway</b>	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

### 4.3 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



## 5. SETUP OF EQUIPMENT UNDER TEST

### 5.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 5.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook	5310m	N/A	N/A	HP	N/A	Unshielded 1.80m
2	Mobilephone	I9300	N/A	N/A	SAMSUNG	N/A	N/A

**Notes:**

*Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*



## 6. FCC PART 15.247 REQUIREMENTS

### 6.1 20dB BANDWIDTH


None; for reporting purpose only.

### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### **TEST CONFIGURATION**

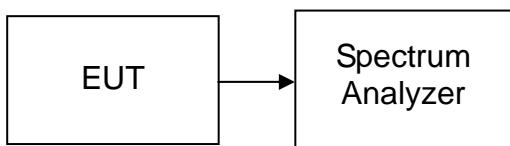

### **TEST PROCEDURE**

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT, then connect a low loss RF cable from antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW=30kHz, VBW=100kHz, Span=3MHz, Sweep = auto.
4. Mark the peak frequency and 20dB (upper and lower) frequency.
5. Repeat until all the test channels are investigated.


### **TEST RESULTS**

No non-compliance noted




## Test plot GFSK

### 20dB Bandwidth(CH Low)


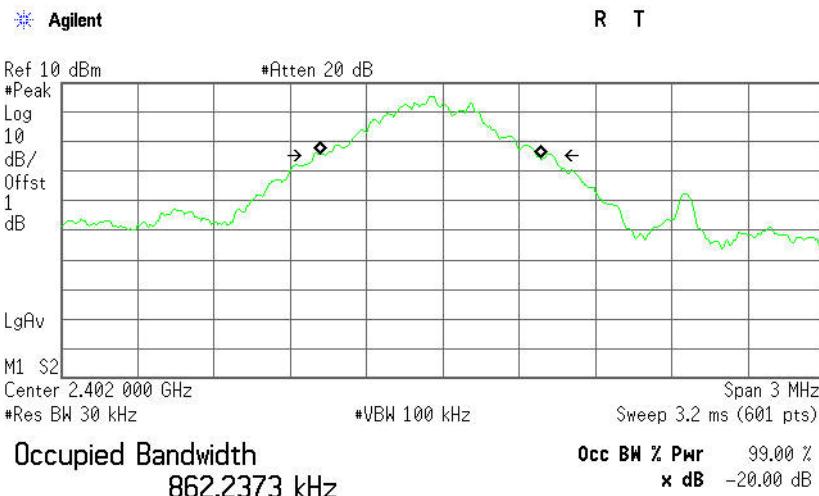


Transmit Freq Error -47.355 kHz  
x dB Bandwidth 934.678 kHz

### 20dB Bandwidth (CH Mid)

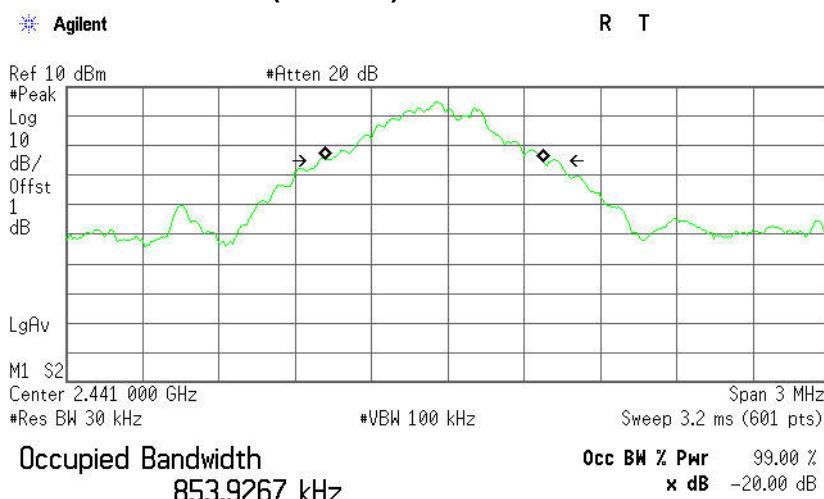

Transmit Freq Error -50.567 kHz  
x dB Bandwidth 935.200 kHz

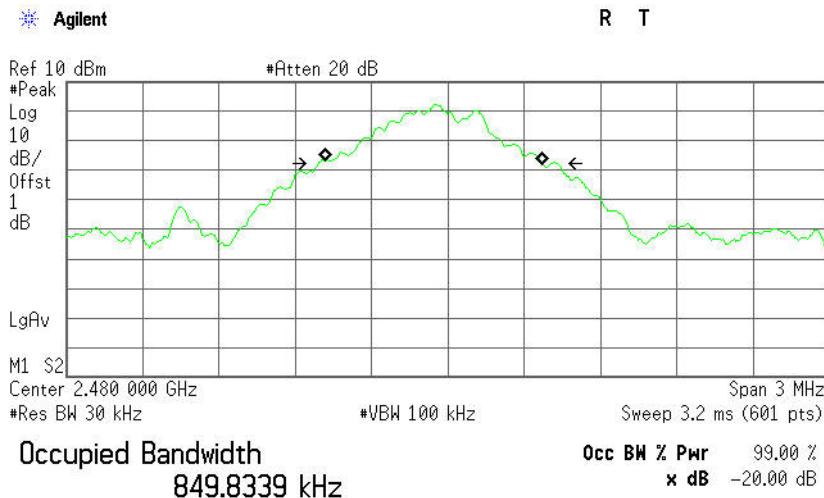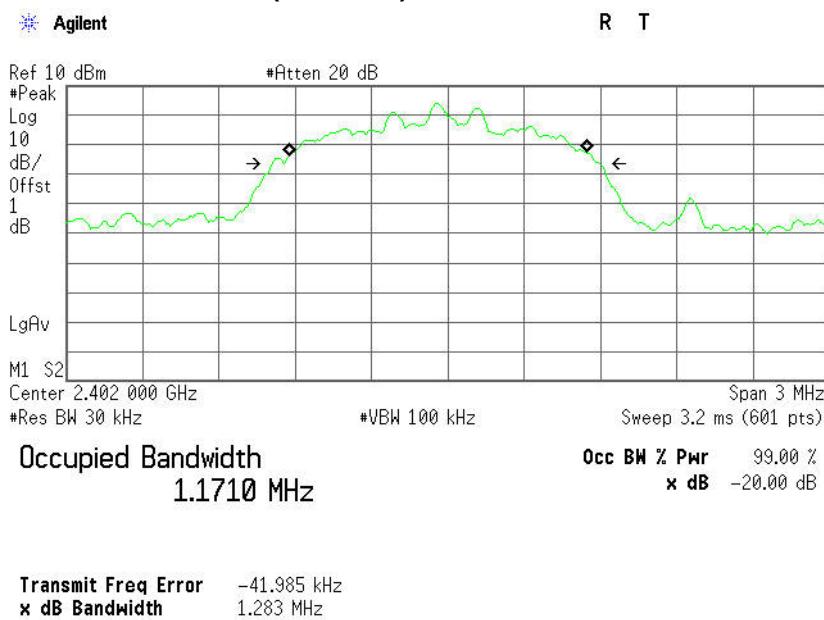
**20dB Bandwidth (CH High)****8DPSK****20dB Bandwidth (CH Low)**



## 20dB Bandwidth (CH Mid)

Agilent

R T

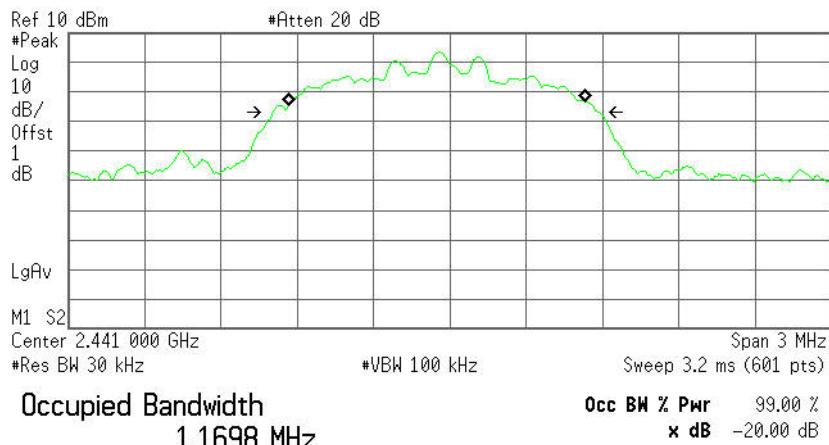


Transmit Freq Error -52.422 kHz  
x dB Bandwidth 1.272 MHz

## 20dB Bandwidth (CH High)

Agilent

R T

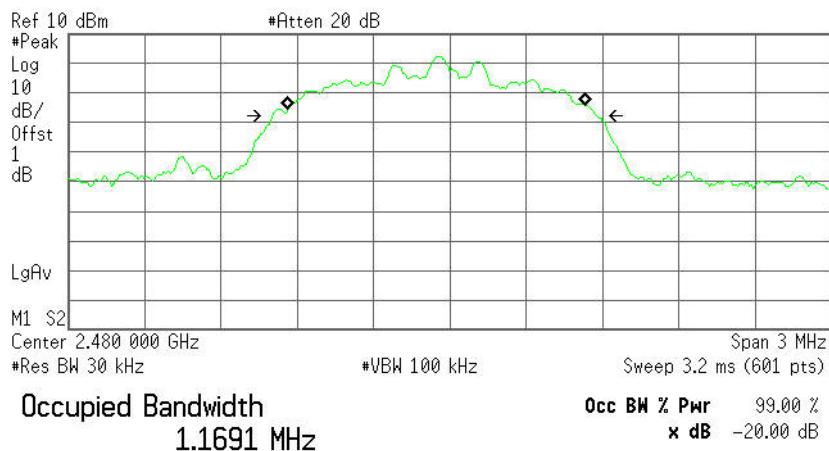

Transmit Freq Error -54.035 kHz  
x dB Bandwidth 1.270 MHz



## 6.2 PEAK POWER

### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:


1. For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.
3. The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Power Meter	Anritsu	ML2495A	1204003	03/09/2013	03/08/2014
Power Sensor	Anritsu	MA2411B	1126150	03/09/2013	03/08/2014
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration

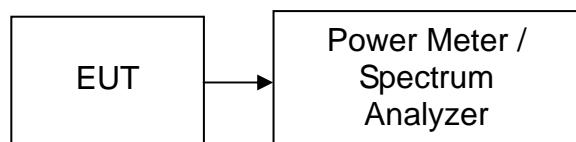

### TEST PROCEDURE

The transmitter output is connected to the RF Power Meter. The RF Power Meter is set to the peak power detection.



## TEST RESULTS

*No non-compliance noted*

### Test Data

#### GFSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	2.20	3.50	5.70	0.00372	1	PASS
Mid	2441	1.80	3.50	5.30	0.00339		PASS
High	2480	1.20	3.50	4.70	0.00295		PASS

#### 8DPSK

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	1.50	3.50	5.00	0.00316	1	PASS
Mid	2441	1.10	3.50	4.60	0.00288		PASS
High	2480	0.50	3.50	4.00	0.00251		PASS



## 6.3 PEAK POWER SPECTRAL DENSITY

### LIMIT


1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*Not applicable. Since EUT is the Bluetooth device.*

## 6.4 BAND EDGES MEASUREMENT


### LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### MEASUREMENT EQUIPMENT USED

Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A, R, A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

### Test Configuration

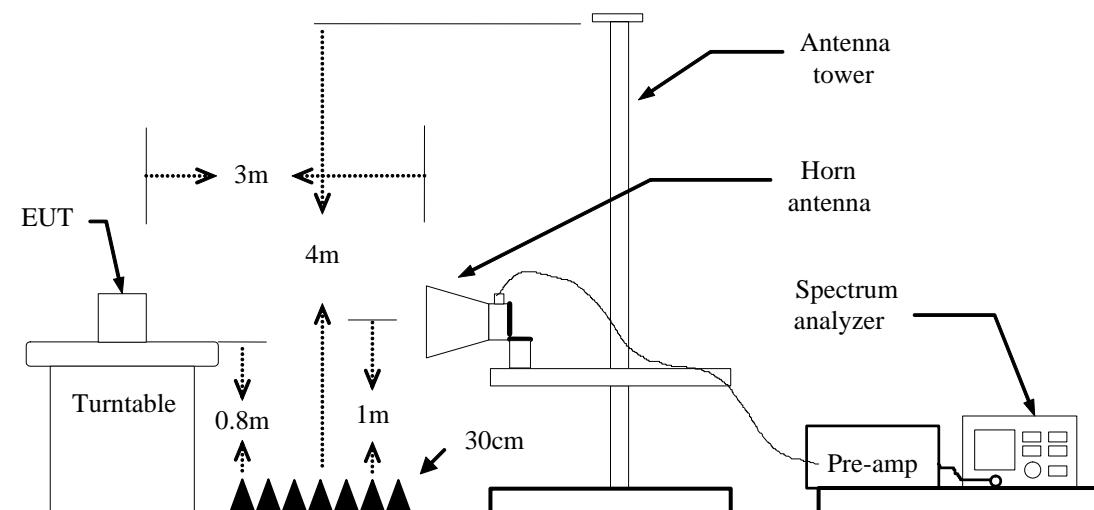



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=2kHz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

## **TEST RESULTS**

Refer to attach spectrum analyzer data chart.



## Test Data ( GFSK )

### Band Edges (CH-Low)

**Detector mode: Peak**

Agilent

Ref 117 dB $\mu$ V/m

#Atten 20 dB

**Polarity: Vertical**

R T

Mkr1 2.402 2 GHz

94.07 dB $\mu$ V/m

#Peak

Log


10

dB/

</div

**Detector mode: Peak**


Agilent

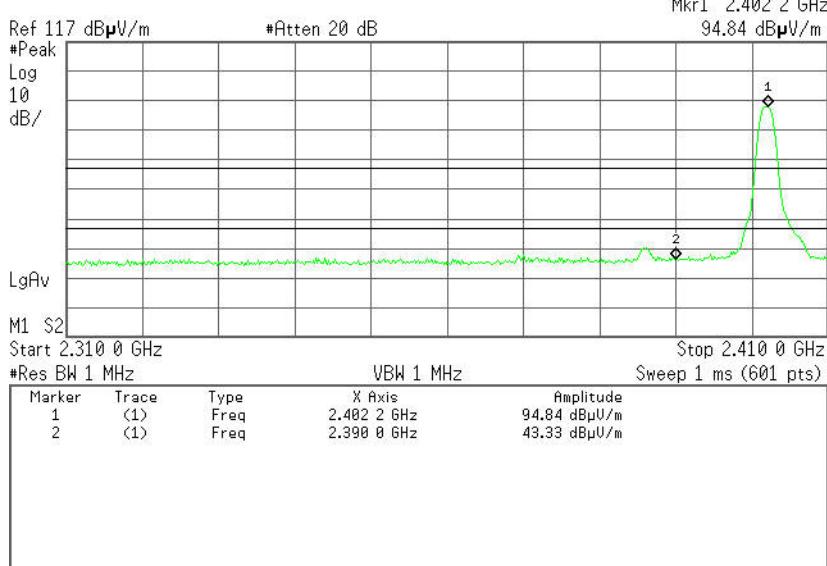**Polarity: Horizontal**

R T

**Detector mode: Average**

Agilent

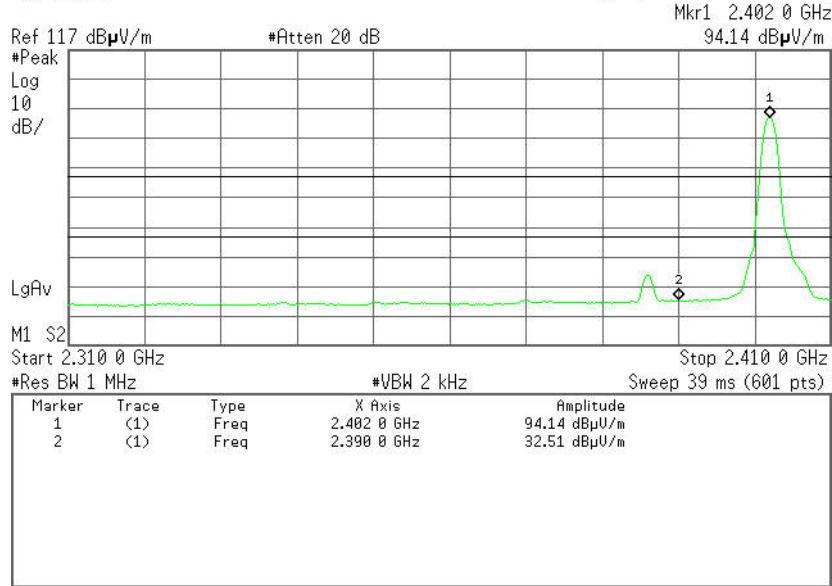




## Band Edges (CH-High)

Detector mode: Peak


Agilent

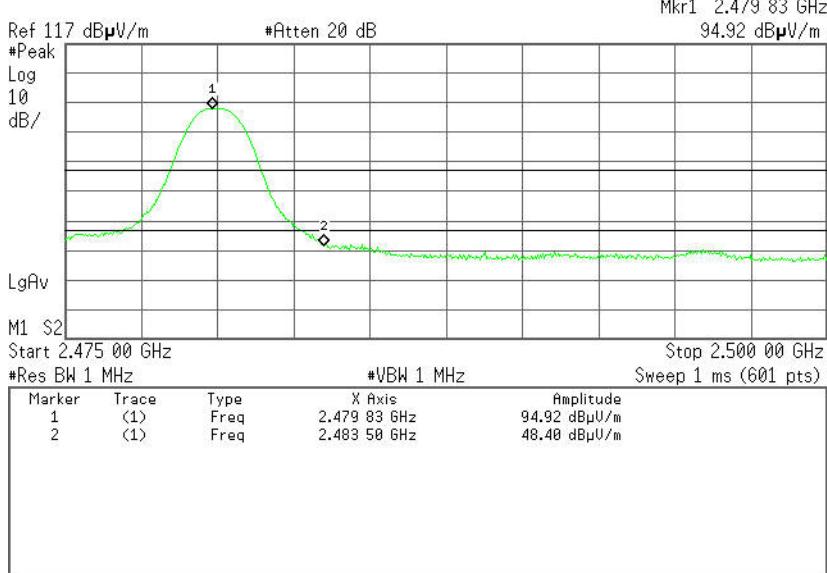

Polarity: Vertical

Detector mode: Average


Agilent

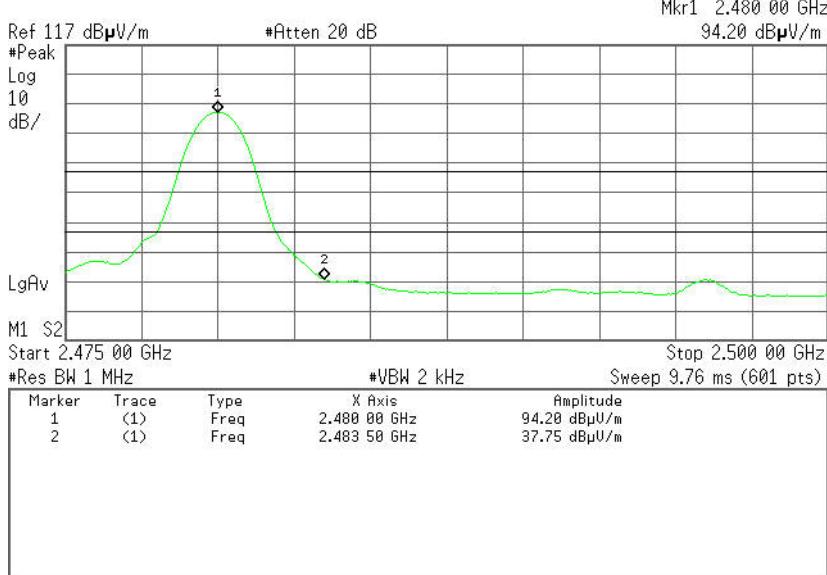



## Detector mode: Peak


Agilent

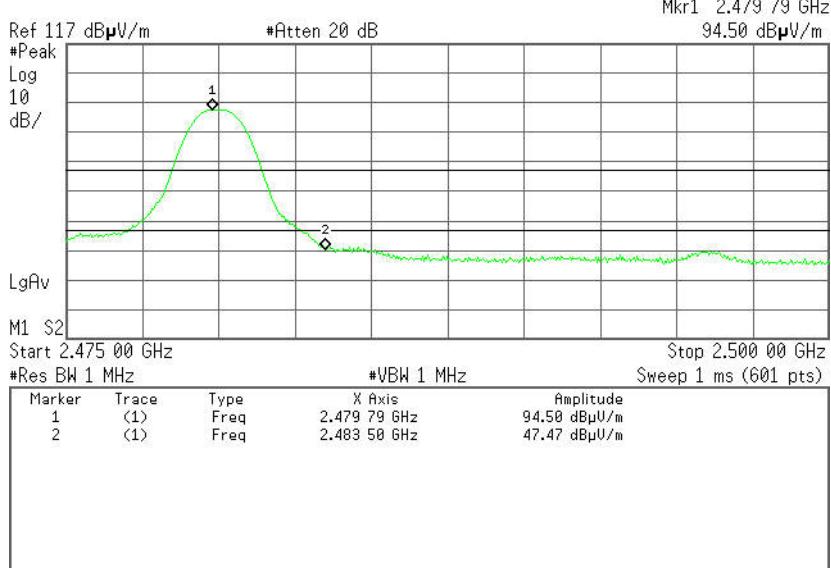

## Polarity: Horizontal

## Detector mode: Average

Agilent

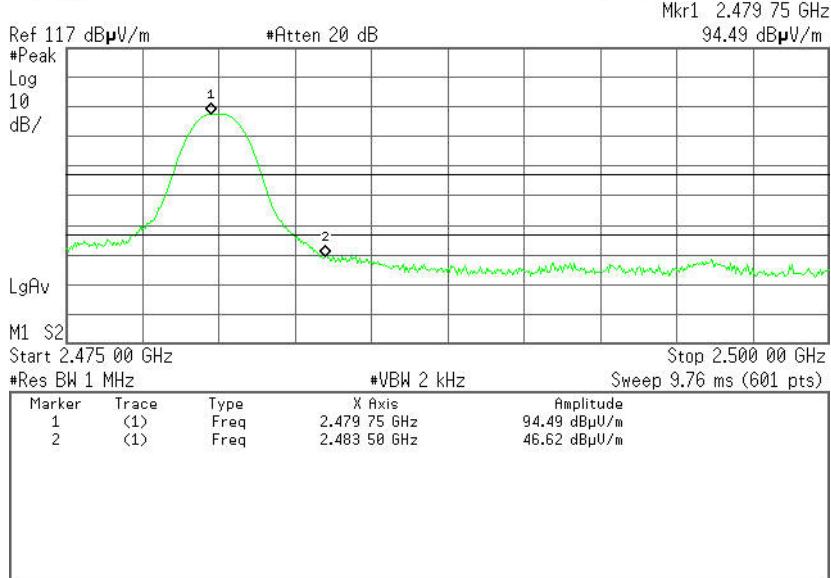



## 8DPSK

### Band Edges (CH-Low)

**Detector mode: Peak**

Agilent

Ref 117 dB $\mu$ V/m

#Atten 20 dB

**Polarity: Vertical**

R T

Mkr1 2.402 0 GHz

91.84 dB $\mu$ V/m

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.410 0 GHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 0 GHz	91.84 dB $\mu$ V/m
2	(1)	Freq	2.390 0 GHz	43.33 dB $\mu$ V/m

**Detector mode: Average**

Agilent

Ref 117 dB $\mu$ V/m

#Atten 20 dB

**Polarity: Vertical**

R T

Mkr1 2.402 0 GHz

88.59 dB $\mu$ V/m

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

#Res BW 1 MHz

#VBW 2 kHz

Stop 2.410 0 GHz

Sweep 39 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 0 GHz	88.59 dB $\mu$ V/m
2	(1)	Freq	2.390 0 GHz	31.74 dB $\mu$ V/m

**Detector mode: Peak**

Agilent

Ref 117 dB $\mu$ V/m

#Atten 20 dB

**Polarity: Horizontal**

R T

Mkr1 2.401 8 GHz

93.26 dB $\mu$ V/m

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.401 8 GHz	93.26 dB $\mu$ V/m
2	(1)	Freq	2.398 0 GHz	42.61 dB $\mu$ V/m

**Detector mode: Average**

Agilent

Ref 117 dB $\mu$ V/m

#Atten 20 dB

**Polarity: Horizontal**

R T

Mkr1 2.402 0 GHz

89.39 dB $\mu$ V/m

#Peak

Log

10

dB/

LgAv

M1 S2

Start 2.310 0 GHz

Stop 2.410 0 GHz

#Res BW 1 MHz

#VBW 2 kHz

Sweep 39 ms (601 pts)


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.402 0 GHz	89.39 dB $\mu$ V/m
2	(1)	Freq	2.398 0 GHz	31.73 dB $\mu$ V/m



## Band Edges (CH-High)

**Detector mode: Peak**


Agilent

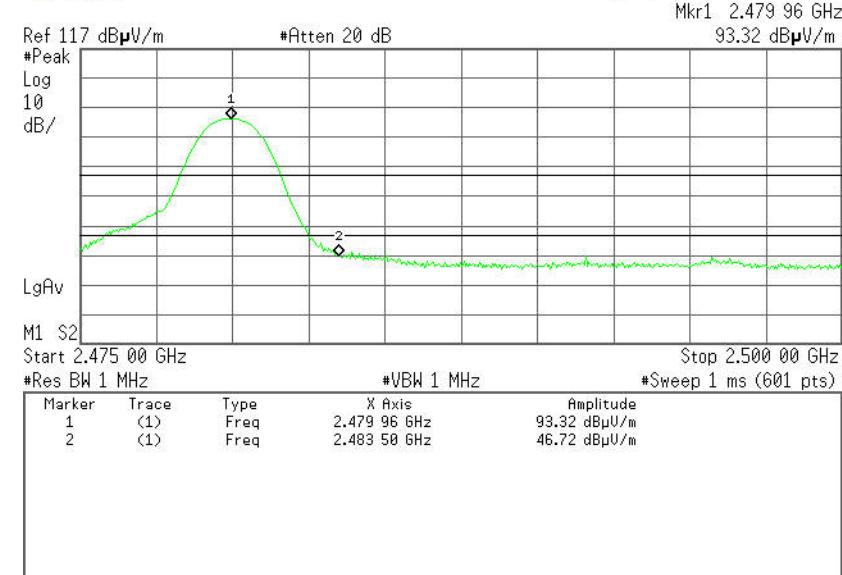

**Polarity: Vertical**


**Detector mode: Average**

Agilent

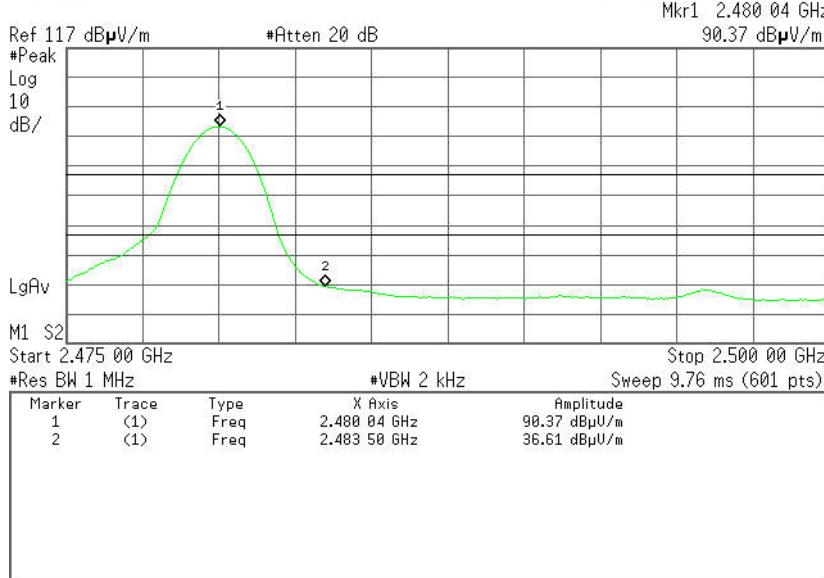

**Detector mode: Peak**


Agilent

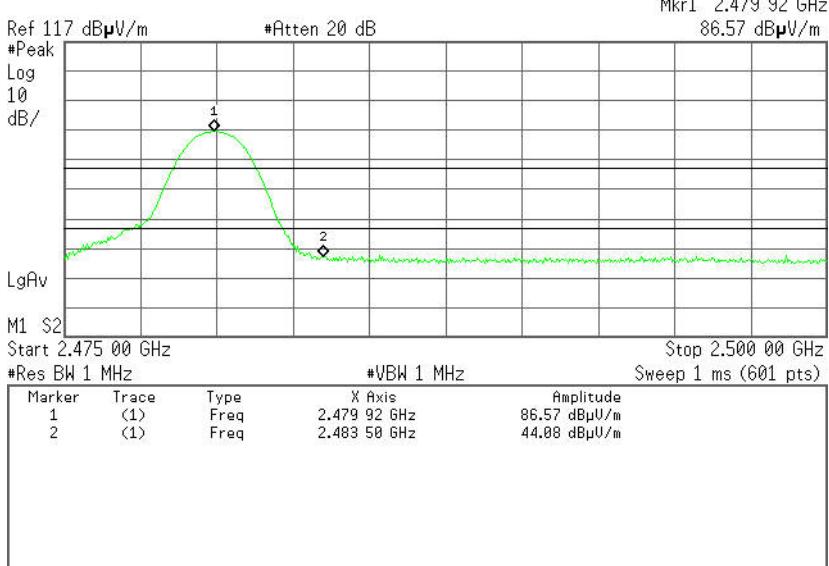**Polarity: Horizontal**

R T

**Detector mode: Average**

Agilent

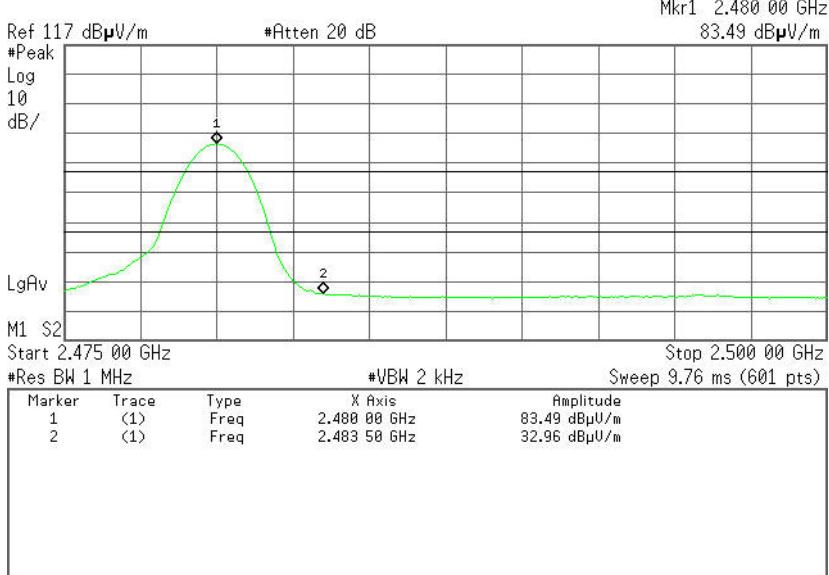**Polarity: Horizontal**

R T



## 6.5 FREQUENCY SEPARATION

### LIMIT


According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### **MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### **TEST PROCEDURE**

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW=30kHz, VBW=30kHz, Adjust Span to 4 MHz, Sweep = auto.
5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

### **TEST RESULTS**

*No non-compliance noted*



### Test Data

#### **GFSK**

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	623.467	> Two-thirds of the 20 dB Bandwidth	Pass

#### **8DPSK**

Channel Separation (MHz)	Two-thirds of the 20 dB Bandwidth (kHz)	Channel Separation Limit	Result
1.000	855.333	> Two-thirds of the 20 dB Bandwidth	Pass

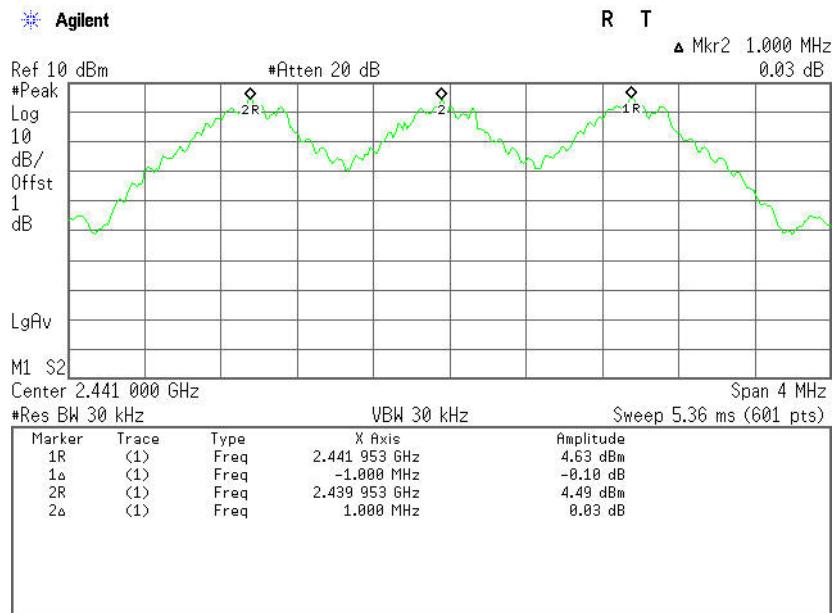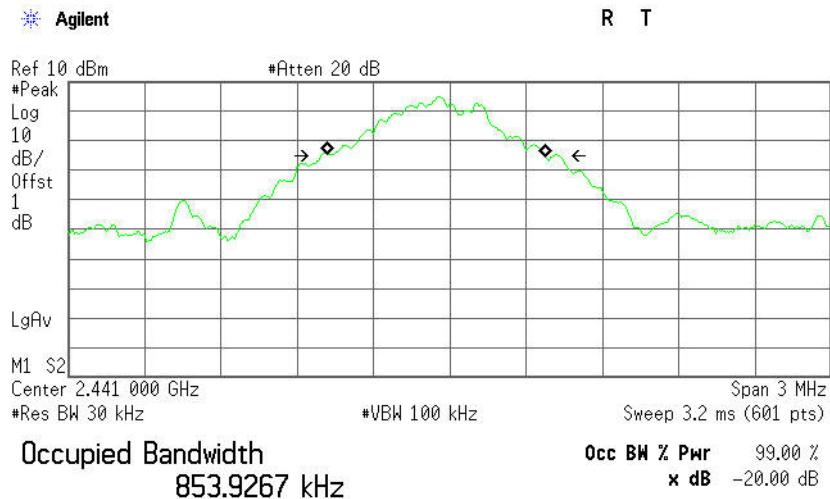GFSKTest Plot**Measurement of Channel Separation****20 dB bandwidth(CH Mid)**


Transmit Freq Error      -50.567 kHz  
x dB Bandwidth      935.200 kHz




## 8DPSK

### Test Plot

#### Measurement of Channel Separation

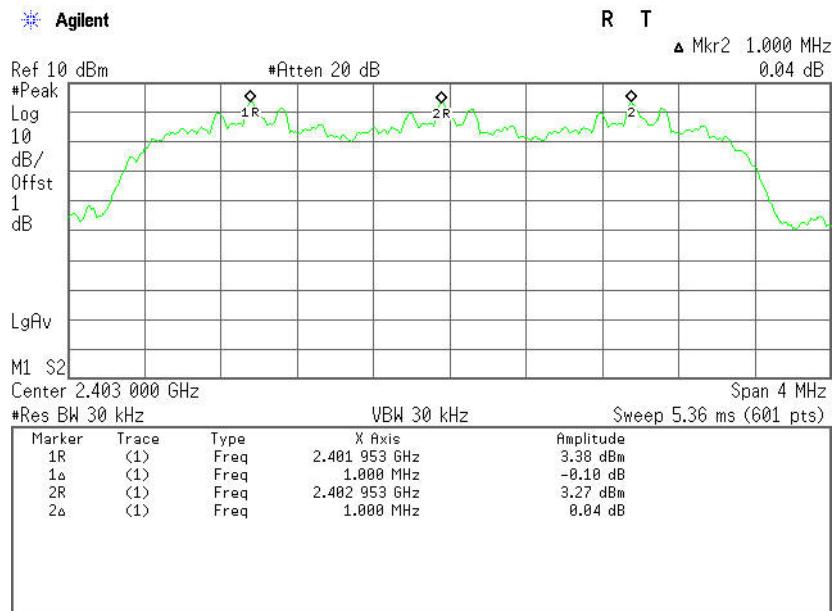

#### 20 dB bandwidth(CH Low)

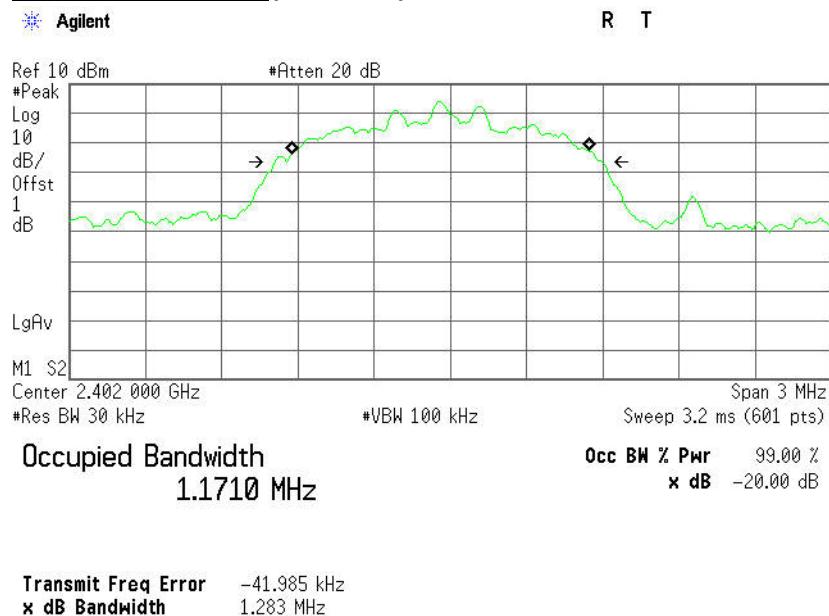



## 6.6 NUMBER OF HOPPING FREQUENCY

### LIMIT


According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

### Test Configuration



### TEST PROCEDURE



1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = 1ms and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = 1ms.
4. Set the spectrum analyzer as RBW, VBW=300kHz,
5. Max hold, view and count how many channel in the band.

### TEST RESULTS

*No non-compliance noted*

### Test Data

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS

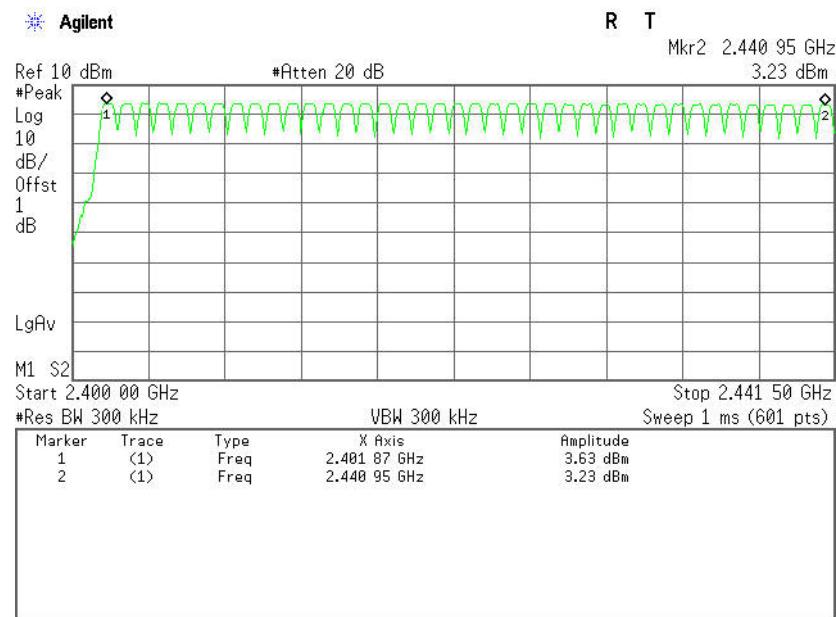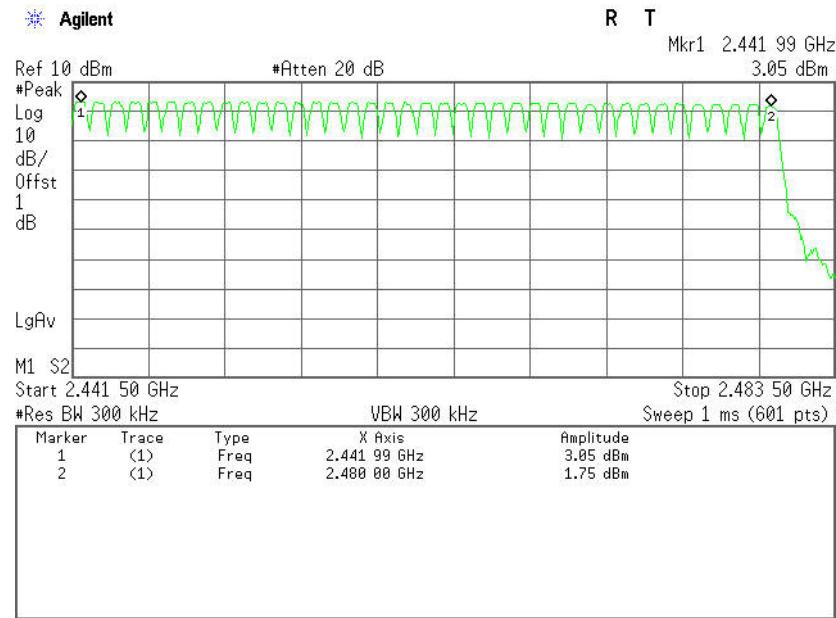
**Test Plot ( GFSK )****Channel Number****2.400 GHz – 2.4415 GHz****2.4415 GHz –2.4835 GHz**




## Test Plot (8DPSK )

### Channel Number

#### **2.400 GHz – 2.4415 GHz**

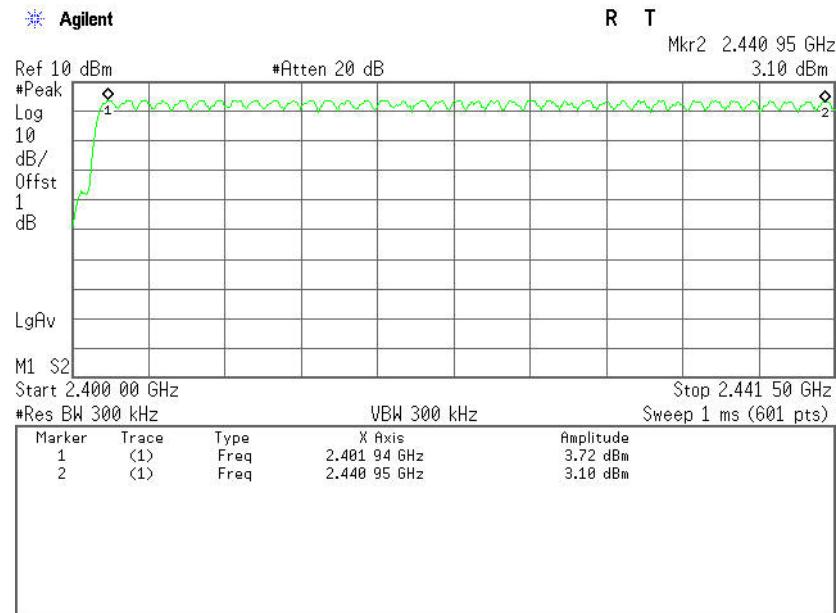

#### **2.4415 GHz –2.4835 GHz**

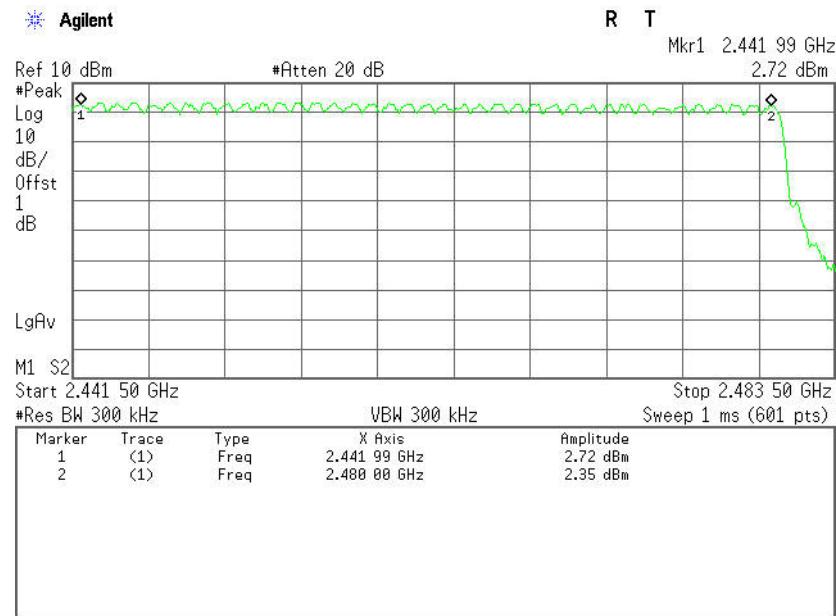



## 6.7 TIME OF OCCUPANCY (DWELL TIME)

### LIMIT


According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

**Remark:** Each piece of equipment is scheduled for calibration once a year.

### Test Configuration



### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.



## TEST RESULTS

*No non-compliance noted*

### Test Data

#### GFSK

##### DH 1

CH Mid:  $0.502^* (1600/2)/79 * 31.6 = 160.640(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.502	160.640	31.60	400.00	PASS

##### DH 3

CH Mid:  $1.755^* (1600/4)/79 * 31.6 = 280.800 (\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.755	280.800	31.60	400.00	PASS

##### DH 5

CH Mid:  $3.008^* (1600/6)/79 * 31.6 = 320.853(\text{ms})$

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.008	320.853	31.60	400.00	PASS



## Test Data

### 8DPSK

#### DH 1

CH Mid:  $0.517^* (1600/2)/79 * 31.6 = 165.440$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	0.517	165.440	31.60	400.00	PASS

#### DH 3

CH Mid:  $1.765^* (1600/4)/79 * 31.6 = 282.400$  (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	1.765	282.400	31.60	400.00	PASS

#### DH 5

CH Mid:  $3.000^* (1600/6)/79 * 31.6 = 320.000$ (ms)

CH	Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
Mid	3.000	320.000	31.60	400.00	PASS




## Test Plot

### GFSK


#### DH 1

##### (CH Mid)

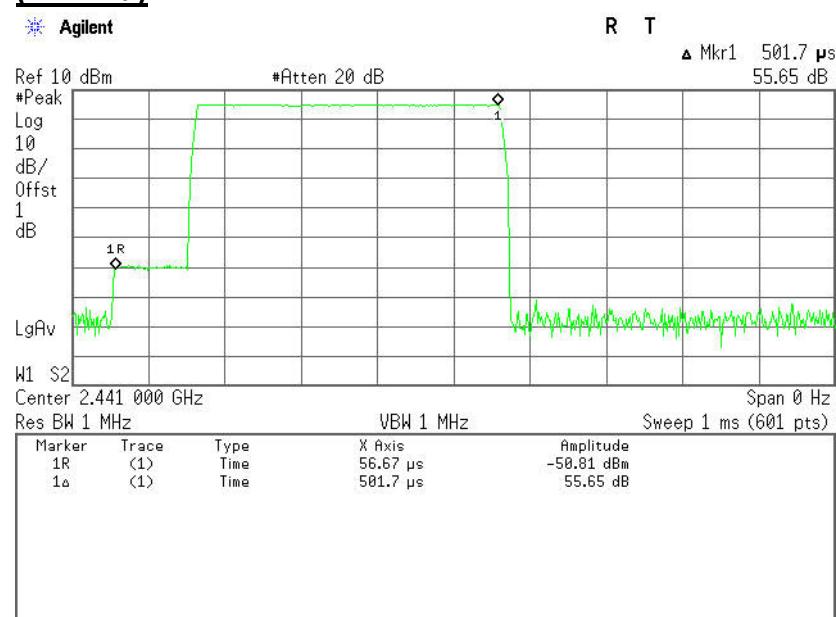

#### DH 3

##### (CH Mid)

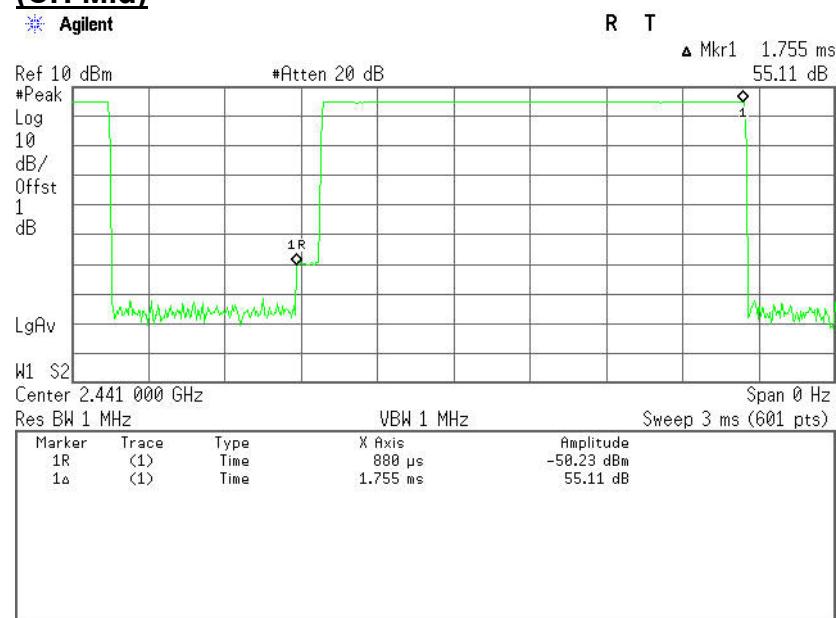






## DH 5

### **(CH Mid)**

Agilent

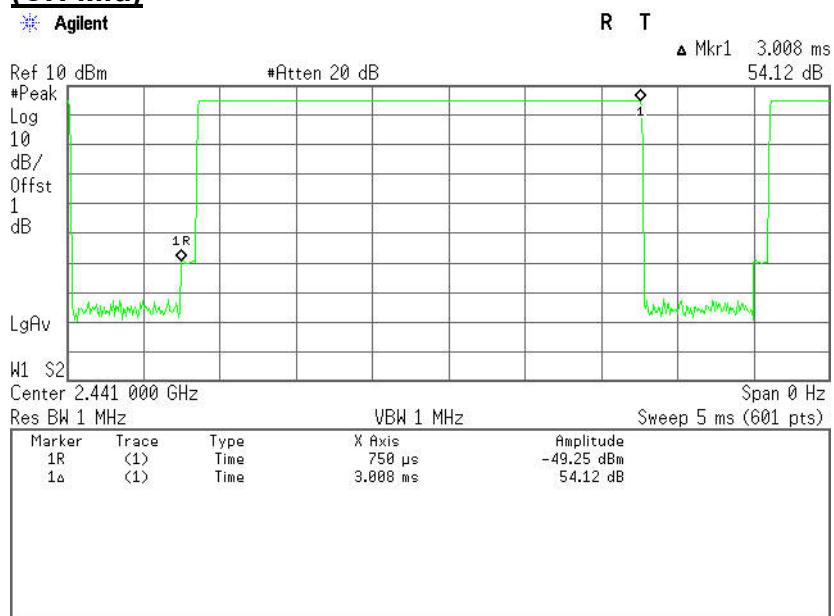

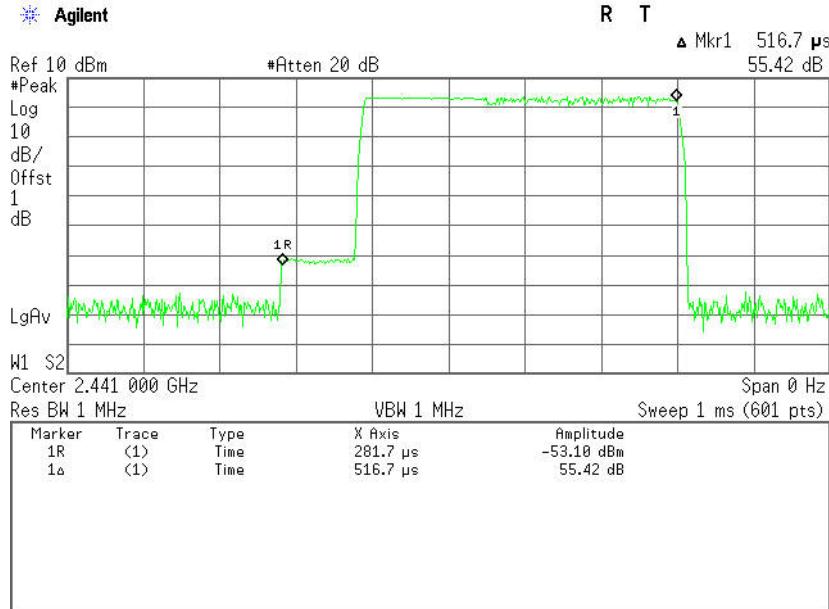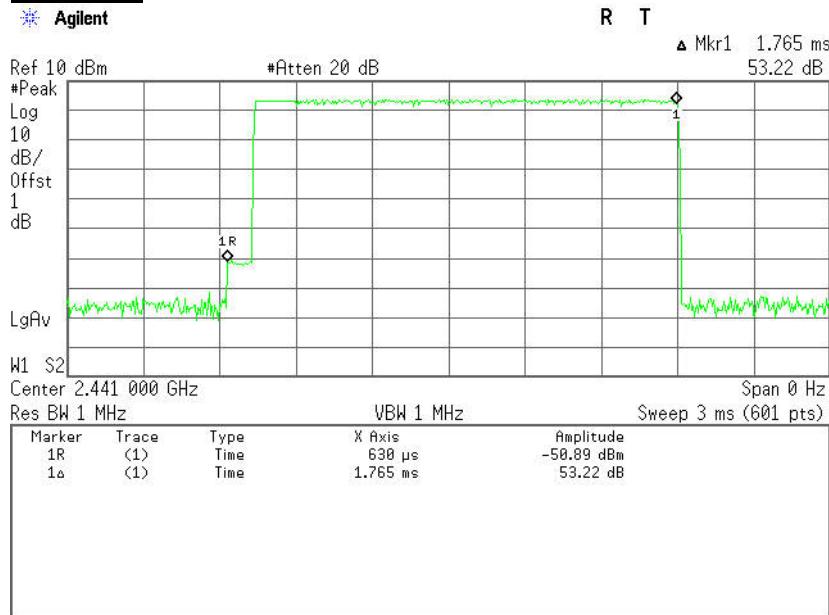
**Test Plot  
8DPSK****DH 1****(CH Mid)****DH 3****(CH Mid)**



## DH 5

### **(CH Mid)**

Agilent

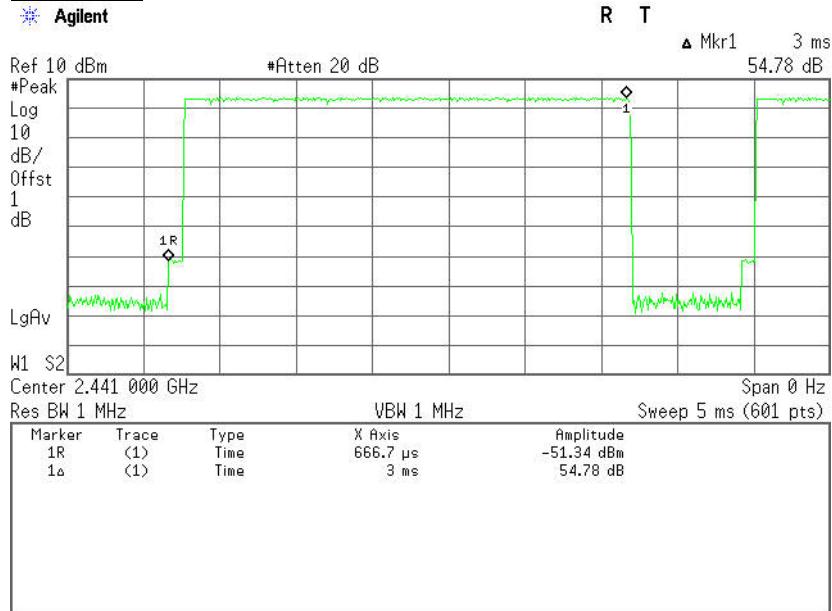



## 6.8 SPURIOUS EMISSIONS

### 6.8.1. CONDUCTED MEASUREMENT

#### LIMIT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014

*Remark: Each piece of equipment is scheduled for calibration once a year.*

#### Test Configuration



#### TEST PROCEDURE



Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.


#### TEST RESULTS



*No non-compliance noted*

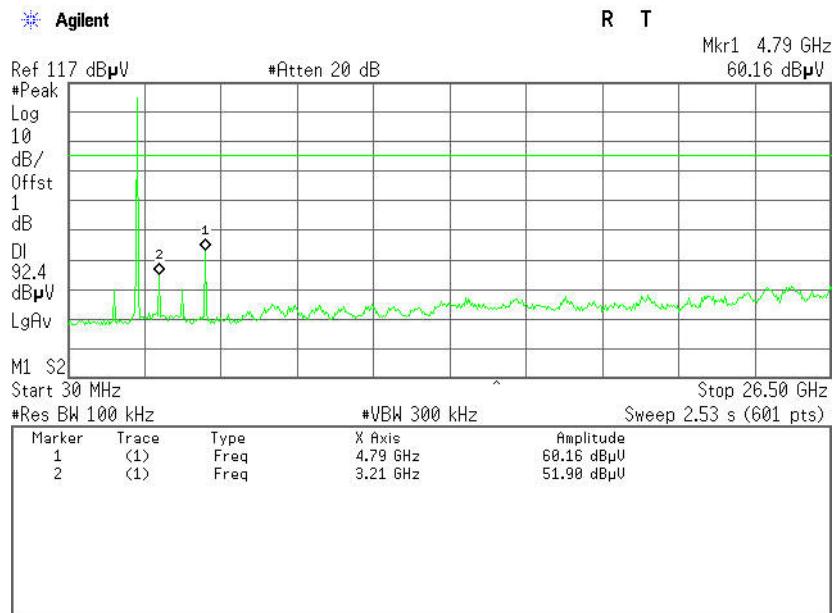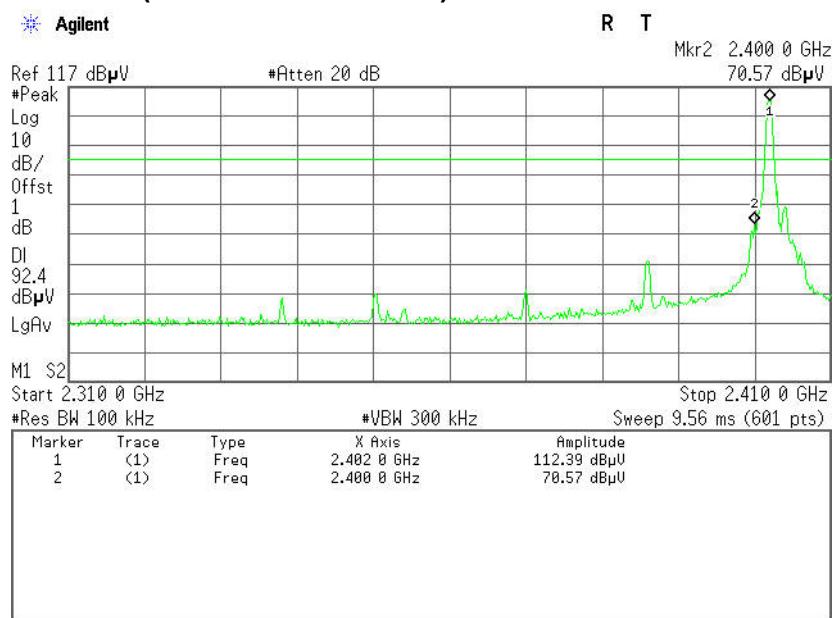**Test Plot ( GFSK )****CH Low (30MHz ~26.5GHz )****CH Low (2.31GHz ~2.41GHz )**



## CH Mid (30MHz ~ 26.5GHz)

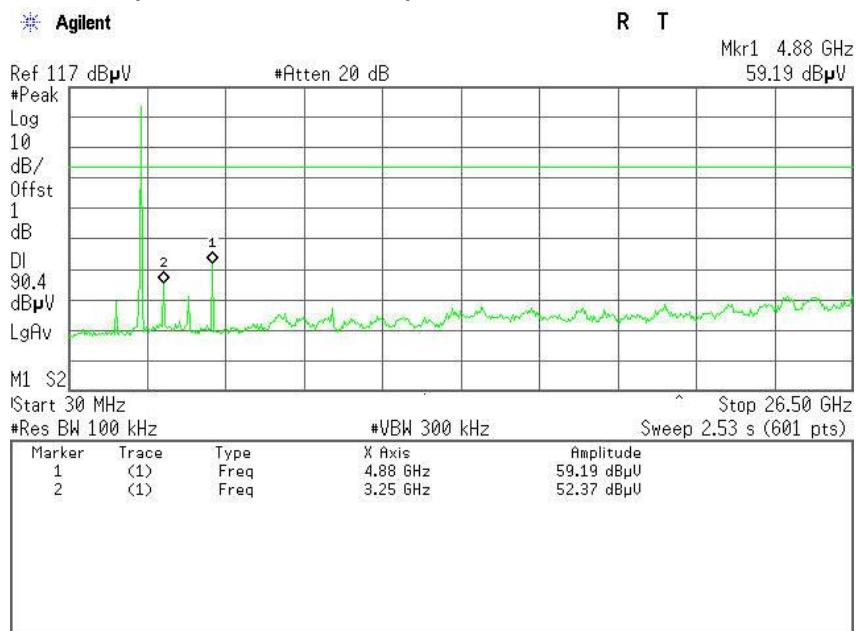


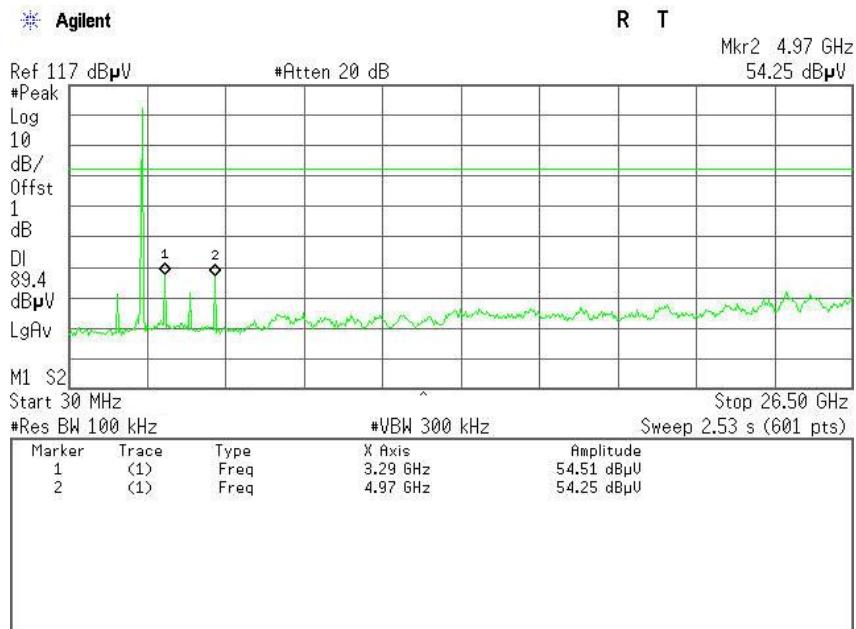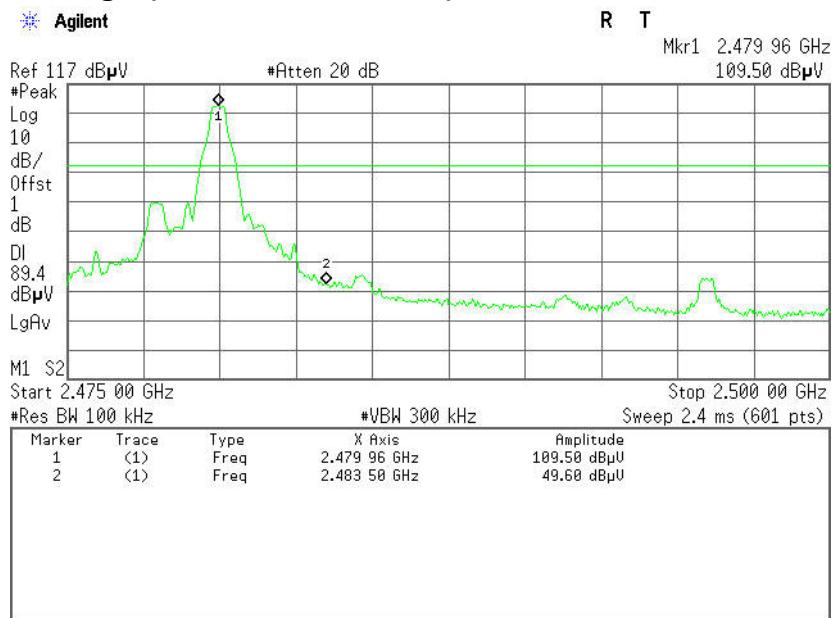**CH High (30MHz ~ 26.5GHz)****CH High (2.475GHz ~ 2.5GHz)**




## Test Plot (8DPSK )

### CH Low (30MHz ~26.5GHz )

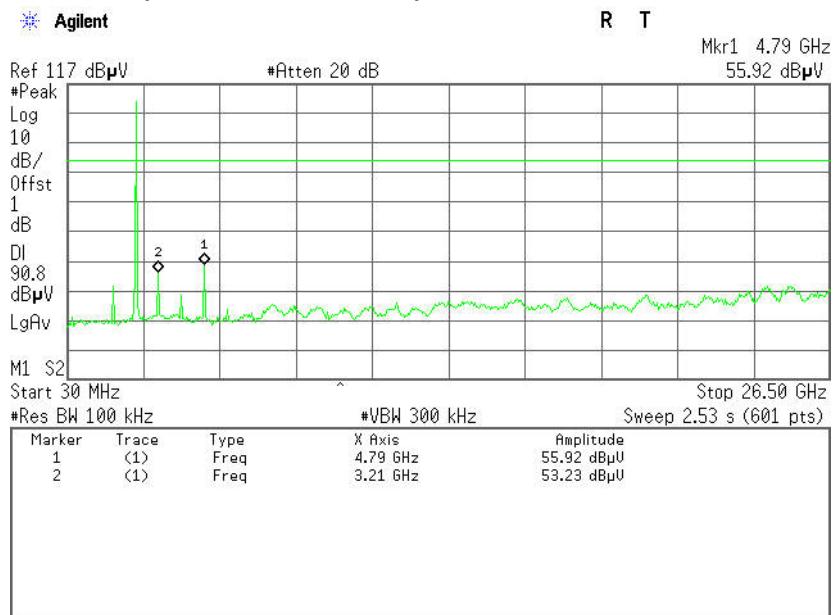




### CH Low (2.31GHz ~2.41GHz )

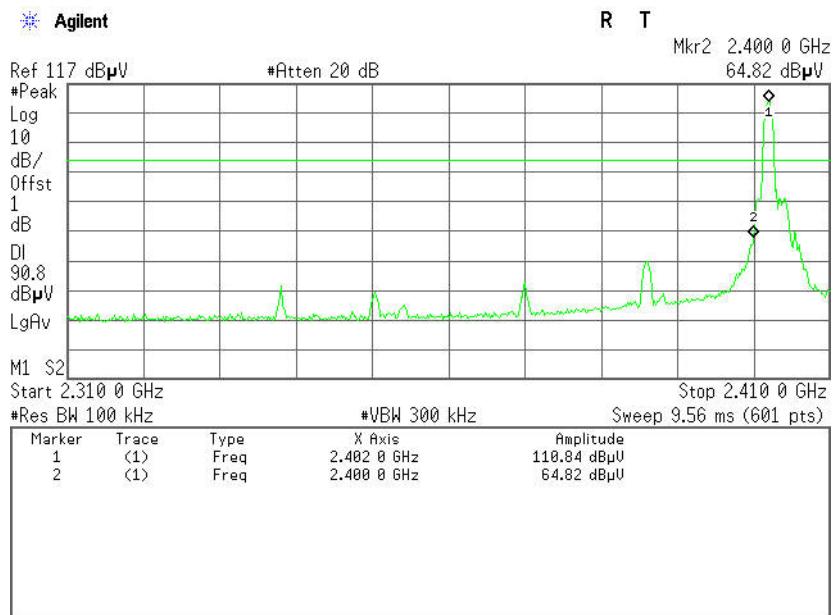



## CH Mid (30MHz ~ 26.5GHz)

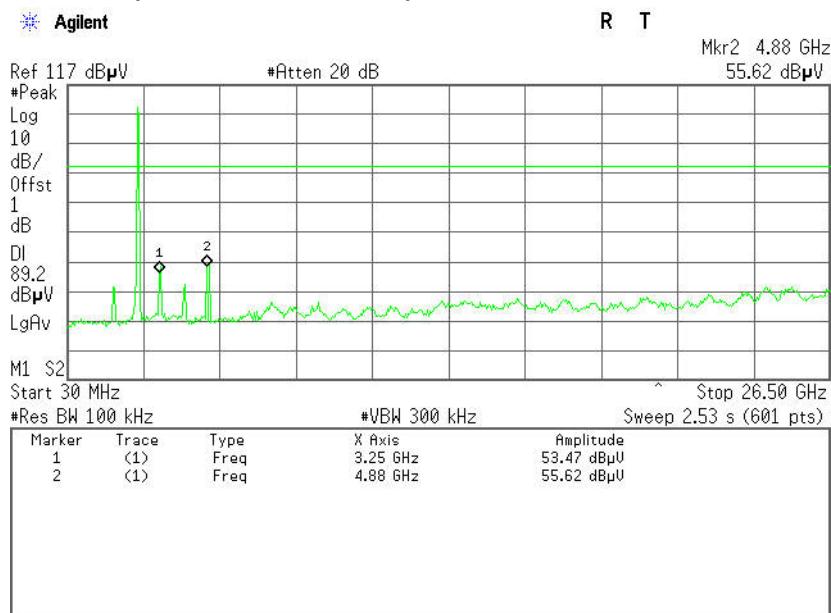

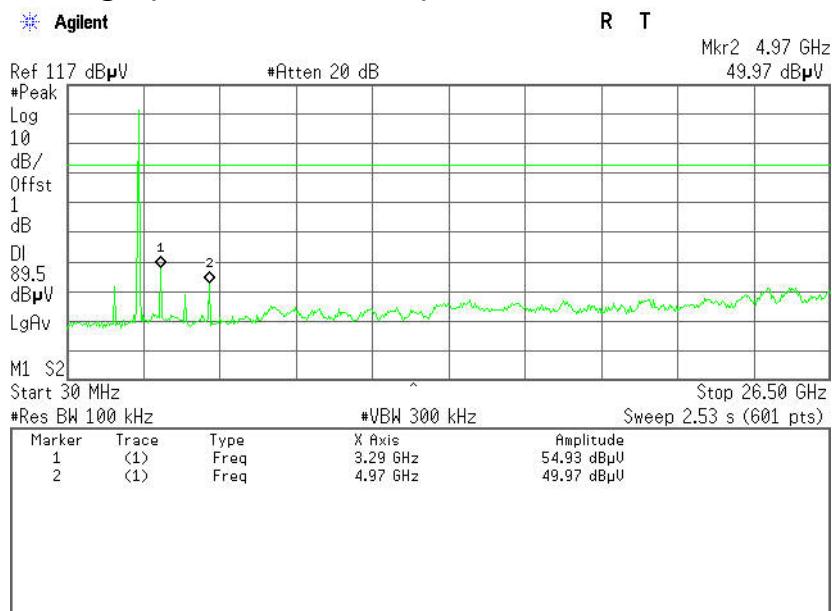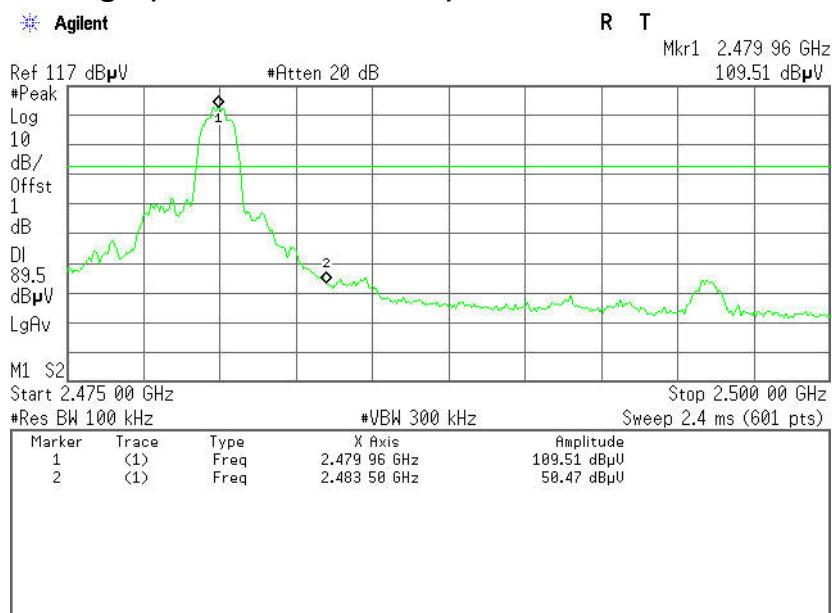**CH High (30MHz ~ 26.5GHz)****CH High (2.475GHz ~ 2.5GHz)**



## 6.8.2. RADIATED EMISSIONS

### LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

**Note:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54




## MEASUREMENT EQUIPMENT USED



Radiated Emission Test Site 966(2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
PSA Series Spectrum Analyzer	Agilent	E4446A	US44300399	03/09/2013	03/08/2014
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
Amplifier	MITEQ	AM-1604-3000	1123808	03/18/2013	03/18/2014
High Noise Amplifier	Agilent	8449B	3008A01838	03/18/2013	03/18/2014
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	06/21/2013	06/21/2014
Bilog Antenna	SCHAFFNER	CBL6143	5082	03/02/2013	03/01/2014
Horn Antenna	SCHWARZBECK	BBHA9120	D286	03/02/2013	03/01/2014
Loop Antenna	A, R, A	PLA-1030/B	1029	03/19/2013	03/18/2014
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	03/04/2013	03/03/2014
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Test S/W	FARAD			LZ-RF / CCS-SZ-3A2	

**Remark:** Each piece of equipment is scheduled for calibration once a year.

## TEST CONFIGURATION

### Below 30MHz

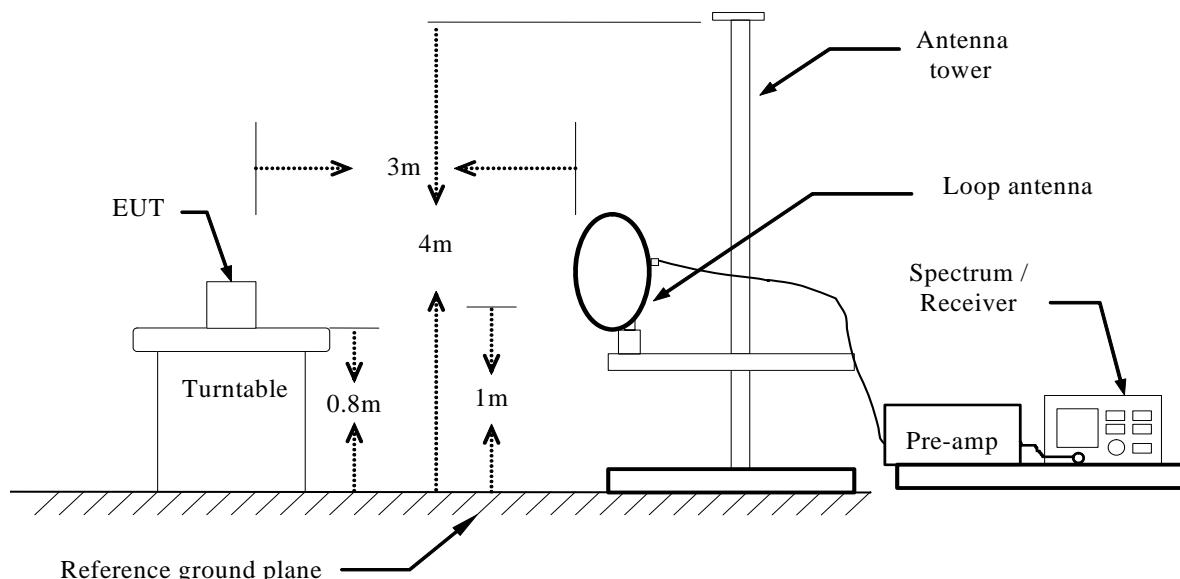

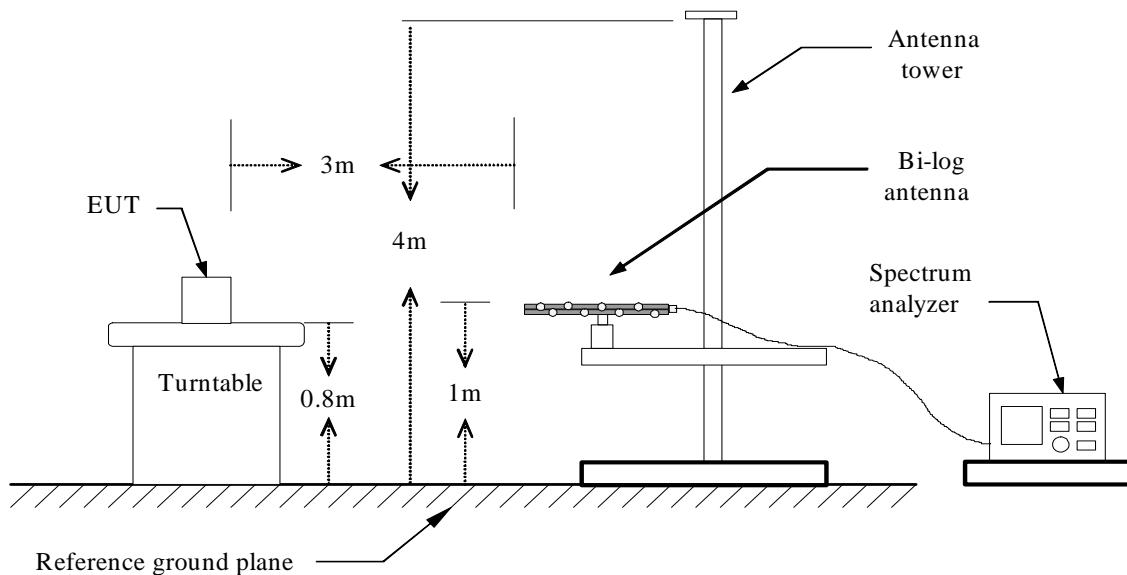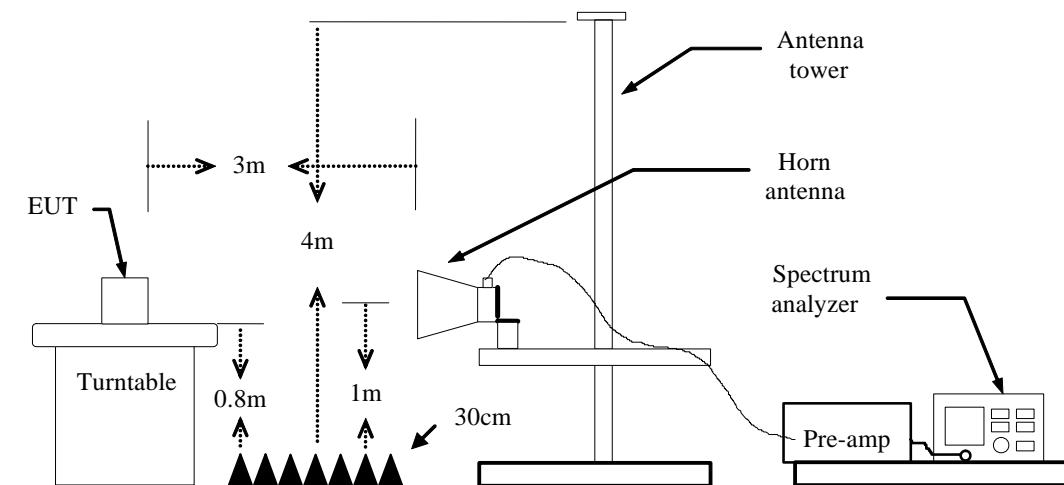**Below 1GHz****Above 1GHz**



## **TEST PROCEDURE**

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.



## TEST RESULTS

### Below 1 GHz

**Operation Mode:** TX

**Test Date:** October 29, 2013

**Temperature:** 24°C

**Tested by:** Mack Li

**Humidity:** 52% RH

**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
191.6666	48.59	-18.73	29.86	43.50	-13.64	V	QP
224.0000	46.89	-17.91	28.98	46.00	-17.02	V	QP
256.3333	48.36	-17.84	30.52	46.00	-15.48	V	QP
282.2000	49.55	-18.67	30.88	46.00	-15.12	V	QP
312.9166	44.42	-18.03	26.39	46.00	-19.61	V	QP
390.5167	40.98	-16.39	24.59	46.00	-21.41	V	QP
191.6667	58.19	-18.73	39.46	43.50	-4.04	H	QP
217.5333	57.84	-17.95	39.89	46.00	-6.11	H	QP
256.3333	61.61	-17.84	43.77	46.00	-2.23	H	QP
282.2000	61.34	-18.67	42.67	46.00	-3.33	H	QP
319.3833	60.37	-17.59	42.78	46.00	-3.22	H	QP
351.7167	53.49	-16.69	36.80	46.00	-9.20	H	QP

**\*\*Remark:** No emission found between lowest internal used/generated frequency to 30MHz.

**Notes:**

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30MHz to 1GHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 120kHz.
5. Frequency (MHz). = Emission frequency in MHz  
Reading (dB $\mu$ V) = Receiver reading  
Correction Factor(dB/m) = Antenna factor + Cable loss – Amplifier gain  
Actual FS (dB $\mu$ V/m) = Reading (dB $\mu$ V) + Corr. Factor (dB/m)  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin(dB) = Measured (dB $\mu$ V/m) – Limits (dB $\mu$ V/m)  
Antenna Pole(V/H) = Current carrying line of reading

**Above 1 GHz****GFSK****Operation Mode:** TX(CH Low)**Test Date:** October 29, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	51.00	-8.23	42.77	74.00	-31.23	V	peak
2005.0000	53.04	-11.22	41.82	74.00	-32.18	V	peak
2830.0000	47.04	-4.92	42.12	74.00	-31.88	V	peak
3640.0000	45.28	-2.91	42.37	74.00	-31.63	V	peak
3910.0000	45.84	-2.51	43.33	74.00	-30.67	V	peak
4810.0000	48.62	0.46	49.08	74.00	-24.92	V	peak
1495.0000	49.16	-8.23	40.93	74.00	-33.07	H	peak
2575.0000	47.49	-5.93	41.56	74.00	-32.44	H	peak
2800.0000	47.03	-5.04	41.99	74.00	-32.01	H	peak
3895.0000	45.63	-2.51	43.12	74.00	-30.88	H	peak
4810.0000	50.57	0.46	51.03	74.00	-22.97	H	peak
5245.0000	44.49	1.54	46.03	74.00	-27.97	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz
- Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading
- Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain
- Limit (dB $\mu$ V/m) = Limit stated in standard
- Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)
- Pk = Peak Reading
- AV. = Average Reading
- Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** October 29, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
2005.0000	54.14	-11.22	42.92	74.00	-31.08	V	peak
2785.0000	46.97	-5.10	41.87	74.00	-32.13	V	peak
3025.0000	46.71	-4.22	42.49	74.00	-31.51	V	peak
3460.0000	46.02	-3.70	42.32	74.00	-31.68	V	peak
3895.0000	46.19	-2.51	43.68	74.00	-30.32	V	peak
4885.0000	47.87	0.80	48.67	74.00	-25.33	V	peak
1105.0000	50.82	-9.49	41.33	74.00	-32.67	H	peak
1630.0000	50.43	-8.79	41.64	74.00	-32.36	H	peak
2575.0000	47.85	-5.93	41.92	74.00	-32.08	H	peak
2845.0000	47.91	-4.86	43.05	74.00	-30.95	H	peak
3895.0000	46.53	-2.51	44.02	74.00	-29.98	H	peak
4885.0000	49.81	0.80	50.61	74.00	-23.39	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:**

October 29, 2013

**Temperature:** 24 °C**Tested by:**

Mack Li

**Humidity:** 52% RH**Polarity:**

Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	50.38	-8.23	42.15	74.00	-31.85	V	peak
2005.0000	53.36	-11.22	42.14	74.00	-31.86	V	peak
2575.0000	48.20	-5.93	42.27	74.00	-31.73	V	peak
3580.0000	46.14	-3.11	43.03	74.00	-30.97	V	peak
4285.0000	45.28	-1.26	44.02	74.00	-29.98	V	peak
4960.0000	46.92	1.14	48.06	74.00	-25.94	V	peak
1300.0000	49.13	-8.28	40.85	74.00	-33.15	H	peak
1660.0000	50.87	-8.91	41.96	74.00	-32.04	H	peak
2590.0000	48.25	-5.87	42.38	74.00	-31.62	H	peak
3025.0000	46.61	-4.22	42.39	74.00	-31.61	H	peak
3760.0000	45.52	-2.59	42.93	74.00	-31.07	H	peak
4960.0000	47.03	1.14	48.17	74.00	-25.83	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss - Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**8DPSK****Operation Mode:** TX(CH Low)**Test Date:** October 29, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1195.0000	48.78	-8.77	40.01	74.00	-33.99	V	peak
1990.0000	53.70	-11.21	42.49	74.00	-31.51	V	peak
2560.0000	47.60	-5.98	41.62	74.00	-32.38	V	peak
3220.0000	46.18	-4.08	42.10	74.00	-31.90	V	peak
3835.0000	45.41	-2.50	42.91	74.00	-31.09	V	peak
5230.0000	46.10	1.55	47.65	74.00	-26.35	V	peak
1165.0000	49.49	-9.01	40.48	74.00	-33.52	H	peak
1495.0000	50.37	-8.23	42.14	74.00	-31.86	H	peak
2815.0000	47.25	-4.98	42.27	74.00	-31.73	H	peak
3775.0000	45.32	-2.55	42.77	74.00	-31.23	H	peak
4810.0000	44.57	0.46	45.03	74.00	-28.97	H	peak
5125.0000	44.27	1.46	45.73	74.00	-28.27	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH Mid)**Test Date:** October 29, 2013**Temperature:** 24°C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	50.72	-8.23	42.49	74.00	-31.51	V	peak
1990.0000	53.51	-11.21	42.30	74.00	-31.70	V	peak
2815.0000	47.16	-4.98	42.18	74.00	-31.82	V	peak
3880.0000	44.93	-2.51	42.42	74.00	-31.58	V	peak
4945.0000	44.93	1.07	46.00	74.00	-28.00	V	peak
5755.0000	43.48	2.59	46.07	74.00	-27.93	V	peak
<hr/>							
1630.0000	50.72	-8.79	41.93	74.00	-32.07	H	peak
2545.0000	47.93	-6.03	41.90	74.00	-32.10	H	peak
2845.0000	47.21	-4.86	42.35	74.00	-31.65	H	peak
3745.0000	45.78	-2.63	43.15	74.00	-30.85	H	peak
4300.0000	45.29	-1.20	44.09	74.00	-29.91	H	peak
4885.0000	44.72	0.80	45.52	74.00	-28.48	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m) - Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading

**Operation Mode:** TX(CH High)**Test Date:** January 4, 2013**Temperature:** 24 °C**Tested by:** Mack Li**Humidity:** 52% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dB $\mu$ V)	Correction Factor (dB/m)	Result (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1495.0000	50.31	-8.23	42.08	74.00	-31.92	V	peak
1990.0000	55.36	-11.21	44.15	74.00	-29.85	V	peak
2860.0000	47.55	-4.80	42.75	74.00	-31.25	V	peak
3760.0000	45.61	-2.59	43.02	74.00	-30.98	V	peak
4480.0000	44.42	-0.68	43.74	74.00	-30.26	V	peak
5200.0000	44.07	1.55	45.62	74.00	-28.38	V	peak
1435.0000	49.72	-7.98	41.74	74.00	-32.26	H	peak
1660.0000	50.56	-8.91	41.65	74.00	-32.35	H	peak
2605.0000	47.36	-5.82	41.54	74.00	-32.46	H	peak
3460.0000	46.35	-3.70	42.65	74.00	-31.35	H	peak
3775.0000	45.72	-2.55	43.17	74.00	-30.83	H	peak
4960.0000	44.69	1.14	45.83	74.00	-28.17	H	peak

**Notes:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Frequency (MHz) = Emission frequency in MHz  
Reading (dB $\mu$ V/m) = Uncorrected Analyzer / Receiver Reading  
Correction Factor (dB) = Antenna factor + Cable loss – Amplifier gain  
Limit (dB $\mu$ V/m) = Limit stated in standard  
Margin (dB) = Result (dB $\mu$ V/m)- Limit (dB $\mu$ V/m)  
Pk = Peak Reading  
AV. = Average Reading  
Remark = Mark Peak Reading or Average Reading



## 6.9 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50


Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

### MEASUREMENT EQUIPMENT USED

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	03/09/2013	03/08/2014
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	04/20/2013	04/19/2014
LISN	EMCO	3825/2	8901-1459	03/09/2013	03/08/2014
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	03/04/2013	03/03/2014
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

*Remark: Each piece of equipment is scheduled for calibration once a year.*

## TEST CONFIGURATION

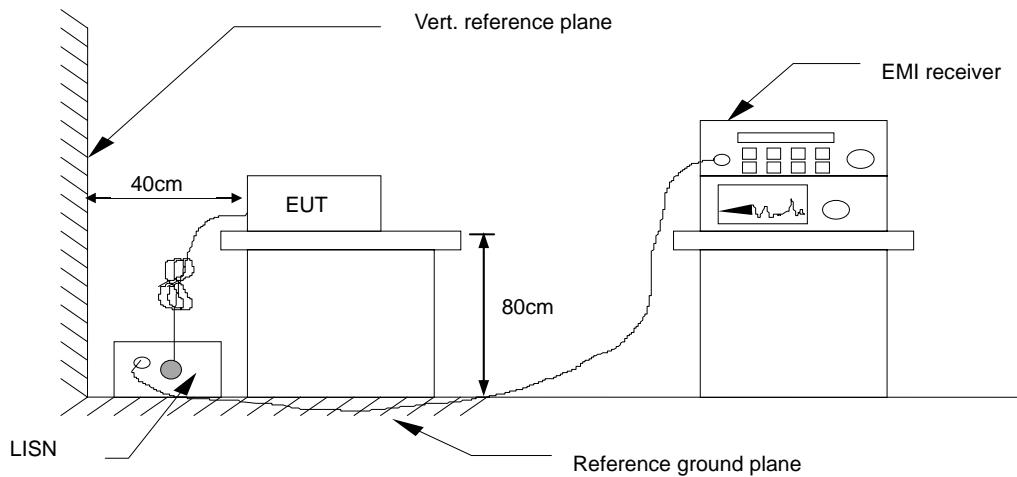

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

## TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

## TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**

**Operation Mode:** Mode 2      **Test Date:** November 4, 2013  
**Temperature:** 22°C      **Humidity:** 45% RH  
**Tested by:** Mack Li

Frequency (MHz)	QuasiPeak Reading (dBuV)	Average Reading (dBuV)	Correction Factor (dB)	QuasiPeak Result (dBuV)	Average Result (dBuV)	QuasiPeak Limit (dBuV)	Average Limit (dBuV)	QuasiPeak Margin (dB)	Average Margin (dB)	Line (L1/L2)
0.4220	37.51	25.14	9.68	47.19	34.82	57.41	47.41	-10.22	-12.59	L1
0.6780	29.11	21.69	9.78	38.89	31.47	56.00	46.00	-17.11	-14.53	L1
1.2620	21.98	11.95	9.72	31.70	21.67	56.00	46.00	-24.30	-24.33	L1
3.4140	21.24	14.74	9.70	30.94	24.44	56.00	46.00	-25.06	-21.56	L1
5.9300	21.23	10.81	9.73	30.96	20.54	60.00	50.00	-29.04	-29.46	L1
18.2939	21.35	3.62	9.85	31.20	13.47	60.00	50.00	-28.80	-36.53	L1
<hr/>										
0.4220	34.84	23.49	9.71	44.55	33.20	57.41	47.41	-12.86	-14.21	L2
0.6780	27.30	19.16	9.69	36.99	28.85	56.00	46.00	-19.01	-17.15	L2
0.8260	23.00	14.48	9.74	32.74	24.22	56.00	46.00	-23.26	-21.78	L2
1.7460	18.80	12.25	9.75	28.55	22.00	56.00	46.00	-27.45	-24.00	L2
2.9100	19.89	10.13	9.75	29.64	19.88	56.00	46.00	-26.36	-26.12	L2
18.7020	22.30	3.71	9.72	32.02	13.43	60.00	50.00	-27.98	-36.57	L2

**Note:**

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Peak detector, Quasi-peak detector and average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit.
4. The IF bandwidth of SPA between 0.15MHz to 30MHz was 10kHz; the IF bandwidth of Test Receiver between 0.15MHz to 30MHz was 9kHz;
5. L1= Line One (Live Line)/ L2= Line Two (Neutral Line)