

APPROVAL SHEET

MESSRS. (주)아이디로

ITEM : Ceramic Patch Antenna




PART NAME : MPAC34SC920PS-TA

MODEL NAME :

REVISION : 0

ISSUE DATE : September 18, 2018

LAST SAVED : September 18, 2018

BUYER : (주)아이디로	SUPPLIER : MAC technologies Inc.		
ACKNOWLEDGED BY	DRAWN	CHECKED	APPROVED
			

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

Revision Log

This log identifies those portions of this document, which have been revised since the original issue and the date of each revision.

Rev.	Authorizing Document	Summary of Changes to Previous Version	Date	Approval

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

Table of Contents

1. Scope	4
2. Part Name Information	4
3. Composition and Materials	4
4. Mechanical Dimensions	5
5. Electrical Specifications	6
6. Test Fixture	6
7. S11 Measurement Data	7
8. Environmental Specifications	8
9. Radiation Patterns	9-10
10. Remark	11

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

1. Scope.

This specification covers the characteristics of the ceramic patch antenna element for the ISM band.

2. Part Name Information.

Part Name : M PA C 34S C 920 PS - TA

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① : MAC technologies Inc.

② : Patch Antenna

③ : Hole Location - Center type (D : Diagonal type)

④ : 34 mm Square (Size)

⑤ : 4 mm Thickness (A : 2 mm, B : 3 mm, C : 4 mm, D : 5 mm ...)

⑥ : Center Frequency : 920 MHz (± 2 MHz)

⑦ : Ground Plane - P : 40 x 40 PCB Ground Plane

PS : 40 x 40 PCB Ground Plane Special Characteristic Graph

⑧ : Assembly - PCB & Cable

3. Composition and Materials.

3-1. Ceramic Substrate : $\epsilon_r = 37.0 \pm 1.5$

3-2. Electrode Plating : Silver


3-3. Terminal pin : Brass with Silver coating

3-4. Antenna Color : Ceramics antenna color alteration is possible


Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

4. Mechanical Dimensions. (unit : mm)

4-1. Antenna Element (The color of ceramic substrates can be changed.)

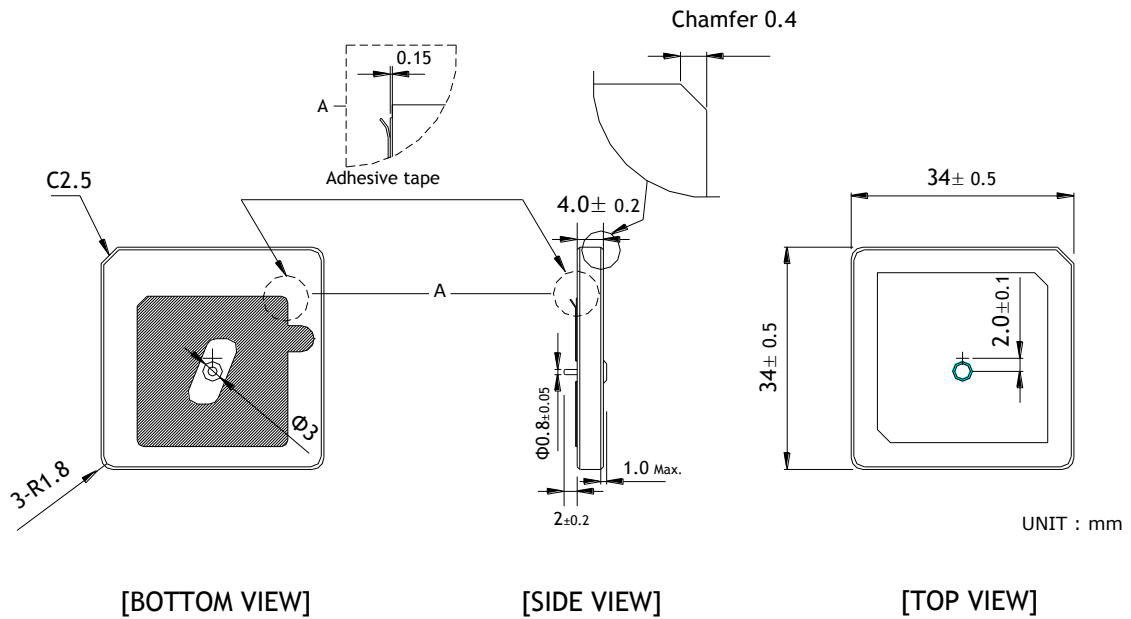

4-2. Cable Ass'y

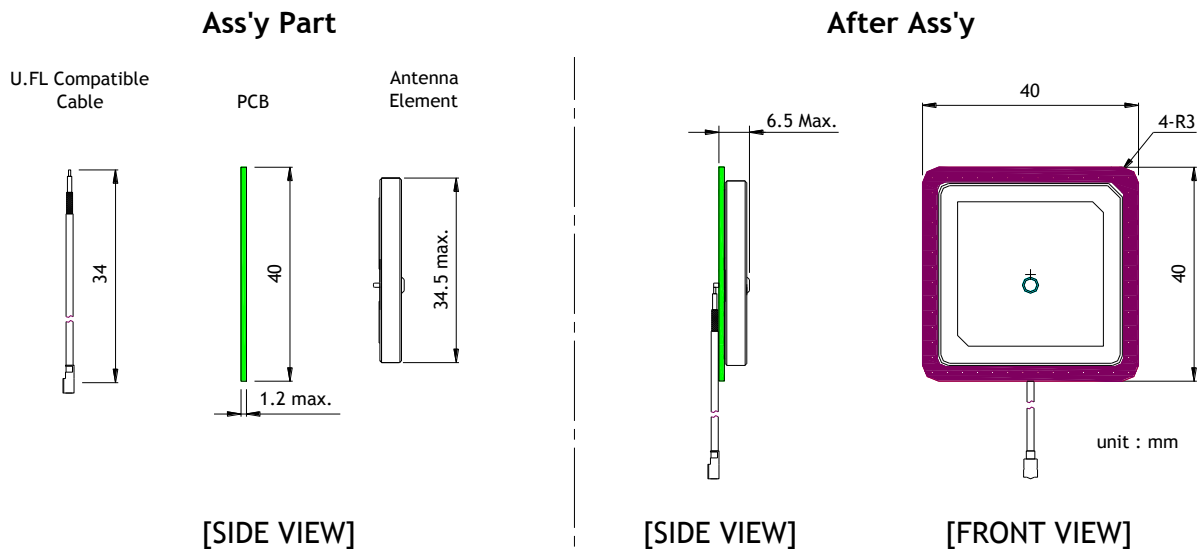


Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

5. Electrical Specifications.

NO.	Parameter	Spec.			Unit	Remark
		Ant. Element	PCB & Cable Ass'y	Set Ass'y		
1	Center Frequency	-	920.2 ± 2	919.0 ± 2	MHz	
2	Peak Gain	typ.	typ.	-2.0 typ.	dBiL	@ 919 MHz
		typ.	typ.	0.0 typ.	dBic	
3	Polarization	RHCP	RHCP	RHCP		
4	Beam Width	typ.	typ.	100 typ.	Deg.	@ -3 dB B.W
5	Band Width	typ.	typ.	4 typ.	MHz	@ -10 dB R.L
6	VSWR	max.	max.	2.0 : 1 max.	Ratio	
7	Impedance	50	50	50	Ohm	


6. Test Fixture.

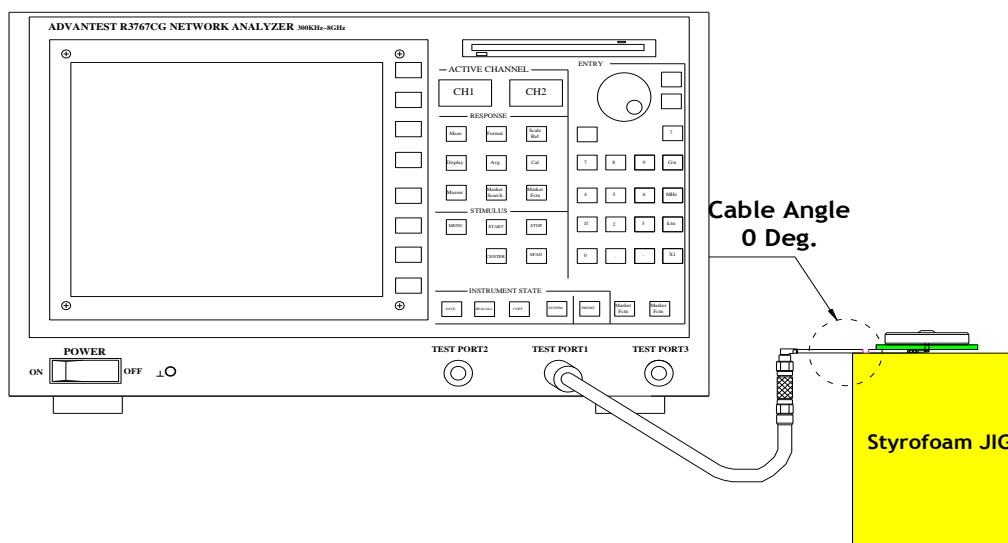


Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

7. S11 Measurement Data.

7-1. Cable Ass'y

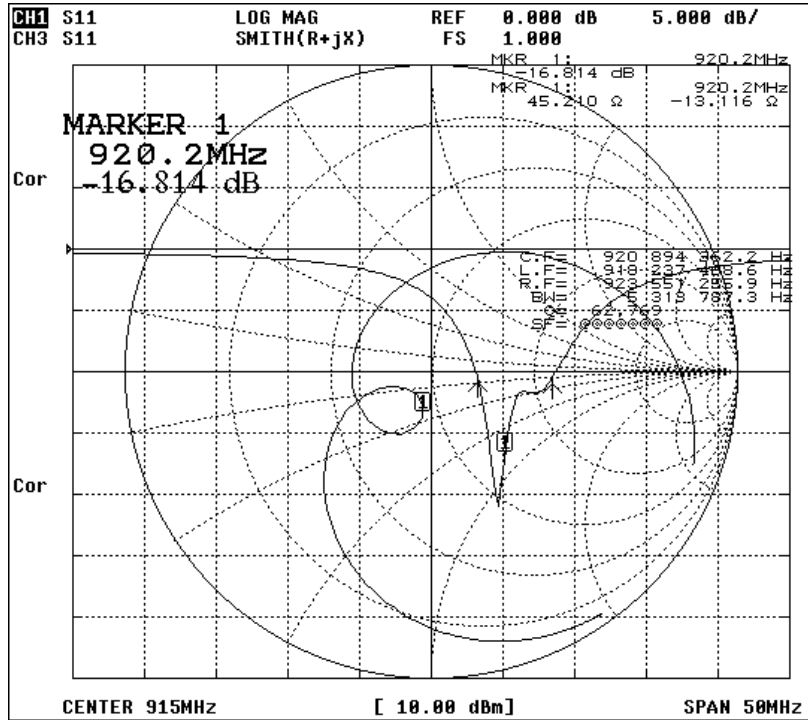

7-2. Set Ass'y

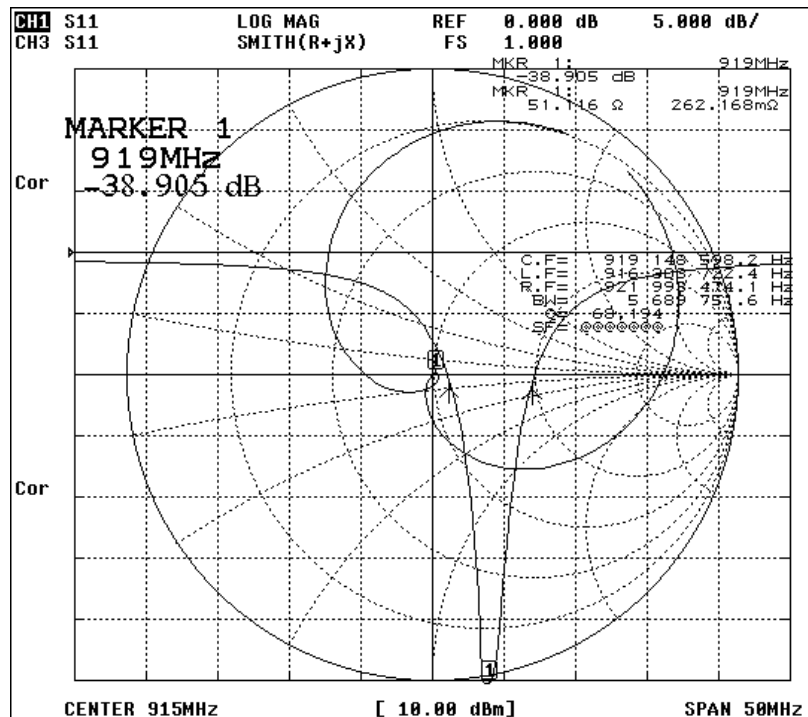

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

8. Environmental Specifications.

** Operation conditions : Temperature range : -30 °C ~ +85 °C

Humidity range : 45 ~ 85 % RH

The device should satisfy the electrical characteristics specified in paragraph 5 after the following tests.

Measurements should be done after putting in the typical condition (20-30 °C / 55-75 % RH) for 2 hours minimum.

8-1. Temperature Characteristics

The device should satisfy the electrical characteristics specified in paragraph 5 at the temperature range of -30 °C ~ +85 °C.

8-2. Heat Proof

The device should satisfy the electrical characteristics specified in paragraph 5 after exposed to the temperature 85 ± 2 °C for 72 hours.

8-3. Cold Proof

The device should satisfy the electrical characteristics specified in paragraph 5 after exposed to the temperature -30 ± 2 °C for 72 hours.

8-4. Moisture Proof

The device should satisfy the electrical characteristics specified in paragraph 5 after exposed to the temperature 40 ± 2 °C and the humidity 95 % RH for 72 hours.


8-5. Vibration

The device should satisfy the electrical characteristics specified in paragraph 5 after applied to the vibration of 10 to 50 Hz with amplitude of 1.5 mm & sw of 1min for 2 hours each of x, y and z directions.


Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

9. Radiation Patterns after Set Ass'y (Test date : June 19, 2018)

9-1. H-pol (Frequency 917.0, 919.0, 921.0, 923.0 MHz)

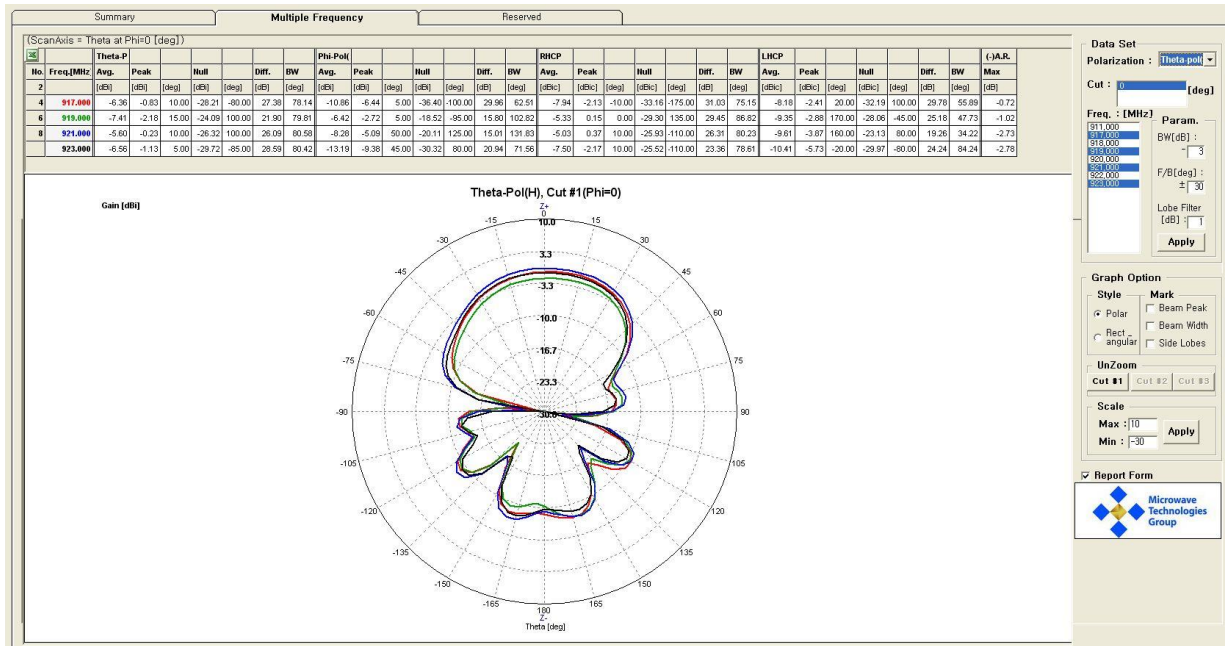

9-2. V-pol (Frequency 917.0, 919.0, 921.0, 923.0 MHz)

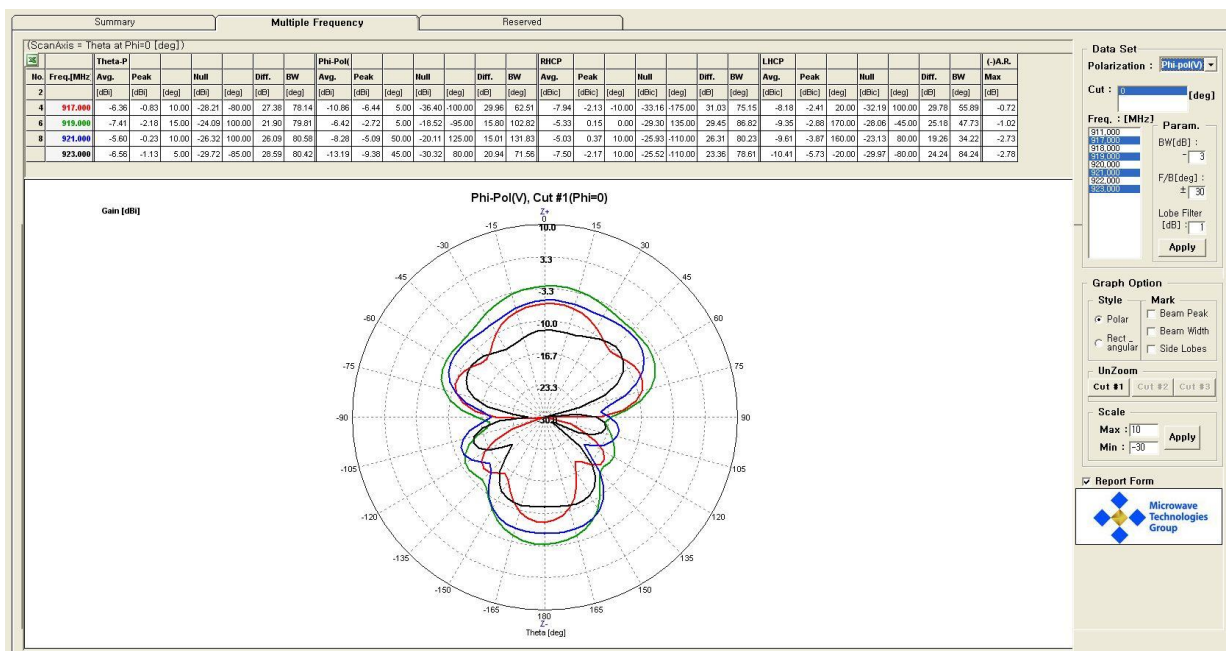

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

9-3. Gain Test Data

Source Antenna Polarization	Frequency			
	917.0 MHz	919.0 MHz	921.0 MHz	923.0 MHz
H-pol (dBiL)	-0.83	-2.18	-0.23	-1.13
V-pol (dBiL)	-6.44	-2.72	-5.09	-9.38
RHCP (dBic)	-2.13	0.15	0.37	-2.17

9-4. List of Equipments (MAC technologies Inc.)

NO	Equipments	Maker	Model No.	S/N	Calibration Date	Specification	Note
1	Anechoic Chamber	MTG	Mobile Chamber		N/A	4.0 m X 2.5 m X 2.5 m (0.4 ~ 3 GHz)	
2	Network Analyzer	Agilent	8753ES	US39173213	16/08/23	30 KHz ~ 6 GHz	
3	Dual-Polarization Horn Antenna with RF Switch	MTG	QRH-004060/ RSW-001060			0.4 MHz ~ 6 GHz	Source
4	Calibration Antenna	Schwarzbeck Mess - Elektronik	BBHA 9120 A	1201	10/04/30	0.7 MHz ~ 3 GHz	Reference
5	Absorber Installation	EMERSON & CUMING	SABS-003 18"			Reflectivity : -25 dB @ 0.8 GHz -30 dB @ 1.0 GHz	

Title	RFID Ceramic Patch Ant. Specification
Document Number	MACQM730-06-18010
Revision & Date	September 18, 2018
Issue Date	September 18, 2018

10. Remark.

- If there is any doubt in this specification and product, it should be resolved between made and manufacture.
- Don't handling by unarmed.
- No responsibility is assumed by us for any consequence resulting from any wrong or improper use or operation, etc. of the product.
- No part of the contents contained herein may be reprinted or re-produced without our prior permission.