

Conducted test results

No.1-1358-20-04-03_TR1-A201-R1

December 12, 2024

Test Standard(s)	FCC 15.247 - NI FCC 15.247, ISSED RSS247 - NI NA - NI
------------------	---

This document is electronically signed and valid without handwritten signature.
Public keys for verification of the electronic signatures can be requested at the testing laboratory.

Authorized

Michael Dorongovski
Lab Manager
Radio Labs

Table of Content

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	3
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	6
FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps	9
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	12
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	17
FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps	22
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	27
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	31
FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps	35
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	39
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	42
FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps	45
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	48
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	52
FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps	56
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	60
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	64
NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps	68

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 13:50:06
Ambit temp [°C] humidity [rel%]	31.0 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.02	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.02 8.96 5
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

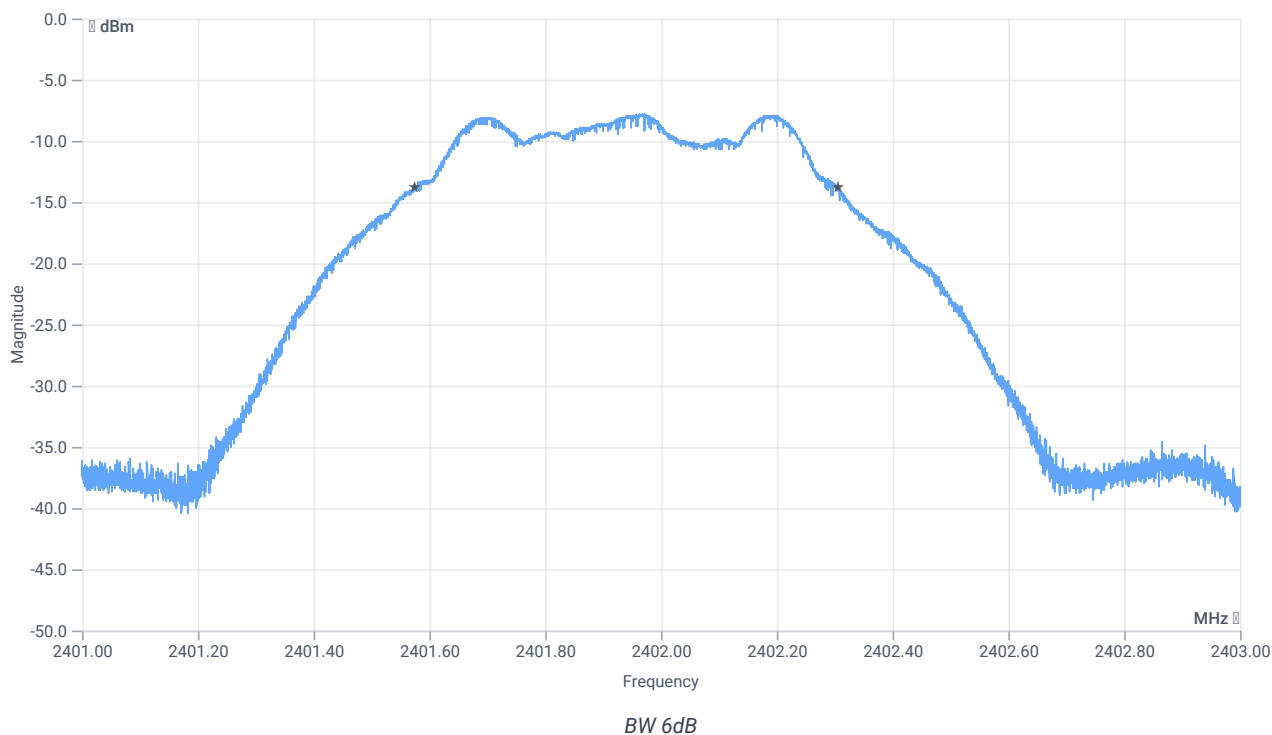

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	730	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:19:47
Ambit temp [°C] humidity [rel%]	31.3 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.54	dBm	INFO
Ref. frequency	---	---	2440.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.54 9 5
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

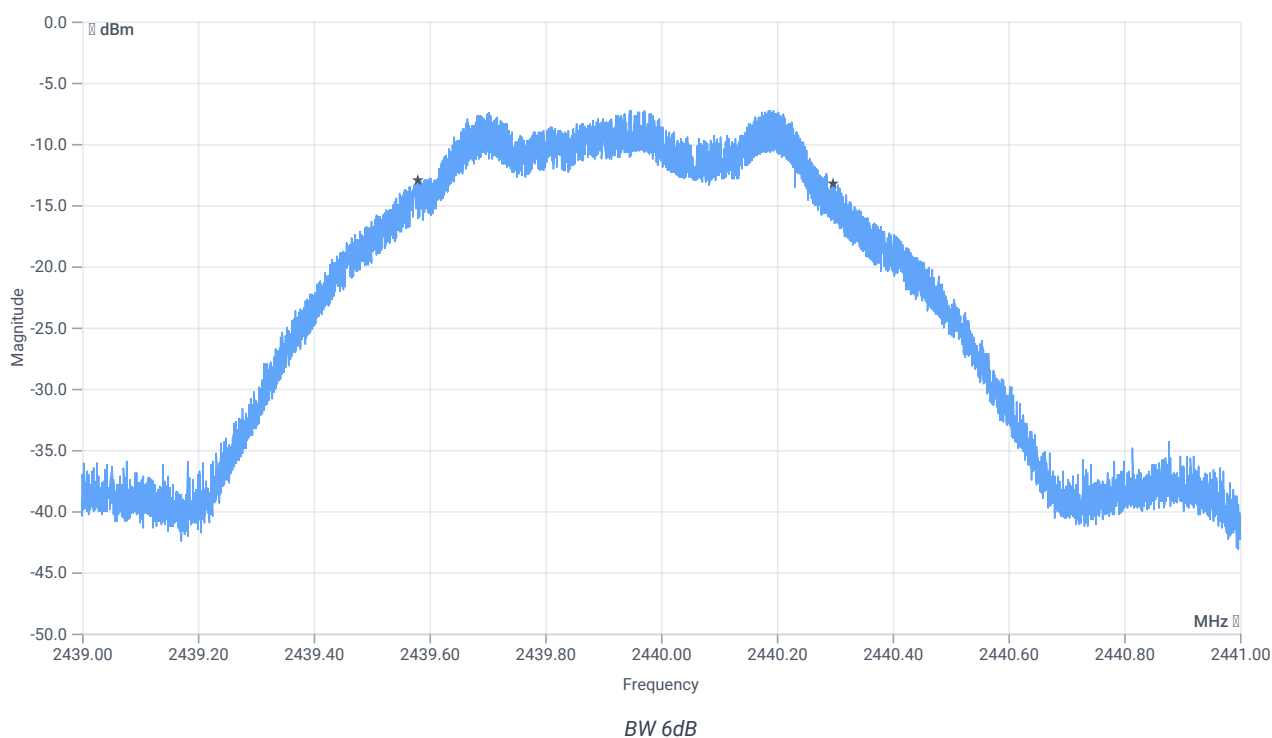

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	718	kHz	PASS

Verdict

PASS

FCC 15.247 # Bandwidth 6dB DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:37:59
Ambit temp [°C] humidity [rel%]	31.5 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	
Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG

Test Parameter

Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.88	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.88 9.1 5
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

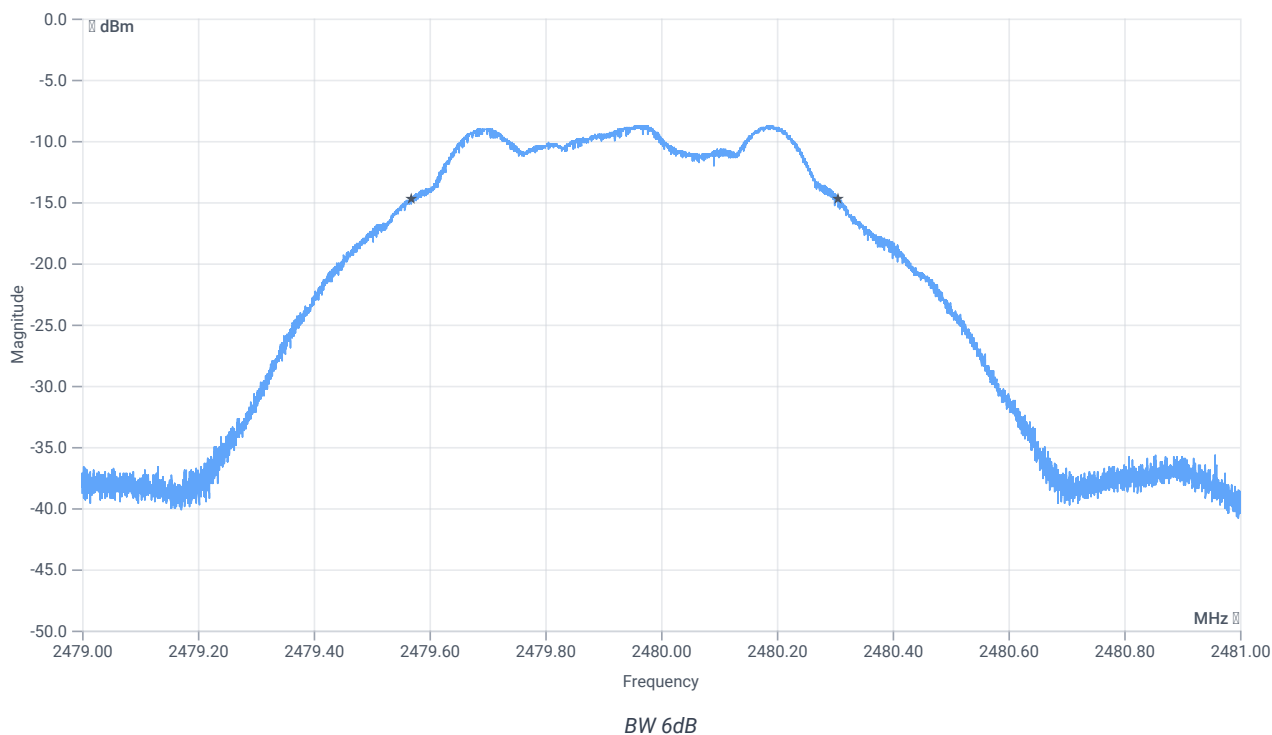

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	500	---	737	kHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	25.07.2024 13:51:20
Ambit temp [°C] humidity [rel%]	31.0 34
System version	5.0.7.3
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.99	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.99 8.96 5
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

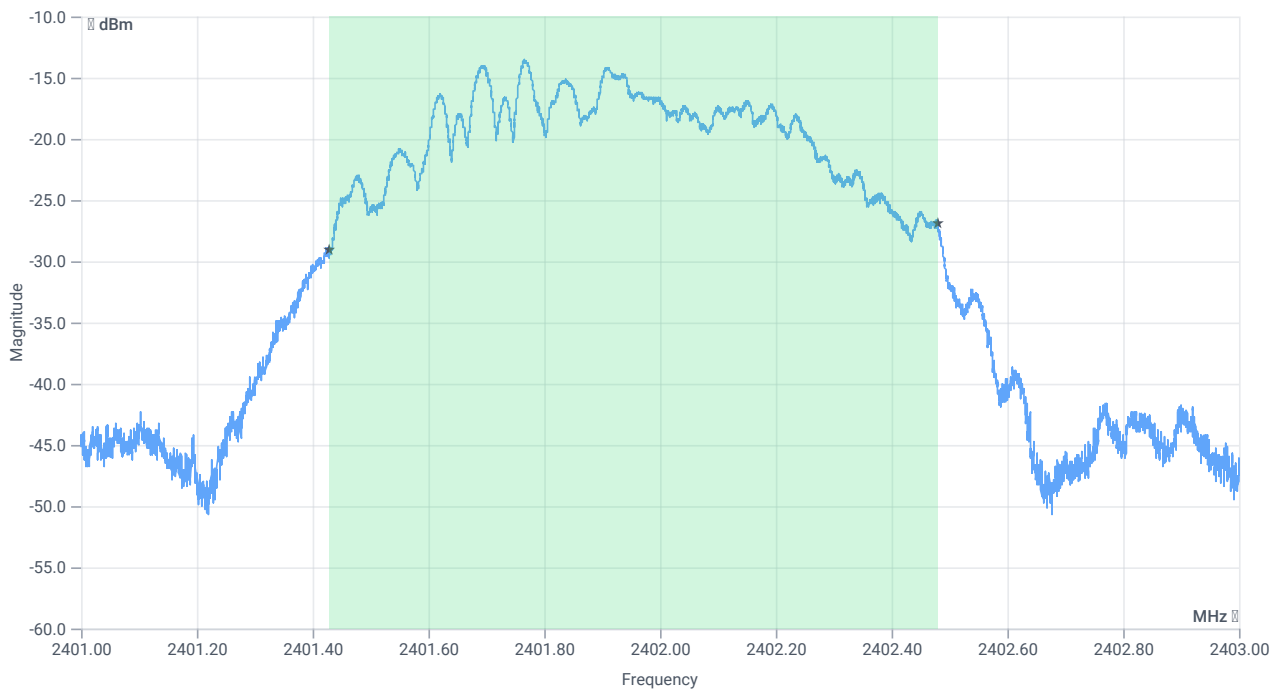


BW 99PCT

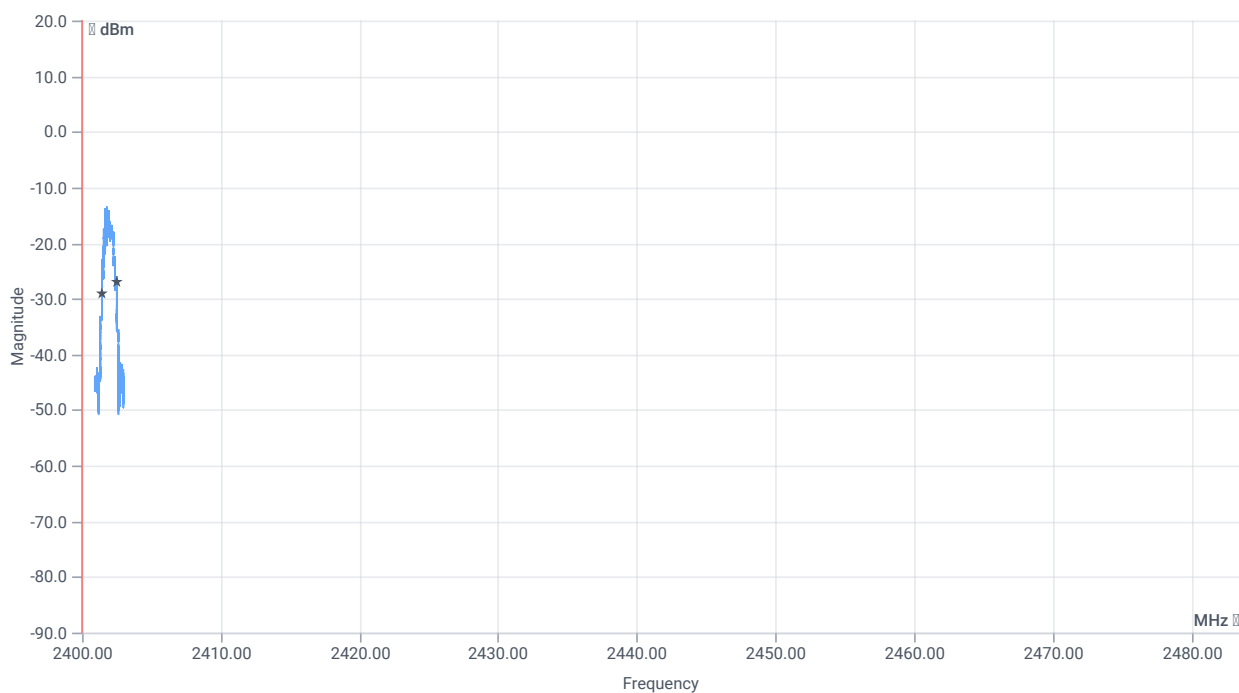


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1052.000	kHz	INFO
T1 99%	2400.000000	---	2401.4273	MHz	PASS
T2 99%	---	2483.500000	2402.4792	MHz	PASS

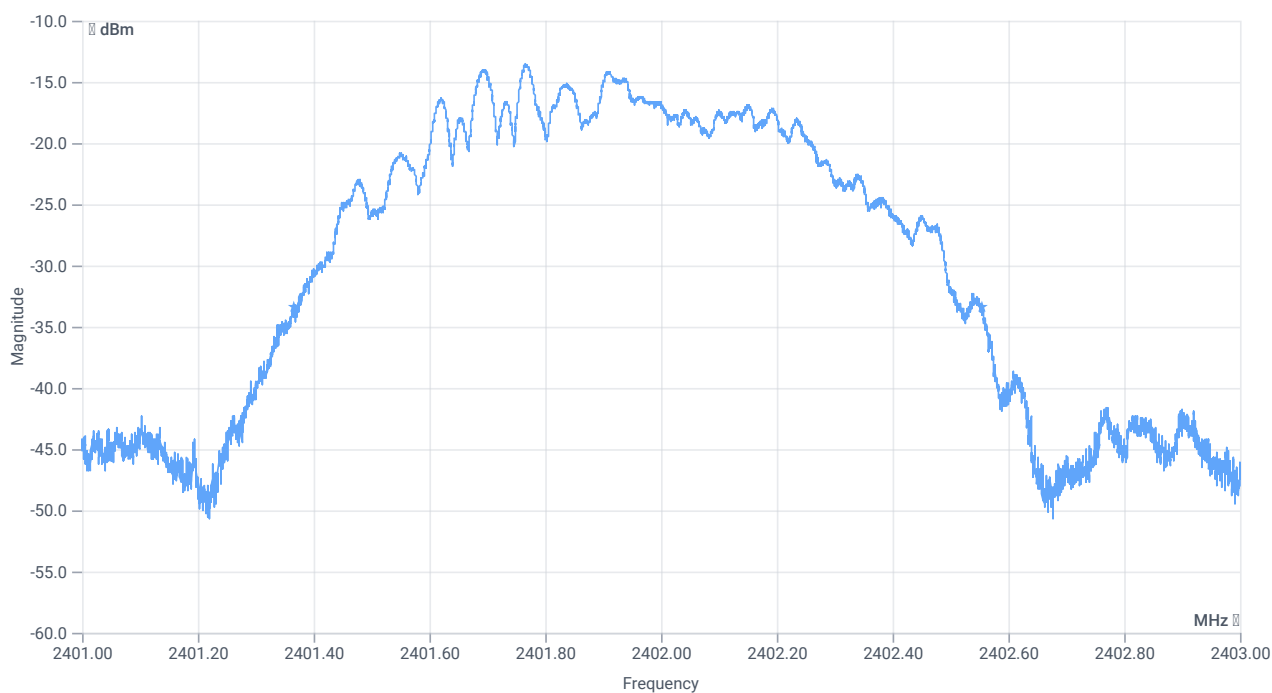

BW 20dB

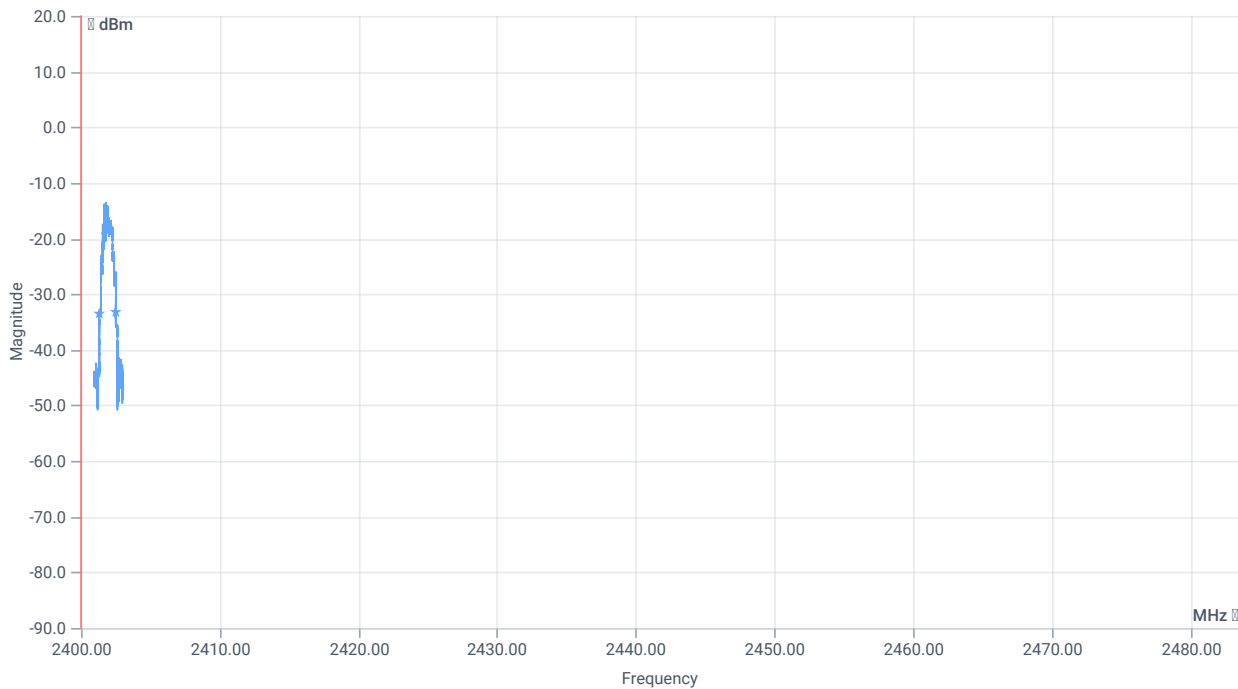

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1189	kHz	INFO
T1 20dB	2400.000000	---	2401.3652	MHz	PASS
T2 20dB	---	2483.500000	2402.5538	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	25.07.2024 14:21:02
Ambit temp [°C] humidity [rel%]	31.3 34
System version	5.0.7.3
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.04	dBm	INFO
Ref. frequency	---	---	2439.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.04 9 5
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

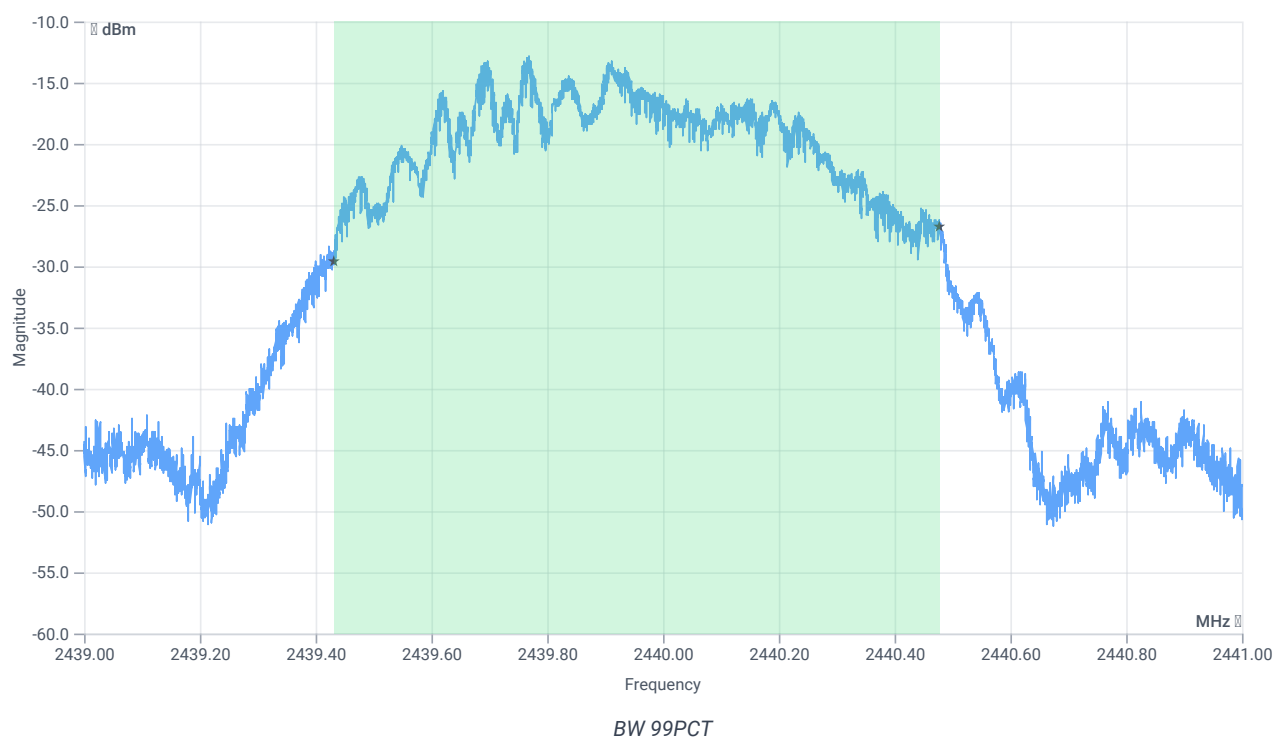


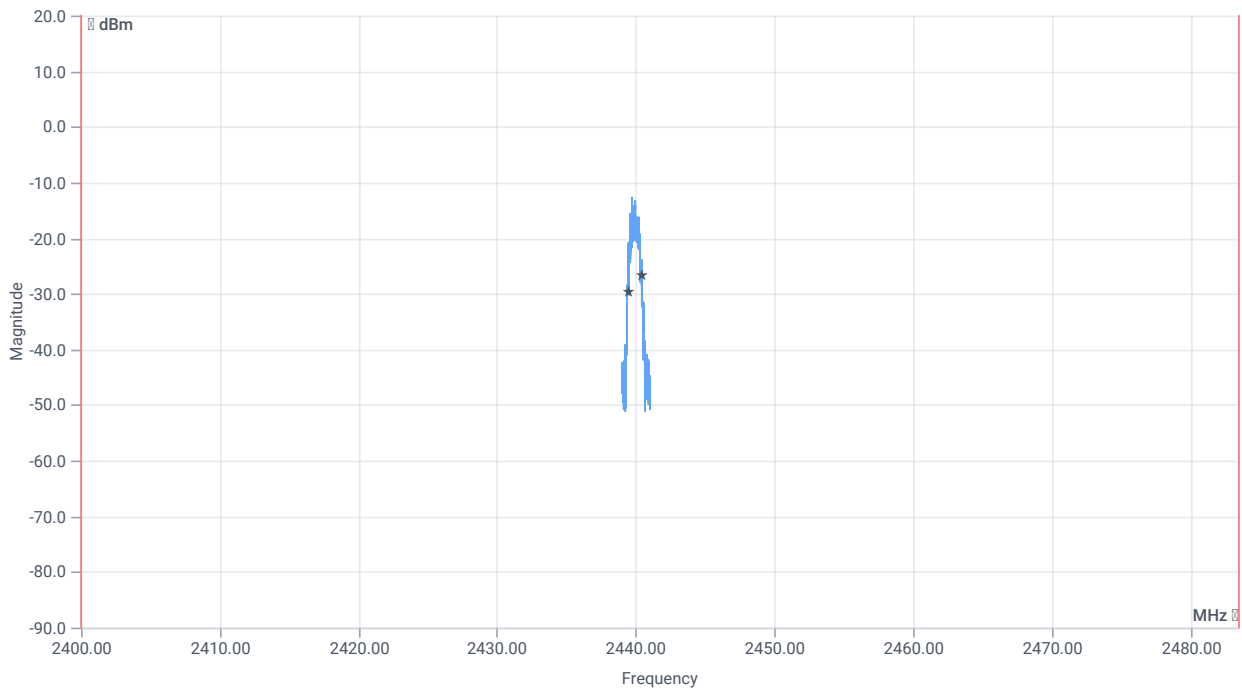


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1046.000	kHz	INFO
T1 99%	2400.000000	---	2439.4311	MHz	PASS
T2 99%	---	2483.500000	2440.4772	MHz	PASS

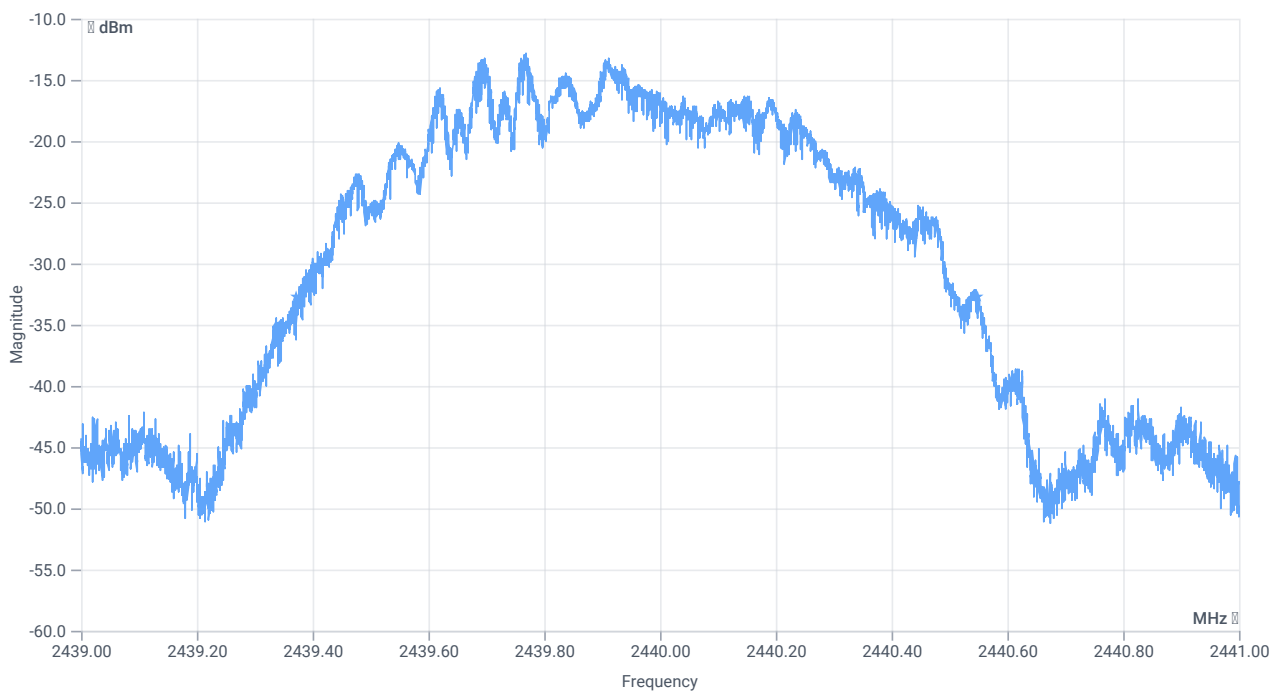

BW 20dB

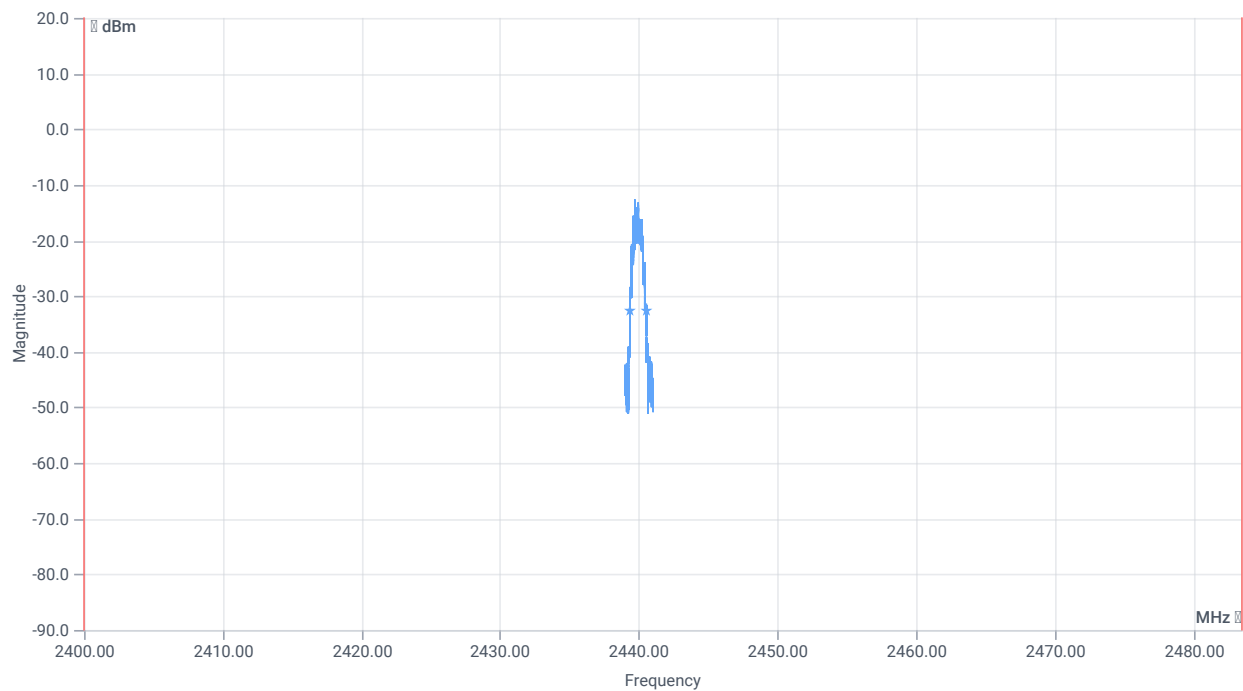

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1178	kHz	INFO
T1 20dB	2400.000000	---	2439.3702	MHz	PASS
T2 20dB	---	2483.500000	2440.5486	MHz	PASS

Verdict

PASS

FCC 15.247, ISED RSS247 # Bandwidth 99PCT and 20dB ~ BT LE 1 Msps

References

TC start	25.07.2024 14:39:13
Ambit temp [°C] humidity [rel%]	31.5 34
System version	5.0.7.3
Standard Version	FCC 15.247, ISED RSS247 NI
Method	
Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.93	dBm	INFO
Ref. frequency	---	---	2479.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.93 9.1 5
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

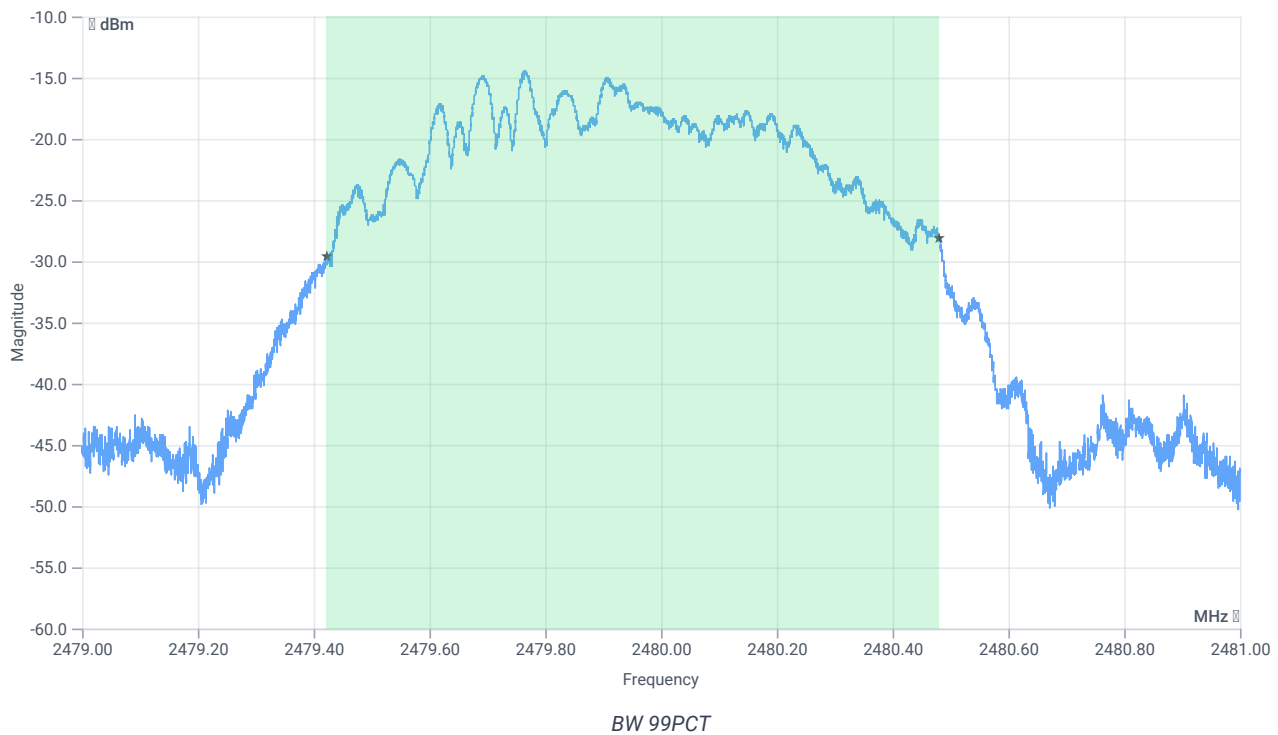


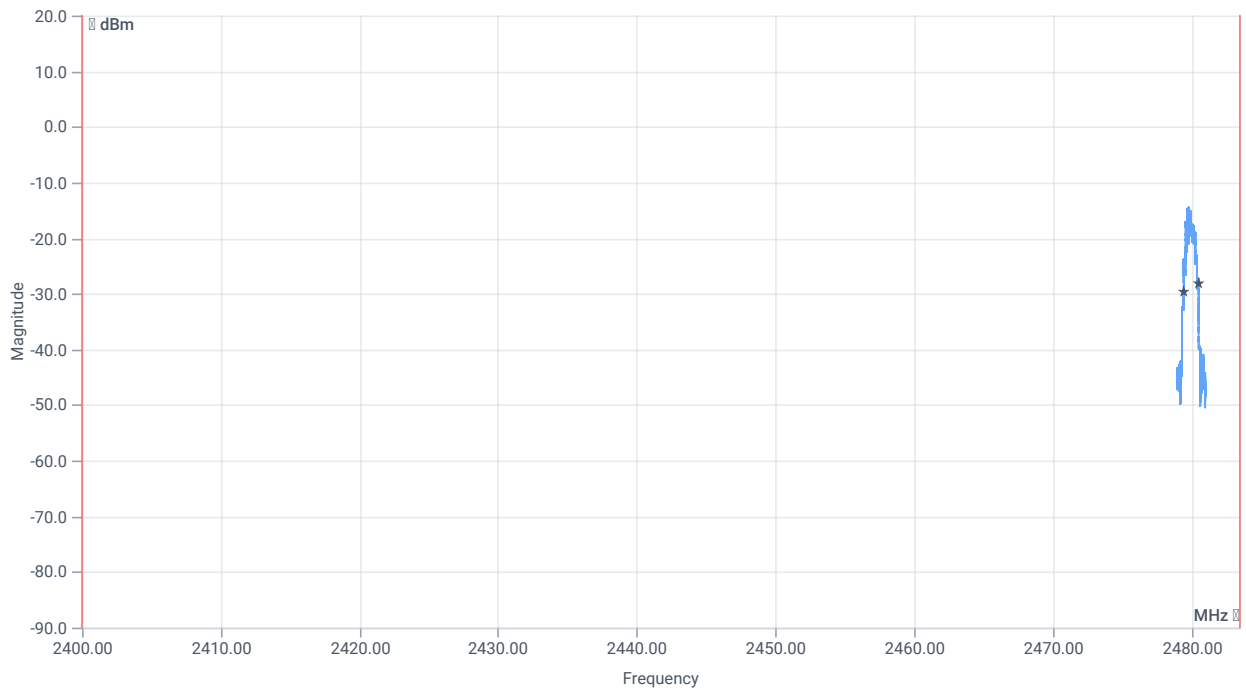


BW within Band 99PCT

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 99%	---	---	1058.000	kHz	INFO
T1 99%	2400.000000	---	2479.4221	MHz	PASS
T2 99%	---	2483.500000	2480.4800	MHz	PASS

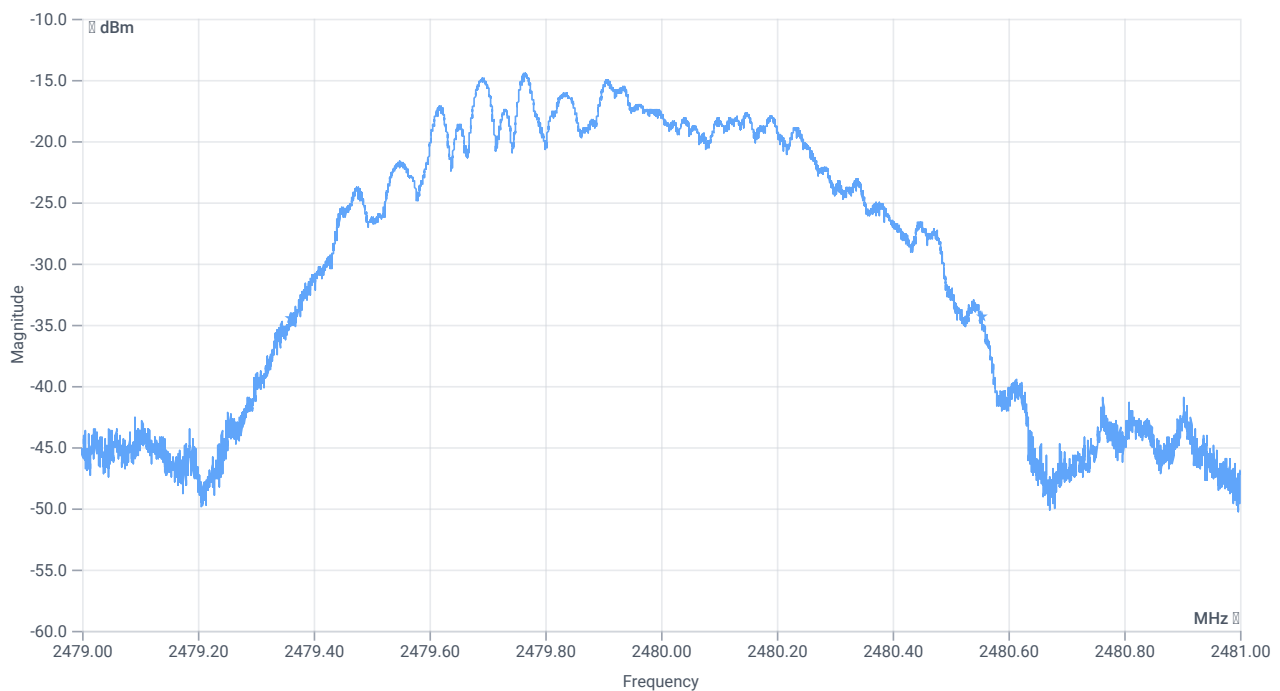

BW 20dB

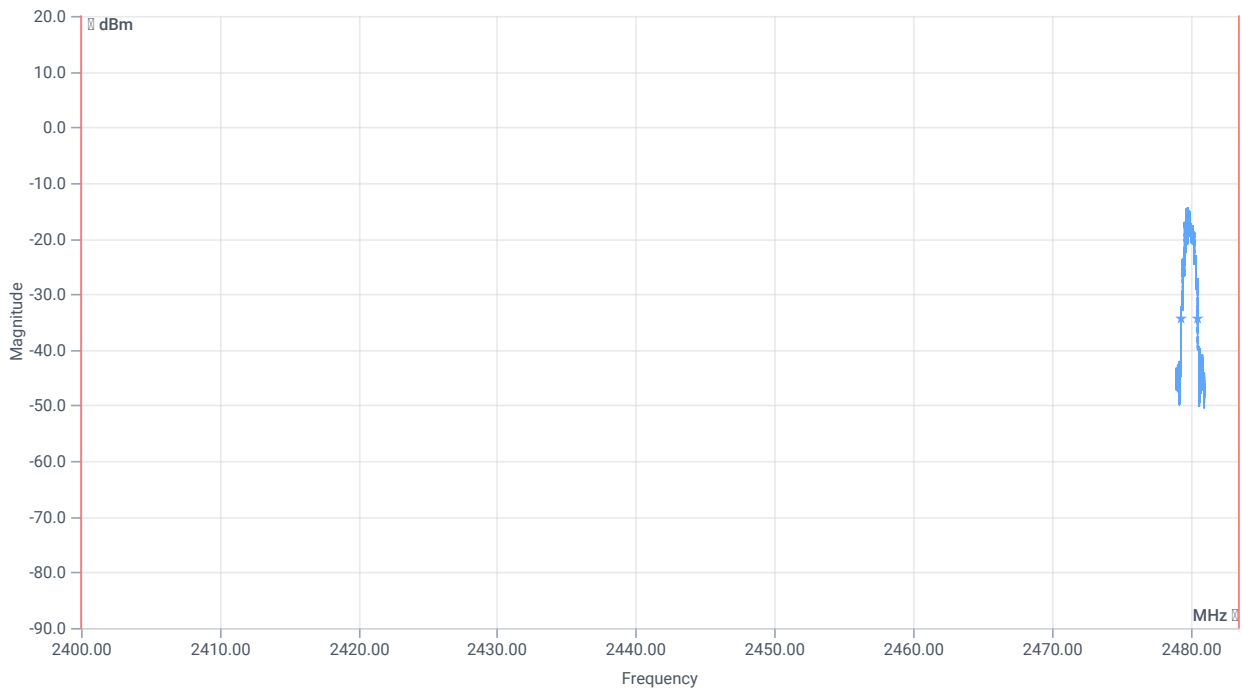

BW within band 20dB

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Bandwidth 20dB	---	---	1196	kHz	INFO
T1 20dB	2400.000000	---	2479.3588	MHz	PASS
T2 20dB	---	2483.500000	2480.5544	MHz	PASS

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 13:49:21
Ambit temp [°C] humidity [rel%]	30.9 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.02	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.02 8.96 5
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	731	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.98 8.96 10
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

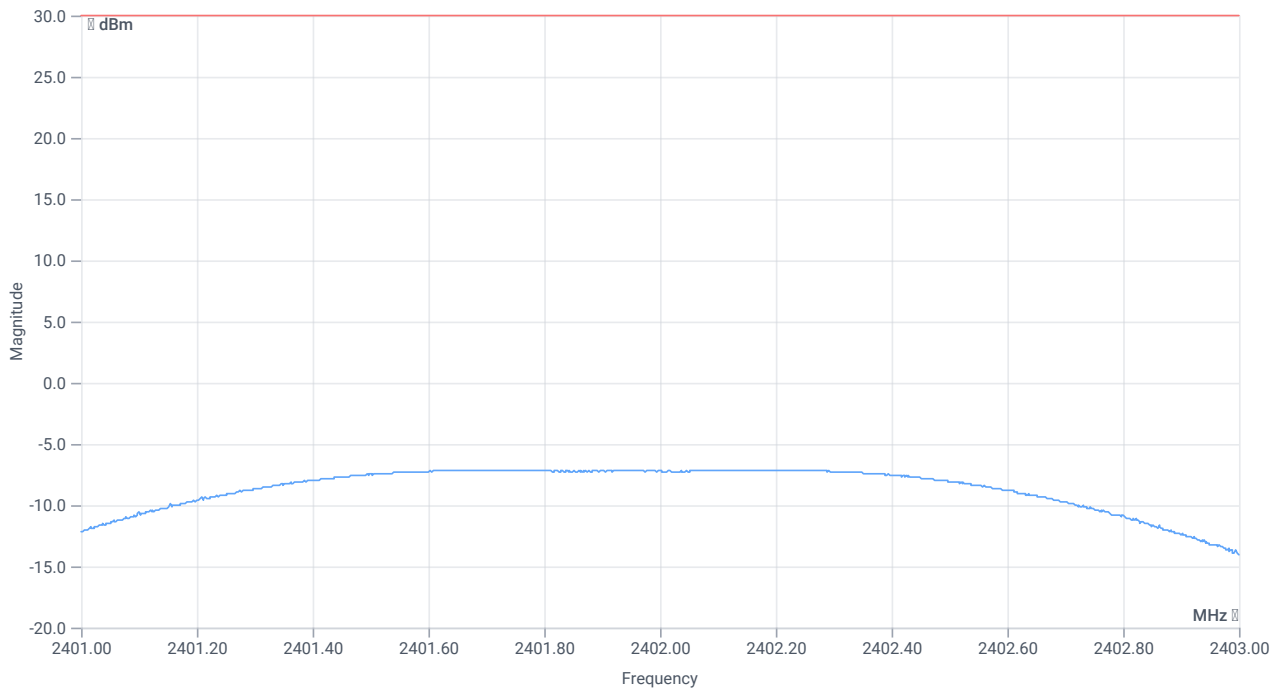

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-7.16	dBm	PASS
Peak power	---	1000	0.192309	mW	PASS
Frequency at peak	---	---	2402.208	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:19:02
Ambit temp [°C] humidity [rel%]	31.2 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.24	dBm	INFO
Ref. frequency	---	---	2440.100	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.24 9 5
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	726	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.76 9 10
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

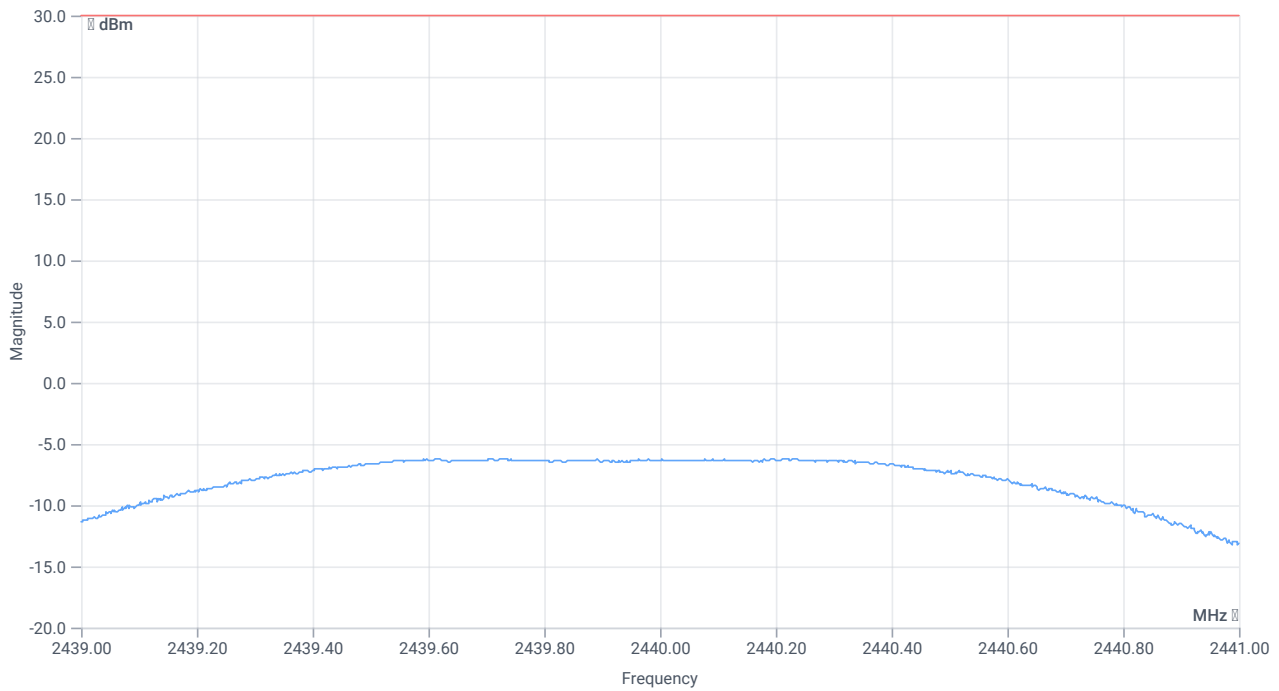

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-6.23	dBm	PASS
Peak power	---	1000	0.238232	mW	PASS
Frequency at peak	---	---	2439.724	MHz	INFO

Verdict

PASS

FCC 15.247 # Maximum peak conducted output power DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:37:13
Ambit temp [°C] humidity [rel%]	31.5 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No

Test Parameter

Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.80	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.80 9.1 5
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 10001 SWE

DTS bandwidth

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
DTS bandwidth (6dB)	---	---	736	kHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.20 9.1 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 5.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	50 200 1001 SWE

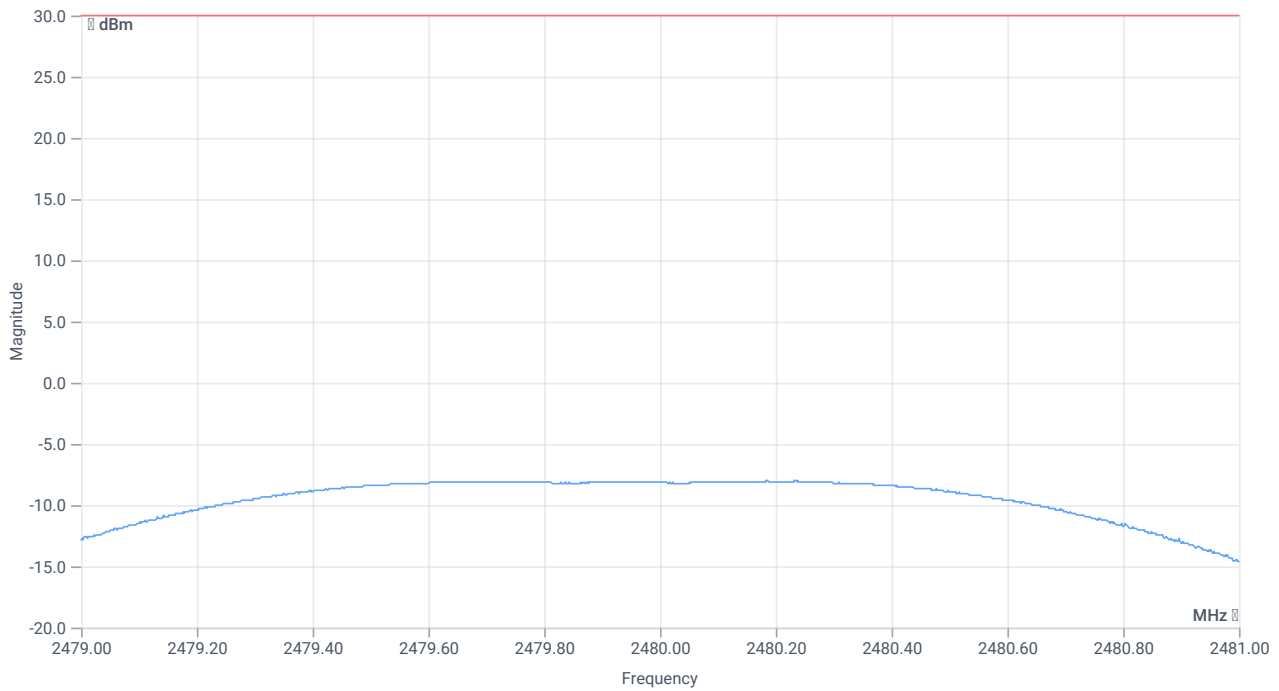

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	30.00	-8.03	dBm	PASS
Peak power	---	1000	0.157398	mW	PASS
Frequency at peak	---	---	2480.238	MHz	INFO

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 13:50:38
Ambit temp [°C] humidity [rel%]	31.0 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.13	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.13 8.96 5
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

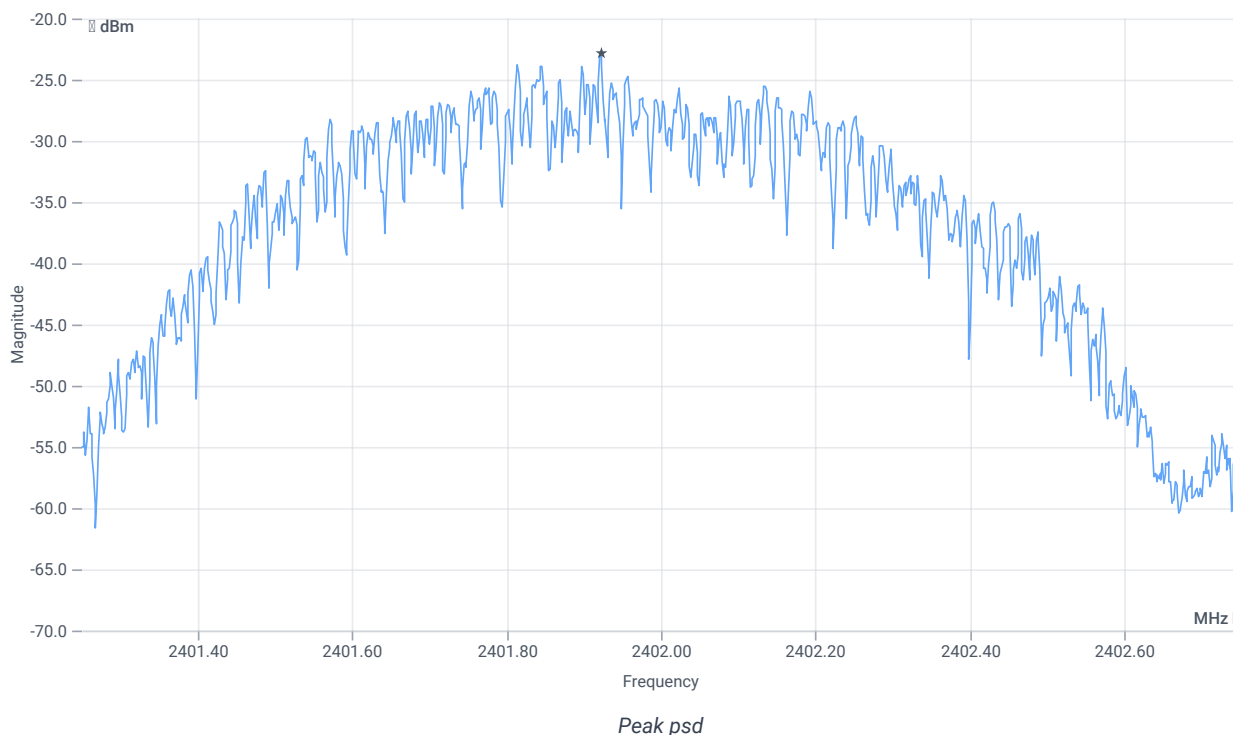

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-22.78	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:20:20
Ambit temp [°C] humidity [rel%]	31.3 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetecom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.51	dBm	INFO
Ref. frequency	---	---	2440.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-1.51 9 5
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

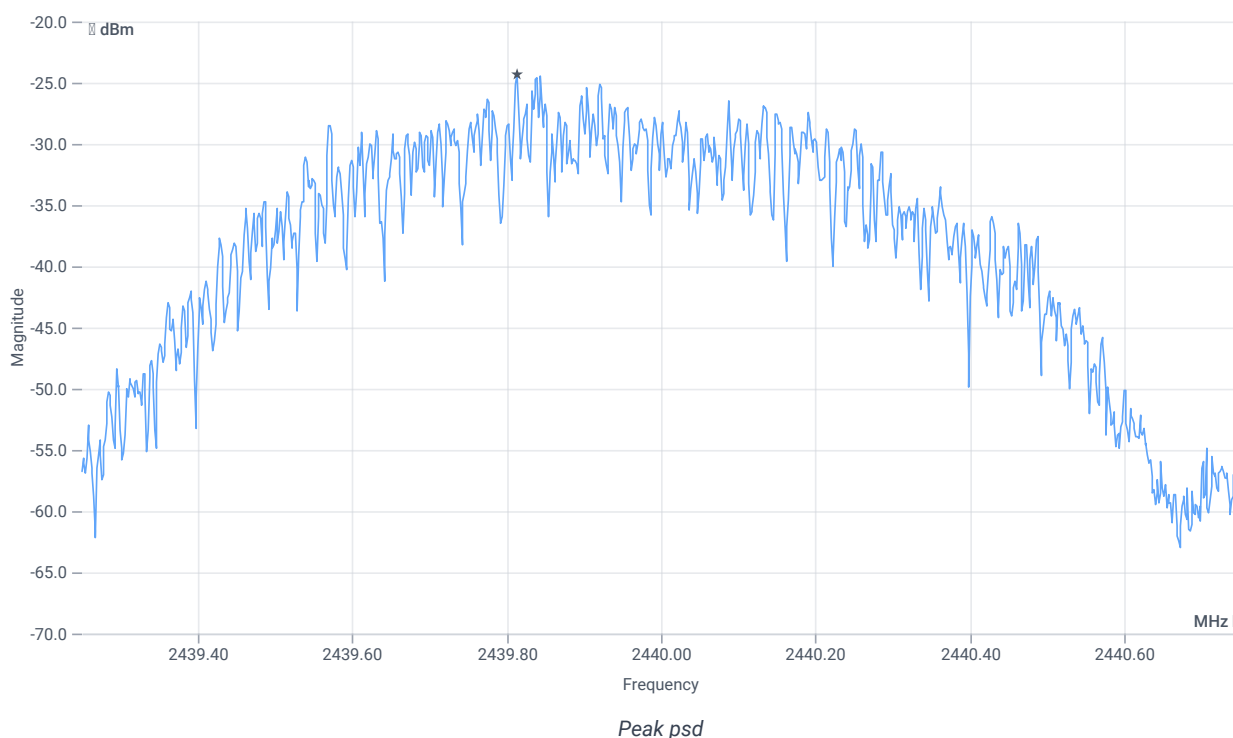

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-24.39	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # Peak psd DTS ~ BT LE 1 Msps

References

TC start	25.07.2024 14:38:31
Ambit temp [°C] humidity [rel%]	31.5 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
Description	FCC 15.247 Peak psd DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7

Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.92	dBm	INFO
Ref. frequency	---	---	2480.200	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-2.92 9.1 5
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 20 1001 SWE

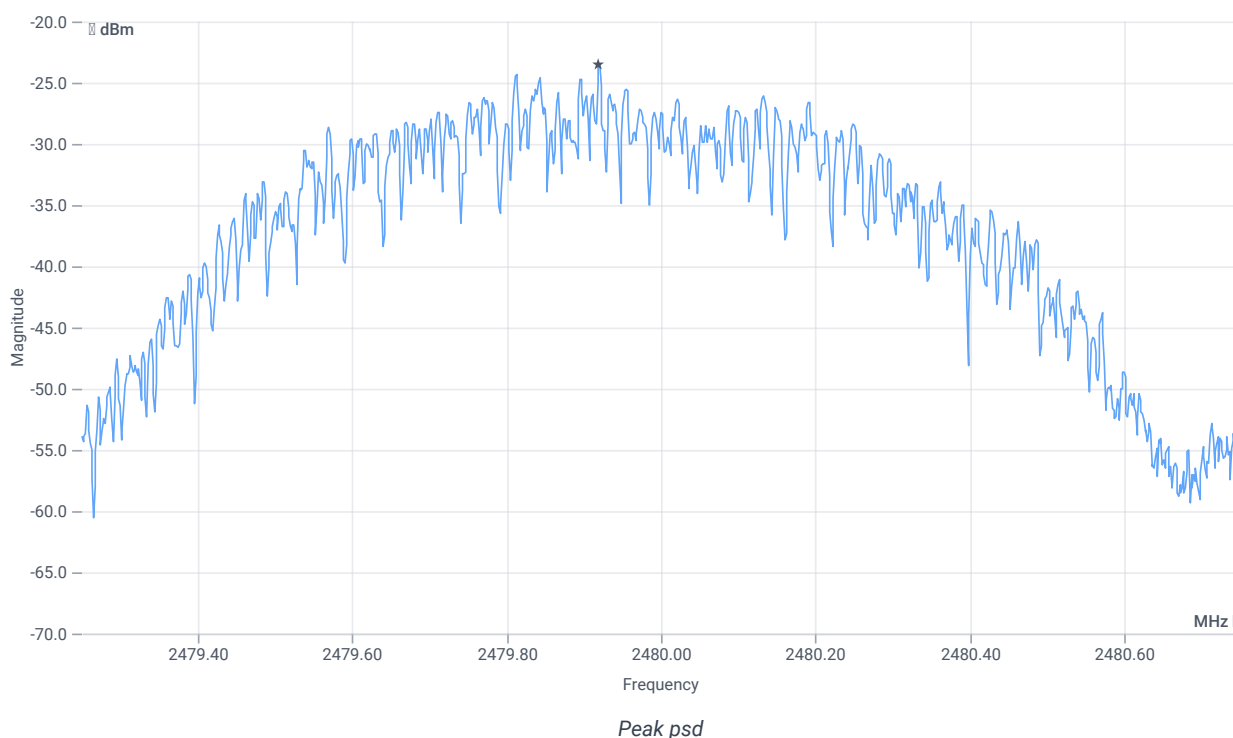

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak psd	---	8	-23.53	dBm/3KHz	PASS

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	25.07.2024 13:52:01
Ambit temp [°C] humidity [rel%]	31.0 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2402 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.13	dBm	INFO
Ref. frequency	---	---	2402.200	MHz	INFO

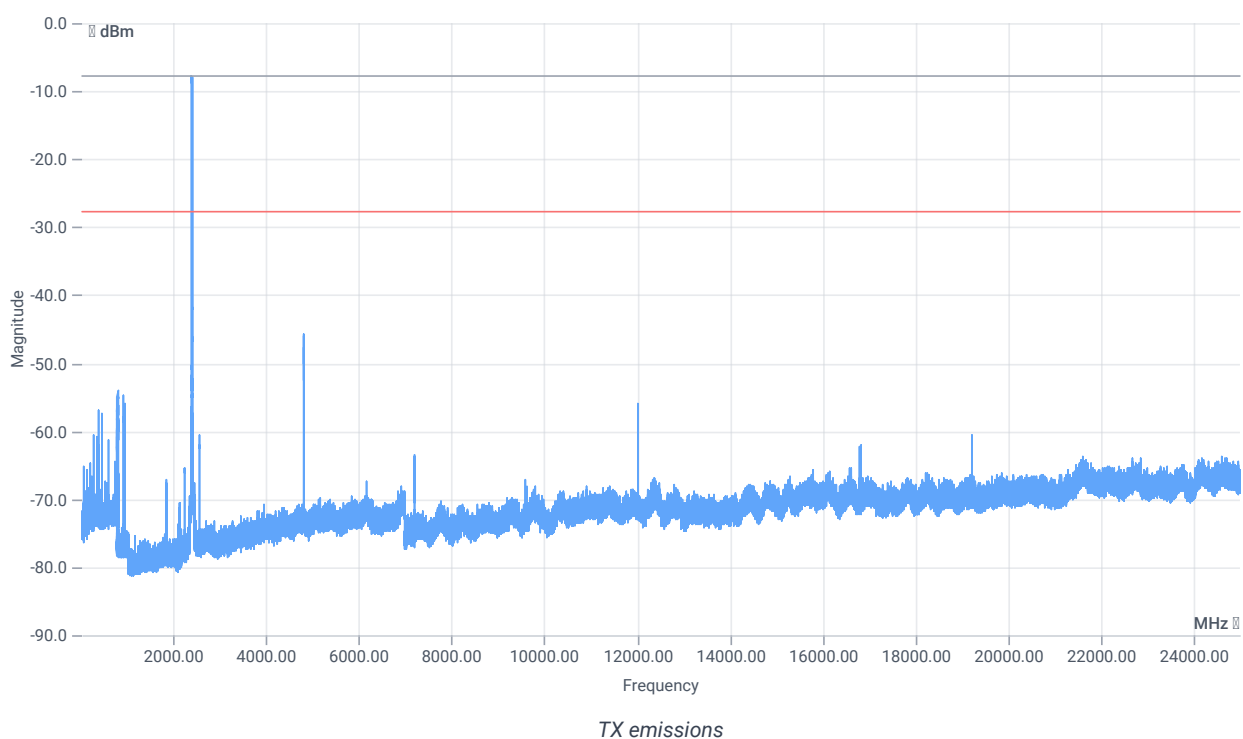

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-7.13 15.92 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

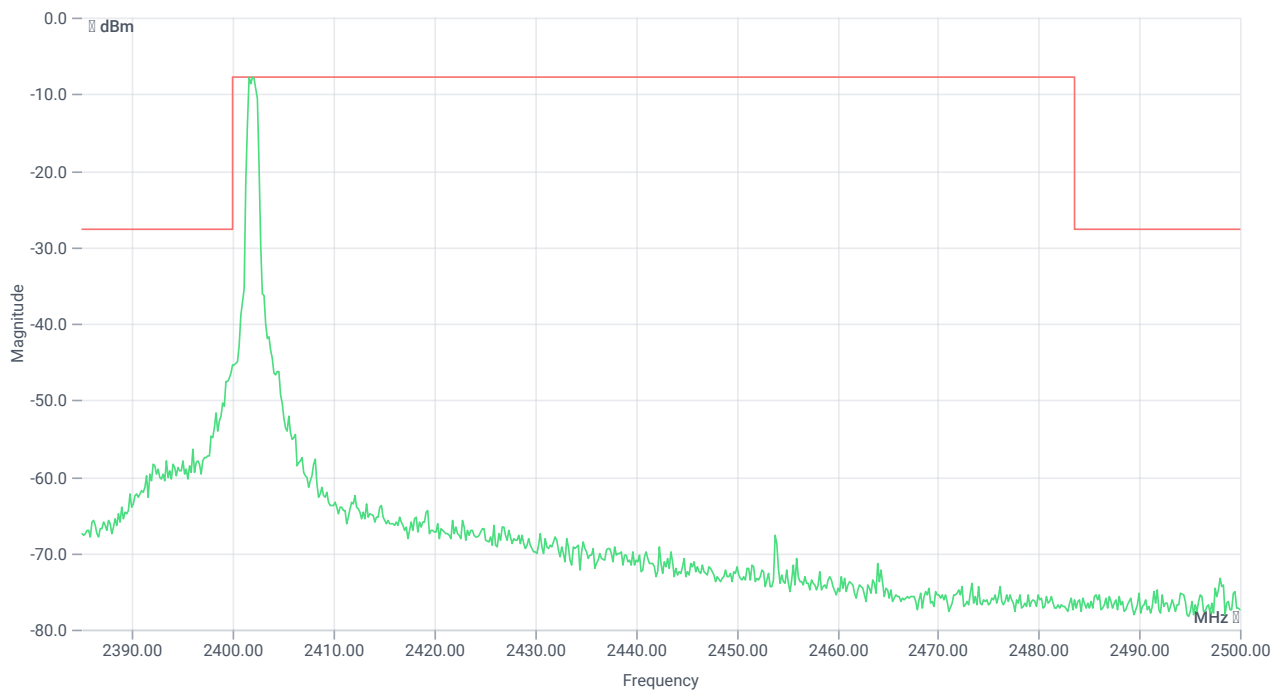

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2402.00 MHz	---	---	-7.77	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4804.333 MHz	0	---	17.97	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	25.07.2024 14:21:42
Ambit temp [°C] humidity [rel%]	31.3 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2440 MHz

RESULT: Reference power cond.


DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-5.84	dBm	INFO
Ref. frequency	---	---	2440.000	MHz	INFO

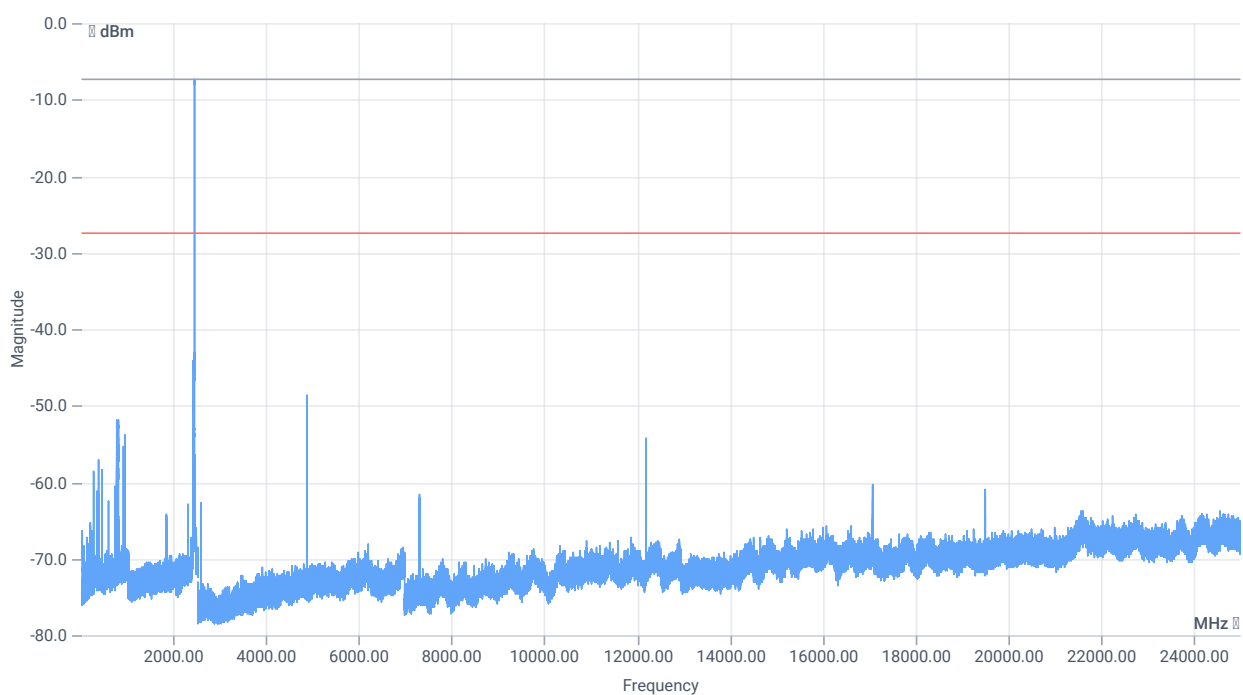

TX emissions

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-5.84 15.92 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

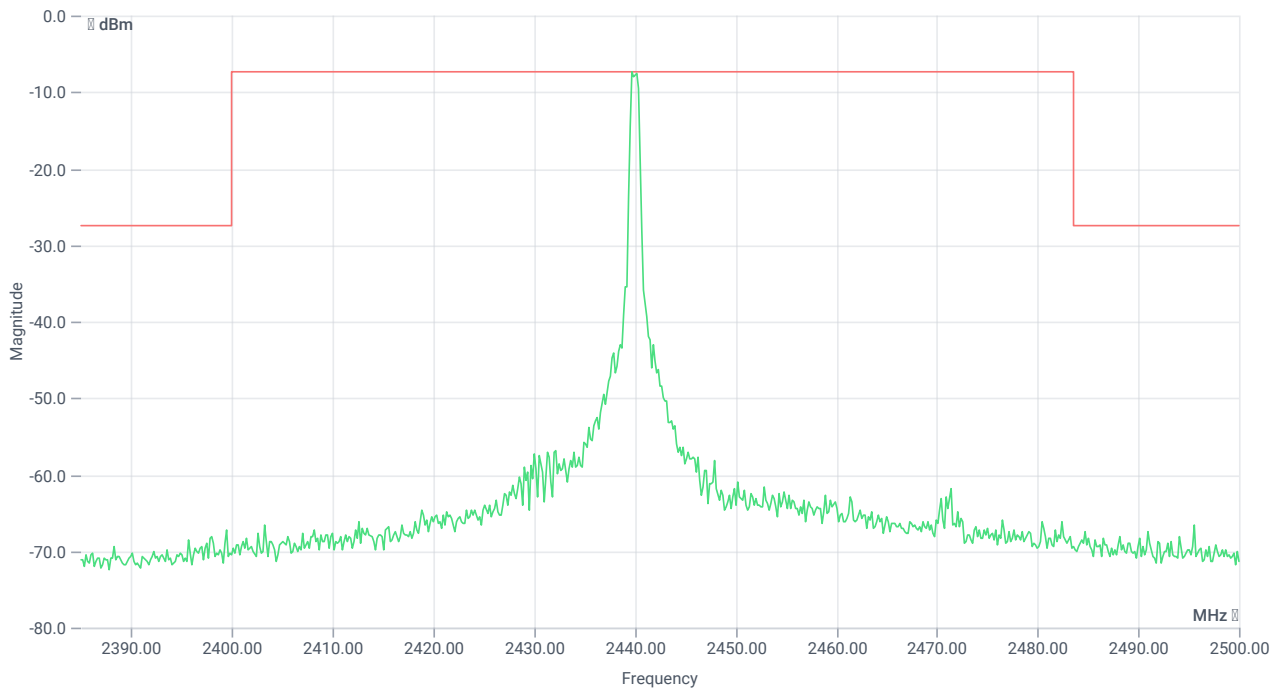

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2439.67 MHz	---	---	-7.45	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4879.333 MHz	0	---	21.3	dB	INFO

Verdict

PASS

FCC 15.247 # TX spurious conducted 20dBc ~ BT LE 1 Msps

References

TC start	25.07.2024 14:39:53
Ambit temp [°C] humidity [rel%]	31.4 34
System version	5.0.7.3
Standard Version	FCC 15.247 NI
Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable
Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103170,3.60
Signaling unit BT,Rohde&Schwarz,CMW,1201.0002k75/102550,4.0.190
Switch matrix,cetekom advanced GmbH,USM,A001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7


Test Parameter

Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/
Switch bits	00010001:00010001:00000000:00000001

Test at TX 2480 MHz


RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.91	dBm	INFO
Ref. frequency	---	---	2480.100	MHz	INFO

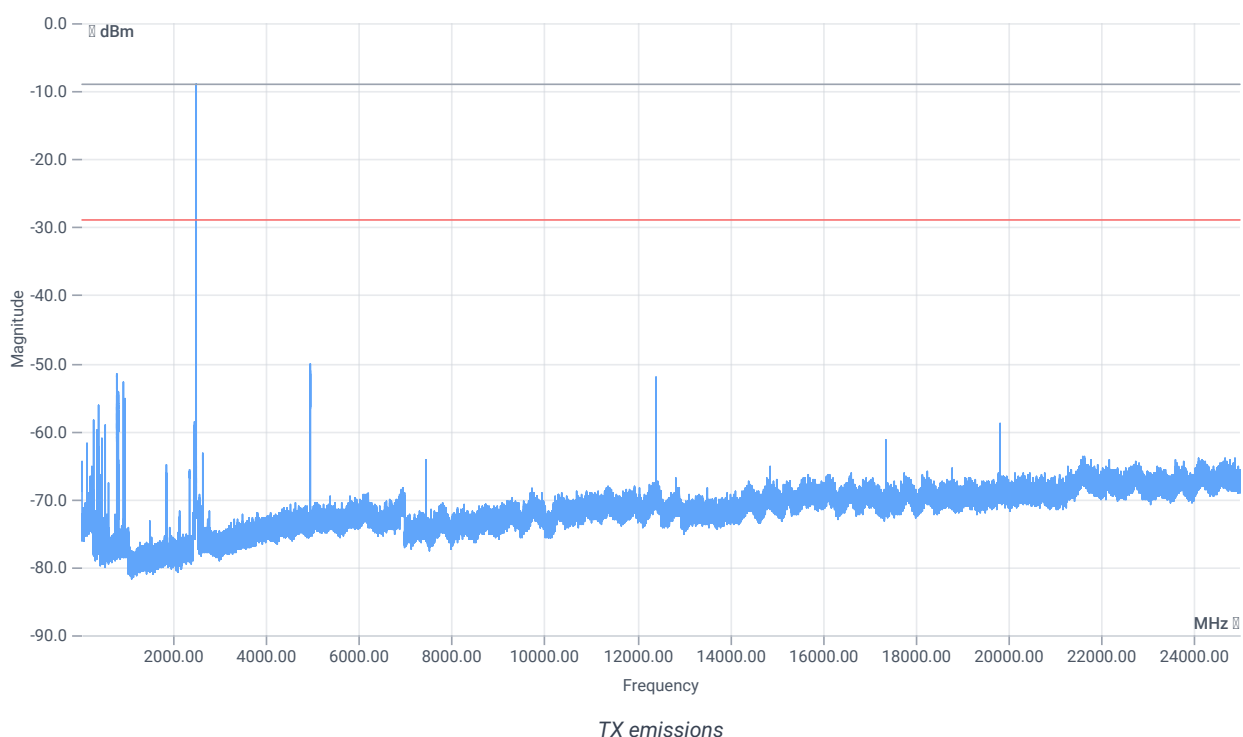

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	-7.91 15.92 0
Start [MHz] Stop [MHz]	24780.000 25000.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	200 25 1501 SWE

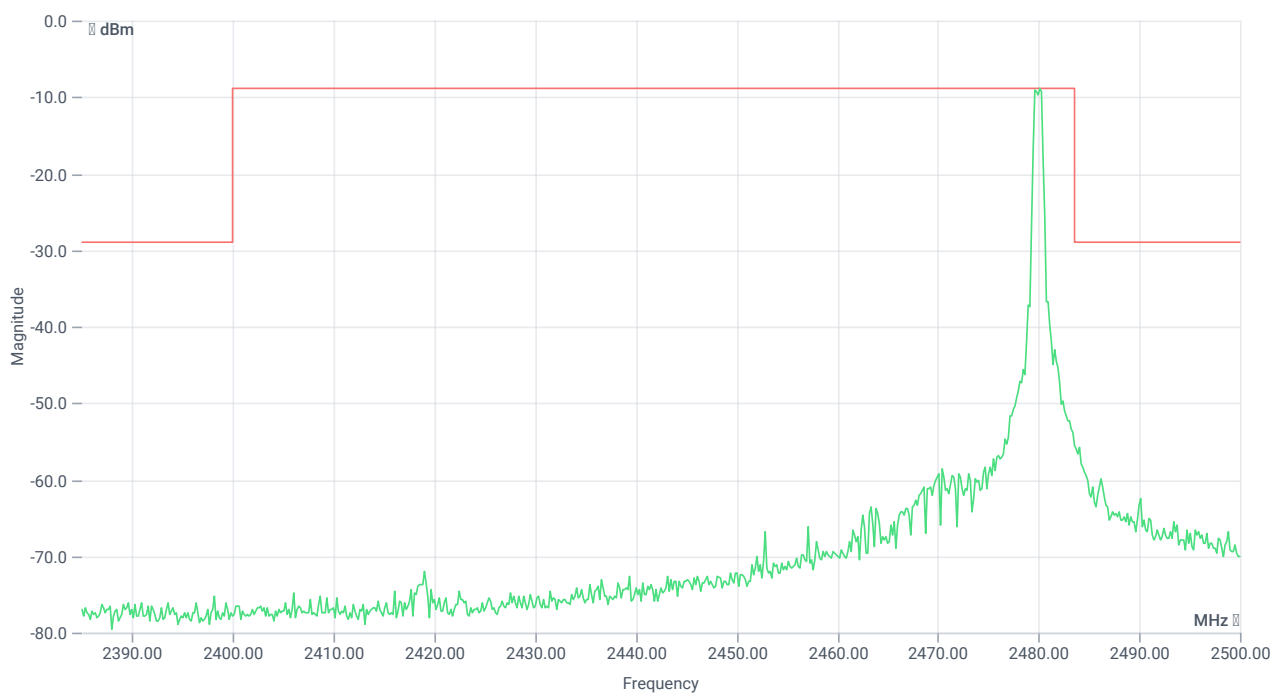

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Reference @ 2480.17 MHz	---	---	-8.97	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 4959.333 MHz	0	---	21.19	dB	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	05.07.2024 15:03:54
Ambit temp [°C] humidity [rel%]	28.8 34
System version	5.0.7.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 37 RXpayload 37
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,B001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/

Test Parameter

Switch bits

00010001:00010001:00000000:00000001


Test at TX 2402 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.49	dBm	INFO
Ref. frequency	---	---	2401.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.51 9.78 10
Start [MHz] Stop [MHz]	2399.500 2404.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

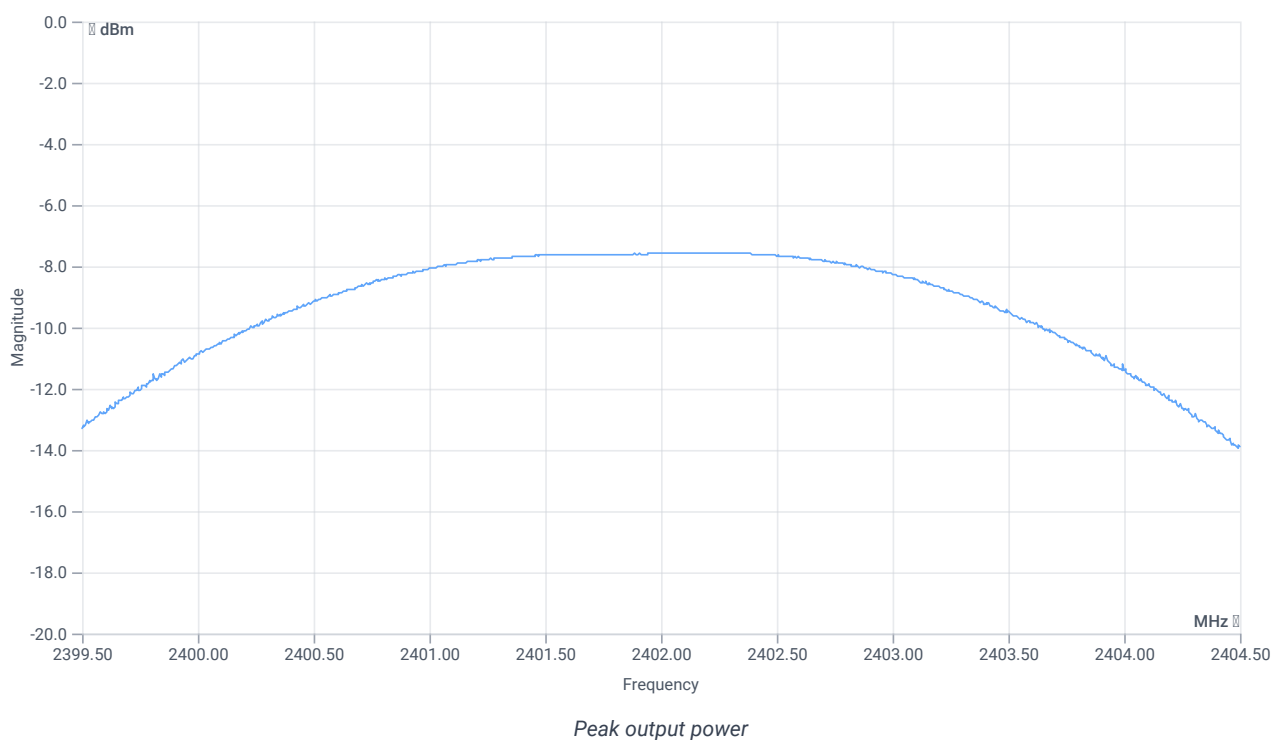

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	-7.56	dBm	INFO
Peak power	---	---	0.175388	mW	INFO
Frequency at peak	---	---	2402.215	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	05.07.2024 15:09:35
Ambit temp [°C] humidity [rel%]	28.7 34
System version	5.0.7.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 37 RXpayload 37
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,B001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/

Test Parameter

Switch bits

00010001:00010001:00000000:00000001


Test at TX 2440 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-6.71	dBm	INFO
Ref. frequency	---	---	2439.700	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	3.29 9.83 10
Start [MHz] Stop [MHz]	2437.500 2442.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

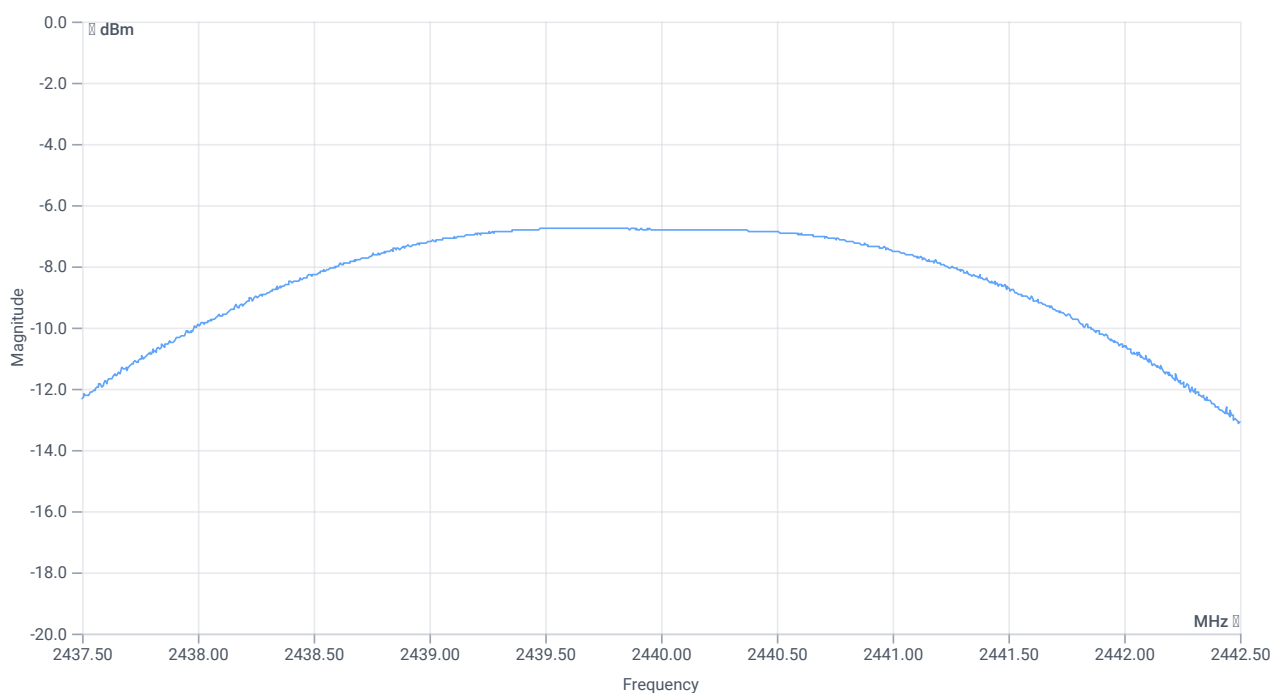

Peak output power

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	-6.76	dBm	INFO
Peak power	---	---	0.210863	mW	INFO
Frequency at peak	---	---	2439.725	MHz	INFO

Verdict

PASS

NA # Peak output power 3MHz/3MHz ~ BT LE 1 Msps

References

TC start	05.07.2024 15:15:11
Ambit temp [°C] humidity [rel%]	28.7 35
System version	5.0.7.0
Standard Version	NA NI
Method	
Description	Peak OP 3MHz/3MHz - BT LE 1 Msps
Information	

EUT Common Settings BT Low Energy

Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	0 0 0
Power Class	2
1 Mbps supported	True TXpayload 37 RXpayload 37
2 Mbps supported	False TXpayload 37 RXpayload 37
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None HCI 1 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No

Equipment

Signal analyzer,Rohde&Schwarz,FSV-30,1321.3008K30/103809,3.70
Switch matrix,cetecom advanced GmbH,USM,B001,1.0.0

Test Parameter

Technology to test	BT LE 1 Msps
EUT port	EUT1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto control enabled power supply Climatic Box	No No
Additional path loss [dB]	0.7
Full path type	EUT_SA_GEN_SIG
Full path name	EUT1.MP.SIG1/EUT1.SA/EUT1.GEN1/EUT1.GEN2/

Test Parameter

Switch bits

00010001:00010001:00000000:00000001


Test at TX 2480 MHz

RESULT: Reference power cond.

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Ref. power 1MHz/1MHz cond.	---	---	-7.21	dBm	INFO
Ref. frequency	---	---	2480.100	MHz	INFO

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	2.79 9.87 10
Start [MHz] Stop [MHz]	2477.500 2482.500
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: time [ms] count points per Section type	1000 10 1001 SWE

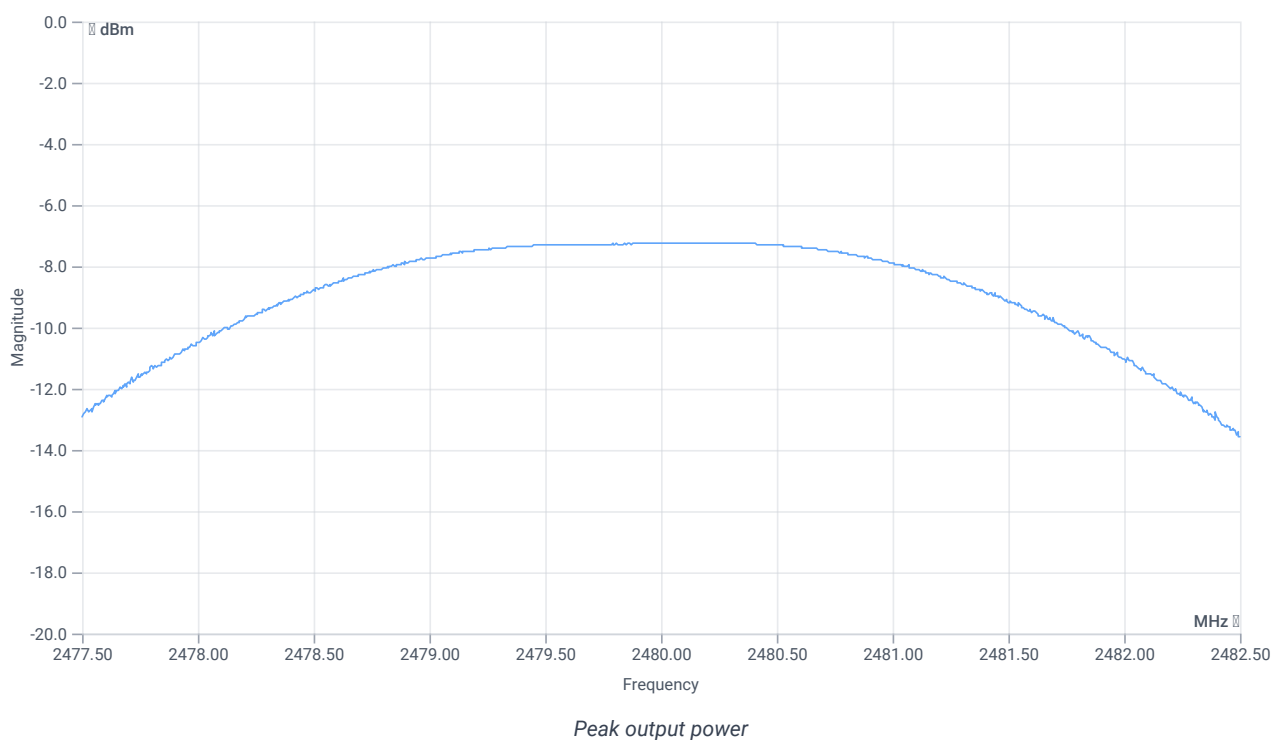

RESULT

DESCRIPTION	LOWER LIMIT	UPPER LIMIT	MEASURED	UNIT	VERDICT
Peak power	---	---	-7.23	dBm	INFO
Peak power	---	---	0.189234	mW	INFO
Frequency at peak	---	---	2480.225	MHz	INFO

Verdict

PASS

- END OF DOCUMENT -