



Shenzhen CTL Electromagnetic Technology Co., Ltd.  
Tel: +86-755-89486194 Fax: +86-755-89486187

## FCC PART 15 SUBPART B TEST REPORT

### FCC Part 15B

**Report Reference No.**.....: **CTL120714670-WF**

Compiled by

( position+printed name+signature)...: File administrators Jacky Chen

*Jacky Chen*

Name of the organization performing the tests

Test Engineer Tracy Qi

*Tracy Qi*

( position+printed name+signature)...:

Approved by

( position+printed name+signature)...: Manager Tracy Qi

*Tracy Qi*

Date of issue.....: July 25, 2012

**Representative Laboratory Name.** : **Shenzhen CTL Electromagnetic Technology Co., Ltd.**

Address.....: Zone B, 4/F, Block 20, Guangqian Industrial Park, Longzhu Road, Nanshan, Shenzhen 518055 China.

**Test Firm**.....: **Bontek Compliance Testing Laboratory Ltd**

Address.....: 1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

**Applicant's name**.....: **Shenzhen Firstview Electronic Co. Ltd.**

Address.....: 3-4/F, Block B, Huafeng 1st Technology Zone, Baoan Main Road, Baoan District, Shenzhen, China

#### Test specification:

Standard.....: FCC Part 15B: Unintentional Radiators

TRF Originator.....: Shenzhen CTL Electromagnetic Technology Co., Ltd.

Master TRF.....: Dated 2011-01

**Shenzhen CTL Electromagnetic Technology Co., Ltd.. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Electromagnetic Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Electromagnetic Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Test item description**.....: 7inch MID

Trade Mark.....: /

Model/Type reference.....: M715

Listed Models.....: M-270, M712, M716

I/O Type of EUT.....: USB Port/ Earphone Port/ DC Input Port/HDMI

I/O Q'TY.....: 1/ 1/ 1/ 1

FCC ID.....: **YW5-JH715R**

Result.....: **Positive**

**TEST REPORT**

<b>Test Report No. :</b> CTL120714670-WF	July 25, 2012 Date of issue
--	--------------------------------

**Equipment under Test** : 7inch MID

**Model /Type** : M715

**Listed Models** : M-270, M712, M716

**Applicant** : Shenzhen Firstview Electronic Co. Ltd.

**Address** : 3-4/F, Block B, Huafeng 1st Technology Zone, Baoan  
Main Road, Baoan District, Shenzhen, China

**Manufacturer** Shenzhen Firstview Electronic Co. Ltd.

**Address** 3-4/F, Block B, Huafeng 1st Technology Zone, Baoan  
Main Road, Baoan District, Shenzhen, China

**Test Result** according to the  
standards on page 4:

**Positive**

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

## Contents

<b>1.</b>	<b>TEST STANDARDS .....</b>	<b>4</b>
<b>2.</b>	<b>SUMMARY .....</b>	<b>5</b>
2.1.	General Remarks	5
2.2.	Equipment Under Test	5
2.3.	Short description of the Equipment under Test (EUT)	5
2.4.	EUT operation mode	5
2.5.	EUT configuration	5
2.6.	Related Submittal(s) / Grant (s)	5
2.7.	Modifications	6
<b>3.</b>	<b>TEST ENVIRONMENT .....</b>	<b>7</b>
3.1.	Address of the test laboratory	7
3.2.	Test Facility	7
3.3.	Environmental conditions	7
3.4.	Configuration of Tested System	7
3.5.	Statement of the measurement uncertainty	8
3.6.	Equipments Used during the Test	8
3.7.	Summary of Test Result	8
<b>4.</b>	<b>TEST CONDITIONS AND RESULTS .....</b>	<b>10</b>
4.1.	Conducted Emissions Test	10
4.2.	Radiated Emissions Test	13
<b>5.</b>	<b>TEST SETUP PHOTOS OF THE EUT .....</b>	<b>21</b>
<b>6.</b>	<b>EXTERNAL AND INTERNAL PHOTOS OF THE EUT .....</b>	<b>22</b>

## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Part 15B: Unintentional Radiators](#)

[ANCI C63.4: 2003](#)



## 2. SUMMARY

### 2.1. General Remarks

Date of receipt of test sample : July 18, 2012

Testing commenced on : July 19, 2012

Testing concluded on : July 20, 2012

### 2.2. Equipment Under Test

#### Power supply system utilised

Power supply voltage : 

- 120V / 60 Hz
- o 115V / 60Hz
- o 12 V DC
- o 24 V DC
- o Other (specified in blank below)

### 2.3. Short description of the Equipment under Test (EUT)

The device is a 7inch MID.

For more details, refer to the user's manual of the EUT.

Serial number: Prototype

### 2.4. EUT operation mode

Test Mode(TM)	Description	Remark
TM1	Playing	Color Bar with 1KHz Audio
TM2	Downloading	Connect to PC
TM3	HDMI	Color Bar with 1KHz Audio

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

The worst case of AC Conducted Emission is mode 1; the test data of this mode was reported.

### 2.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

#### Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Unshielded	Without Core
HDMI Cable	0.8	Unshielded	Without Core
Earphone Cable	1.5	Unshielded	Without Core

- - supplied by the manufacturer
- - supplied by the lab

- LCD Display

Manufacturer : SHARP

Model No. : LCD-26Z100A

- Ear-phone

Manufacturer : Philip

Model No. : KY21-05

- Notebook PC

Manufacturer : SONY Coporation

Model No. : PCG-41216W

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **YW5-JH715R** filing to comply with of the FCC Part 15B Rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.





### **3. TEST ENVIRONMENT**

#### **3.1. Address of the test laboratory**

Bontek Compliance Testing Laboratory Ltd  
1/F, Block East H-3, OCT Eastern Ind. Zone, Qiaocheng East Road, Nanshan, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 (2003) and CISPR Publication 22.

#### **3.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

##### **IC Registration No.: 7631A**

The 3m alternate test site of Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 7631A on March, 2011.

##### **FCC-Registration No.: 338263**

Bontek Compliance Testing Laboratory Ltd EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 338263, March 24, 2008.

#### **3.3. Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:


Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

#### **3.4. Configuration of Tested System**

**Fig. 2-1 Configuration of Tested System**

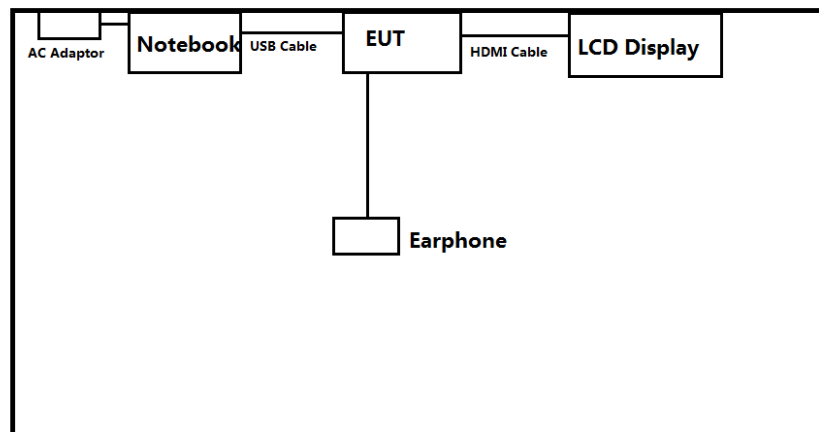

### 3.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Bontek Compliance Testing Laboratory Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Bontek laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.6. Equipments Used during the Test

Item	Test Equipment	Manufacturer	Model No.	Last Cal.	Due. Date
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCI	2012/04/14	2013/04/13
2	Radio Communication Tester	ROHDE & SCHWARZ	CMU200	2012/04/14	2013/04/13
3	Dual Directional Coupler	Agilent	778D	2012/04/14	2013/04/13
4	10dB attenuator	SCHWARZBECK	MTAIMP-136	2012/04/14	2013/04/13
5	Tunable Bandreject filter	K&L	3TNF-800	2012/04/14	2013/04/13
6	Tunable Bandreject filter	K&L	5TNF-1700	2012/04/14	2013/04/13
7	High-Pass Filter	K&L	9SH10-2700/X12750-O/O	2012/04/14	2013/04/13
8	High-Pass Filter	K&L	41H10-1375/U12750-O/O	2012/04/14	2013/04/13
9	Coaxial Cable	Huber+Suhner	AC4-RF-H	2012/04/14	2013/04/13
10	AC Power Supply	IDRC	CF-500TP	2012/04/14	2013/04/13
11	DC Power Supply	IDRC	CD-035-020PR	2012/04/14	2013/04/13
12	RF Current Probe	FCC	F-33-4	2012/04/14	2013/04/13
13	Temperature /Humidity Meter	zhicheng	ZC1-2	2012/04/14	2013/04/13
14	MICROWAVE AMPLIFIER	HP	8349B	2012/04/14	2013/04/13
15	Amplifier	HP	8447D	2012/04/14	2013/04/13
16	SIGNAL GENERATOR	HP	8647A	2012/04/14	2013/04/13
17	Log Periodic Antenna	ELECTRO-METRICS	EM-6950	2012/04/14	2013/04/13
18	Horn Antenna	Schwarzbeck	BBHA9120A	2012/04/14	2013/04/13
19	EMI Test Receiver	R&S	ESPI	2012/04/14	2013/04/13
20	Loop Antenna	ZHINAN	ZN30900A	2012/04/14	2013/04/13
21	Horn Antenna	Schwarzbeck	ZN30900A	2012/04/14	2013/04/13
22	Horn Antenna	Schwarzbeck	ZN30900A	2012/04/14	2013/04/13



### 3.7. Summary of Test Result

No deviations from the test standards

Test Item	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15	Section 15.109	PASS
Conducted Emission	FCC PART 15	Section 15.107	PASS

### 3.8. Test Software

The following programs installed in the EUT were programmed during the test.


1. Execute the program, “Winthrax” , installed in PC for files transfer with EUT via USB cable.
2. Turn on camera to capture images.



## 4. TEST CONDITIONS AND RESULTS

### 4.1. Conducted Emissions Test

#### TEST CONFIGURATION

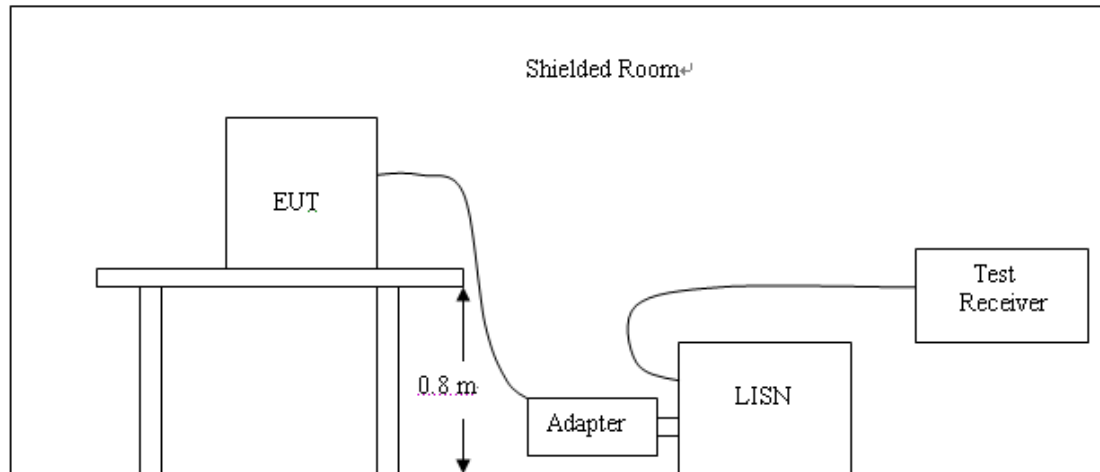

#### TEST PROCEDURE

For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage (dBµV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

\* Decreasing linearly with the logarithm of the frequency


For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

1. Please follow the guidelines in ANSI C63.4-2003.
2. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN).
4. All the support units are connecting to the other LISN.
5. The LISN provides 50 ohm coupling impedance for the measuring instrument.
6. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
7. Both sides of AC line were checked for maximum conducted interference.
8. The frequency range from 150 kHz to 30 MHz was searched.
9. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

**The RBW/VBW for 150KHz to 30MHz: 9KHz**

**TEST RESULTS****SCAN TABLE: "Voltage (9K-30M) FIN"**

Short Description: 150K-30M Voltage

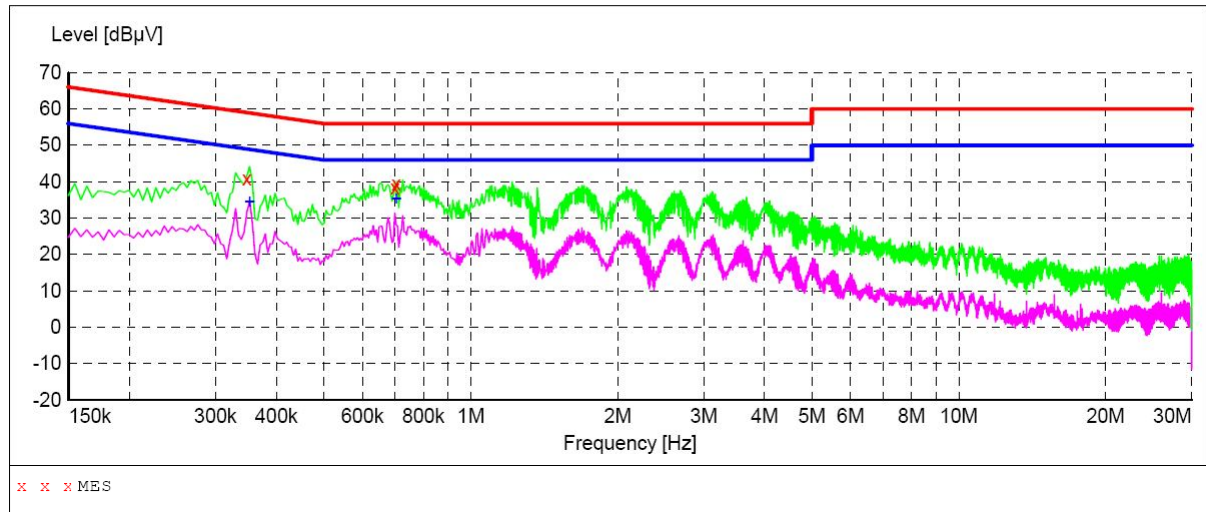
**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.348000	40.90	10.2	59	18.1	QP	L1	GND
0.699000	38.30	10.2	56	17.7	QP	L1	GND
0.703500	39.40	10.2	56	16.6	QP	L1	GND

**MEASUREMENT RESULT:**

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
0.352500	34.50	10.2	49	14.4	AV	L1	GND
0.703500	35.30	10.2	46	10.7	AV	L1	GND

**SCAN TABLE: "Voltage (9K-30M) FIN"**  
Short Description: 150K-30M Voltage

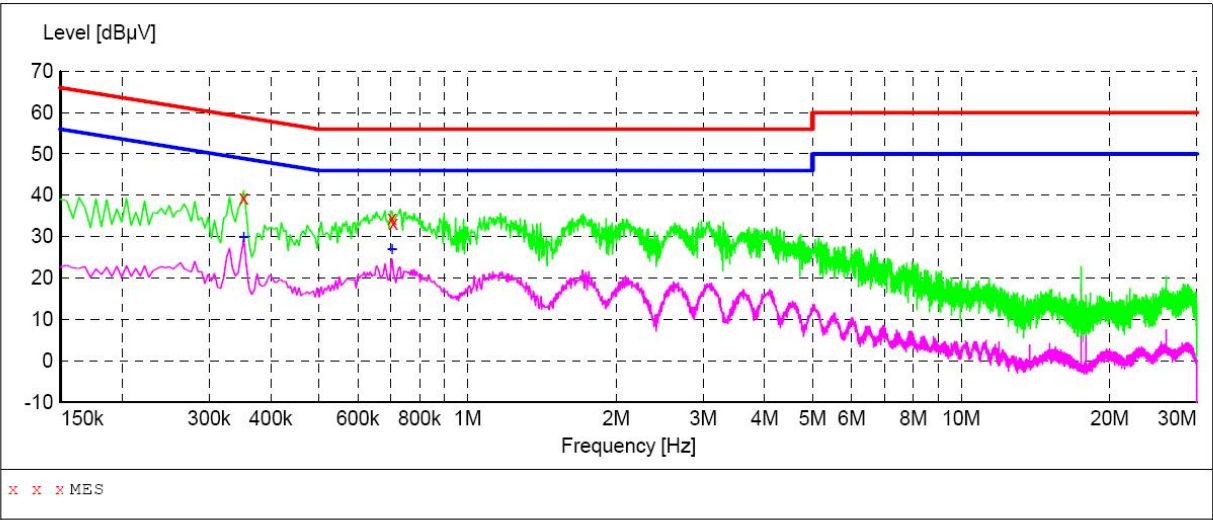

**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.352500	39.30	10.2	59	19.6	QP	N	GND
0.703500	34.50	10.2	56	21.5	QP	N	GND
0.708000	33.20	10.2	56	22.8	QP	N	GND


**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.352500	29.80	10.2	49	19.1	AV	N	GND
0.703500	27.00	10.2	46	19.0	AV	N	GND


## 4.2. Radiated Emissions Test

### TEST CONFIGURATION


#### (A) Radiated Emission Test Set-Up, Frequency Below 30MHz

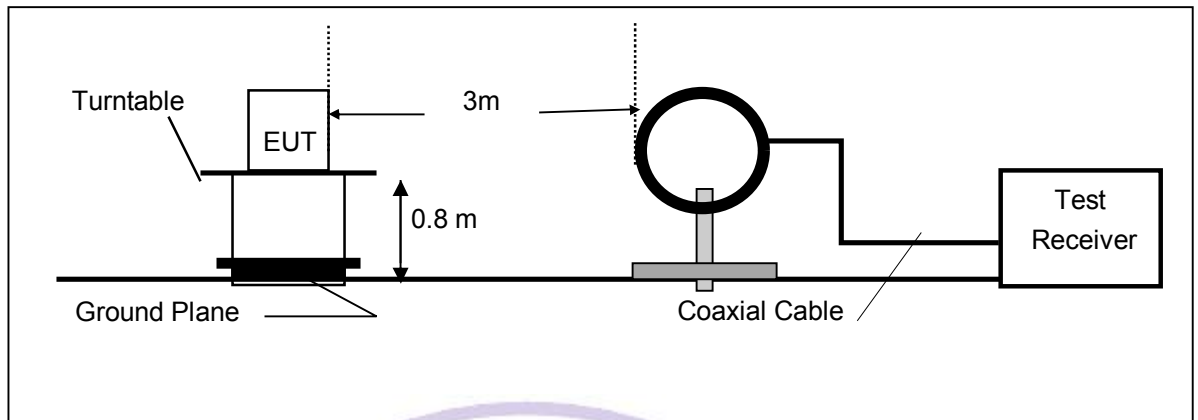

#### (B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

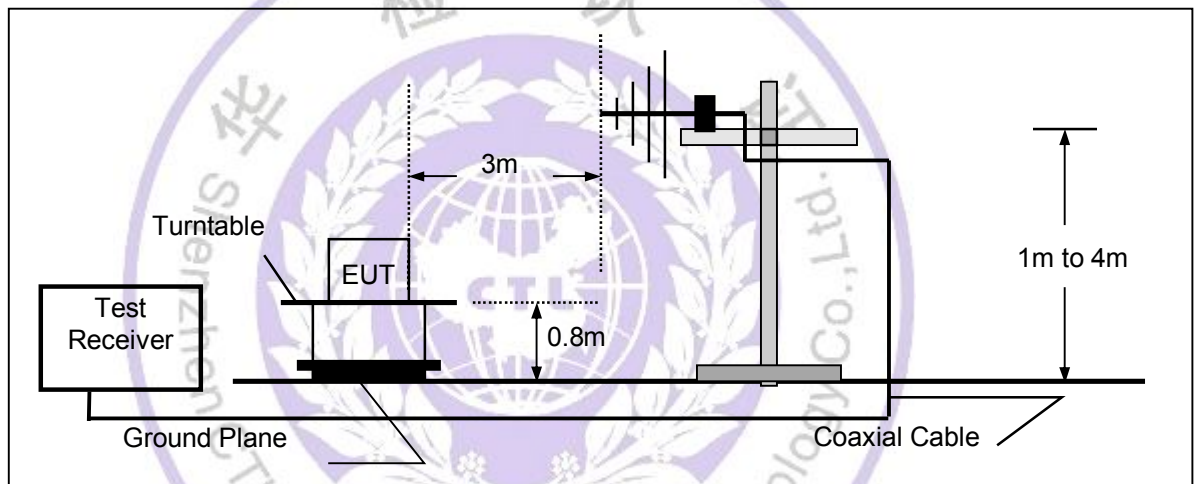

#### (C) Radiated Emission Test Set-Up, Frequency above 1000MHz

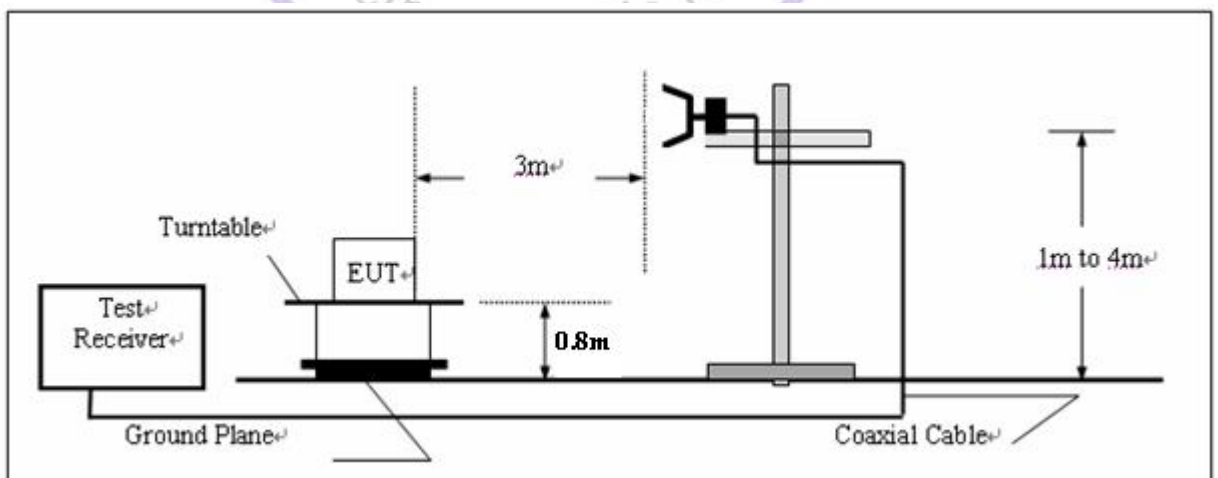



**LIMIT**

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

**TEST PROCEDURE**


1. The testing follows the guidelines in ANSI C63.4-2003.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measurements have been completed.
6. Based on the Frequency Generator in the device include 32KHz, 24MHz and 27MHz. The test frequency range from 9KHz to 1GHz per FCC PART 15.33(a).

TEST RESULTS

TM 1(Playing):

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

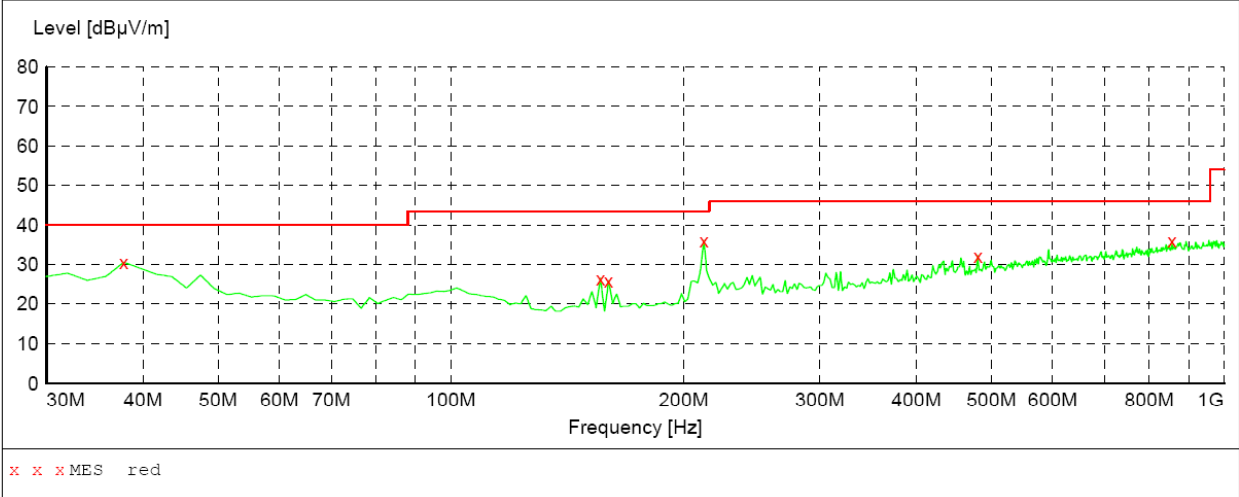


**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
37.760000	30.60	15.2	40.0	9.4	---	100.0	0.00	VERTICAL
156.100000	26.60	12.6	43.5	16.9	---	100.0	0.00	VERTICAL
159.980000	26.00	12.8	43.5	17.5	---	100.0	0.00	VERTICAL
212.360000	36.10	15.1	43.5	7.4	---	100.0	0.00	VERTICAL
480.080000	32.30	23.1	46.0	13.7	---	100.0	0.00	VERTICAL
856.440000	36.20	28.7	46.0	9.8	---	100.0	0.00	VERTICAL



**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

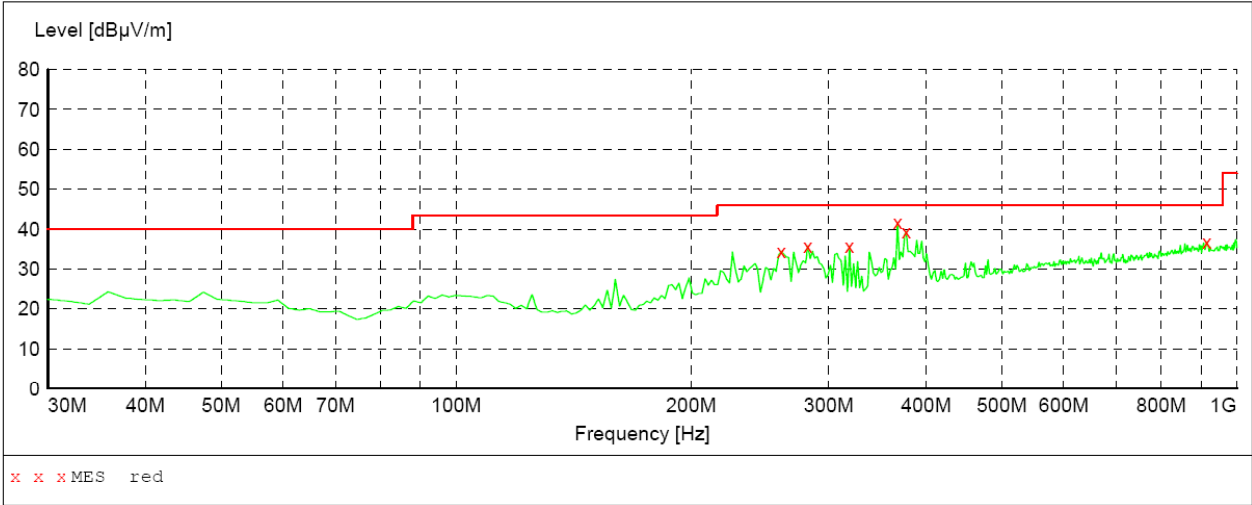

**MEASUREMENT RESULT:**


Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
260.860000	34.60	17.4	46.0	11.4	---	100.0	0.00	HORIZONTAL
282.200000	35.90	18.2	46.0	10.1	---	100.0	0.00	HORIZONTAL
319.060000	35.90	19.2	46.0	10.1	---	100.0	0.00	HORIZONTAL
367.560000	41.70	20.7	46.0	4.3	---	300.0	0.00	HORIZONTAL
377.260000	39.50	20.9	46.0	6.5	---	300.0	0.00	HORIZONTAL
914.640000	36.90	29.3	46.0	9.1	---	100.0	0.00	HORIZONTAL



TM 2(Downloading):

**SWEEP TABLE: "test (30M-1G)"**


Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency	Time	Bandw.		
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

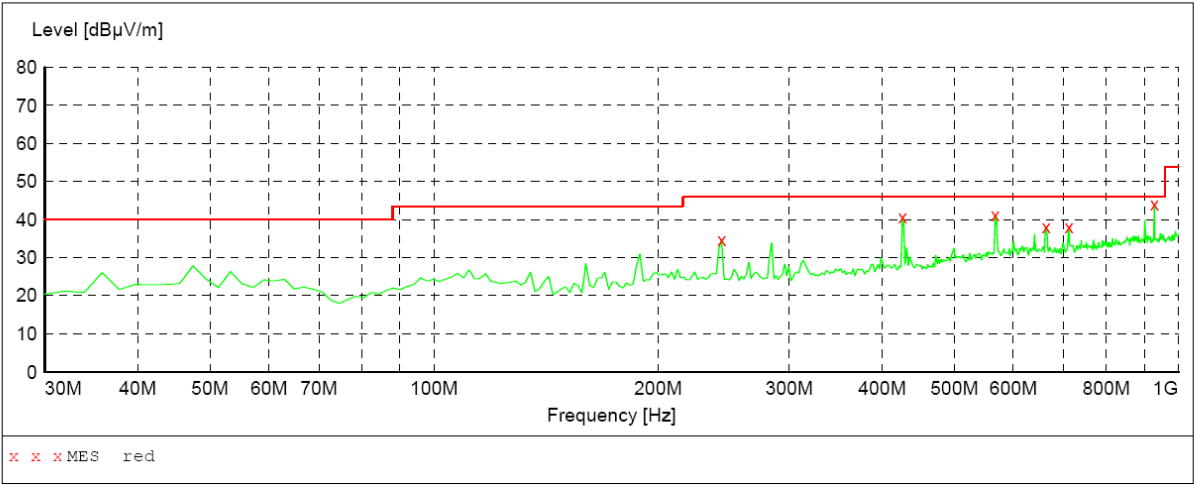

**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
243.400000	34.80	17.0	46.0	11.2	---	100.0	0.00	VERTICAL
425.760000	40.80	22.0	46.0	5.2	---	100.0	0.00	VERTICAL
567.380000	41.20	25.3	46.0	4.8	---	100.0	0.00	VERTICAL
664.380000	38.20	26.3	46.0	7.8	---	100.0	0.00	VERTICAL
712.880000	38.10	26.7	46.0	7.9	---	100.0	0.00	VERTICAL
928.220000	44.10	29.4	46.0	1.9	---	100.0	0.00	VERTICAL

**SWEEP TABLE: "test (30M-1G)"**

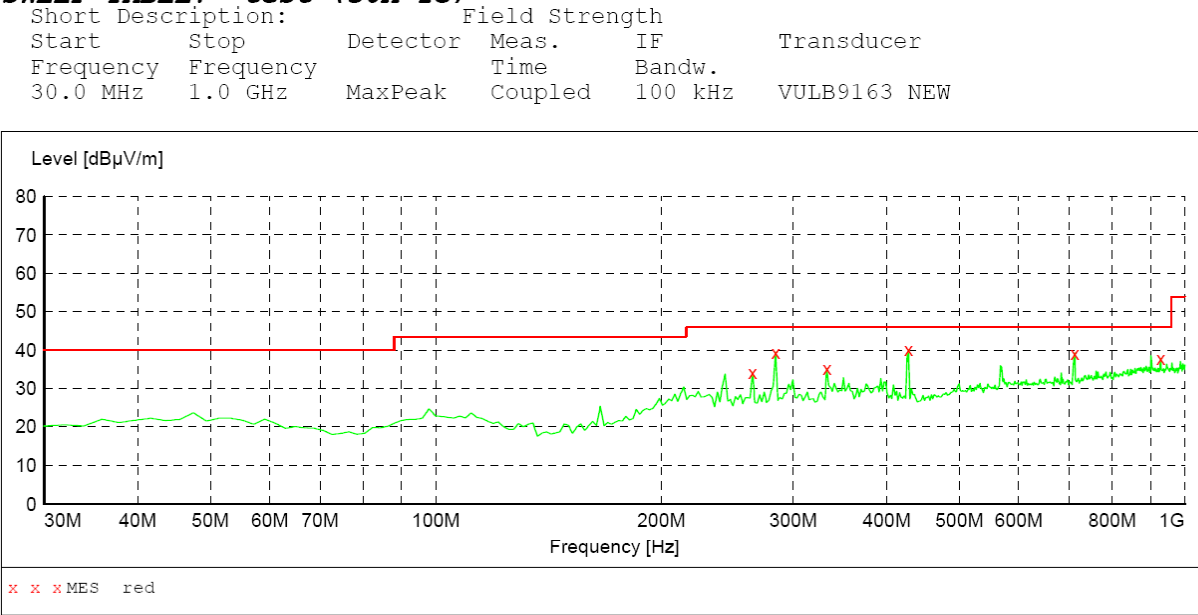

**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
264.740000	34.30	17.5	46.0	11.7	---	100.0	0.00	HORIZONTAL
284.140000	39.50	18.3	46.0	6.5	---	100.0	0.00	HORIZONTAL
332.640000	35.20	19.8	46.0	10.8	---	100.0	0.00	HORIZONTAL
427.700000	40.20	22.0	46.0	5.8	---	100.0	0.00	HORIZONTAL
712.880000	39.30	26.7	46.0	6.7	---	100.0	0.00	HORIZONTAL
928.220000	37.90	29.4	46.0	8.1	---	100.0	0.00	HORIZONTAL






TM 3(HDMI):

**SWEEP TABLE: "test (30M-1G)"**

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

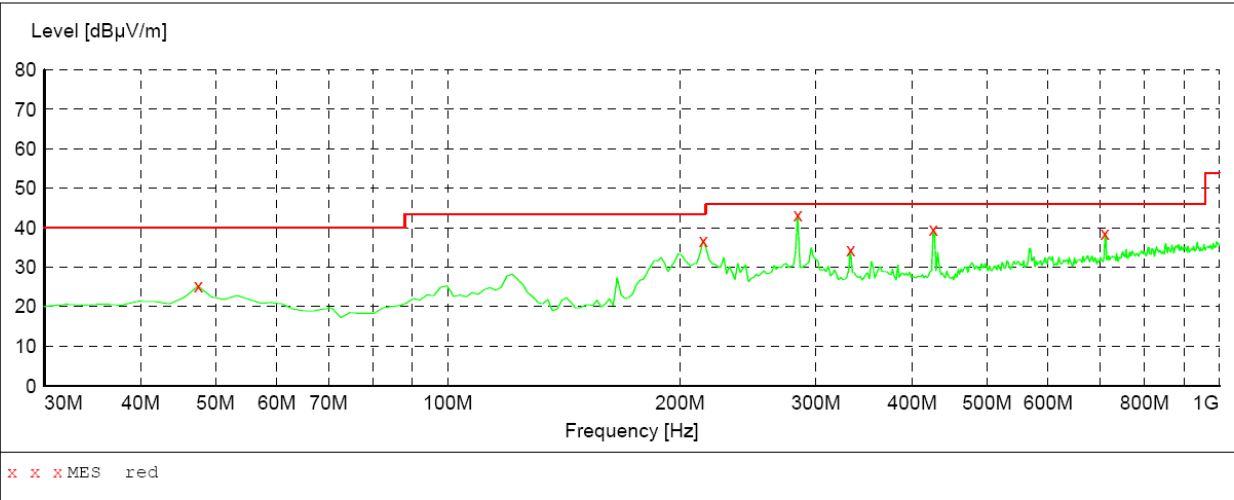


**MEASUREMENT RESULT:**

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	25.30	15.8	40.0	14.7	---	100.0	0.00	HORIZONTAL
214.300000	36.90	15.2	43.5	6.6	---	100.0	0.00	HORIZONTAL
284.140000	43.40	18.3	46.0	2.6	---	100.0	0.00	HORIZONTAL
332.640000	34.40	19.8	46.0	11.6	---	100.0	0.00	HORIZONTAL
425.760000	39.60	22.0	46.0	6.4	---	100.0	0.00	HORIZONTAL
710.940000	38.70	26.7	46.0	7.3	---	100.0	0.00	HORIZONTAL



***SWEEP TABLE: "test (30M-1G)"***

Short Description:		Field Strength			
Start	Stop	Detector	Meas.	IF	Transducer
Frequency	Frequency		Time	Bandw.	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	VULB9163 NEW

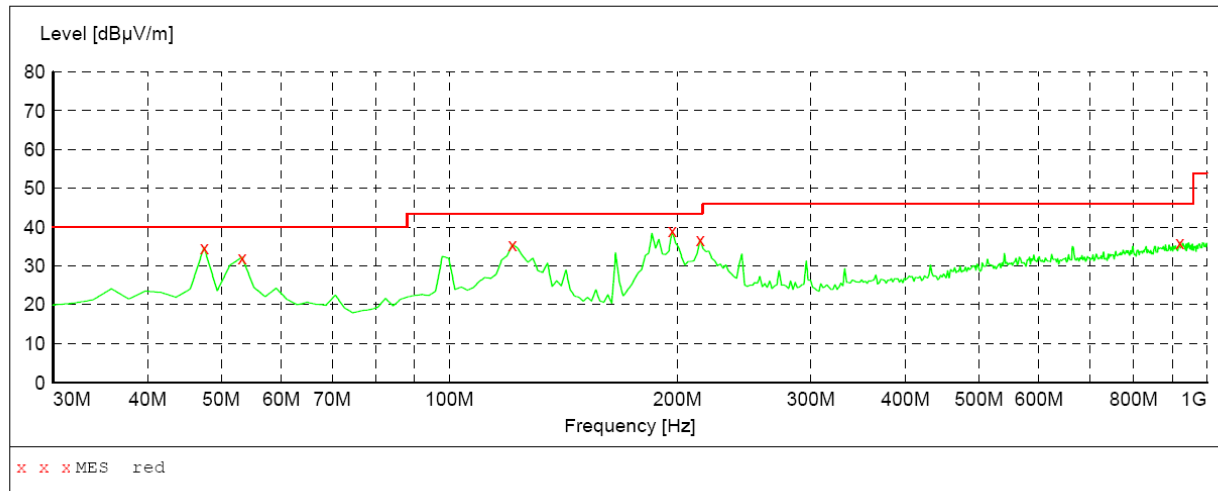***MEASUREMENT RESULT:***

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
47.460000	34.80	15.8	40.0	5.2	---	100.0	0.00	VERTICAL
53.280000	32.30	15.7	40.0	7.7	---	100.0	0.00	VERTICAL
121.180000	35.60	14.5	43.5	7.9	---	100.0	0.00	VERTICAL
196.840000	39.10	14.8	43.5	4.4	---	100.0	0.00	VERTICAL
214.300000	36.90	15.2	43.5	6.6	---	100.0	0.00	VERTICAL
920.460000	36.10	29.3	46.0	9.9	---	100.0	0.00	VERTICAL

**Remark:**

- (1) Measuring frequencies from 9 KHz to the 1GHz, Loop Antenna used below 30MHz. See Section 3.6 table item 20. Radiated emission test from 9KHz to 30MHz was verified, and no any emission was found except system noise floor.
- (2) "F" denotes fundamental frequency, "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Datas of measurement within this frequency range shown " - " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The test results from 9KHz to 25MHz are not reported because the emissions levels that are 20dB below the official limit.
- (5) The IF bandwidth of EMI Test Receiver between 25MHz to 1GHz was 100KHz. Below 30MHz was 10KHz.

## 5. Test Setup Photos of the EUT



Electromagnetic Techn

## 6. External and Internal Photos of the EUT


### External Photos







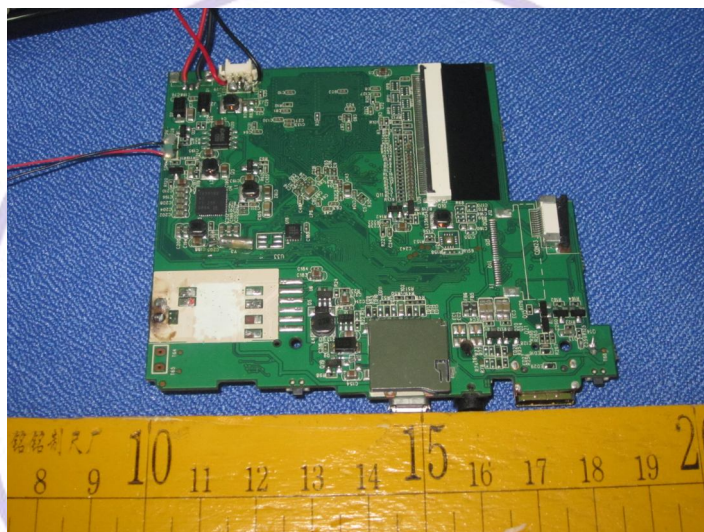

Internal Photos

.....End of Report.....