



Certificate #4312.01

TEST REPORT

Product Name: Compact Hotel Phone
Trade Mark: GRANDSTREAM
Model No.: GHP611W
Add. Model No.: GHP610W
HVIN: GHP611WM1
Add. HVIN: GHP610WM1
Report Number: 24121715264RFC-1
Test Standards: FCC 47 CFR Part 15 Subpart C
RSS-247 Issue 3
RSS-Gen Issue 5
FCC ID: YZZGHP61XWM1
IC: 11964A-GHP61XWM1
Test Result: PASS
Date of Issue: March 19, 2025

Prepared for:

Grandstream Networks, Inc.
126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China

TEL: +86-755-2823 0888**FAX: +86-755-2823 0886**

Prepared by:

David Chen
Senior Project Engineer

Reviewed by:

Kevin Liang
Assistant Manager

Approved by:

Billy Li
Technical Director

Date:

March 19, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Version

Version No.	Date	Description
V1.0	March 19, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	6
1.5 DESCRIPTION OF SUPPORT UNITS	6
1.6 TEST LOCATION	6
1.7 TEST FACILITY	6
1.8 DEVIATION FROM STANDARDS	7
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.11 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	10
4.2 TEST CHANNELS	10
4.3 EUT TEST STATUS	11
4.4 PRE-SCAN	11
4.5 TEST SETUP	12
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	12
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	13
4.5.3 FOR CONDUCTED RF TEST SETUP	14
4.6 SYSTEM TEST CONFIGURATION	14
4.7 DUTY CYCLE	15
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	19
5.1 REFERENCE DOCUMENTS FOR TESTING	19
5.2 ANTENNA REQUIREMENT	19
5.3 CONDUCTED PEAK OUTPUT POWER	20
5.4 6 dB BANDWIDTH & OCCUPIED BANDWIDTH	21
5.5 POWER SPECTRAL DENSITY	22
5.6 CONDUCTED OUT OF BAND EMISSION	23
5.7 RADIATED SPURIOUS EMISSIONS	24
5.8 BAND EDGE MEASUREMENTS (RADIATED)	33
5.9 CONDUCTED EMISSION	47
APPENDIX A RF TEST DATA	50
A.1 99% BANDWIDTH	50
A.2 6dB BANDWIDTH	60
A.3 CONDUCTED OUT OF BAND EMISSION	70
A.4 POWER SPECTRAL DENSITY	98
APPENDIX 1 PHOTOS OF TEST SETUP	108
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	108

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Grandstream Networks, Inc.
Address of Applicant:	126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA
Manufacturer:	Grandstream Networks, Inc.
Address of Manufacturer:	126 Brookline Ave., 3rd Floor, Boston, MA 02215, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Compact Hotel Phone		
Model No.:	GHP611W		
Add. Model No.:	GHP610W		
HVIN:	GHP611WM1		
Add. HVIN:	GHP610WM1		
Trade Mark:	GRANDSTREAM		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	2.4 GHz ISM Band:	IEEE 802.11b/g/n/ax	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac/ax
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac/ax
		5 470 MHz to 5 730 MHz	IEEE 802.11a/n/ac/ax
		5 730 MHz to 5 850 MHz	IEEE 802.11a/n/ac/ax
Sample Received Date:	December 17, 2024		
Sample Tested Date:	December 17, 2024 to February 20, 2025		
Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model GHP611W, but the circuit and the electronic construction do not change, declared by the manufacturer.			

Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.2.2 Description of Accessories

Adapter (1)	
Model No.:	DCT06W120050US-D0
Input:	100-240V~50/60Hz 200 mA
Output:	12.0V == 0.5A
DC Cable	1.8 Meter, Unshielded without ferrite

Adapter (2)	
Model No.:	DCT06W120050US-D1
Input:	100-240V~50/60Hz 200 mA
Output:	12.0V == 0.5A
DC Cable	1.8 Meter, Unshielded without ferrite

Adapter (3)	
Model No.:	GLH006G-1200050CU
Input:	100-240V~50/60Hz 0.3A
Output:	12.0V == 0.5A 6.0W

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

DC Cable	1.8 Meter, Unshielded without ferrite
----------	---------------------------------------

Adapter (4)	
Model No.:	TS-A006-120050AB
Input:	100-240V~50/60Hz 0.2A
Output:	12.0V $\equiv$ 0.5A 6.0W
DC Cable	1.8 Meter, Unshielded without ferrite

Cable	
Connector:	Phone Cord
Cable Type:	Unshielded without ferrite
Length:	2.5 Meter

Others	
Charging base	

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Band:	2400 MHz to 2483.5 MHz
Frequency Range:	2412 MHz to 2462 MHz
Support Standards:	IEEE 802.11b/g/n-HT20/n-HT40/ax-HE20/ax-HE40
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax:OFDM/OFDMA ^{Note} (1024QAM, 256QAM, 64QAM, 16QAM, QPSK, BPSK)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7 IEEE 802.11ax-HE20/ HE40: Up to MCS11
Number of Channels:	IEEE 802.11b: 11 IEEE 802.11g: 11 IEEE 802.11n-HT20/ax-HE20: 11 IEEE 802.11n-HT40/ax-HE40: 7
Channel Separation:	5 MHz
Antenna Type:	Dipole Antenna
Antenna Gain: (Provided by the customer)	3.0 dBi
Maximum Peak Power:	IEEE 802.11b: 17.25 dBm IEEE 802.11g: 21.99 dBm IEEE 802.11n-HT20: 23.90 dBm IEEE 802.11n-HT40: 23.86 dBm IEEE 802.11ax-HE20: 24.36 dBm IEEE 802.11ax-HE40: 24.19 dBm
Maximum e.i.r.p	IEEE 802.11b: 20.25 dBm IEEE 802.11g: 24.99 dBm IEEE 802.11n-HT20: 26.90 dBm IEEE 802.11n-HT40: 26.86 dBm IEEE 802.11ax-HE20: 27.36 dBm IEEE 802.11ax-HE40: 27.19 dBm
Normal Test Voltage:	12Vdc

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

Note: For 802.11ax modes, the device not support partial RU mode

1.4 OTHER INFORMATION

Operation Frequency Each of Channel	
IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20 IEEE 802.11ax-HE20	$f = 2407 + 5k \text{ MHz}, k = 1, \dots, 11$
IEEE 802.11n-HT40 IEEE 802.11ax-HE40	$f = 2407 + 5k \text{ MHz}, k = 3, \dots, 9$
Note: f is the operating frequency (MHz); k is the operating channel.	

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
Notebook	DELL	Latitude 3400	16238087894	UnionTrust
Mouse	DELL	MS111	CN-011D3V-738	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.1Meter	UnionTrust

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.9 dB
5	Radiated emission 1GHz-18GHz	± 4.8 dB
6	Radiated emission 18GHz-26GHz	± 5.1 dB
7	Radiated emission 26GHz-40GHz	± 5.1 dB
8	Conducted spurious emissions	± 2.7 dB
9	RF Power, Conducted	± 0.68 dB
10	Occupied Bandwidth	± 1.86 %
11	Radio Frequency	2.4 GHz: ± 6.5 × 10 ⁻⁸
12	Transmission Time	± 0.19 %

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart C Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)(4) RSS-Gen Issue 5, Section 6.8	N/A	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart C Section 15.207 RSS-Gen Issue 5, Section 8.8	ANSI C63.10-2013 Clause 6.2	PASS
Conducted Peak Output Power	FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3) RSS-247 Issue 3, Section 5.4(d)	ANSI C63.10-2013 Clause 11.9.1.3	PASS
6dB Bandwidth	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2) RSS-247 Issue 3, Section 5.2(a)	ANSI C63.10-2013 Clause 11.8.1	PASS
Occupied Bandwidth	RSS-Gen Issue 5, Section 6.7	RSS-Gen Issue 5, Section 6.7	PASS
Power Spectral Density	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 3, Section 5.2(b)	ANSI C63.10-2013 Clause 11.10.2	PASS
Conducted Out of Band Emission	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Clause 11.11	PASS
Radiated Spurious Emissions	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-Gen Issue 5, Section 6.13/8.9/8.10	ANSI C63.10-2013 Clause 11.11 & Clause 11.12	PASS
Band Edge Measurements (Radiated)	FCC 47 CFR Part 15 Subpart C Section 15.205/15.209 RSS-247 Issue 3, Section 5.5	ANSI C63.10-2013 Clause 11.13	PASS
Disclaimer and Explanations: The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.			

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Oct-2024	28-Oct-2025
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
☒	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	01-Apr-2024	31-Mar-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	28-Oct-2024	27-Oct-2025
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESC13	1166.5950.03	25-Oct-2024	24-Oct-2025
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
☒	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
☐	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	29-Mar-2024	28-Mar-2025
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	25-Oct-2024	24-Oct-2025
☐	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	25-Oct-2024	24-Oct-2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	12	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
AC Power Line Conducted Emission	21.7	37.7	100.5	S202412174876-ZJA01/4	Linson Xie
Conducted Peak Output Power	24.5	51.2	100.2	S202412174876-ZJA02/4	Allen Zhou
6dB Bandwidth & Occupied Bandwidth					
Power Spectral Density					
Conducted Out of Band Emission	21.3	41.5	100.7	S202412174876-ZJA03/4	Jackson Wu
Radiated Spurious Emissions					
Band Edge Measurements (Radiated)					

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	2412 MHz to 2462 MHz	Channel 1	Channel 6	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11g	2412 MHz to 2462 MHz	Channel 1	Channel 6	Channel 11
		2412 MHz	2437 MHz	2462 MHz
IEEE 802.11n-HT20 IEEE 802.11ax-HE20	2412 MHz to 2462 MHz	Channel 1	Channel 6	Channel 11
		2412 MHz	2437 MHz	2462 MHz
Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11n-HT40 IEEE 802.11ax-HE40	2422 MHz to 2452 MHz	Channel 3	Channel 6	Channel 9
		2422 MHz	2437 MHz	2452 MHz

4.3 EUT TEST STATUS

Mode	Tx Function	Description
IEEE 802.11b IEEE 802.11g IEEE 802.11n-HT20 IEEE 802.11n-HT40 IEEE 802.11ax-HE20 IEEE 802.11ax-HE40	1Tx	1. Keep the EUT in continuously transmitting with modulation test single.

Power Setting			
Mode	Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11b	14	14	14
IEEE 802.11g	16	16	16
IEEE 802.11n-HT20	Default	Default	Default
IEEE 802.11n-HT40	Default	Default	Default
IEEE 802.11ax-HE20	Default	Default	Default
IEEE 802.11ax-HE40	Default	Default	Default

Test Software
Test software name: Command



4.4 PRE-SCAN


Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11b	1 Mbps
IEEE 802.11g	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ax-HE20	MCS0
IEEE 802.11ax-HE40	MCS0


4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

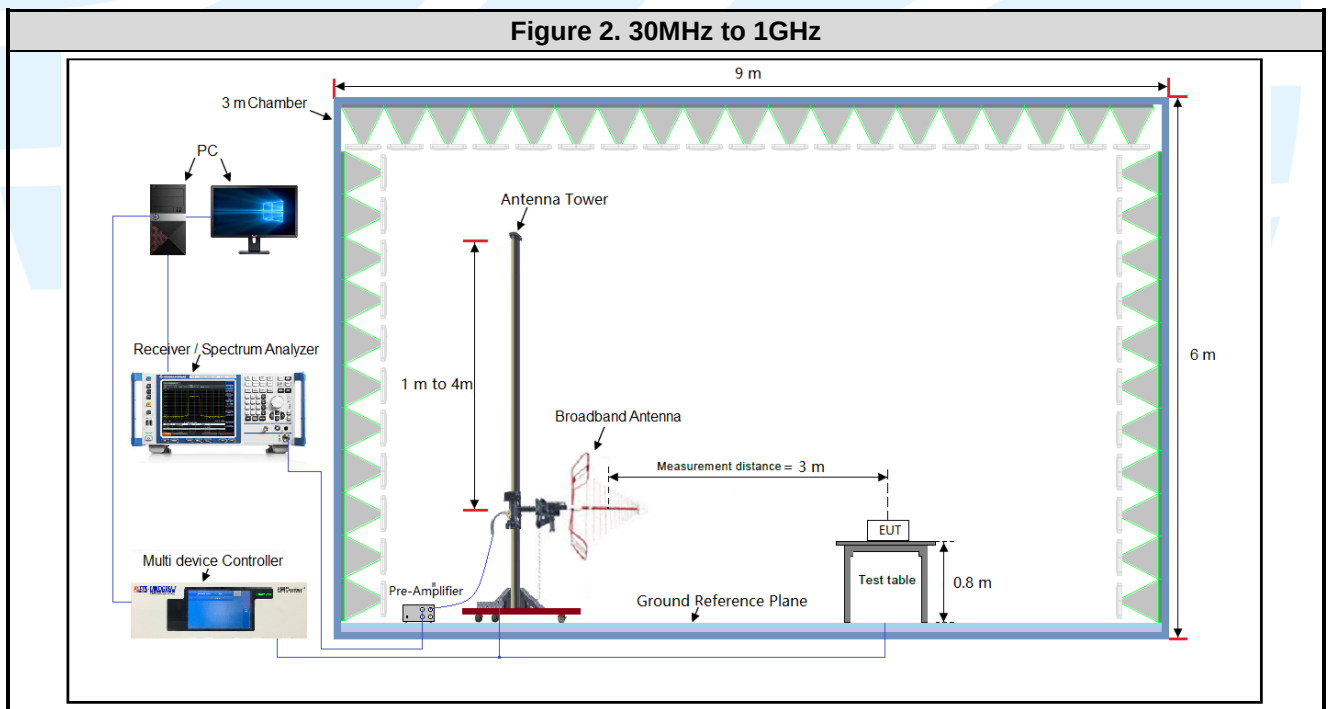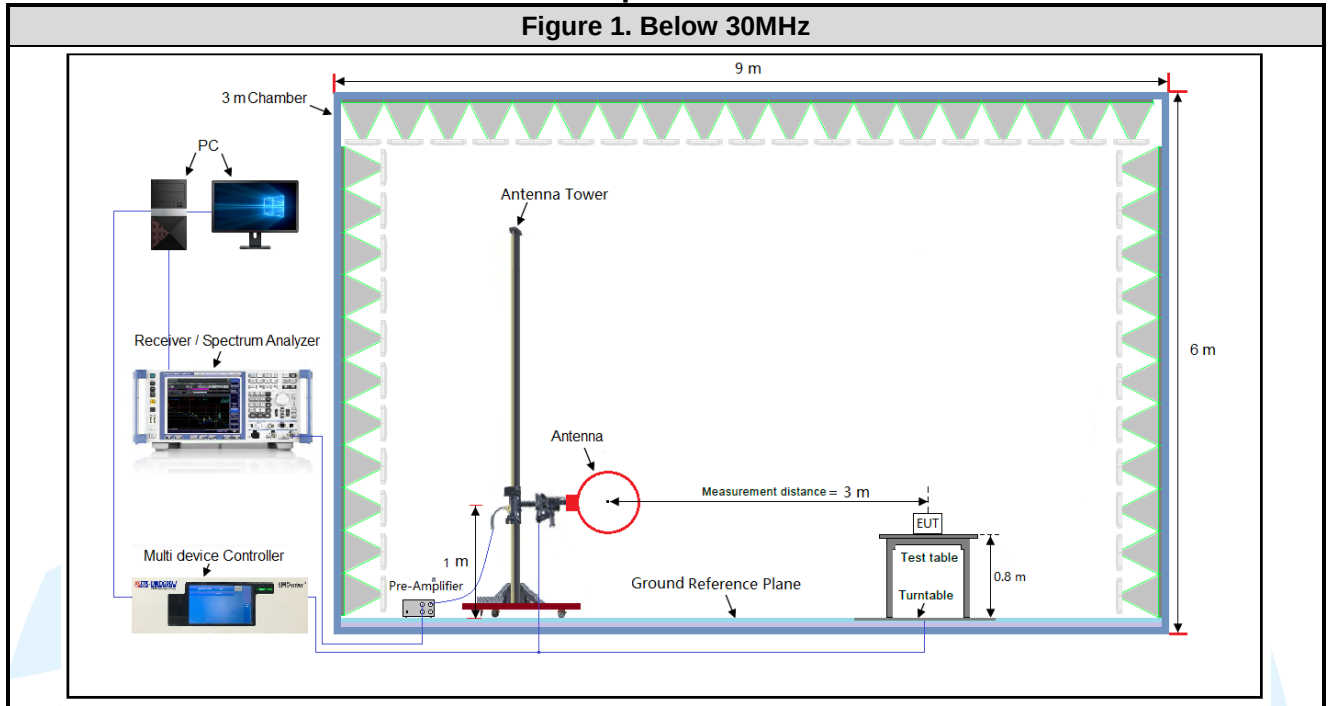


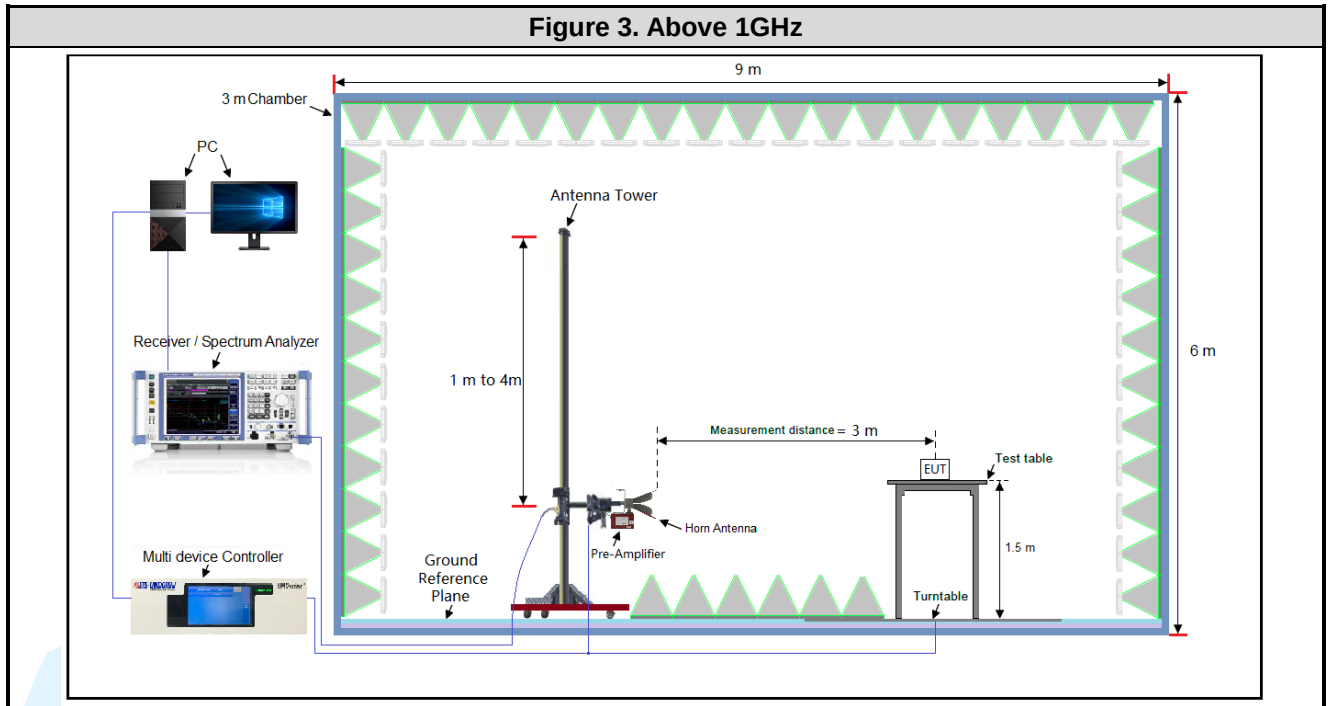

4.5.2 For Conducted Emissions test setup

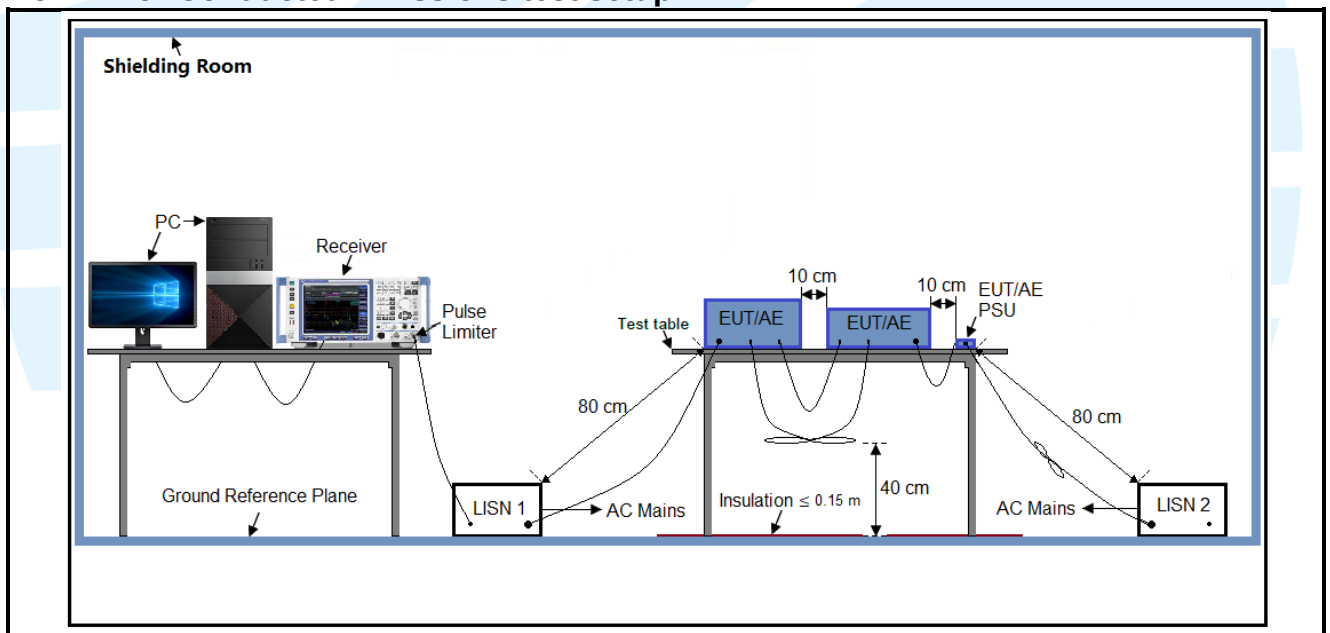

4.5.3 For Conducted RF test setup

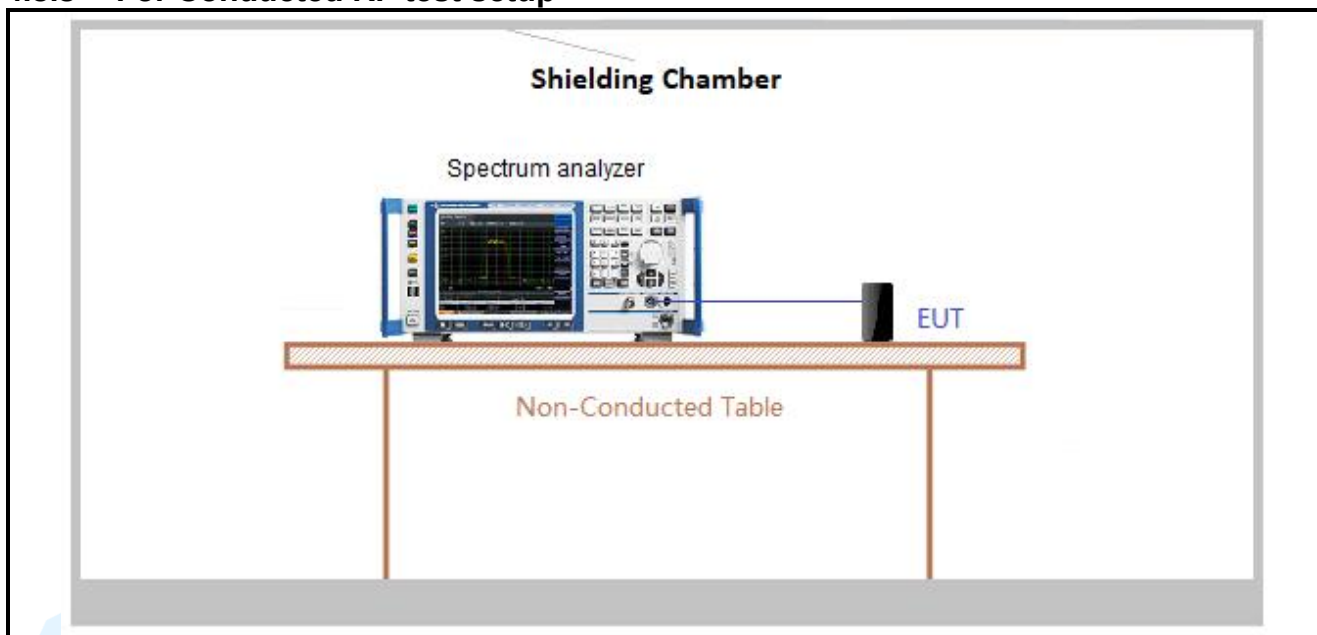

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Z axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 11.6.


Test Results



Mode	Data Rates	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/T Minimum VBW (kHz)
IEEE 802.11b	1 Mbps	12.21	12.33	0.99	99.03	0.00	0.01
IEEE 802.11g	6 Mbps	2.03	2.20	0.92	92.27	0.35	0.49
IEEE 802.11n-HT20	MCS 0	5.09	5.25	0.97	96.95	0.13	0.20
IEEE 802.11n-HT40	MCS 0	4.89	5.27	0.93	92.79	0.33	0.20
IEEE 802.11ax-HE20	MCS 0	3.87	4.11	0.94	94.16	0.26	0.26
IEEE 802.11ax-HE40	MCS 0	3.88	4.04	0.96	96.04	0.18	0.26



Remark:


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

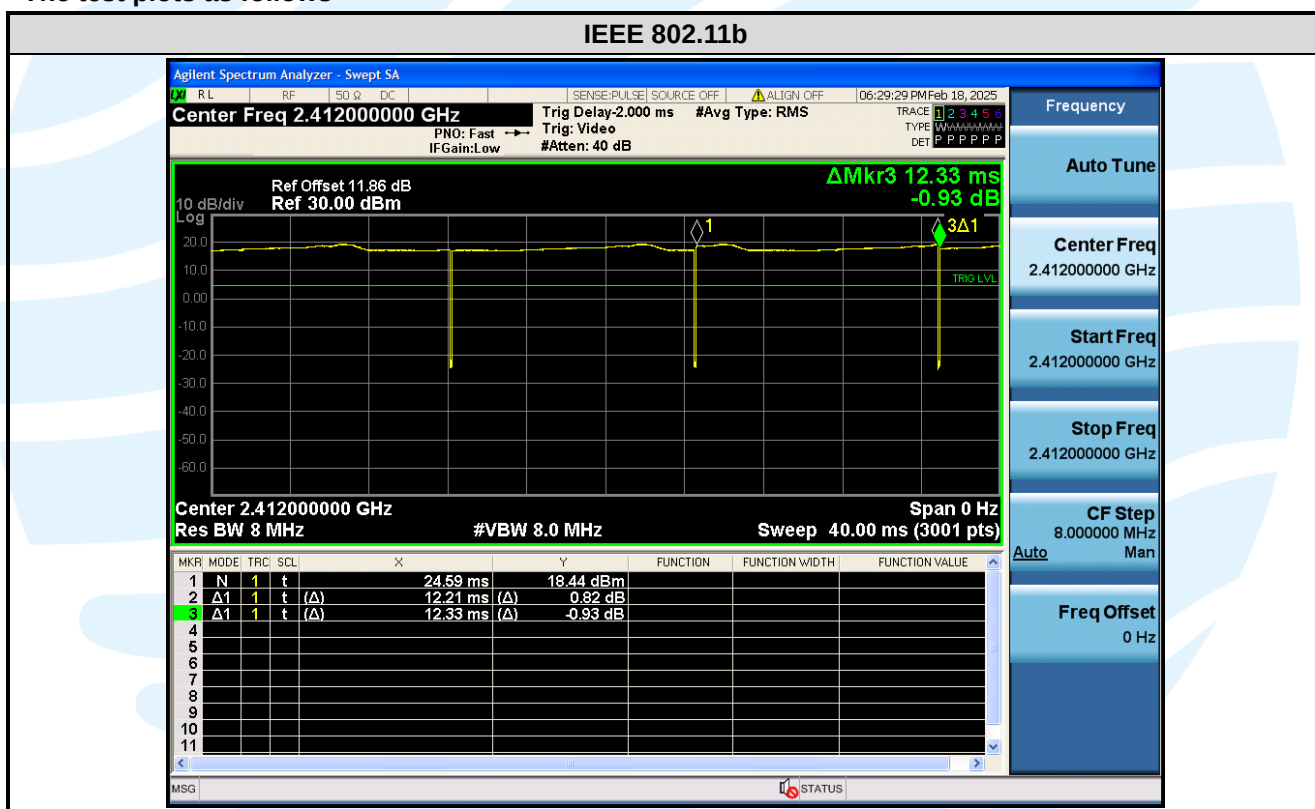

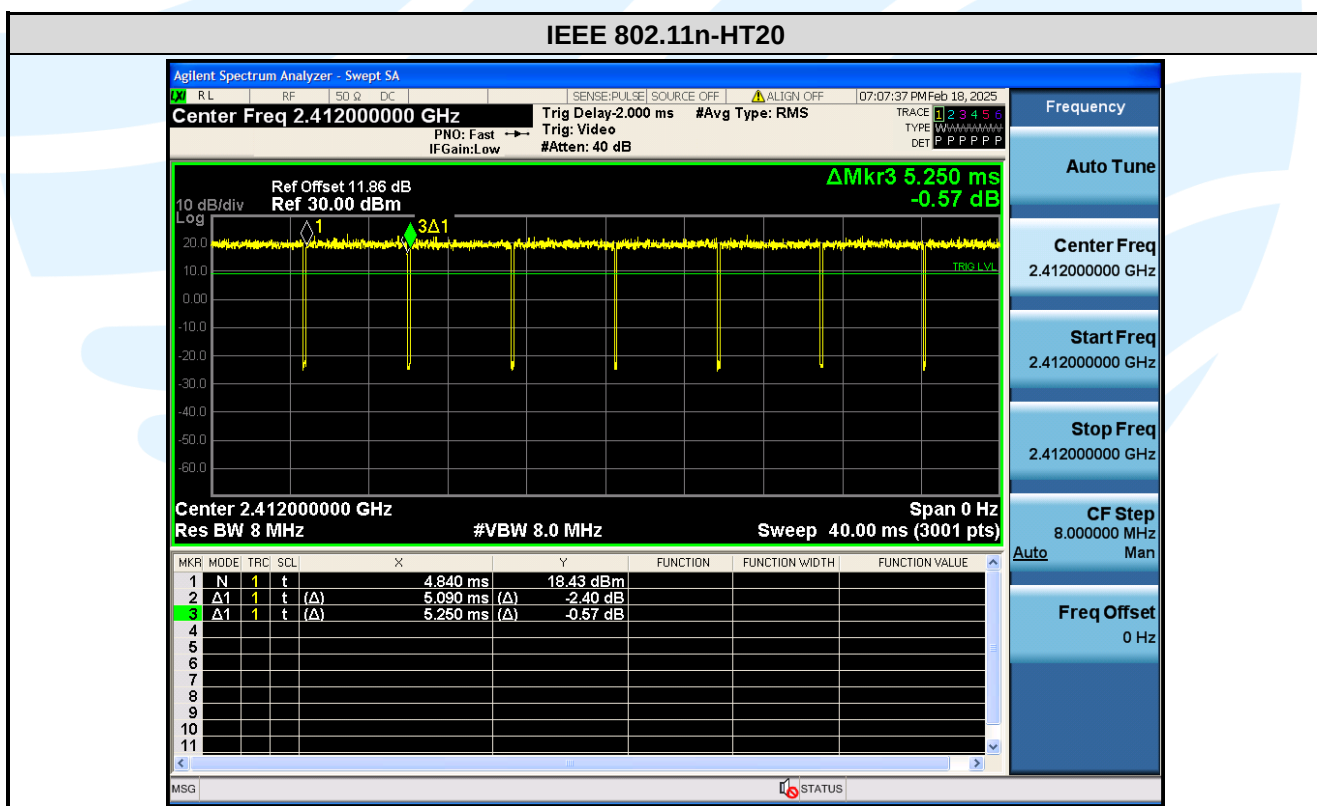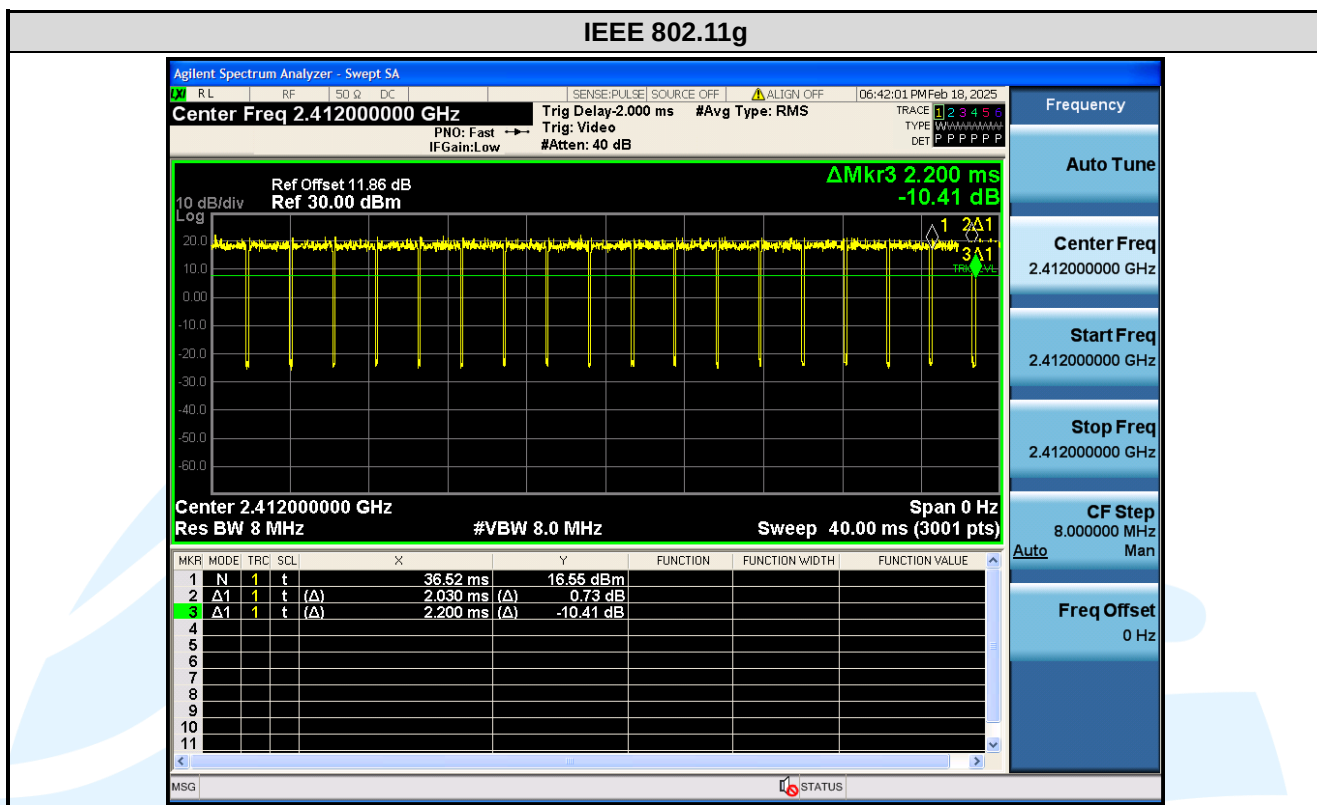

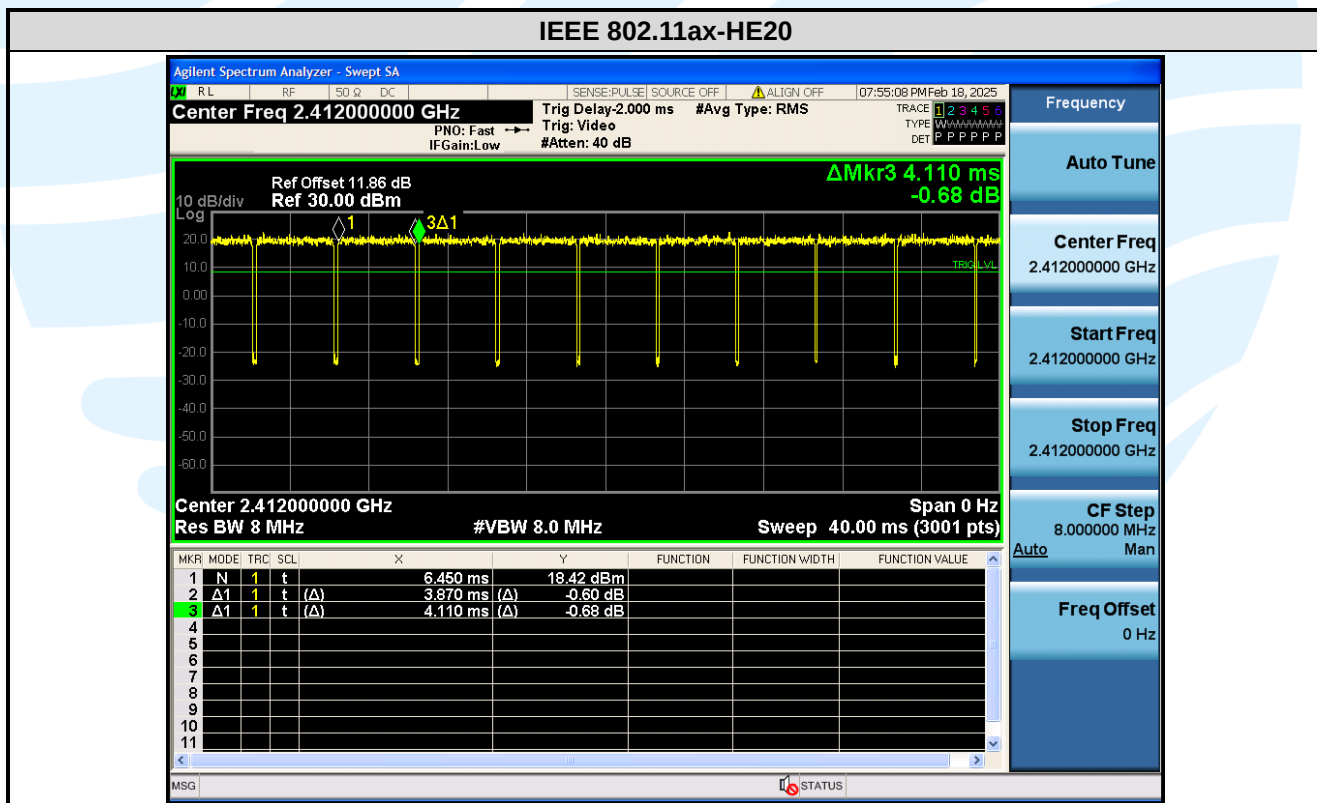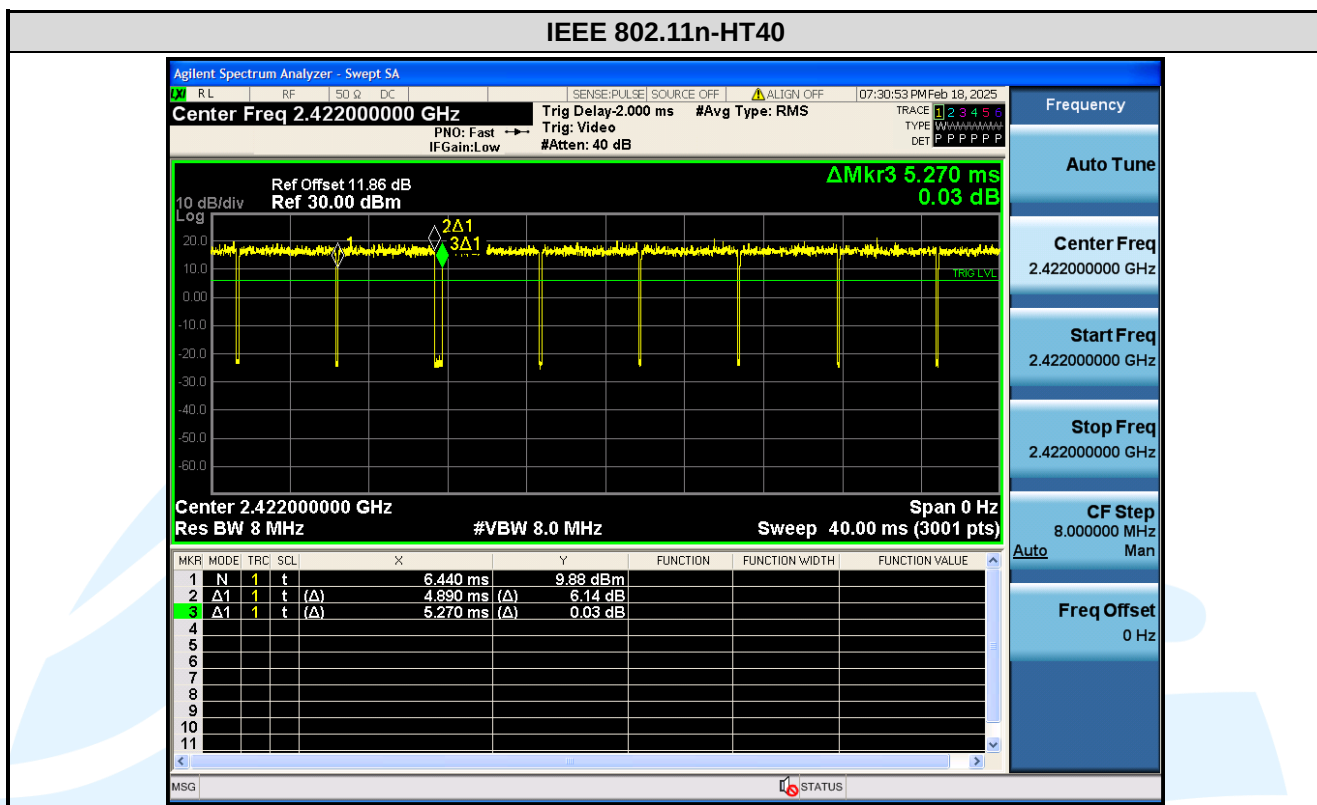

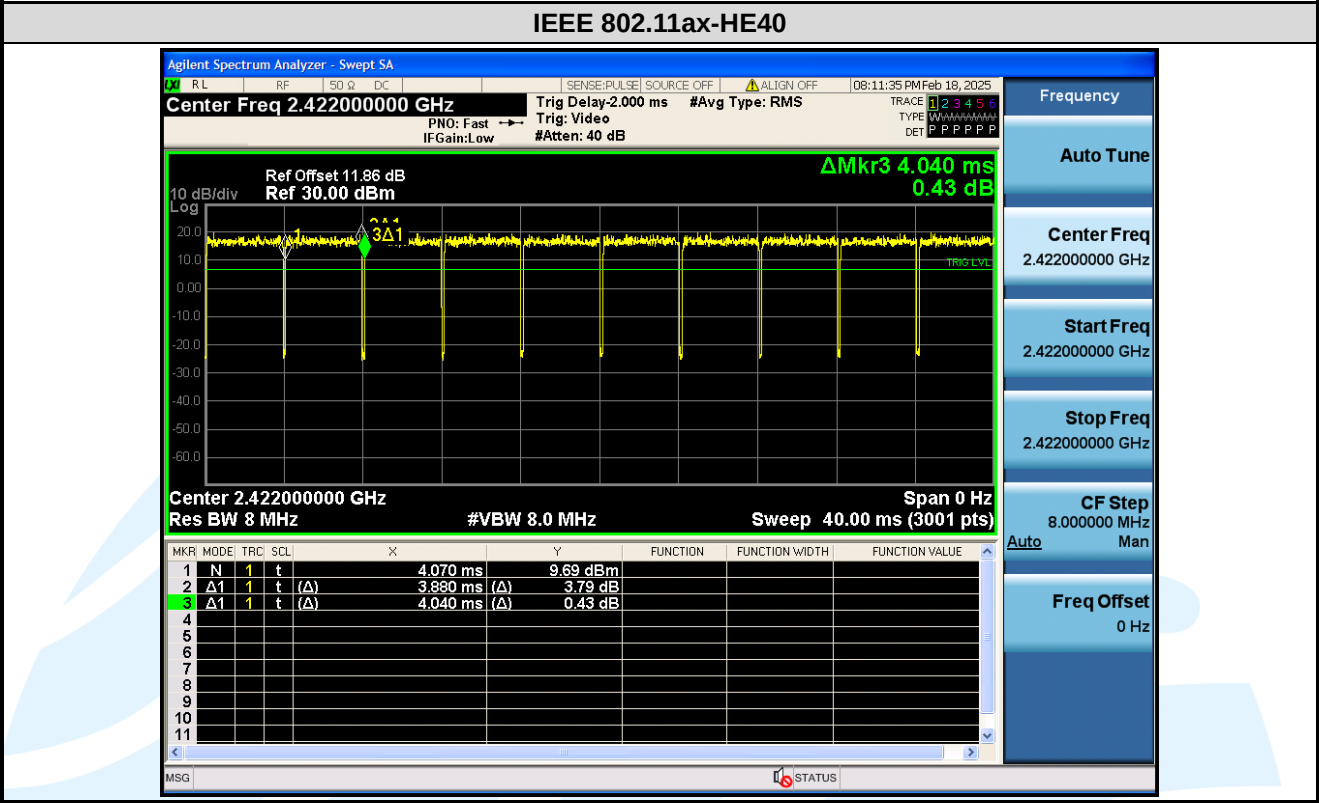

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	RSS-247 Issue 3	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSS) and Licence-Exempt Local Area Network (LE-LAN) Devices
4	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus
5	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
6	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi. RSS-Gen Issue 5, Section 6.8 requirement: According to RSS-Gen Issue 5, Section 6.8, a transmitter can only be sold or operated with antennas with which it was certified. A transmitter may be certified with multiple antenna types. An antenna type comprises antennas having similar in-band and out-of-band radiation patterns. EUT Antenna: Antenna in the interior of the equipment and no consideration of replacement. The gain of the antenna is 3.0 dBi.

5.3 CONDUCTED PEAK OUTPUT POWER

Test Requirement:

FCC 47 CFR Part 15 Subpart C Section 15.247 (b)(3)
RSS-247 Issue 3, Section 5.4(d)

Test Method:

ANSI C63.10-2013 Clause 11.9.1.3

Limit:

For systems using digital modulation in the 2400-2483.5 MHz bands: 1 Watt.

Test Procedure:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
2. Measure out each test modes' peak or average output power, record the power level.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:

Refer to section 4.5.3 for details.

Instruments
Used:

Refer to section 3 for details

Test Results:

Mode	Frequency (MHz)	RU&Index	Max. Avg Power (dBm)	Max. Peak Power (dBm)	Limit (dBm)	ISED EIRP (dBm)	Limit (dBm)	Result
IEEE 802.11b	2412	N/A	14.54	17.25	30.00	20.25	36.02	Pass
	2437	N/A	13.24	16.23	30.00	19.23	36.02	Pass
	2462	N/A	13.58	16.55	30.00	19.55	36.02	Pass
IEEE 802.11g	2412	N/A	14.92	21.37	30.00	24.37	36.02	Pass
	2437	N/A	15.46	21.99	30.00	24.99	36.02	Pass
	2462	N/A	15.24	21.43	30.00	24.43	36.02	Pass
IEEE 802.11n-HT20	2412	N/A	16.83	23.34	30.00	26.34	36.02	Pass
	2437	N/A	16.99	23.90	30.00	26.90	36.02	Pass
	2462	N/A	16.40	23.19	30.00	26.19	36.02	Pass
IEEE 802.11n-HT40	2422	N/A	16.64	23.12	30.00	26.12	36.02	Pass
	2437	N/A	16.74	23.86	30.00	26.86	36.02	Pass
	2452	N/A	16.88	23.39	30.00	26.39	36.02	Pass
IEEE 802.11ax-HE20	2412	SU	16.74	23.56	30.00	26.56	36.02	Pass
	2437	SU	17.11	24.36	30.00	27.36	36.02	Pass
	2462	SU	16.89	23.66	30.00	26.66	36.02	Pass
IEEE 802.11ax-HE40	2422	SU	16.64	23.56	30.00	26.56	36.02	Pass
	2437	SU	17.07	24.19	30.00	27.19	36.02	Pass
	2452	SU	16.76	24.10	30.00	27.10	36.02	Pass

Note:

1. The antenna gain of 3.0 dBi less than 6dBi maximum permission antenna gain value based on 1 watt (30dBm) peak output power limit.
2. The maximum EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

5.46 DB BANDWIDTH & OCCUPIED BANDWIDTH

	FCC 47 CFR Part 15 Subpart C Section 15.247 (a)(2)
Test Requirement:	RSS-247 Issue 3, Section 5.2(a) RSS-Gen Issue 5, Section 6.7
Test Method:	ANSI C63.10-2013 Clause 11.8.1 RSS-Gen Issue 5, Section 6.7
Limit:	For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings:

6dB Bandwidth

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

- Set RBW = 1% to 5% of the occupied bandwidth
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.5 POWER SPECTRAL DENSITY

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247 (e) RSS-247 Issue 3, Section 5.2(b)
Test Method:	ANSI C63.10-2013 Clause 11.10.2
Limit:	For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.6 CONDUCTED OUT OF BAND EMISSION

Test Requirement:	FCC 47 CFR Part 15 Subpart C Section 15.247(d) RSS-247 Issue 2, Section 5.5
Test Method:	ANSI C63.10-2013 Clause 11.11
Limit:	In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.
Test Procedure:	Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer. Use the following spectrum analyzer settings: Step 1: Measurement Procedure REF - Set instrument center frequency to DTS channel center frequency. - Set the span to ≥ 1.5 times the DTS bandwidth. - Set the RBW = 100 kHz. - Set the VBW $\geq 3 \times$ RBW. - Detector = peak. - Sweep time = auto couple. - Trace mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum PSD level. - Note that the channel found to contain the maximum PSD level can be used to establish the reference level. Step 2: Measurement Procedure OOB - Set RBW = 100 kHz. - Set VBW ≥ 300 kHz. - Detector = peak. - Sweep = auto couple. - Trace Mode = max hold. - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level. Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.
Test Setup:	Refer to section 4.5.3 for details.
Instruments Used:	Refer to section 3 for details
Test Mode:	Link mode
Test Results:	Please refer to Appendix A

5.7 RADIATED SPURIOUS EMISSIONS

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-Gen Issue 5, Section 6.13/8.9/8.10

Test Method: ANSI C63.10-2013 Clause 11.11 & Clause 11.12

Receiver Setup:

Frequency	RBW
0.009 MHz-0.150 MHz	200/300 kHz
0.150 MHz -30 MHz	9/10 kHz
30 MHz-1 GHz	100/120 kHz
Above 1 GHz	1 MHz

Limits:

Spurious Emissions

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009 MHz-0.490 MHz	2400/F(kHz)	--	--	300
0.490 MHz-1.705 MHz	24000/F(kHz)	--	--	30
1.705 MHz-30 MHz	30	--	--	30
30 MHz-88 MHz	100	40.0	Quasi-peak	3
88 MHz-216 MHz	150	43.5	Quasi-peak	3
216 MHz-960 MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1 GHz	500	54.0	Average	3

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (uV/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

1. From 30 MHz to 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

2. Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

- 2) Test the EUT in the lowest channel ,middle channel, the Highest channel
- 3) The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the Z axis positioning which it is worse case.
- 4) Repeat above procedures until all frequencies measured was complete.

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:


Radiated Emission Test Data (9 KHz ~ 30 MHz):

The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.


Radiated Emission Test Data (30 MHz ~ 1 GHz):

Worst-Case Configuration(IEEE 802.11ax-HE20 Channel 6)

Horizontal

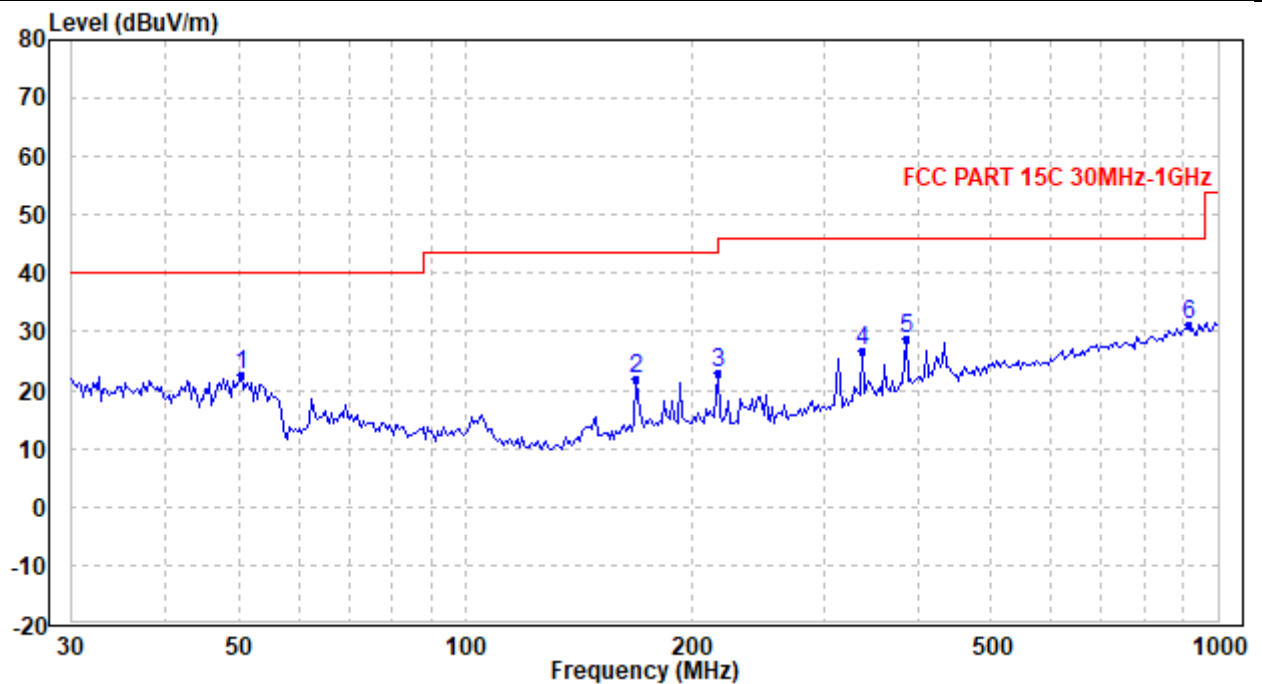

No.	Frequency (MHz)	Reading (dBμV/m)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	50.461	36.74	-14.19	22.55	40.00	-17.45	QP
2	168.997	34.29	-12.49	21.80	43.50	-21.70	QP
3	216.120	33.79	-10.98	22.81	46.00	-23.19	QP
4	336.482	34.03	-7.22	26.81	46.00	-19.19	QP
5	384.545	33.78	-4.90	28.88	46.00	-17.12	QP
6	912.695	26.77	4.51	31.28	46.00	-14.72	QP

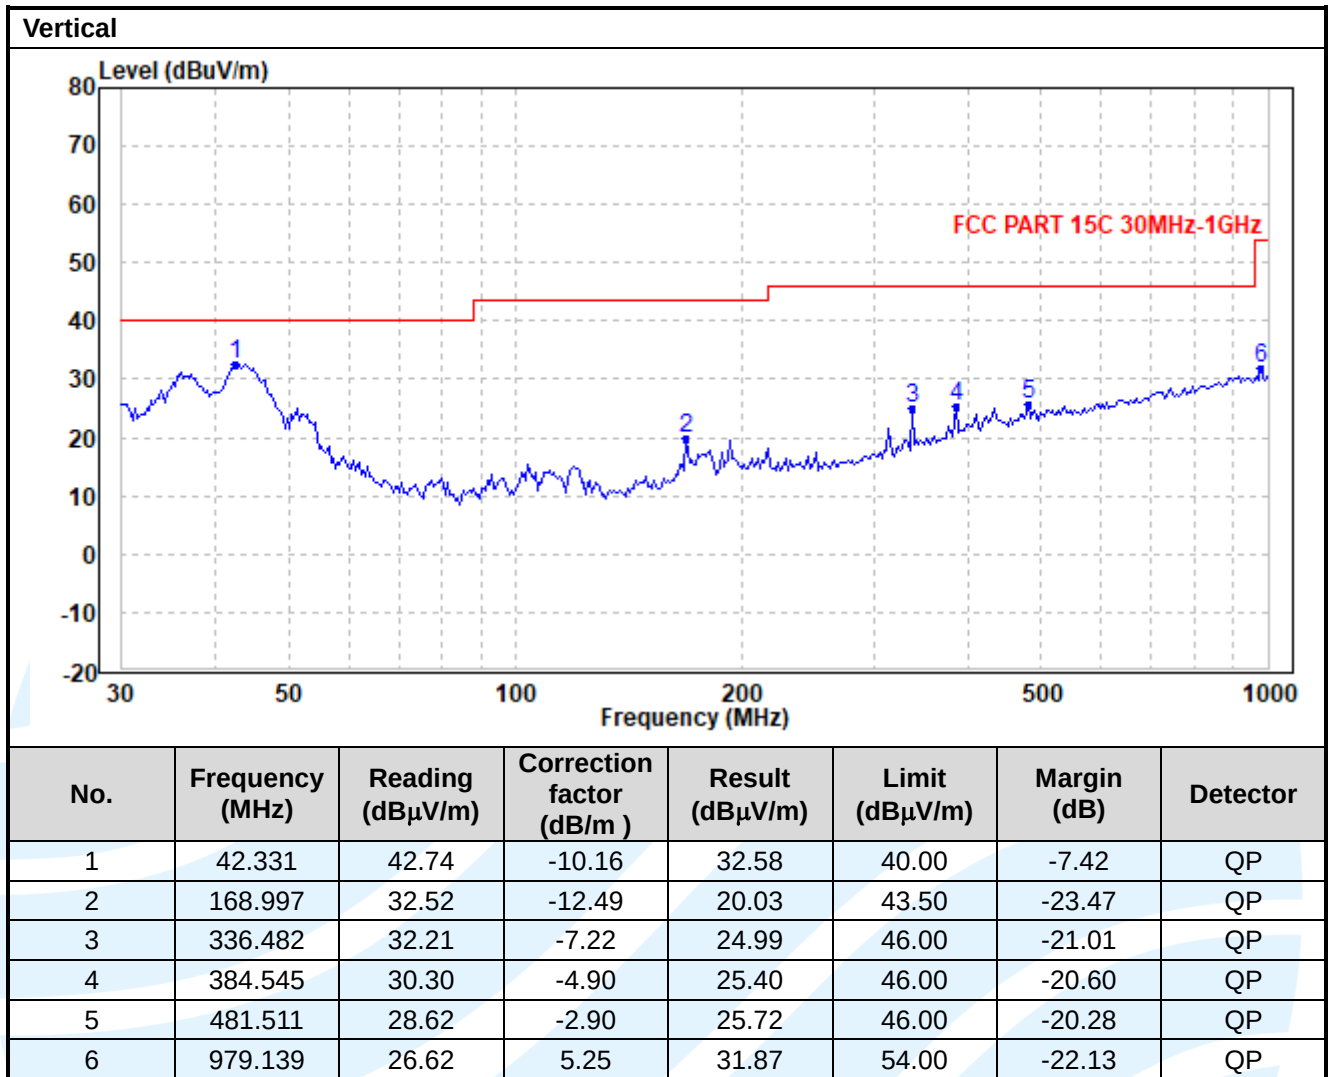

Radiated Emission Test Data (Above 1GHz):								
IEEE 802.11b Channel 1:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4805.307	54.79	-2.08	52.71	54.00	-1.29	Peak	Horizontal
2	4805.307	57.85	-2.08	55.77	74.00	-18.23	Average	Horizontal
3	7207.945	50.09	1.30	51.39	54.00	-2.61	Average	Horizontal
4	7207.945	55.26	1.30	56.56	74.00	-17.44	Peak	Horizontal
5	4805.307	54.68	-2.08	52.60	54.00	-1.40	Average	Vertical
6	4805.307	57.41	-2.08	55.33	74.00	-18.67	Peak	Vertical
7	7207.945	49.82	1.30	51.12	54.00	-2.88	Average	Vertical
8	7207.945	53.08	1.30	54.38	74.00	-19.62	Peak	Vertical
IEEE 802.11b Channel 6:								
1	4874	51.89	-2.05	49.84	54.00	-4.16	Average	Horizontal
2	4874	53.89	-2.05	51.84	74.00	-22.16	Peak	Horizontal
3	7311	51.43	1.31	52.74	54.00	-1.26	Average	Horizontal
4	7311	56.43	1.31	57.74	74.00	-16.26	Peak	Horizontal
5	4874	50.08	-2.05	48.03	54.00	-5.97	Average	Vertical
6	4874	52.08	-2.05	50.03	74.00	-23.97	Peak	Vertical
7	7311	48.51	1.31	49.82	54.00	-4.18	Average	Vertical
8	7311	52.51	1.31	53.82	74.00	-20.18	Peak	Vertical
IEEE 802.11b Channel 11:								
1	4924	51.52	-2.03	49.49	54.00	-4.51	Average	Horizontal
2	4924	54.52	-2.03	52.49	74.00	-21.51	Peak	Horizontal
3	7386	47.38	1.31	48.69	54.00	-5.31	Average	Horizontal
4	7386	51.38	1.31	52.69	74.00	-21.31	Peak	Horizontal
5	4924	47.74	-2.03	45.71	54.00	-8.29	Average	Vertical
6	4924	49.74	-2.03	47.71	74.00	-26.29	Peak	Vertical
7	7386	46.22	1.31	47.53	54.00	-6.47	Average	Vertical
8	7386	49.22	1.31	50.53	74.00	-23.47	Peak	Vertical

IEEE 802.11g Channel 1:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4805.307	53.87	-2.08	51.79	54.00	-2.21	Average	Horizontal
2	4805.307	56.36	-2.08	54.28	74.00	-19.72	Peak	Horizontal
3	7207.945	51.68	1.30	52.98	54.00	-1.02	Average	Horizontal
4	7207.945	54.68	1.30	55.98	74.00	-18.02	Peak	Horizontal
5	4833.222	52.31	-2.07	50.24	54.00	-3.76	Average	Vertical
6	4833.222	54.25	-2.07	52.18	74.00	-21.82	Peak	Vertical
7	7207.945	49.24	1.30	50.54	54.00	-3.46	Average	Vertical
8	7207.945	53.02	1.30	54.32	74.00	-19.68	Peak	Vertical
IEEE 802.11g Channel 6:								
1	4861.298	52.46	-2.05	50.41	54.00	-3.59	Average	Horizontal
2	4861.298	55.52	-2.05	53.47	74.00	-20.53	Peak	Horizontal
3	7291.932	51.39	1.30	52.69	54.00	-1.31	Average	Horizontal
4	7291.932	54.66	1.30	55.96	74.00	-18.04	Peak	Horizontal
5	4861.298	49.48	-2.05	47.43	54.00	-6.57	Average	Vertical
6	4861.298	52.76	-2.05	50.71	74.00	-23.29	Peak	Vertical
7	7291.932	49.70	1.30	51.00	54.00	-3.00	Average	Vertical
8	7291.932	52.58	1.30	53.88	74.00	-20.12	Peak	Vertical
IEEE 802.11g Channel 11:								
1	4924	54.88	-2.03	52.85	54.00	-1.15	Average	Horizontal
2	4924	58.88	-2.03	56.85	74.00	-17.15	Peak	Horizontal
3	7386	50.31	1.31	51.62	54.00	-2.38	Average	Horizontal
4	7386	53.31	1.31	54.62	74.00	-19.38	Peak	Horizontal
5	4924	51.46	-2.03	49.43	54.00	-4.57	Average	Vertical
6	4924	53.46	-2.03	51.43	74.00	-22.57	Peak	Vertical
7	7386	45.94	1.31	47.25	54.00	-6.75	Average	Vertical
8	7386	48.94	1.31	50.25	74.00	-23.75	Peak	Vertical

IEEE 802.11n-HT20_Channel 1:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4805.307	54.16	-2.08	52.08	54.00	-1.92	Average	Horizontal
2	4805.307	57.16	-2.08	55.08	74.00	-18.92	Peak	Horizontal
3	7236	50.40	1.30	51.70	54.00	-2.30	Average	Horizontal
4	7236	54.40	1.30	55.70	74.00	-18.30	Peak	Horizontal
5	4824	51.64	-2.07	49.57	54.00	-4.43	Average	Vertical
6	4824	53.64	-2.07	51.57	74.00	-22.43	Peak	Vertical
7	7236	49.96	1.30	51.26	54.00	-2.74	Average	Vertical
8	7236	52.96	1.30	54.26	74.00	-19.74	Peak	Vertical
IEEE 802.11n-HT20_Channel 6:								
1	4874	54.29	-2.05	52.24	54.00	-1.76	Average	Horizontal
2	4874	56.29	-2.05	54.24	74.00	-19.76	Peak	Horizontal
3	7311	50.86	1.31	52.17	54.00	-1.83	Average	Horizontal
4	7311	55.86	1.31	57.17	74.00	-16.83	Peak	Horizontal
5	4874	52.92	-2.05	50.87	54.00	-3.13	Average	Vertical
6	4874	54.92	-2.05	52.87	74.00	-21.13	Peak	Vertical
7	7311	49.71	1.31	51.02	54.00	-2.98	Average	Vertical
8	7311	52.71	1.31	54.02	74.00	-19.98	Peak	Vertical
IEEE 802.11n-HT20_Channel 11:								
1	4924	54.30	-2.03	52.27	54.00	-1.73	Average	Horizontal
2	4924	57.30	-2.03	55.27	74.00	-18.73	Peak	Horizontal
3	7386	49.43	1.31	50.74	54.00	-3.26	Average	Horizontal
4	7386	52.43	1.31	53.74	74.00	-20.26	Peak	Horizontal
5	4924	51.82	-2.03	49.79	54.00	-4.21	Average	Vertical
6	4924	53.82	-2.03	51.79	74.00	-22.21	Peak	Vertical
7	7386	48.00	1.31	49.31	54.00	-4.69	Average	Vertical
8	7386	50.00	1.31	51.31	74.00	-22.69	Peak	Vertical

IEEE 802.11n-HT40_ Channel 3:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4844	51.45	-2.06	49.39	54.00	-4.61	Average	Horizontal
2	4844	53.45	-2.06	51.39	74.00	-22.61	Peak	Horizontal
3	7266	50.89	1.31	52.20	54.00	-1.80	Average	Horizontal
4	7266	53.89	1.31	55.20	74.00	-18.80	Peak	Horizontal
5	4844	50.54	-2.06	48.48	54.00	-5.52	Average	Vertical
6	4844	52.54	-2.06	50.48	74.00	-23.52	Peak	Vertical
7	7266	49.89	1.31	51.20	54.00	-2.80	Average	Vertical
8	7266	51.89	1.31	53.20	74.00	-20.80	Peak	Vertical
IEEE 802.11n-HT40_ Channel 6:								
1	4874	51.21	-2.05	49.16	54.00	-4.84	Average	Horizontal
2	4874	53.21	-2.05	51.16	74.00	-22.84	Peak	Horizontal
3	7311	50.46	1.31	51.77	54.00	-2.23	Average	Horizontal
4	7311	53.46	1.31	54.77	74.00	-19.23	Peak	Horizontal
5	4874	51.58	-2.05	49.53	54.00	-4.47	Average	Vertical
6	4874	53.58	-2.05	51.53	74.00	-22.47	Peak	Vertical
7	7311	50.28	1.31	51.59	54.00	-2.41	Average	Vertical
8	7311	52.28	1.31	53.59	74.00	-20.41	Peak	Vertical
IEEE 802.11n-HT40_ Channel 9:								
1	4889.539	52.80	-2.04	50.76	54.00	-3.24	Average	Horizontal
2	4889.539	54.80	-2.04	52.76	74.00	-21.24	Peak	Horizontal
3	7334.292	50.47	1.31	51.78	54.00	-2.22	Average	Horizontal
4	7334.292	54.47	1.31	55.78	74.00	-18.22	Peak	Horizontal
5	4889.539	51.72	-2.04	49.68	54.00	-4.32	Average	Vertical
6	4889.539	53.72	-2.04	51.68	74.00	-22.32	Peak	Vertical
7	7356	47.88	1.31	49.19	54.00	-4.81	Average	Vertical
8	7356	49.88	1.31	51.19	74.00	-22.81	Peak	Vertical

IEEE 802.11ax-HE20_Channel 1:

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4824	51.76	-2.07	49.69	54.00	-4.31	Average	Horizontal
2	4824	53.76	-2.07	51.69	74.00	-22.31	Peak	Horizontal
3	7236	47.23	1.30	48.53	54.00	-5.47	Average	Horizontal
4	7236	49.23	1.30	50.53	74.00	-23.47	Peak	Horizontal
5	4805.307	52.22	-2.08	50.14	54.00	-3.86	Average	Vertical
6	4805.307	54.22	-2.08	52.14	74.00	-21.86	Peak	Vertical
7	7236	47.38	1.30	48.68	54.00	-5.32	Average	Vertical
8	7236	49.38	1.30	50.68	74.00	-23.32	Peak	Vertical

IEEE 802.11ax-HE20_Channel 6:

1	4874	51.15	-2.05	49.10	54.00	-4.90	Average	Horizontal
2	4874	53.15	-2.05	51.10	74.00	-22.90	Peak	Horizontal
3	7311	49.08	1.31	50.39	54.00	-3.61	Average	Horizontal
4	7311	51.08	1.31	52.39	74.00	-21.61	Peak	Horizontal
5	4874	49.10	-2.05	47.05	54.00	-6.95	Average	Vertical
6	4874	51.10	-2.05	49.05	74.00	-24.95	Peak	Vertical
7	7311	47.83	1.31	49.14	54.00	-4.86	Average	Vertical
8	7311	49.83	1.31	51.14	74.00	-22.86	Peak	Vertical

IEEE 802.11ax-HE20_Channel 11:

1	4924	50.78	-2.03	48.75	54.00	-5.25	Average	Horizontal
2	4924	52.78	-2.03	50.75	74.00	-23.25	Peak	Horizontal
3	7386	46.21	1.31	47.52	54.00	-6.48	Average	Horizontal
4	7386	48.21	1.31	49.52	74.00	-24.48	Peak	Horizontal
5	4924	46.81	-2.03	44.78	54.00	-9.22	Average	Vertical
6	4924	48.81	-2.03	46.78	74.00	-27.22	Peak	Vertical
7	7386	44.45	1.31	45.76	54.00	-8.24	Average	Vertical
8	7386	46.45	1.31	47.76	74.00	-26.24	Peak	Vertical

IEEE 802.11ax-HE40_Channel 3:								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
1	4844	49.32	-2.06	47.26	54.00	-6.74	Average	Horizontal
2	4844	52.32	-2.06	50.26	74.00	-23.74	Peak	Horizontal
3	7266	45.71	1.31	47.02	54.00	-6.98	Average	Horizontal
4	7266	47.71	1.31	49.02	74.00	-24.98	Peak	Horizontal
5	4844	48.84	-2.06	46.78	54.00	-7.22	Average	Vertical
6	4844	50.84	-2.06	48.78	74.00	-25.22	Peak	Vertical
7	7266	46.63	1.31	47.94	54.00	-6.06	Average	Vertical
8	7266	48.63	1.31	49.94	74.00	-24.06	Peak	Vertical
IEEE 802.11ax-HE40_Channel 6:								
1	4889.539	49.10	-2.04	47.06	54.00	-6.94	Average	Horizontal
2	4889.539	51.10	-2.04	49.06	74.00	-24.94	Peak	Horizontal
3	7334.292	48.64	1.31	49.95	54.00	-4.05	Average	Horizontal
4	7334.292	50.64	1.31	51.95	74.00	-22.05	Peak	Horizontal
5	4874	45.53	-2.05	43.48	54.00	-10.52	Average	Vertical
6	4874	47.53	-2.05	45.48	74.00	-28.52	Peak	Vertical
7	7311	43.24	1.31	44.55	54.00	-9.45	Average	Vertical
8	7311	45.24	1.31	46.55	74.00	-27.45	Peak	Vertical
IEEE 802.11ax-HE40_Channel 9:								
1	4889.539	49.10	-2.04	47.06	54.00	-6.94	Average	Horizontal
2	4889.539	51.10	-2.04	49.06	74.00	-24.94	Peak	Horizontal
3	7334.292	48.64	1.31	49.95	54.00	-4.05	Average	Horizontal
4	7334.292	50.64	1.31	51.95	74.00	-22.05	Peak	Horizontal
5	4904	45.35	-2.04	43.31	54.00	-10.69	Average	Vertical
6	4904	48.20	-2.04	46.16	74.00	-27.84	Peak	Vertical
7	7356	43.67	1.31	44.98	54.00	-9.02	Average	Vertical
8	7356	46.88	1.31	48.19	74.00	-25.81	Peak	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.8 BAND EDGE MEASUREMENTS (RADIATED)

Test Requirement: FCC 47 CFR Part 15 Subpart C Section 15.205/15.209
RSS-247 Issue 3, Section 5.5

Test Method: ANSI C63.10-2013 Clause 11.13

Limits:

Radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Frequency	Limit (dB μ V/m @3m)	Remark
30 MHz-88 MHz	40.0	Quasi-peak Value
88 MHz-216 MHz	43.5	Quasi-peak Value
216 MHz-960 MHz	46.0	Quasi-peak Value
960 MHz-1 GHz	54.0	Quasi-peak Value
Above 1 GHz	54.0	Average Value
	74.0	Peak Value

Test Setup: Refer to section 4.4.1 for details.

Test Procedures:

Radiated band edge measurements at 2390 MHz and 2483.5 MHz were made with the unit transmitting in the low end of the channel range and the high end closest to the restricted bands respectively. The emissions were made on the 966 Semi-Chamber. Use (resolution bandwidth (RBW) = 1 MHz, video bandwidth (VBW) = 3 MHz for peak levels and RBW = 1 MHz and VBW = 10 Hz or 1/T for average levels).


1. Use radiated spurious emission test procedure described in clause 5.10. The transmitter output (antenna port) was connected to the test receiver.
2. Set the PK and AV limit line.
3. Record the fundamental emission and emissions out of the band-edge.
4. Determine band-edge compliance as required.


Equipment Used: Refer to section 3 for details.



Test Result: Pass

The measurement data as follows:



IEEE 802.11b

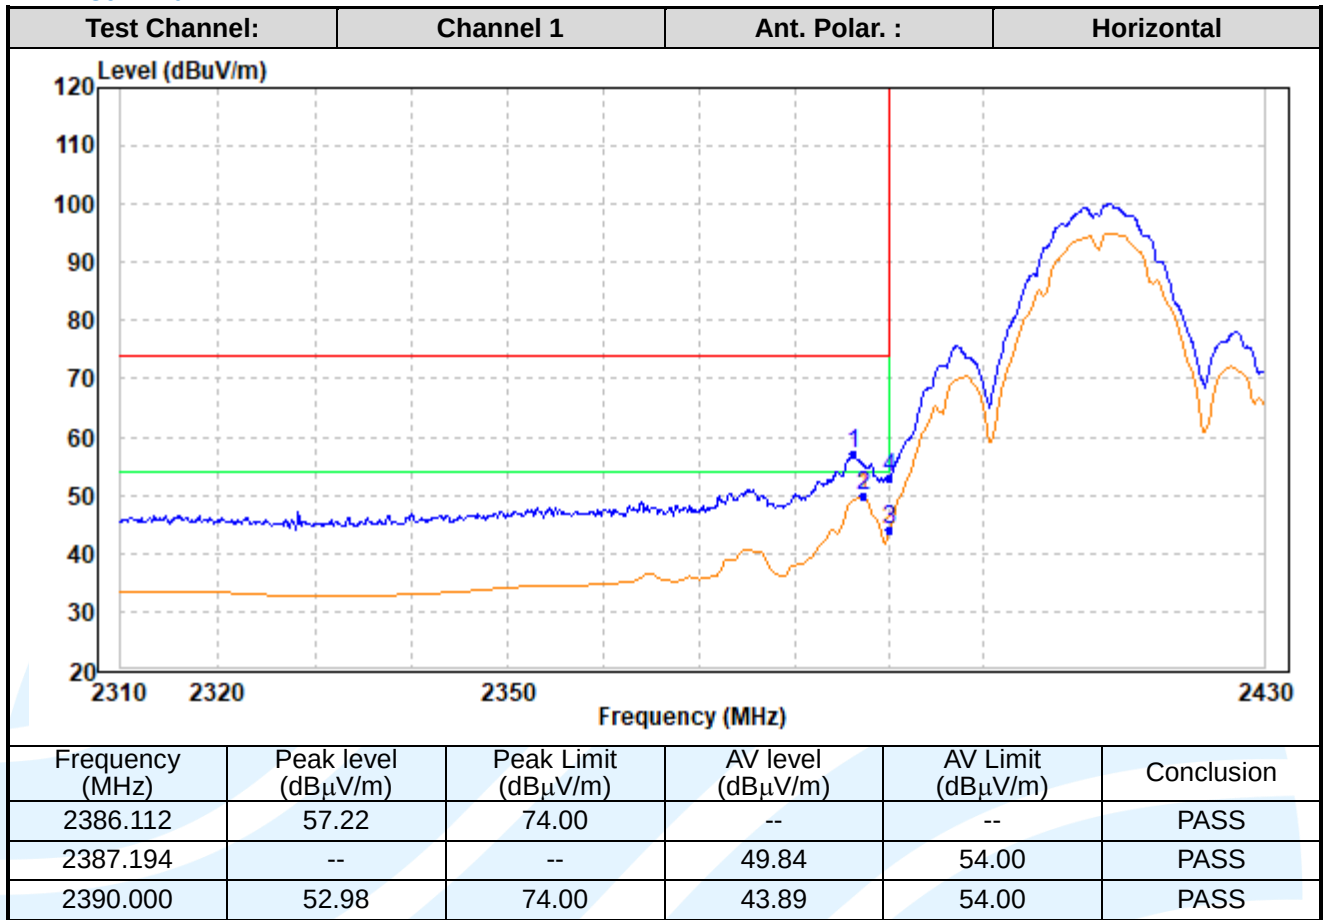

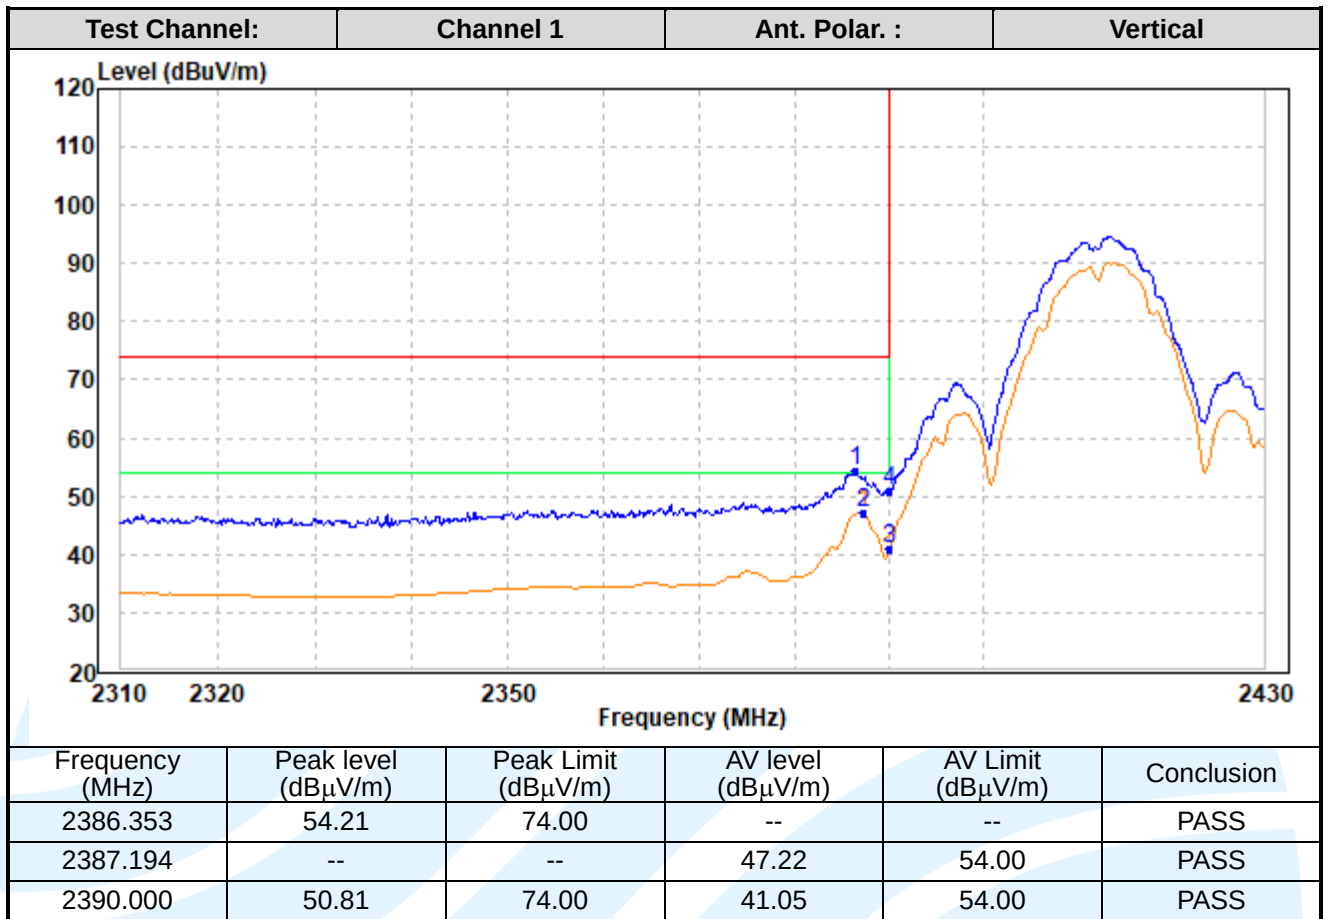

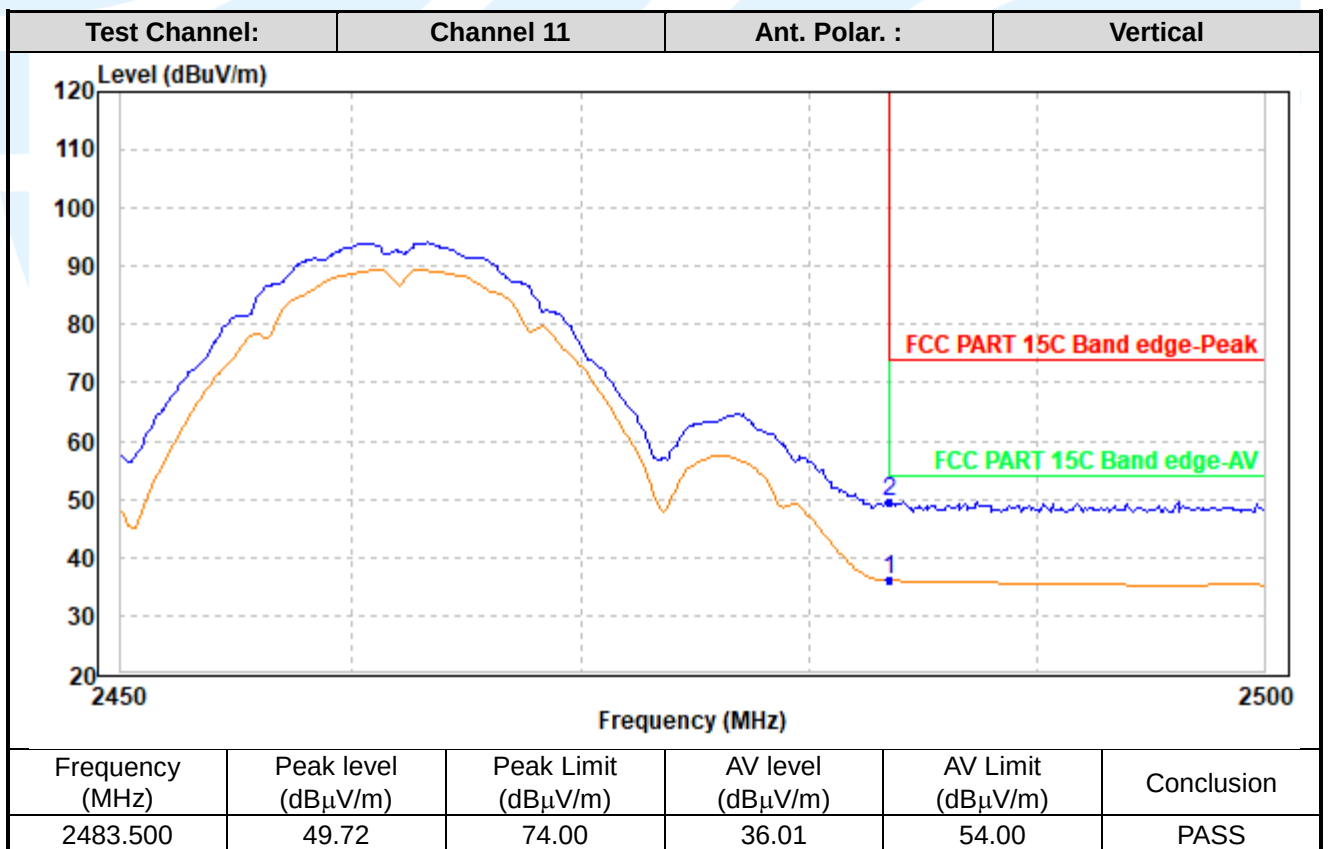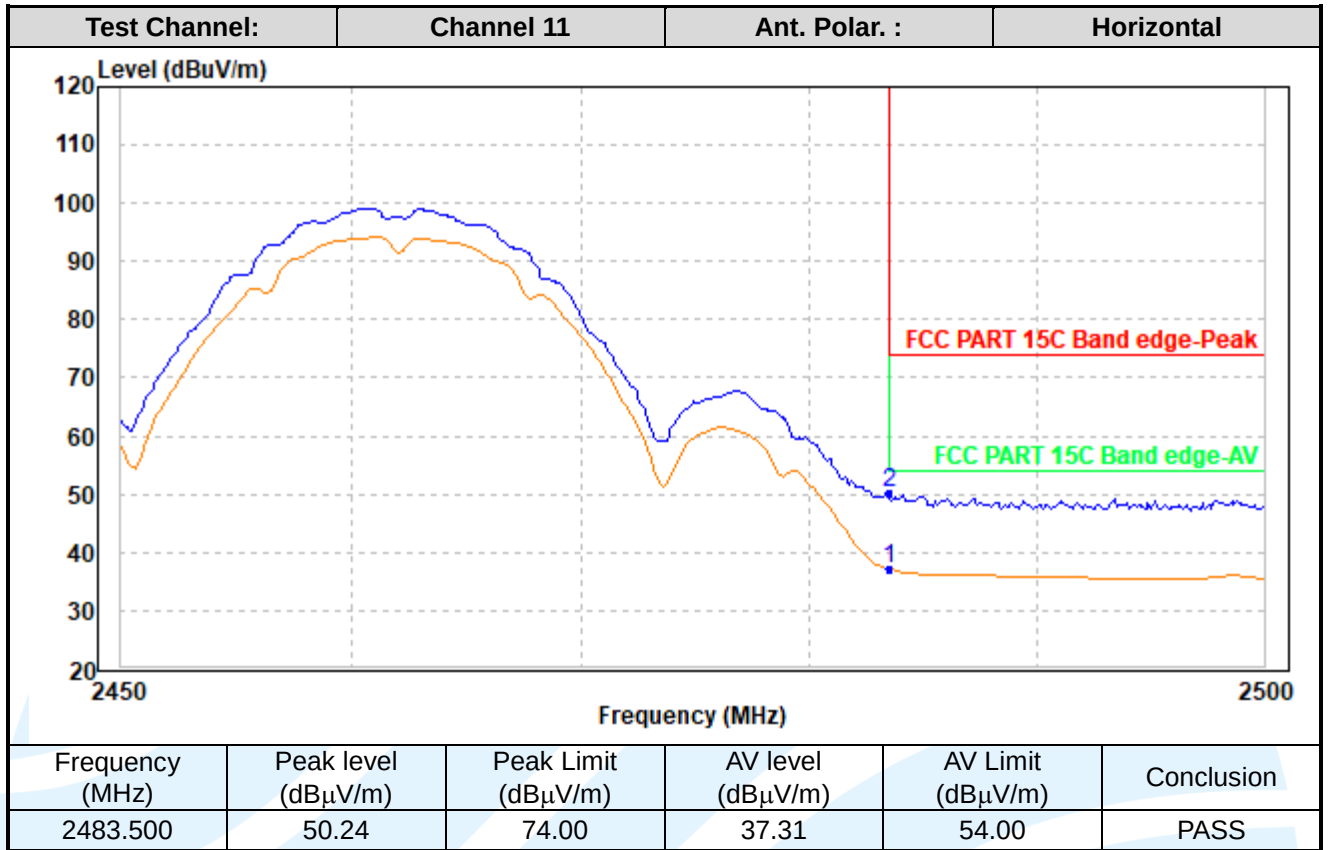

IEEE 802.11g

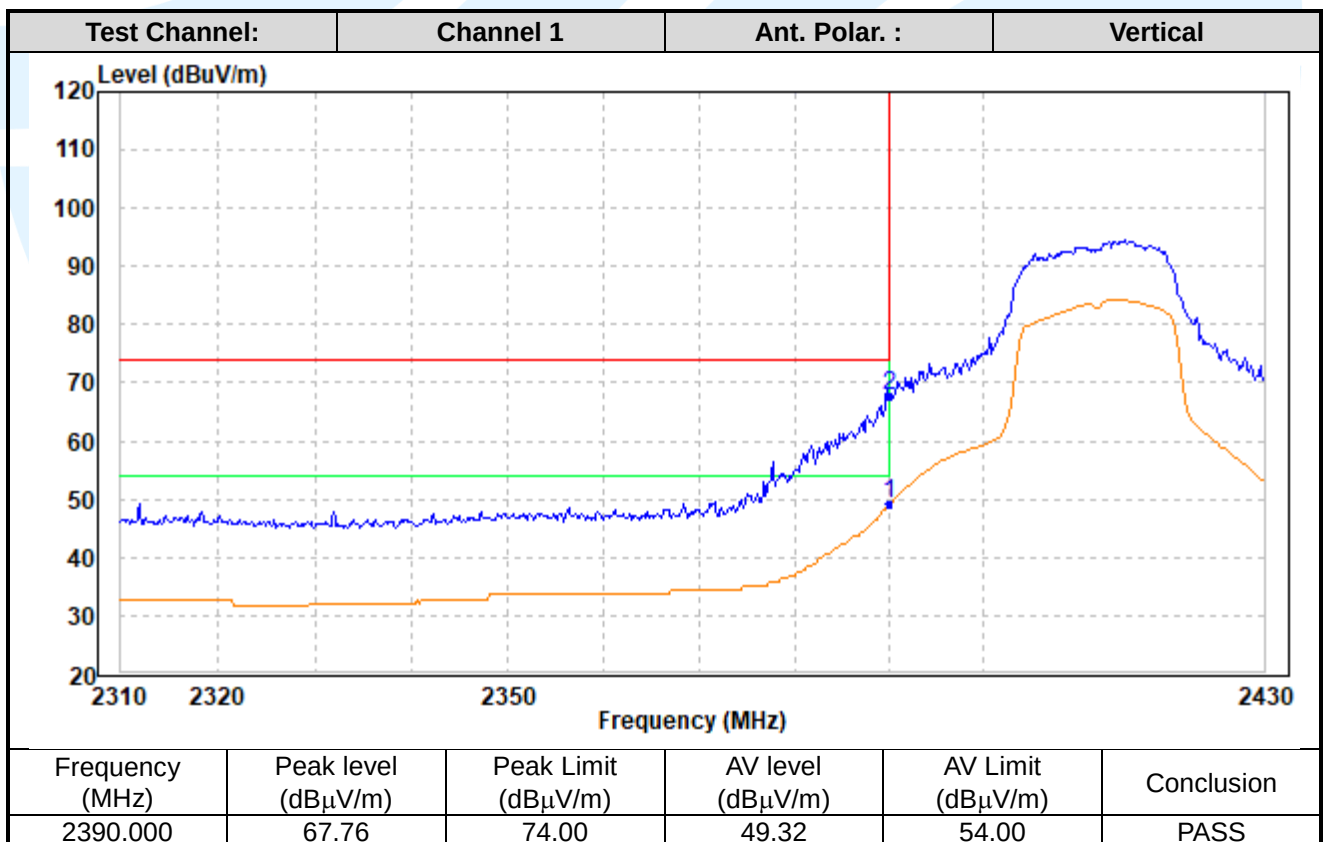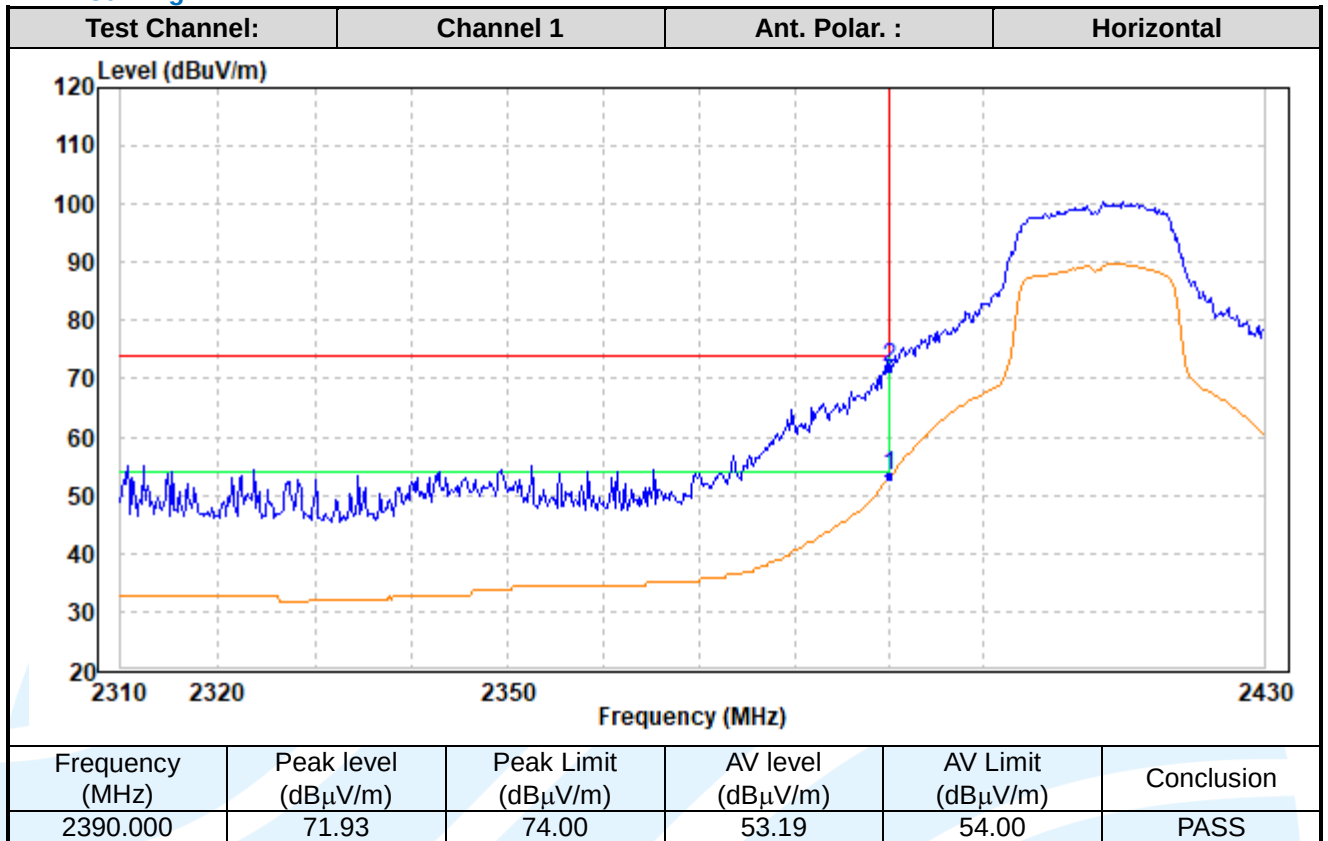

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

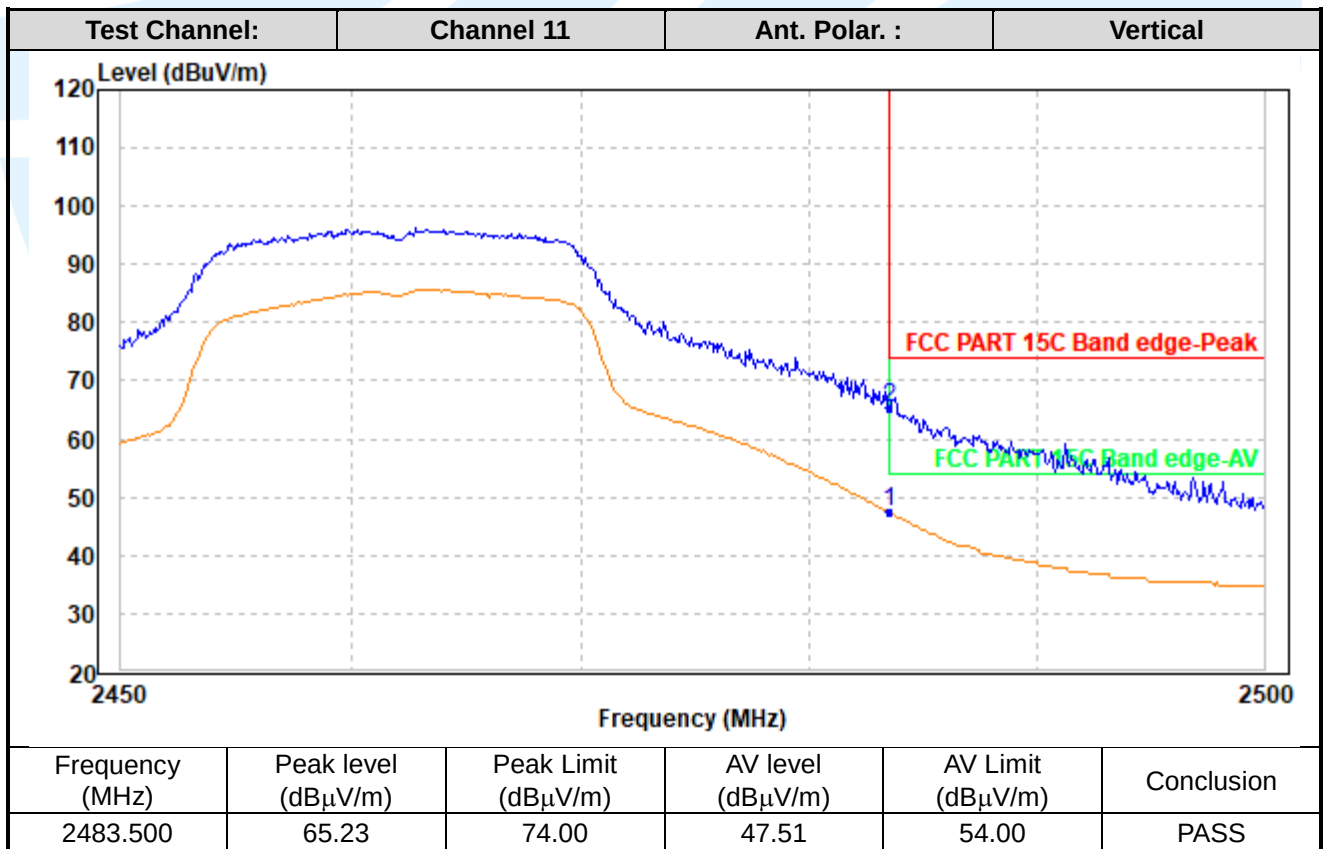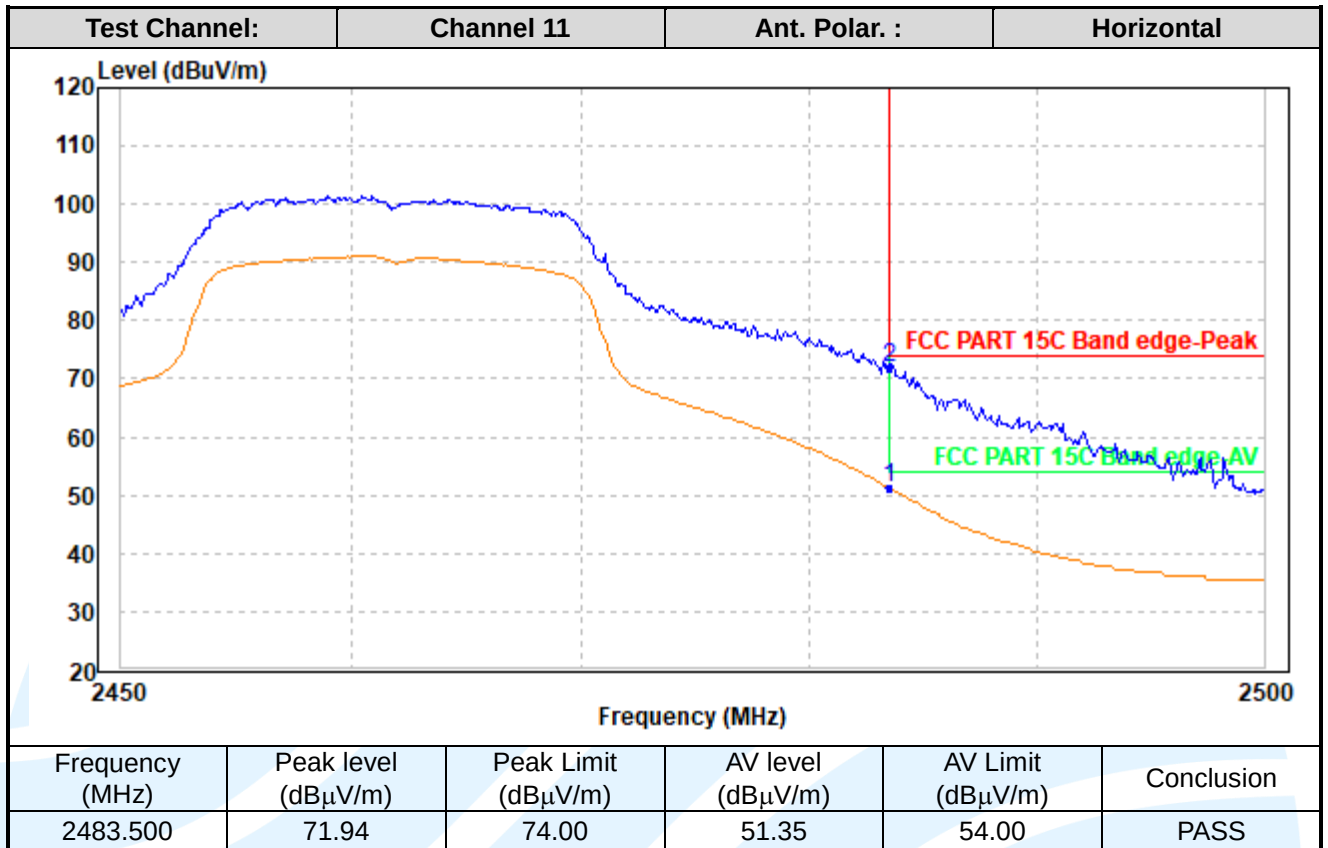

IEEE 802.11n-HT20

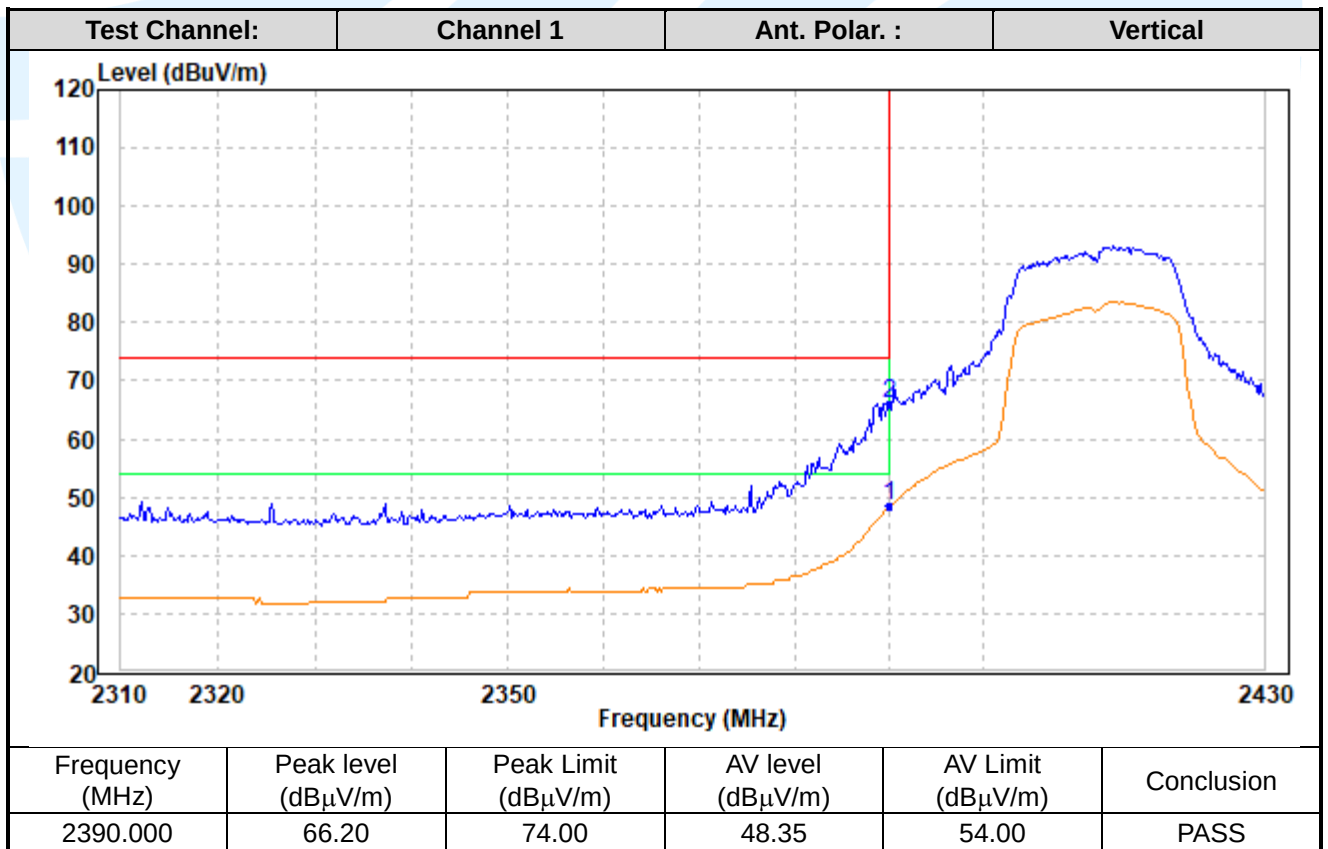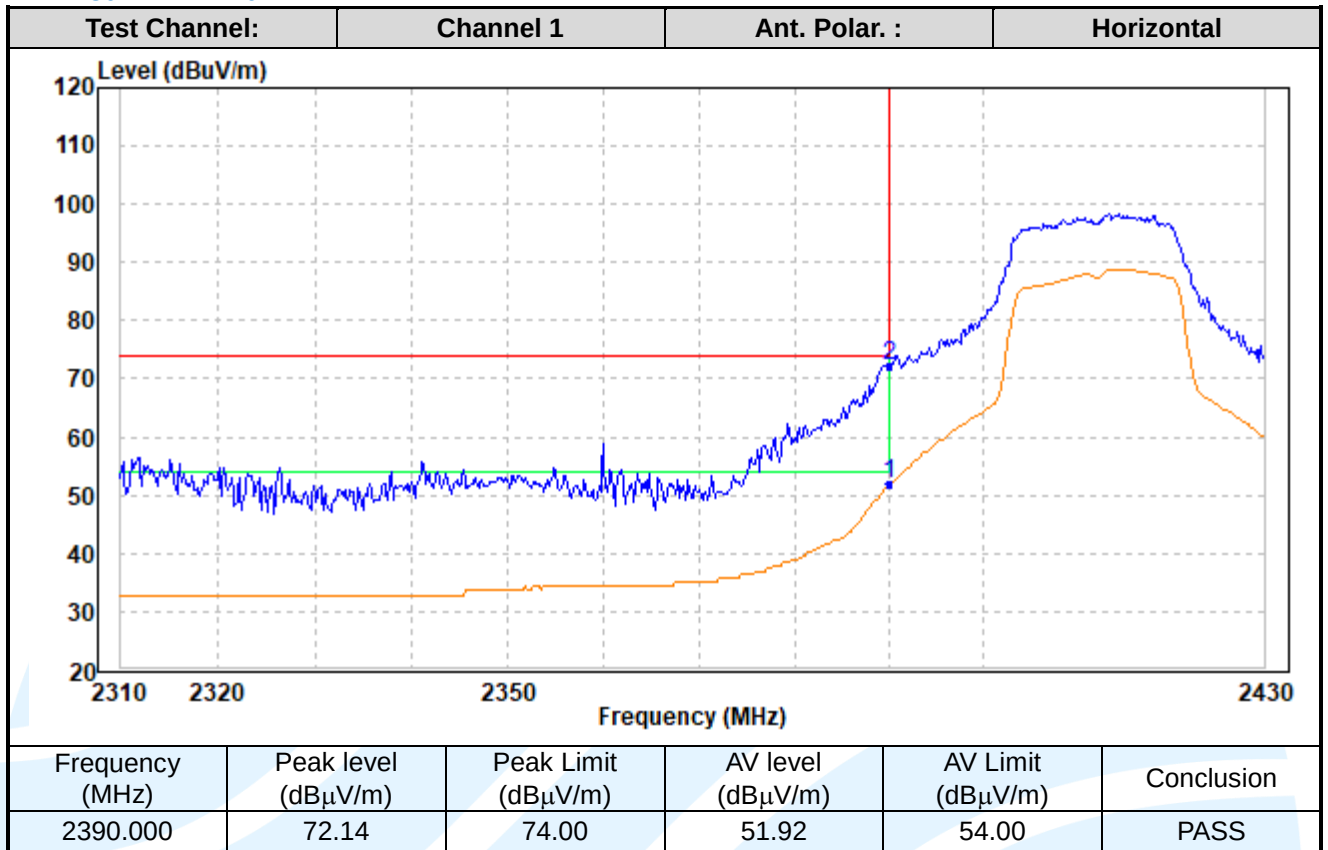

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

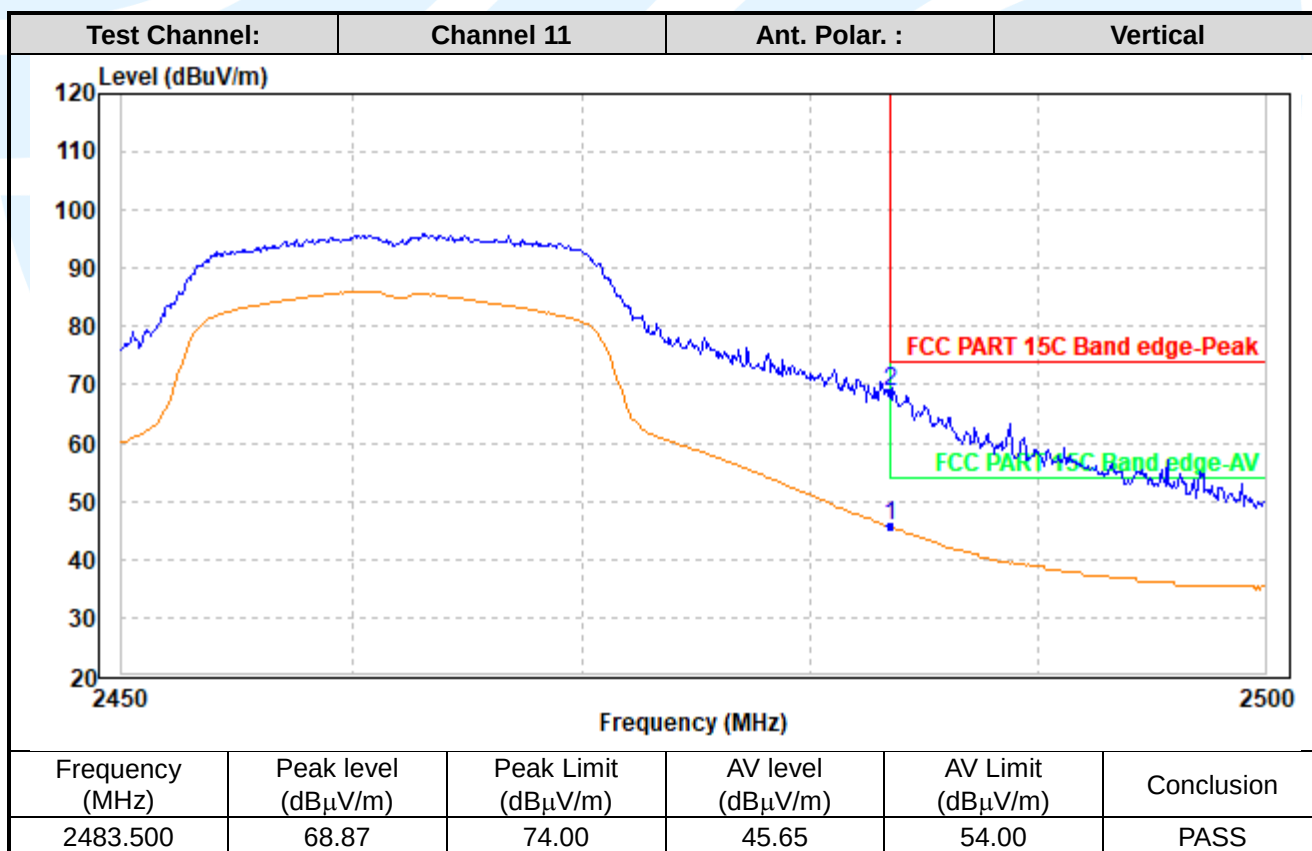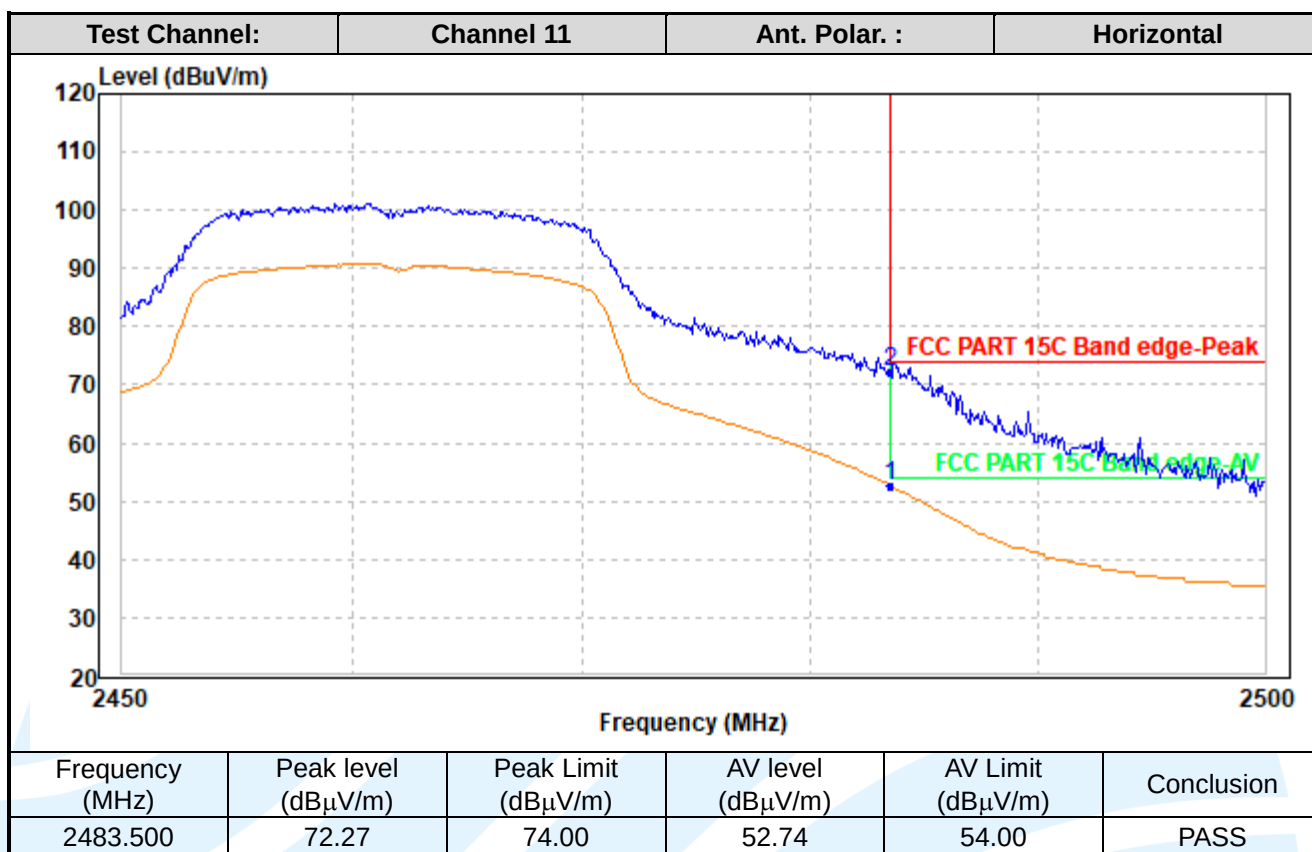

IEEE 802.11n-HT40

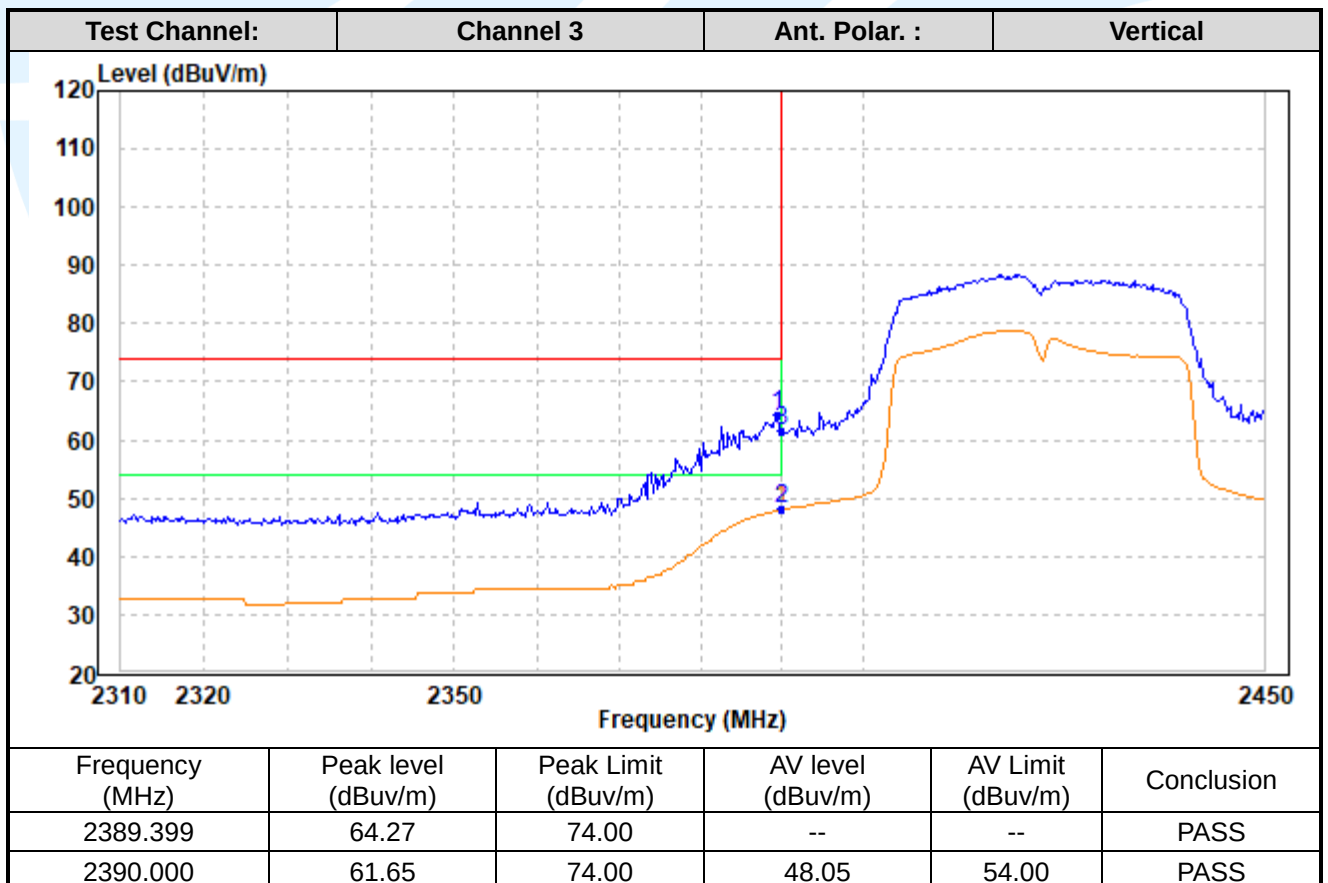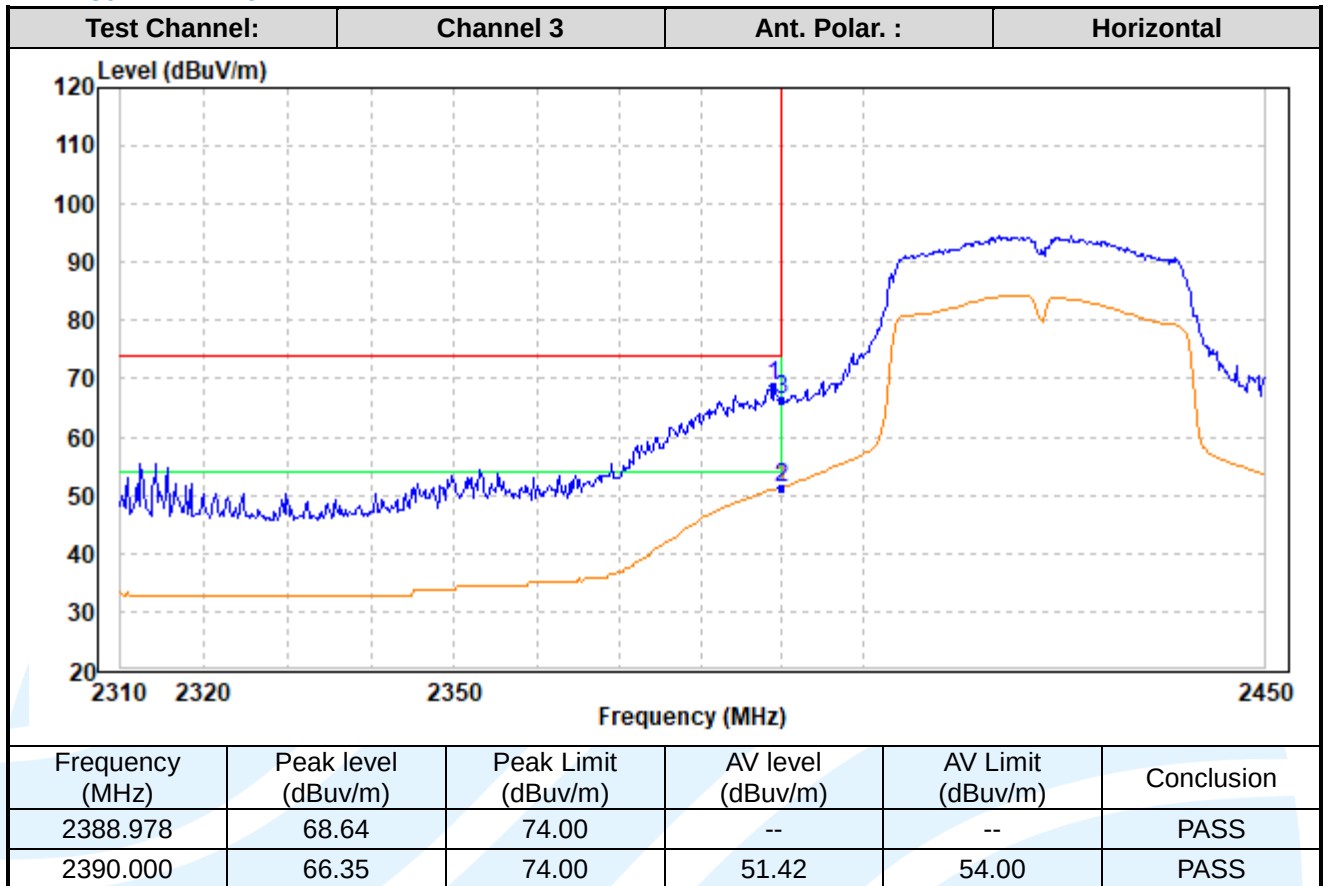

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

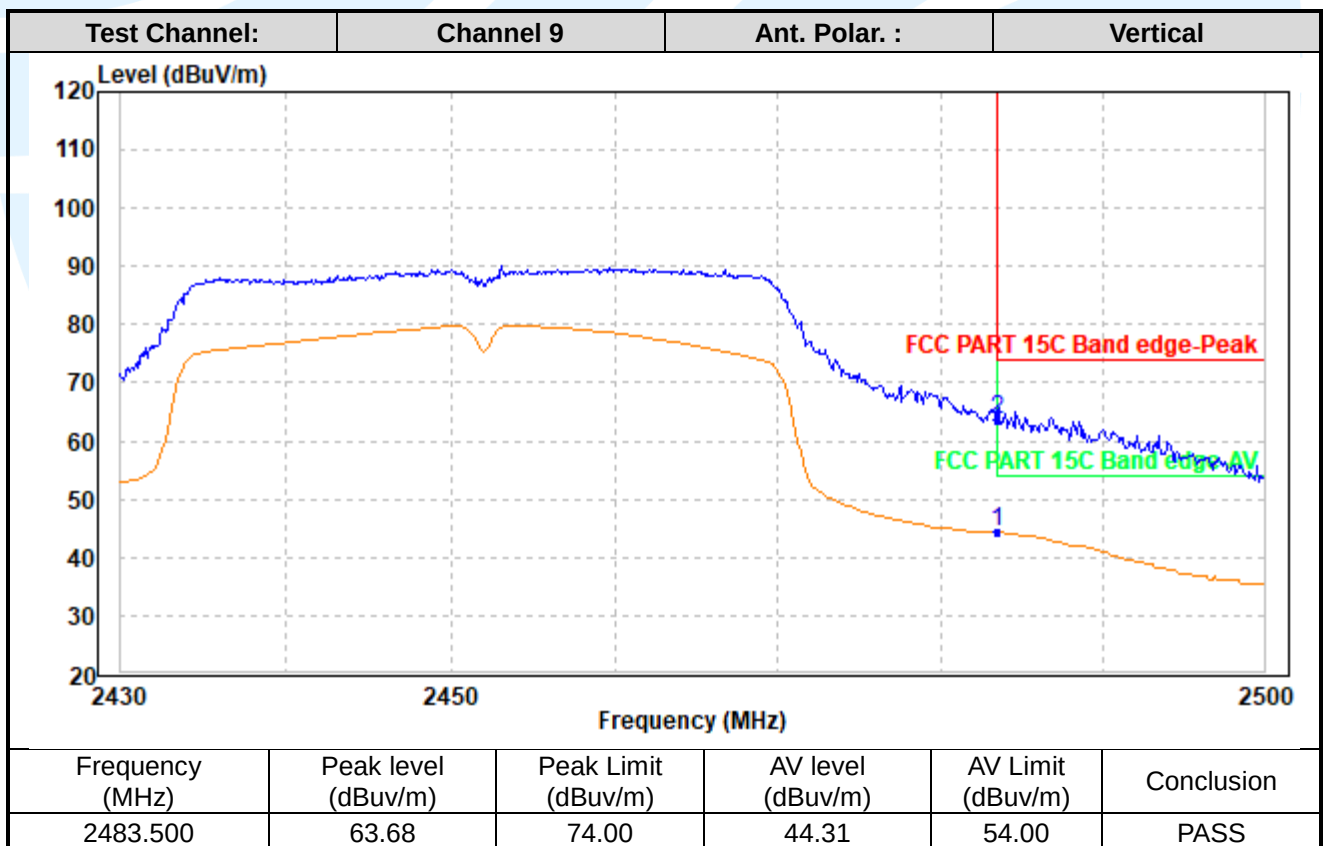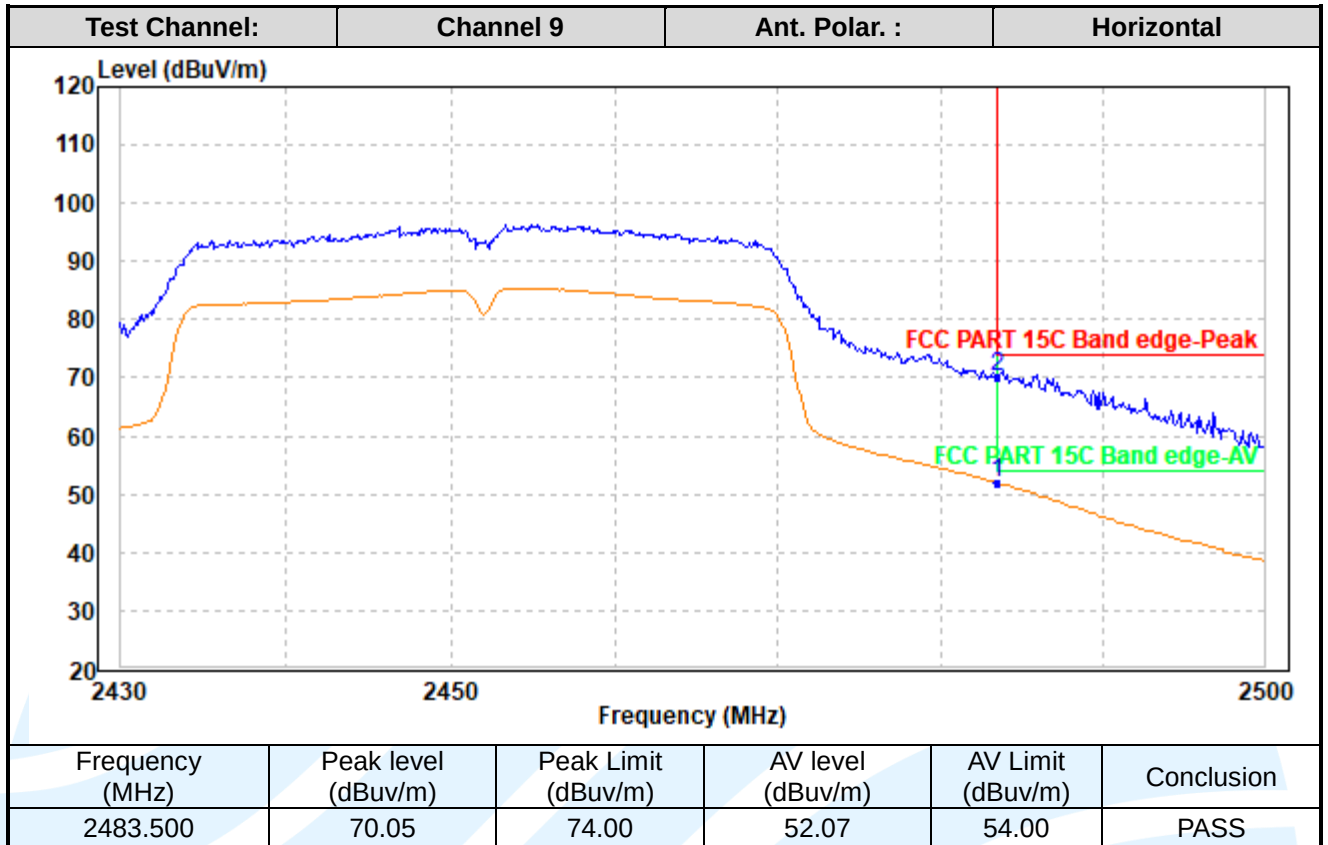

IEEE 802.11ax-HE20

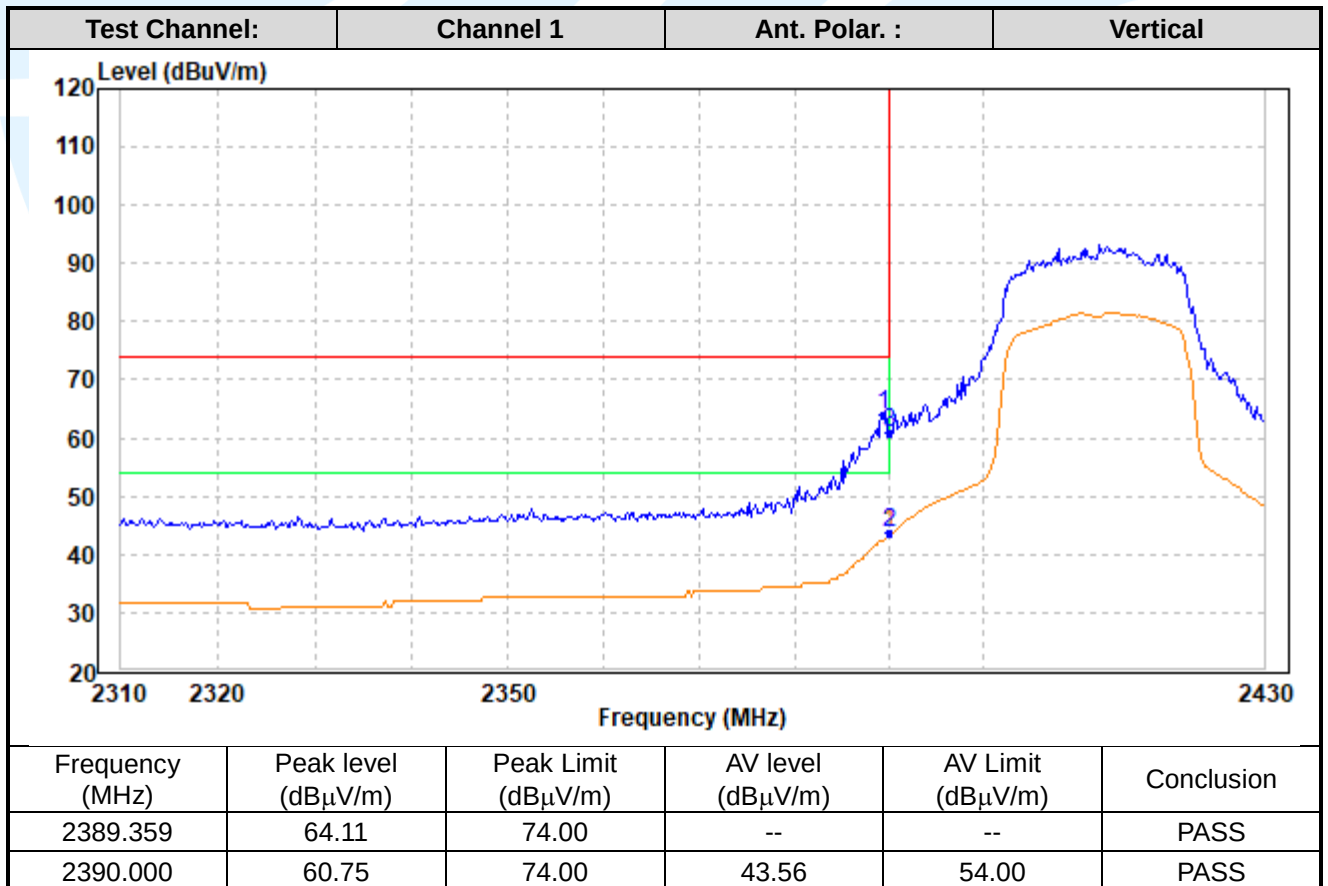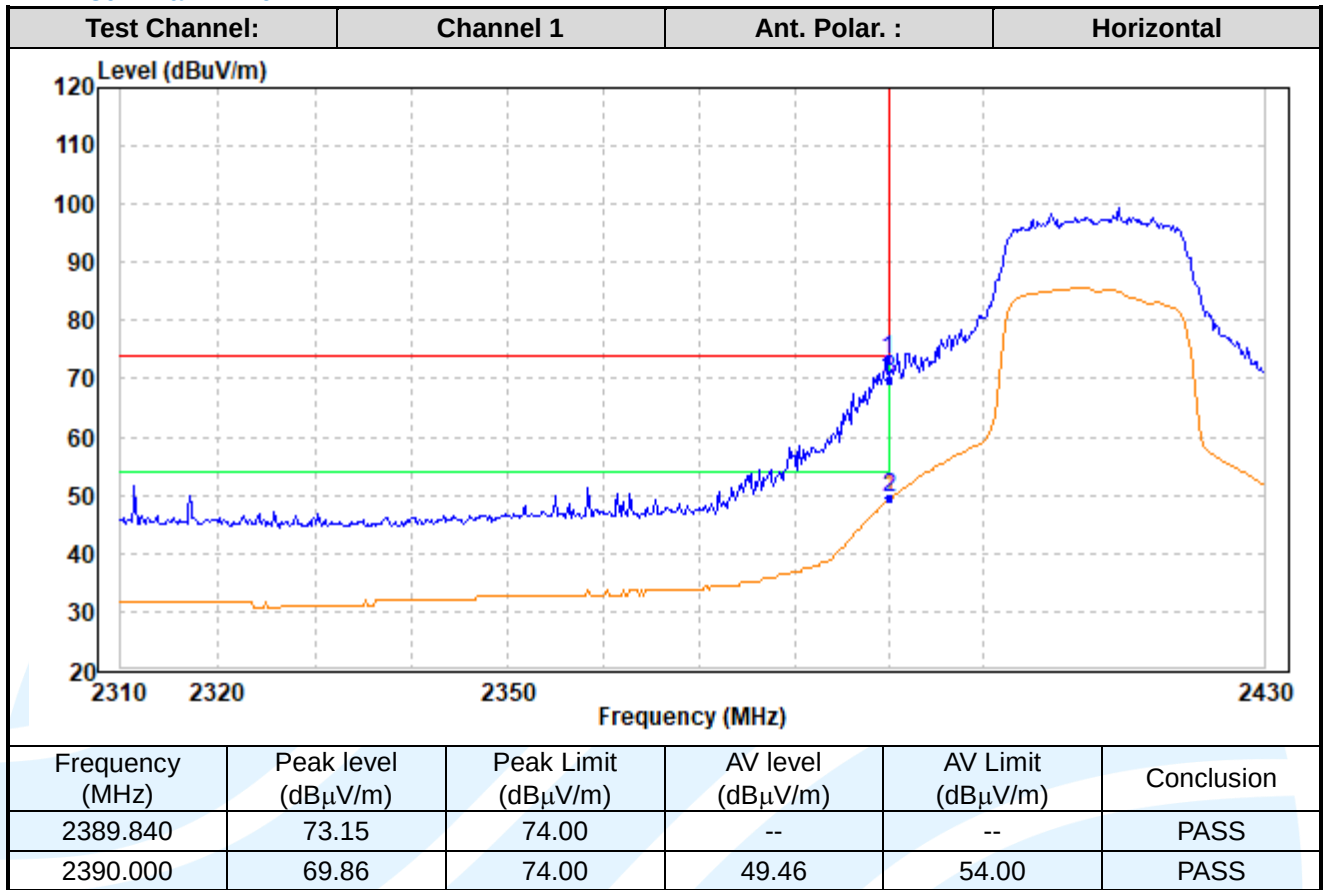

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886



E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

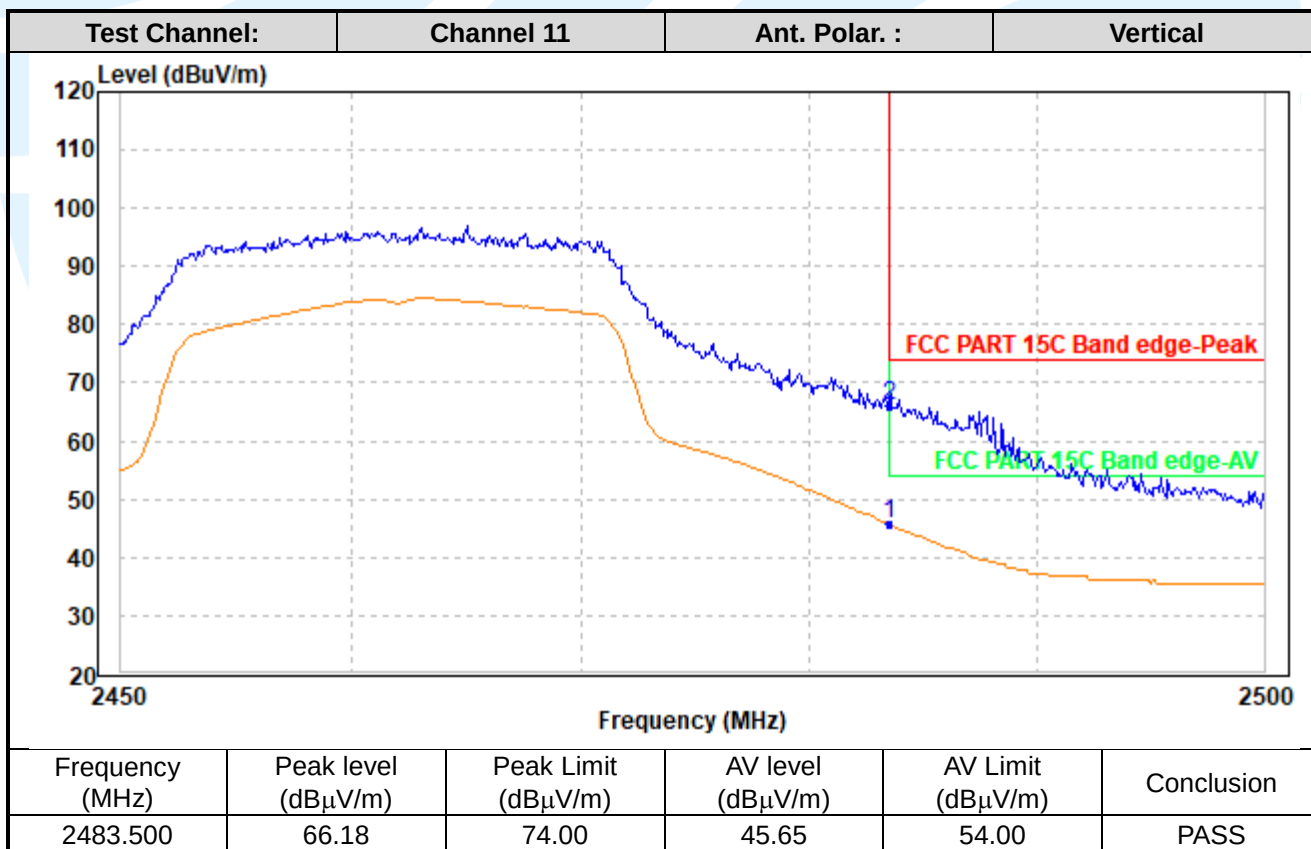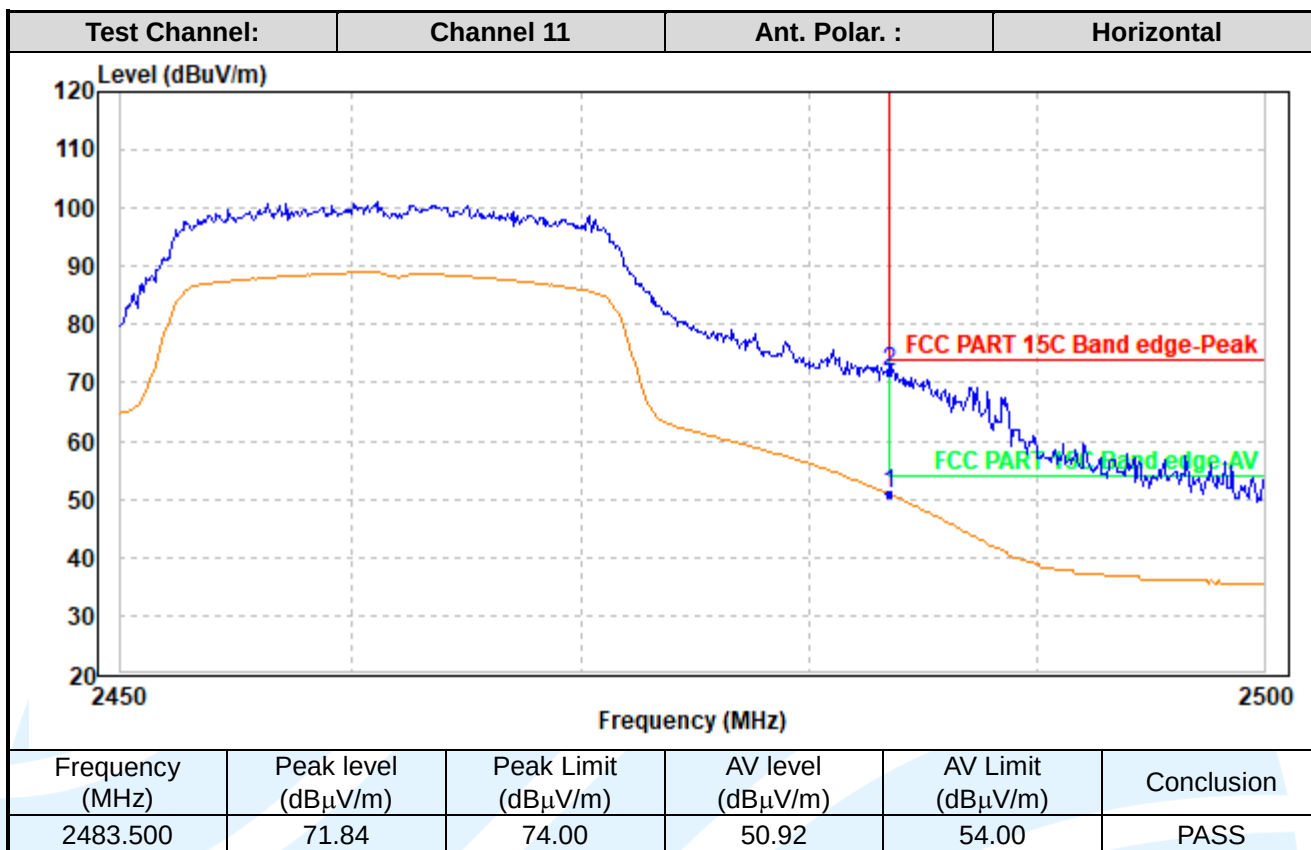

IEEE 802.11ax-HE40

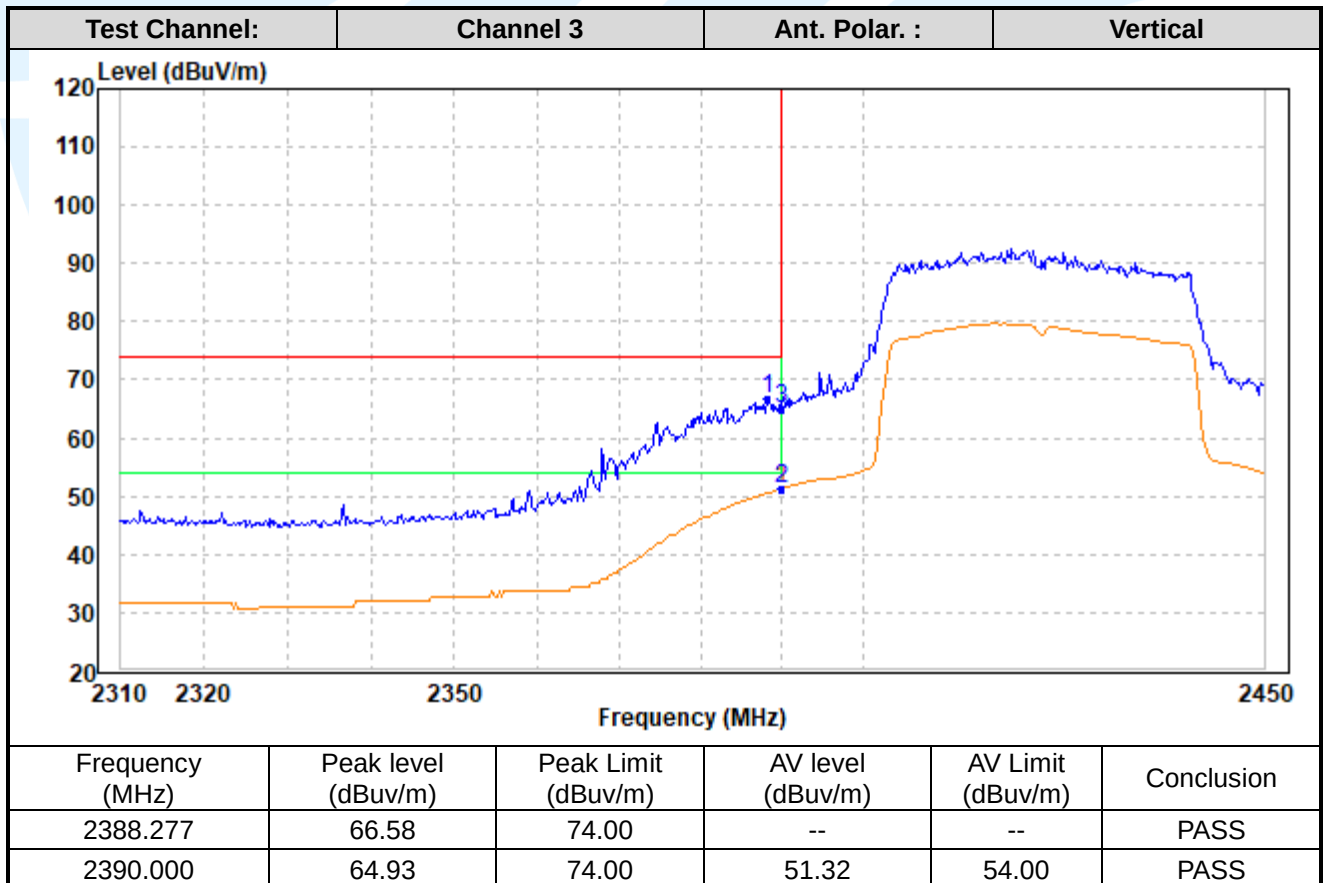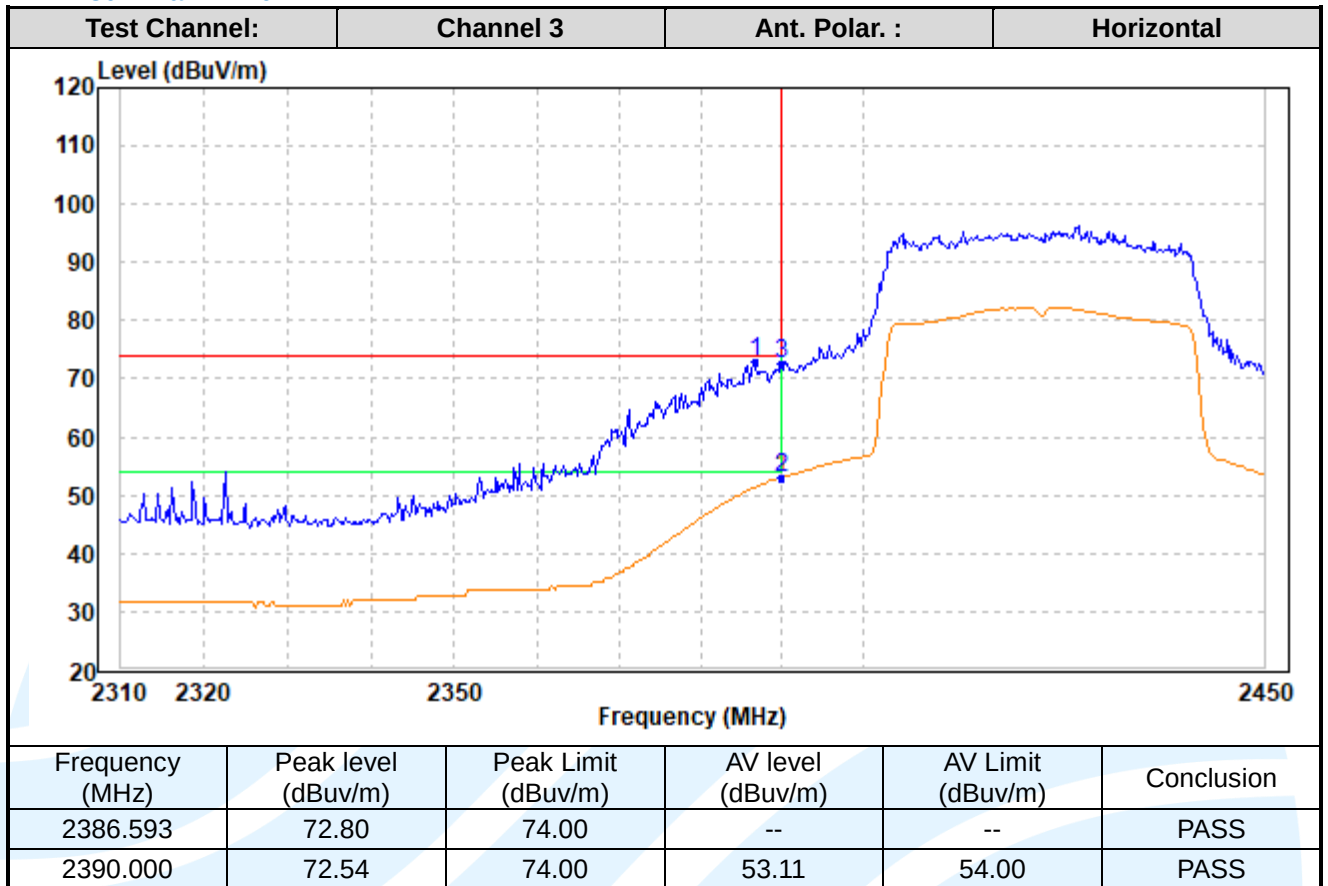

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China



Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

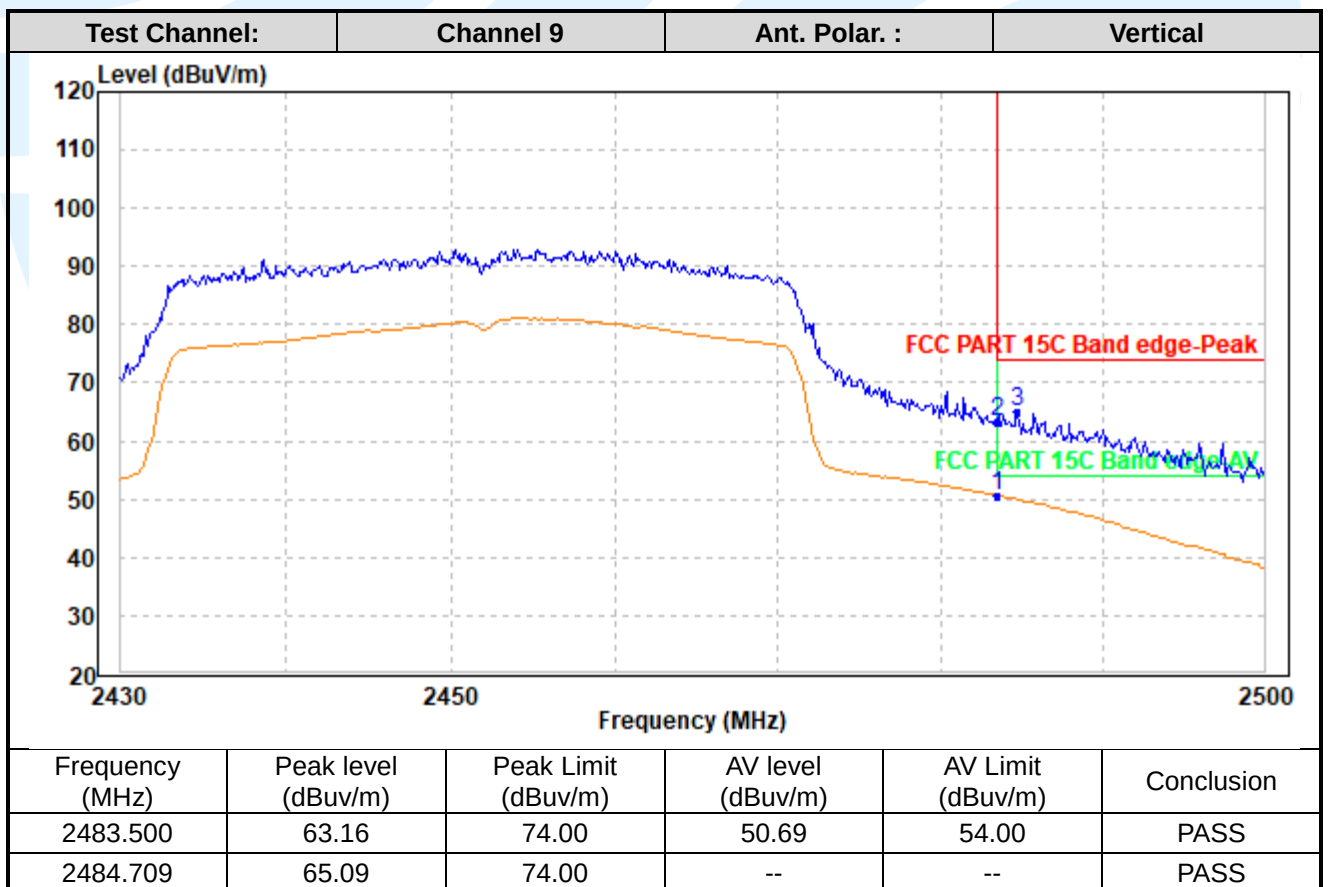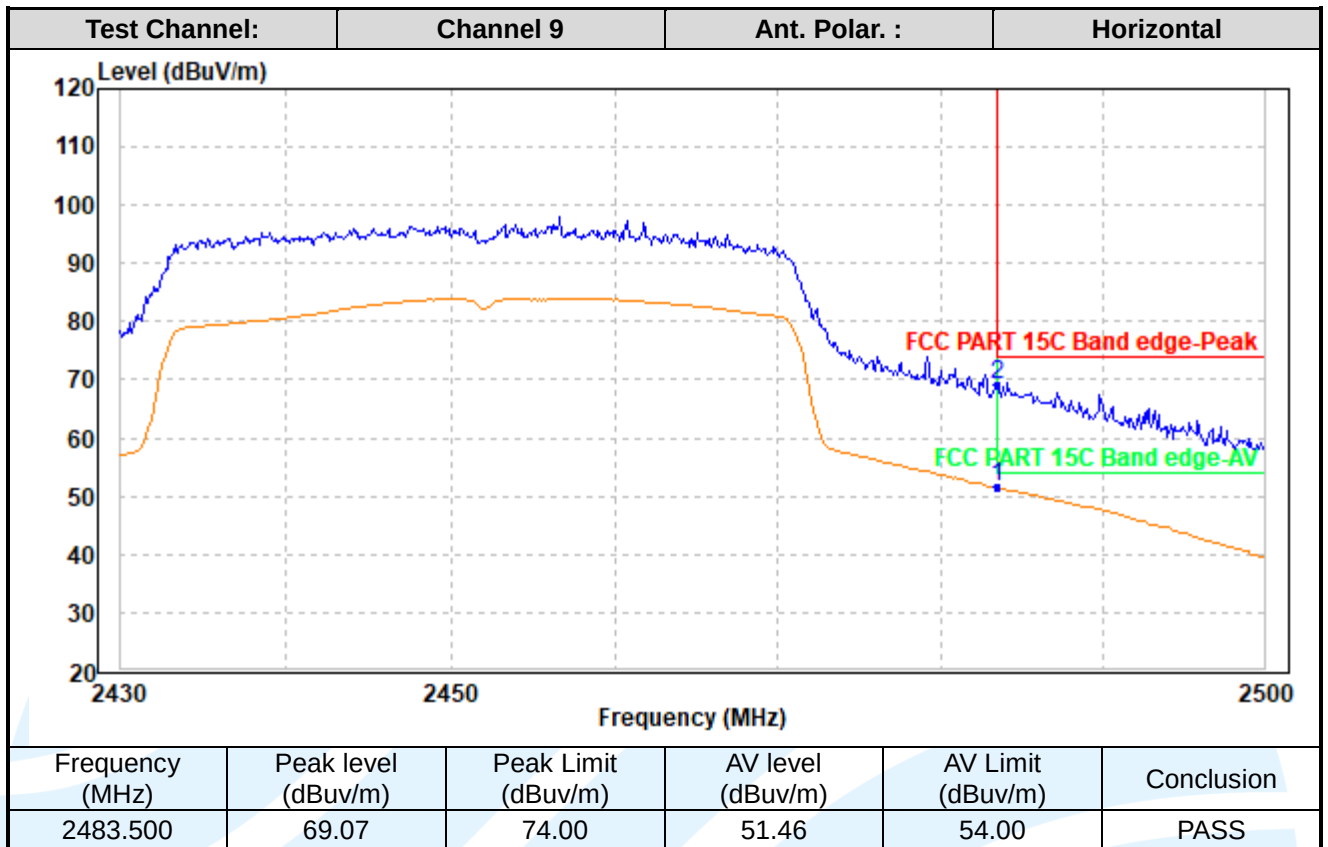

5.9 CONDUCTED EMISSION

Test Requirement: 47 CFR Part 15C Section 15.207
RSS-Gen Issue 5, Section 8.8

Test Method: ANSI C63.10-2013 Section 6.2

Limits:

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.4.2 for details.

Test Procedures:

Test frequency range :150KHz-30MHz

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Quasi Peak and Average:

Mode: WIFI Link

Live Line

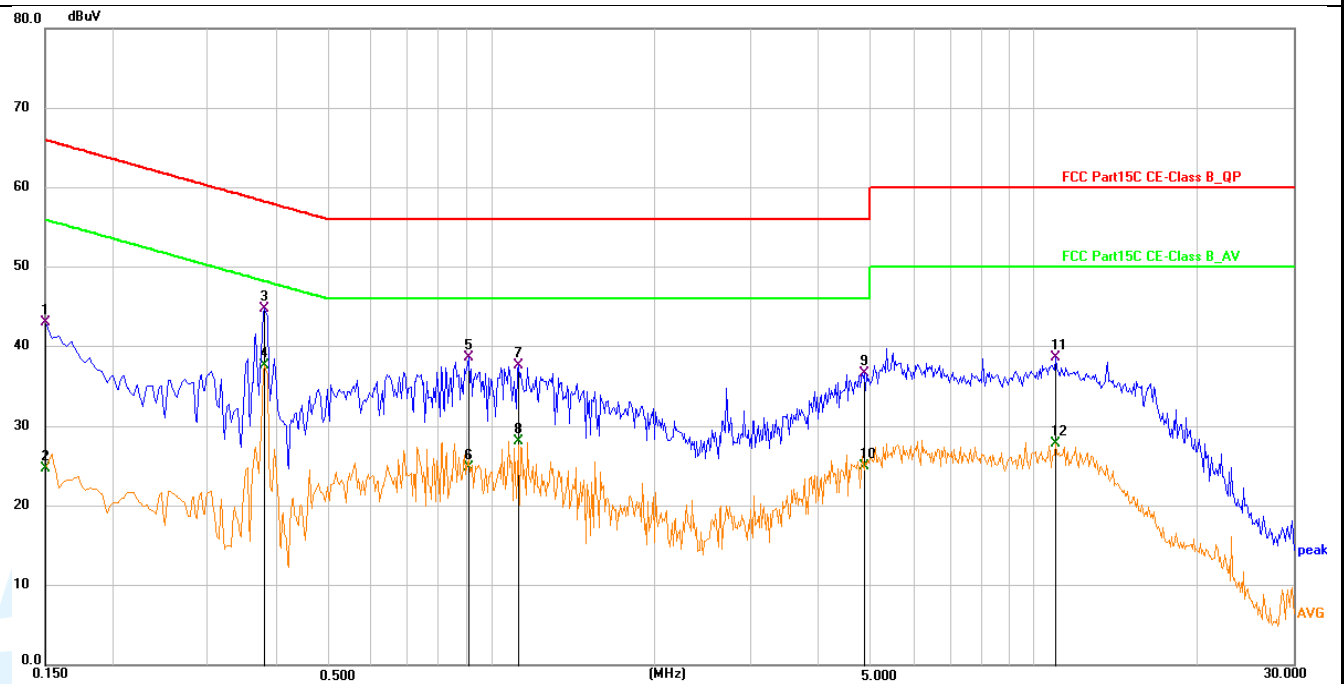

No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.1500	33.20	9.88	43.08	66.00	-22.92	QP
2	0.1500	14.81	9.88	24.69	56.00	-31.31	AVG
3	0.3795	35.01	9.78	44.79	58.29	-13.50	QP
4	0.3795	27.94	9.78	37.72	48.29	-10.57	AVG
5	0.9060	28.90	9.71	38.61	56.00	-17.39	QP
6	0.9060	15.07	9.71	24.78	46.00	-21.22	AVG
7	1.1174	27.92	9.71	37.63	56.00	-18.37	QP
8	1.1174	18.38	9.71	28.09	46.00	-17.91	AVG
9	4.8570	26.96	9.75	36.71	56.00	-19.29	QP
10	4.8570	15.22	9.75	24.97	46.00	-21.03	AVG
11	10.9365	28.87	9.72	38.59	60.00	-21.41	QP
12	10.9365	18.06	9.72	27.78	50.00	-22.22	AVG

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

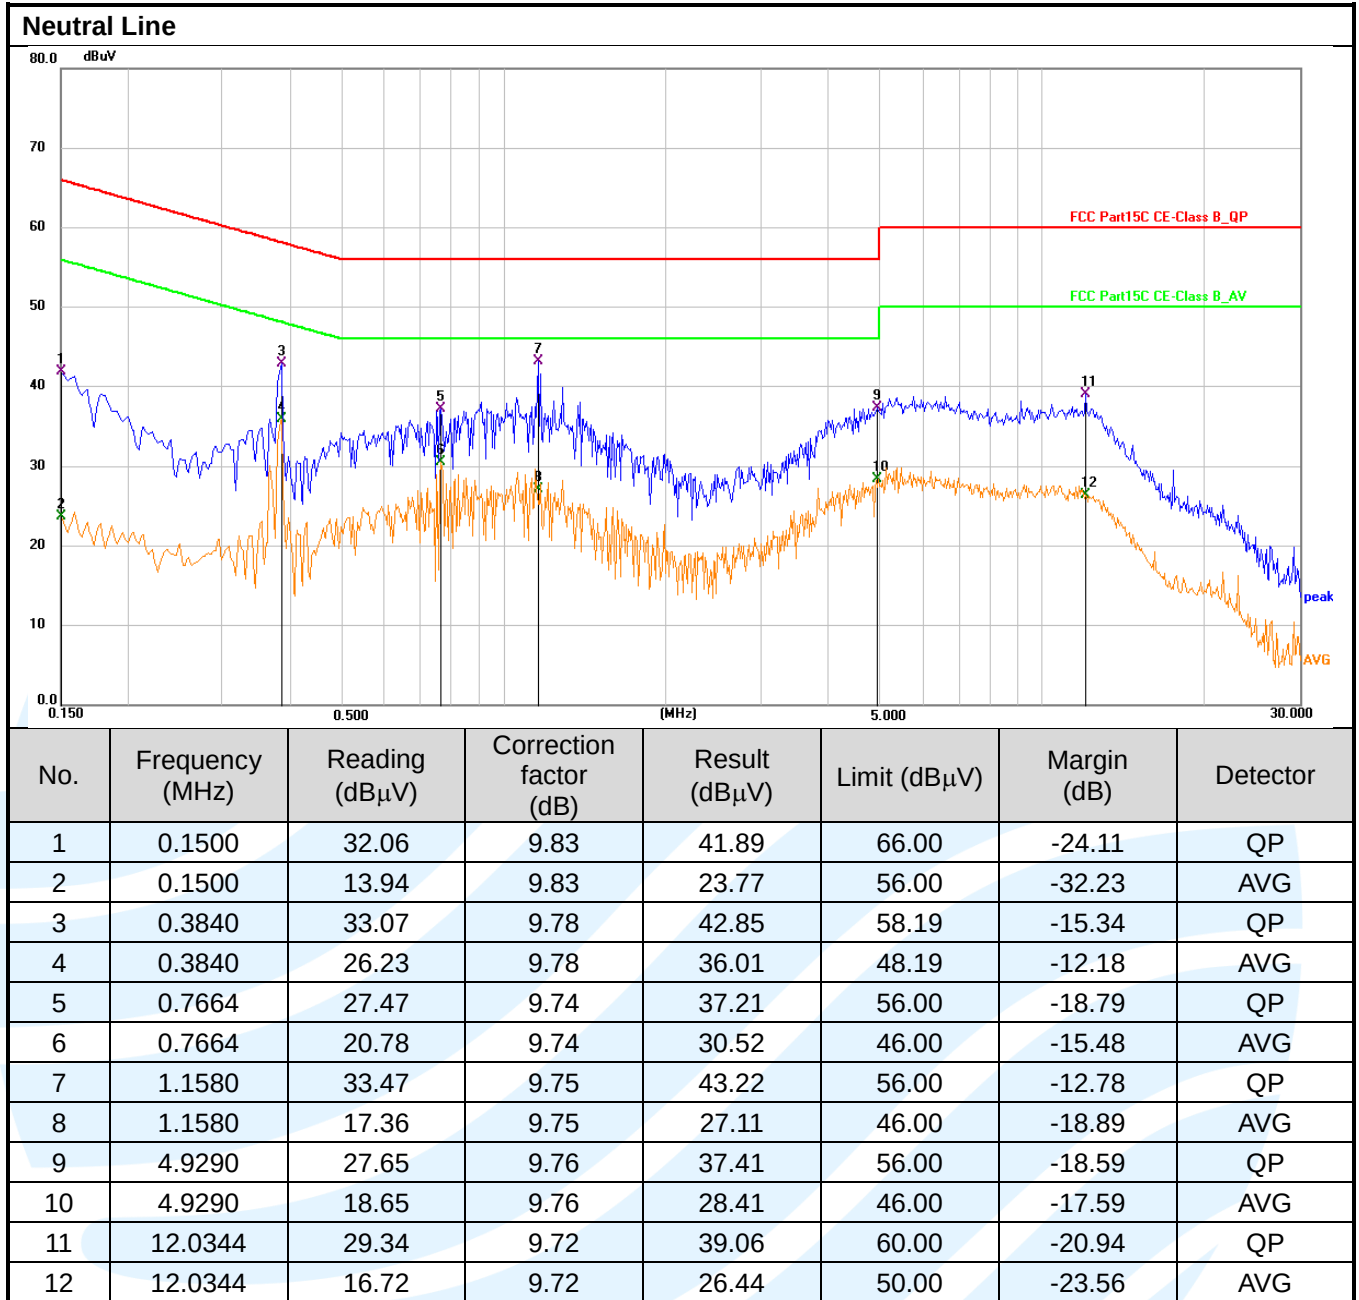

Remark:


1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

APPENDIX A RF TEST DATA

A.1 99% BANDWIDTH

Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.286	2405.4001	2418.6861	---	---
11B	Ant1	2437	13.254	2430.4074	2443.6614	---	---
11B	Ant1	2462	13.294	2455.3671	2468.6611	---	---
11G	Ant1	2412	17.351	2403.3292	2420.6802	---	---
11G	Ant1	2437	17.538	2428.1225	2445.6605	---	---
11G	Ant1	2462	17.416	2453.2404	2470.6564	---	---
11N20SISO	Ant1	2412	18.617	2402.6567	2421.2737	---	---
11N20SISO	Ant1	2437	18.796	2427.5461	2446.3421	---	---
11N20SISO	Ant1	2462	18.898	2452.4416	2471.3396	---	---
11N40SISO	Ant1	2422	37.048	2403.4578	2440.5058	---	---
11N40SISO	Ant1	2437	37.169	2418.2669	2455.4359	---	---
11N40SISO	Ant1	2452	37.135	2433.3212	2470.4562	---	---
11AX20SISO	Ant1	2412	19.324	2402.3254	2421.6494	---	---
11AX20SISO	Ant1	2437	19.351	2427.3096	2446.6606	---	---
11AX20SISO	Ant1	2462	19.361	2452.2930	2471.6540	---	---
11AX40SISO	Ant1	2422	38.108	2402.9248	2441.0328	---	---
11AX40SISO	Ant1	2437	38.337	2417.7755	2456.1125	---	---
11AX40SISO	Ant1	2452	38.309	2432.7706	2471.0796	---	---

Test Graphs

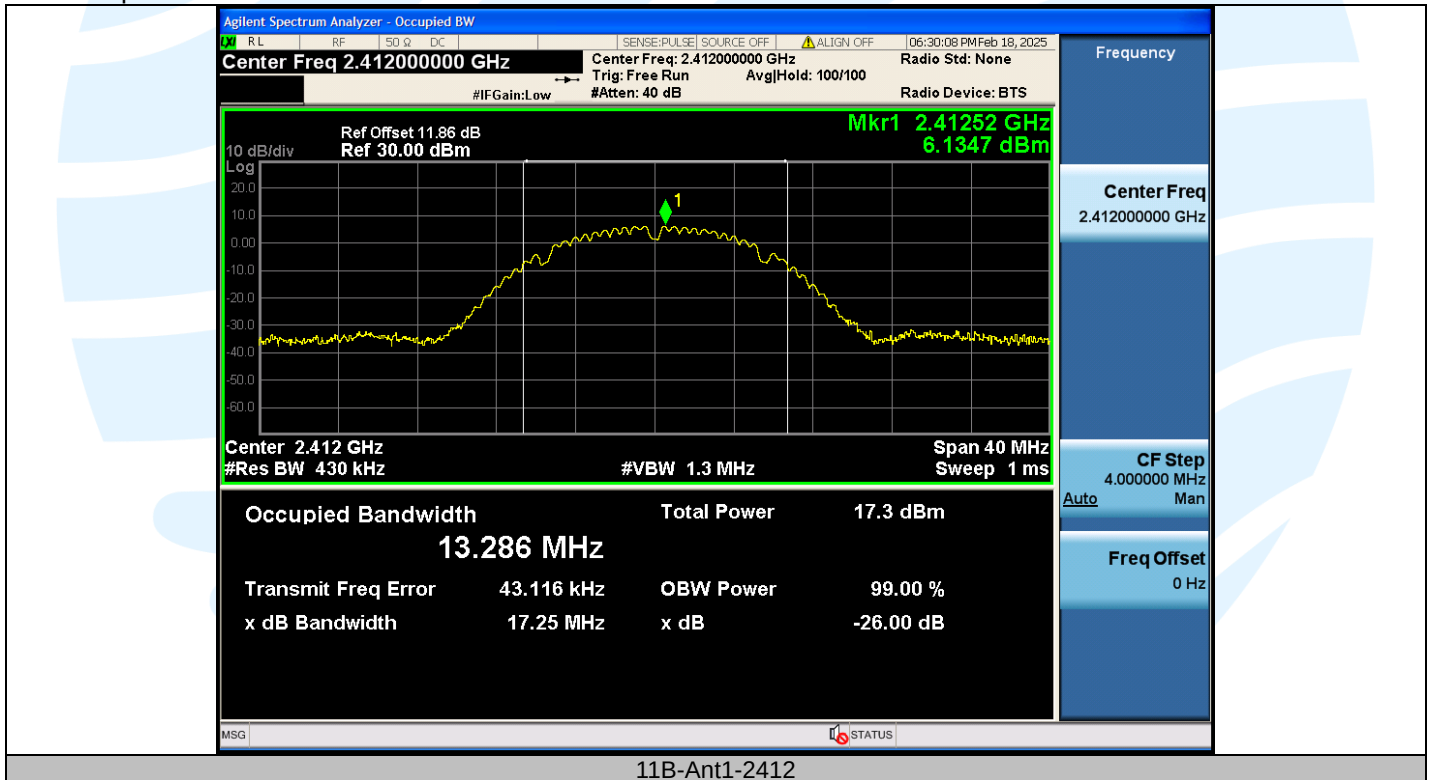

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

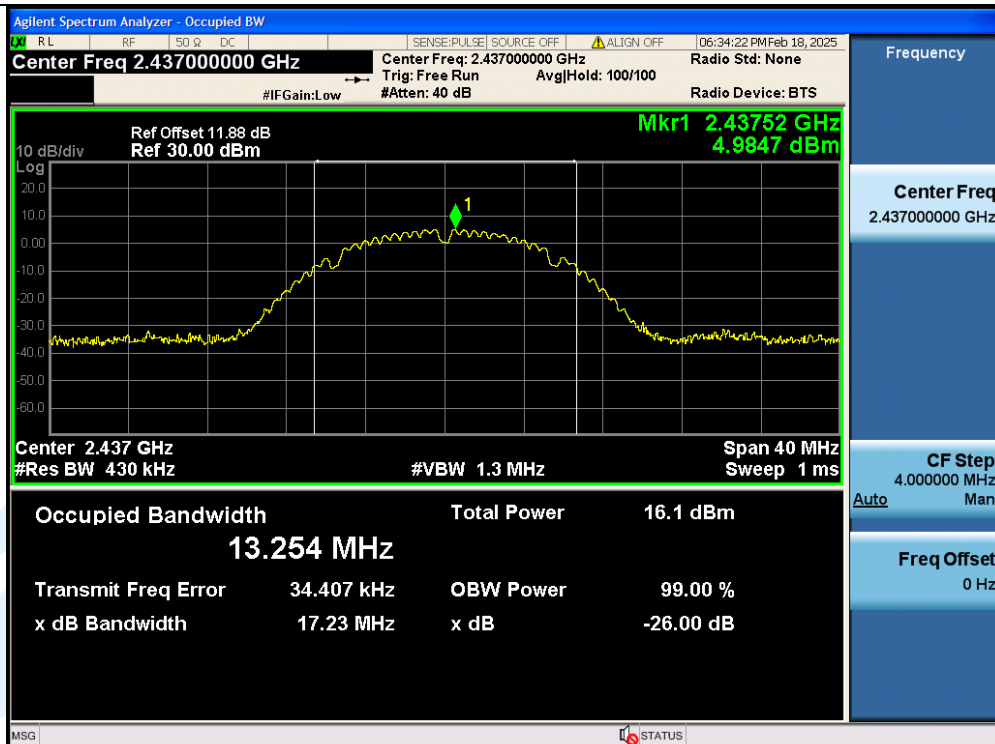

11B-Ant1-2437

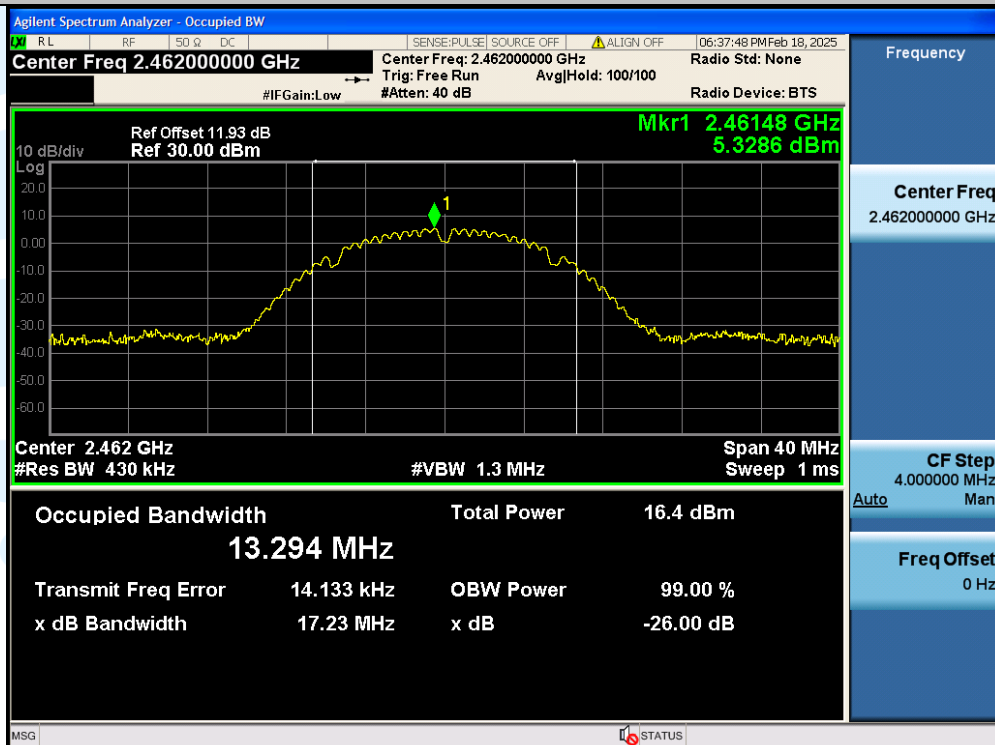

11B-Ant1-2462

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

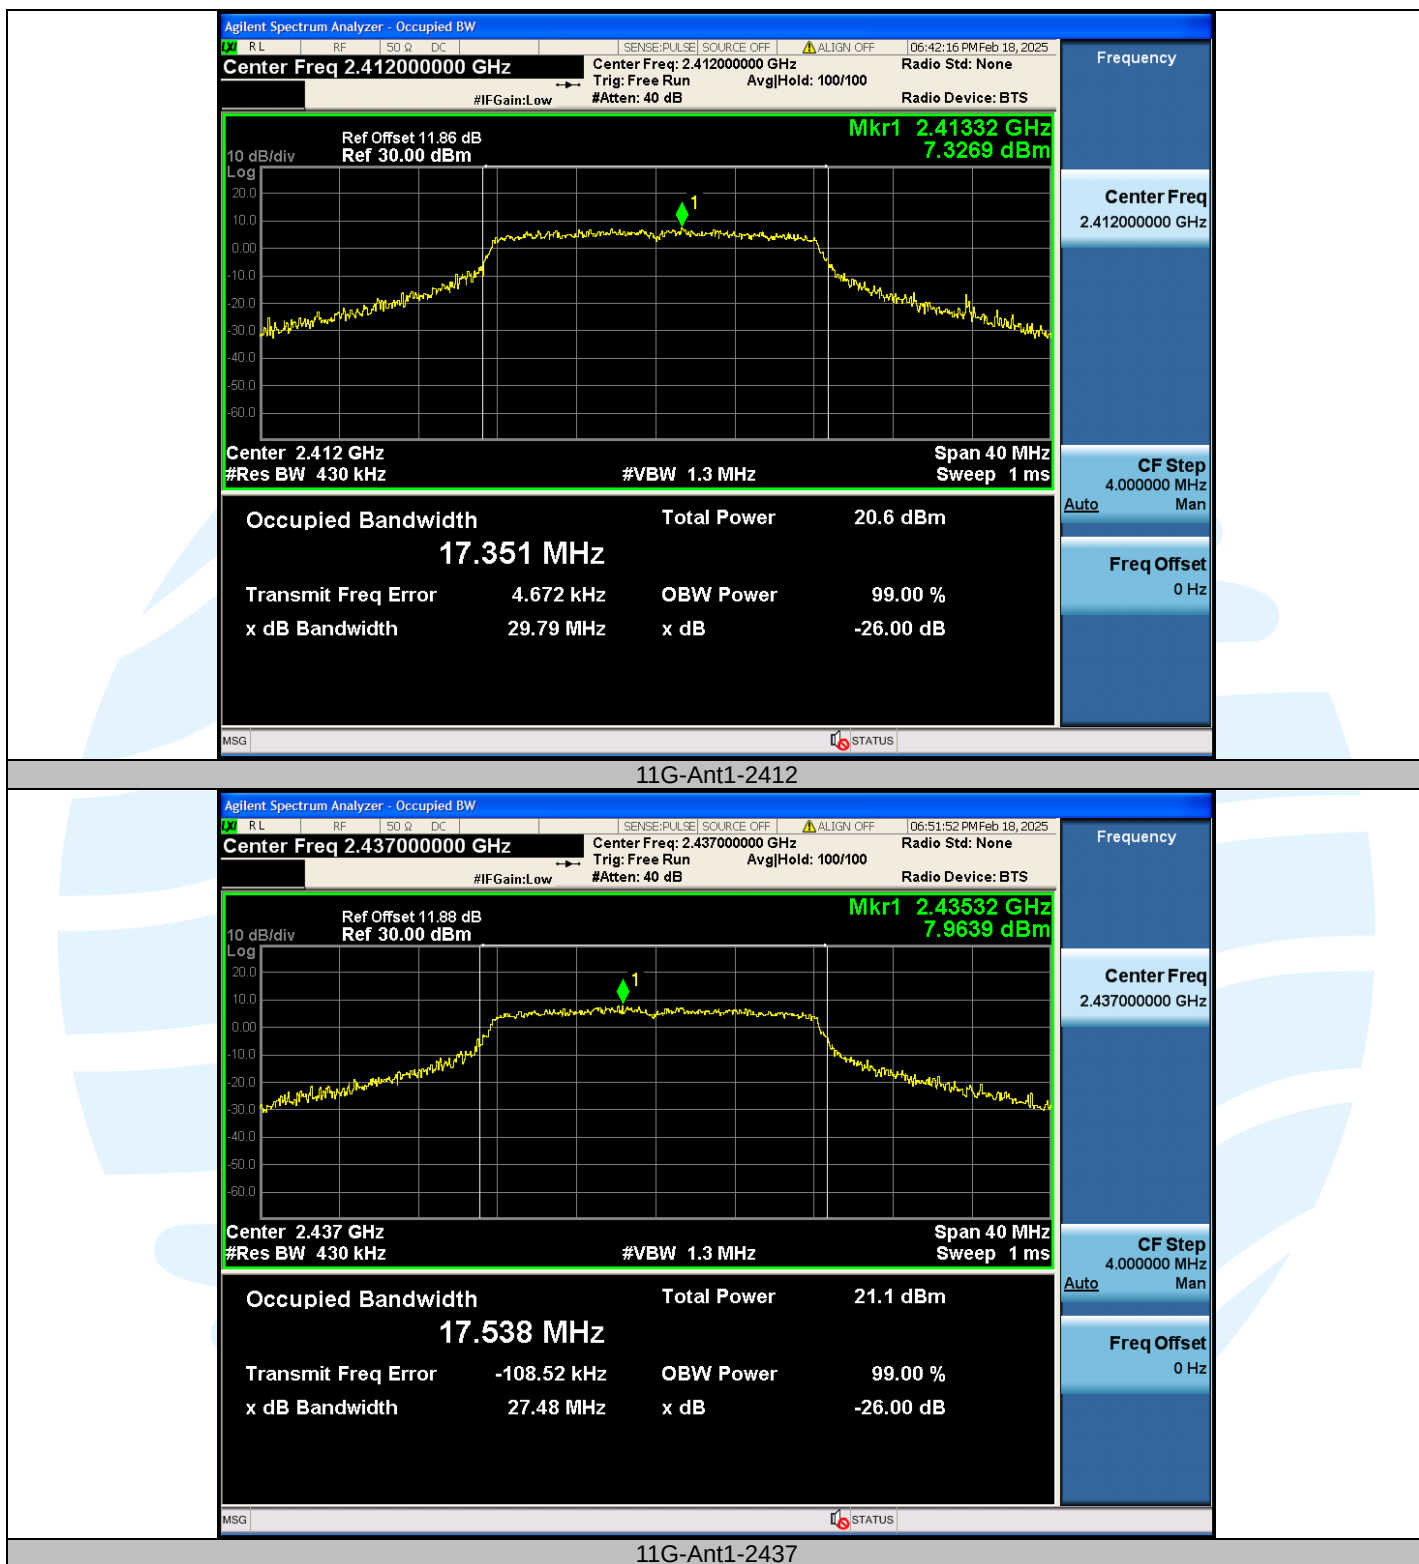


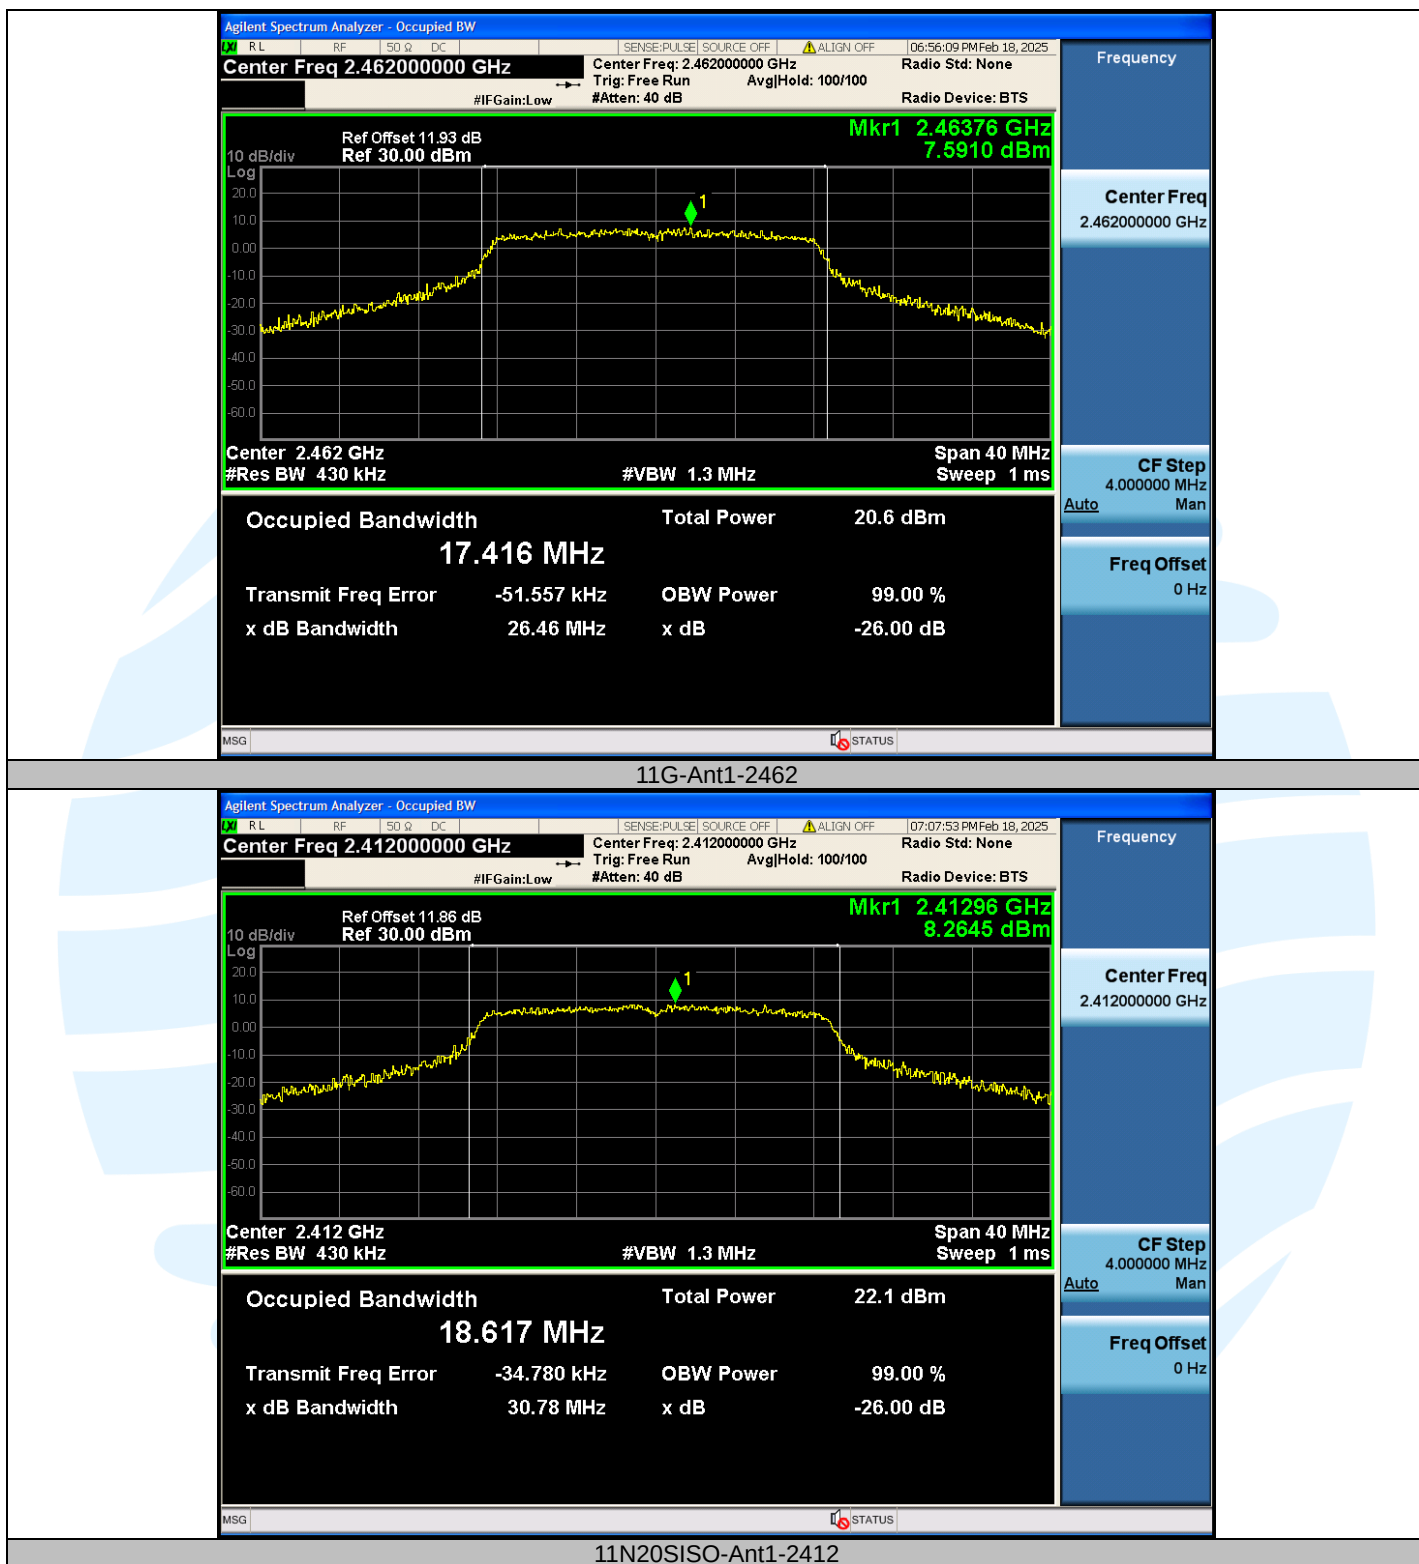

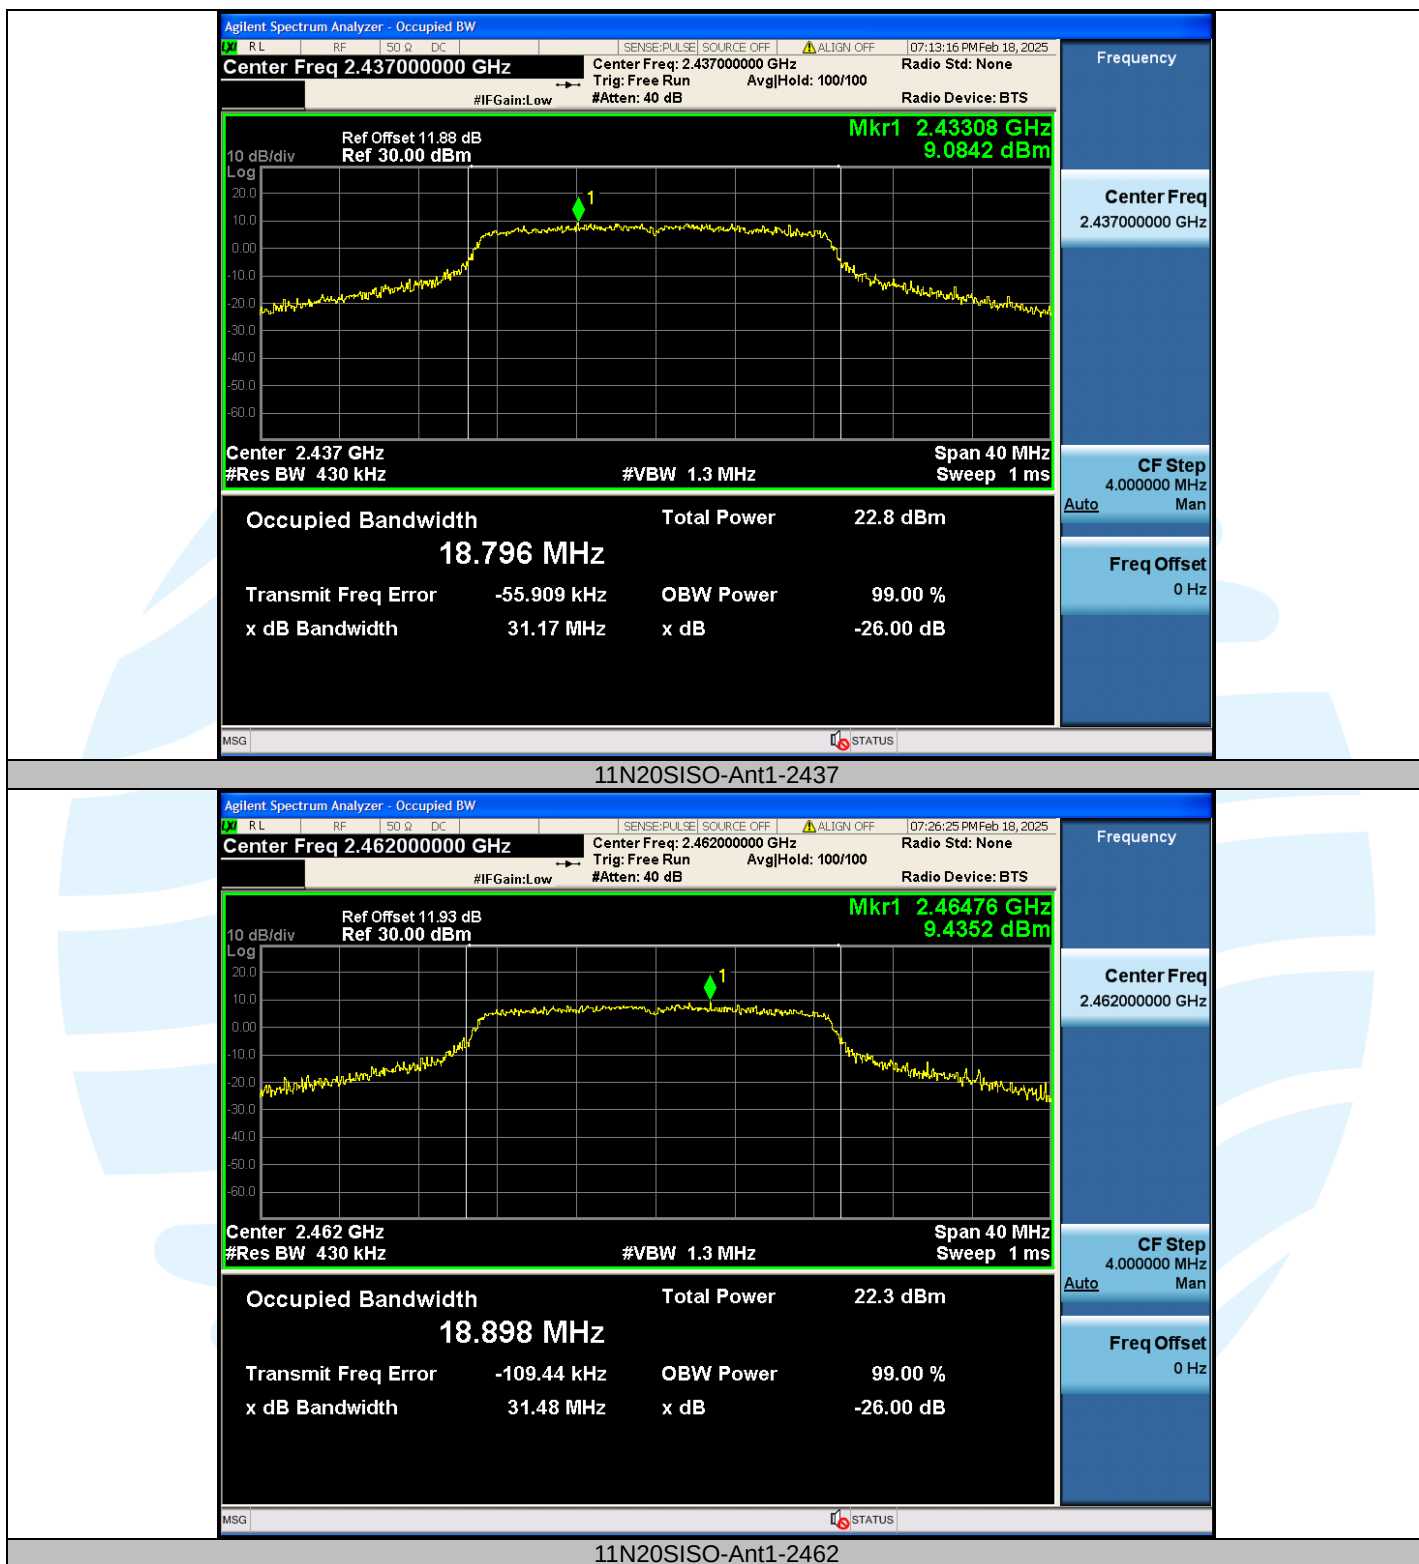

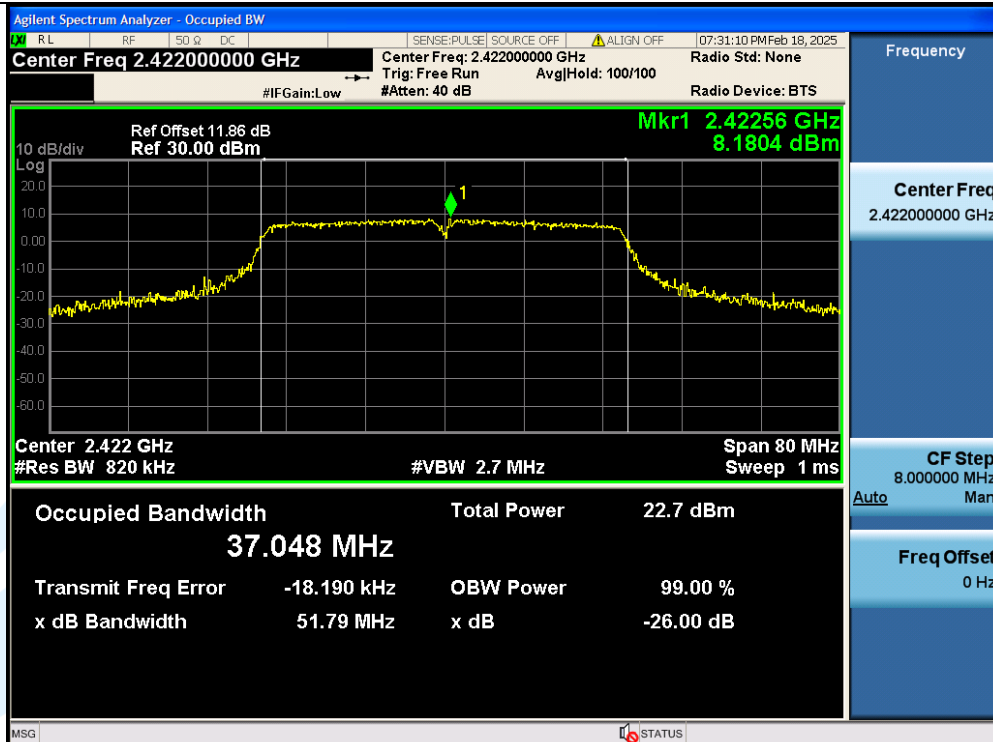

11N40SISO-Ant1-2422

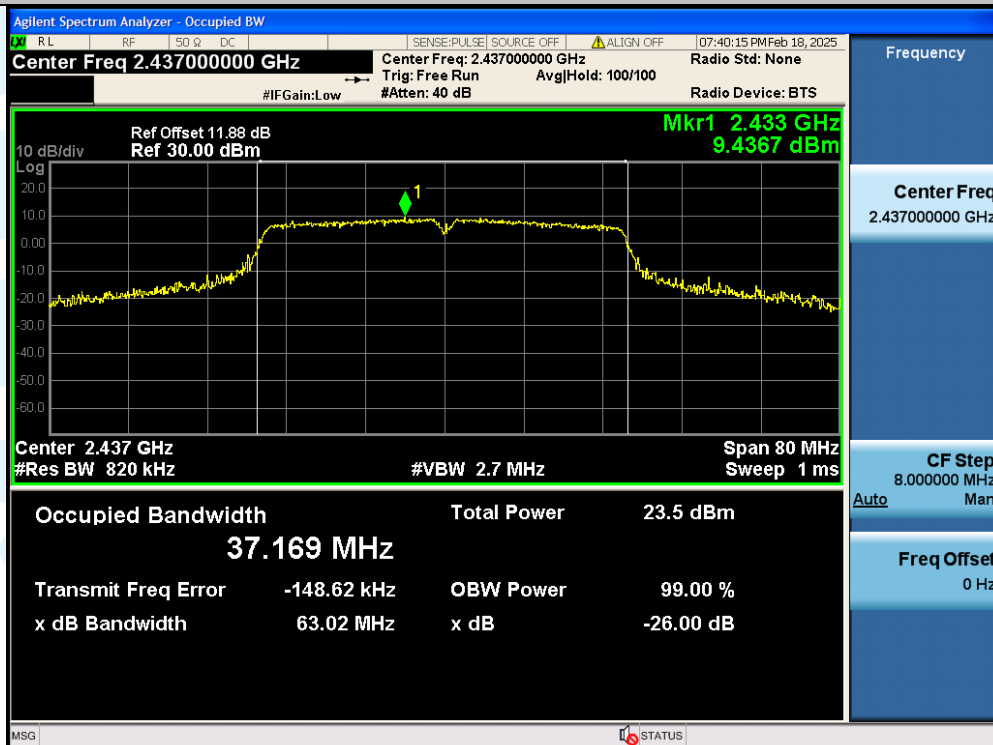

11N40SISO-Ant1-2437

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

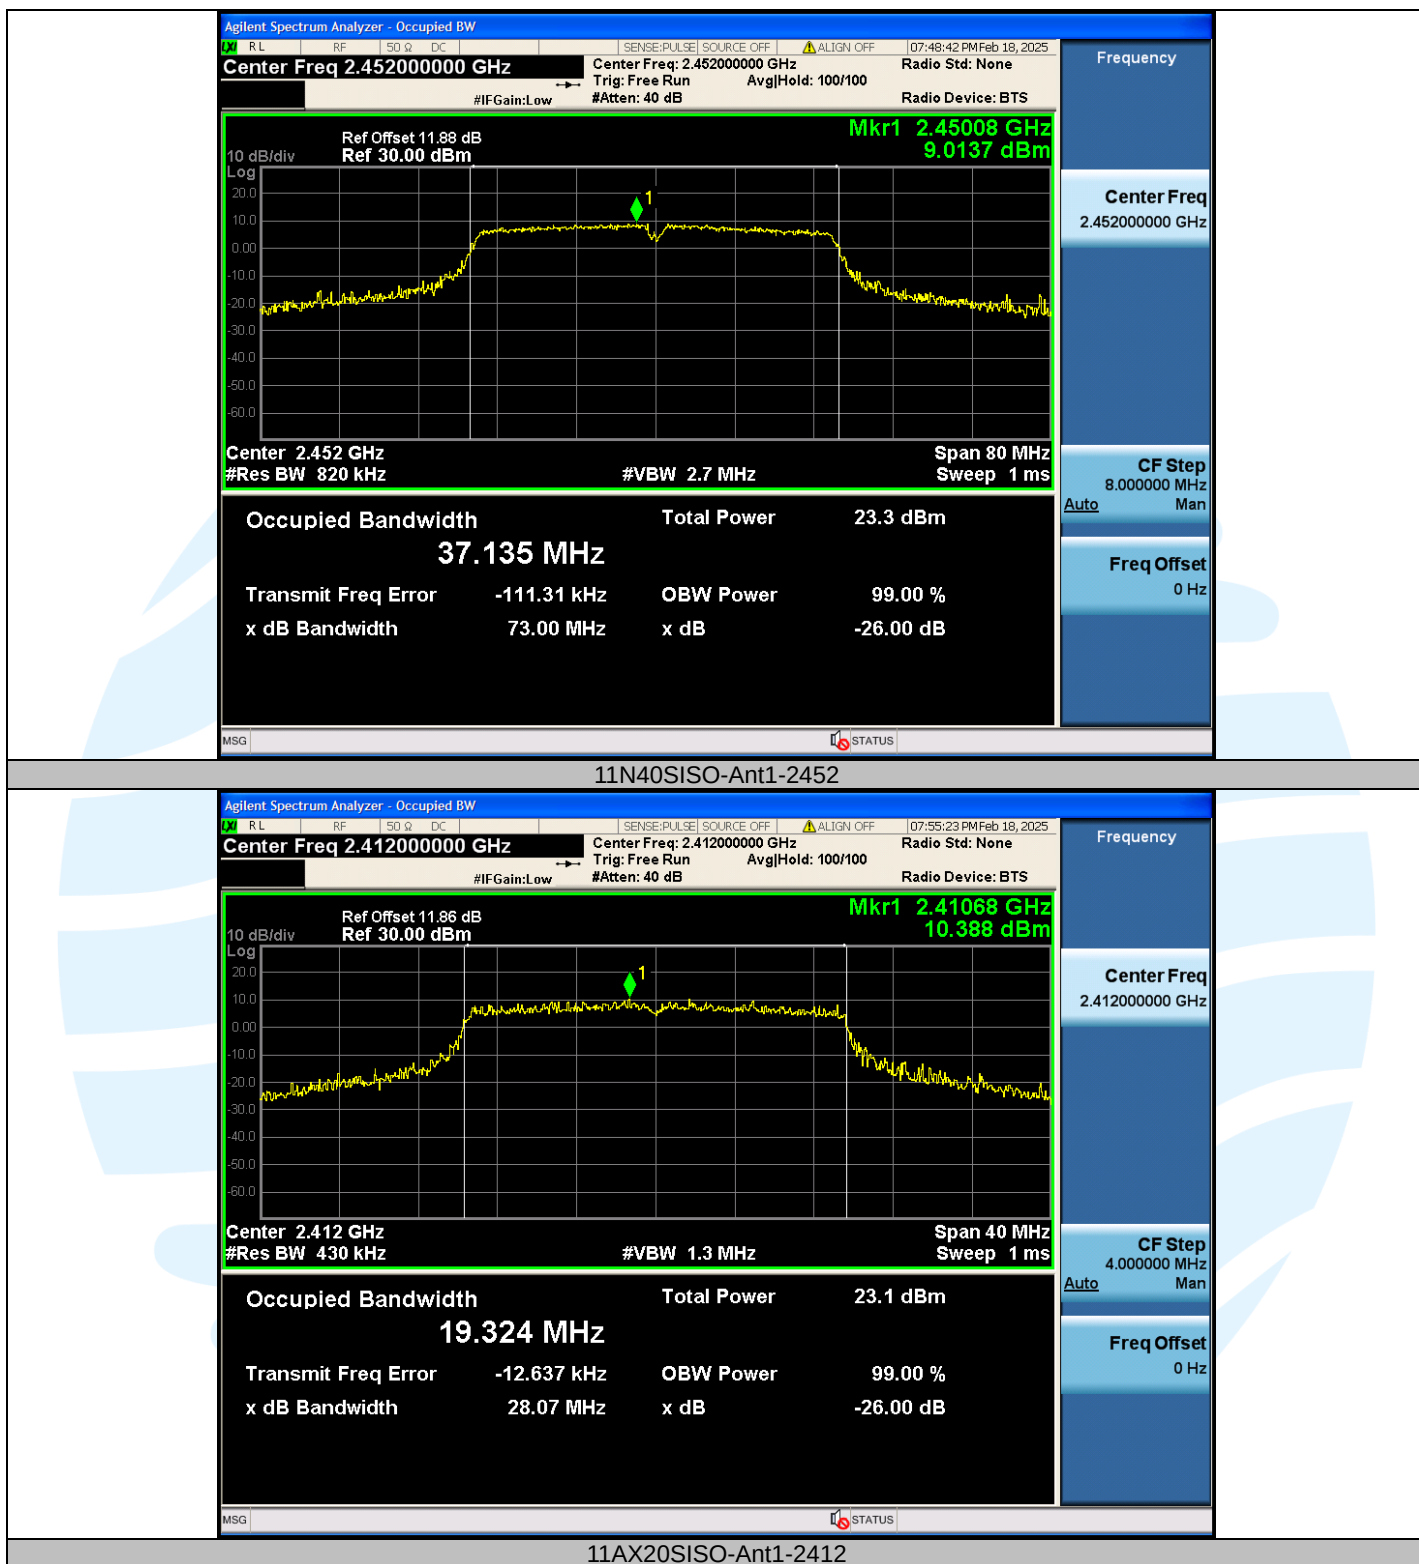**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

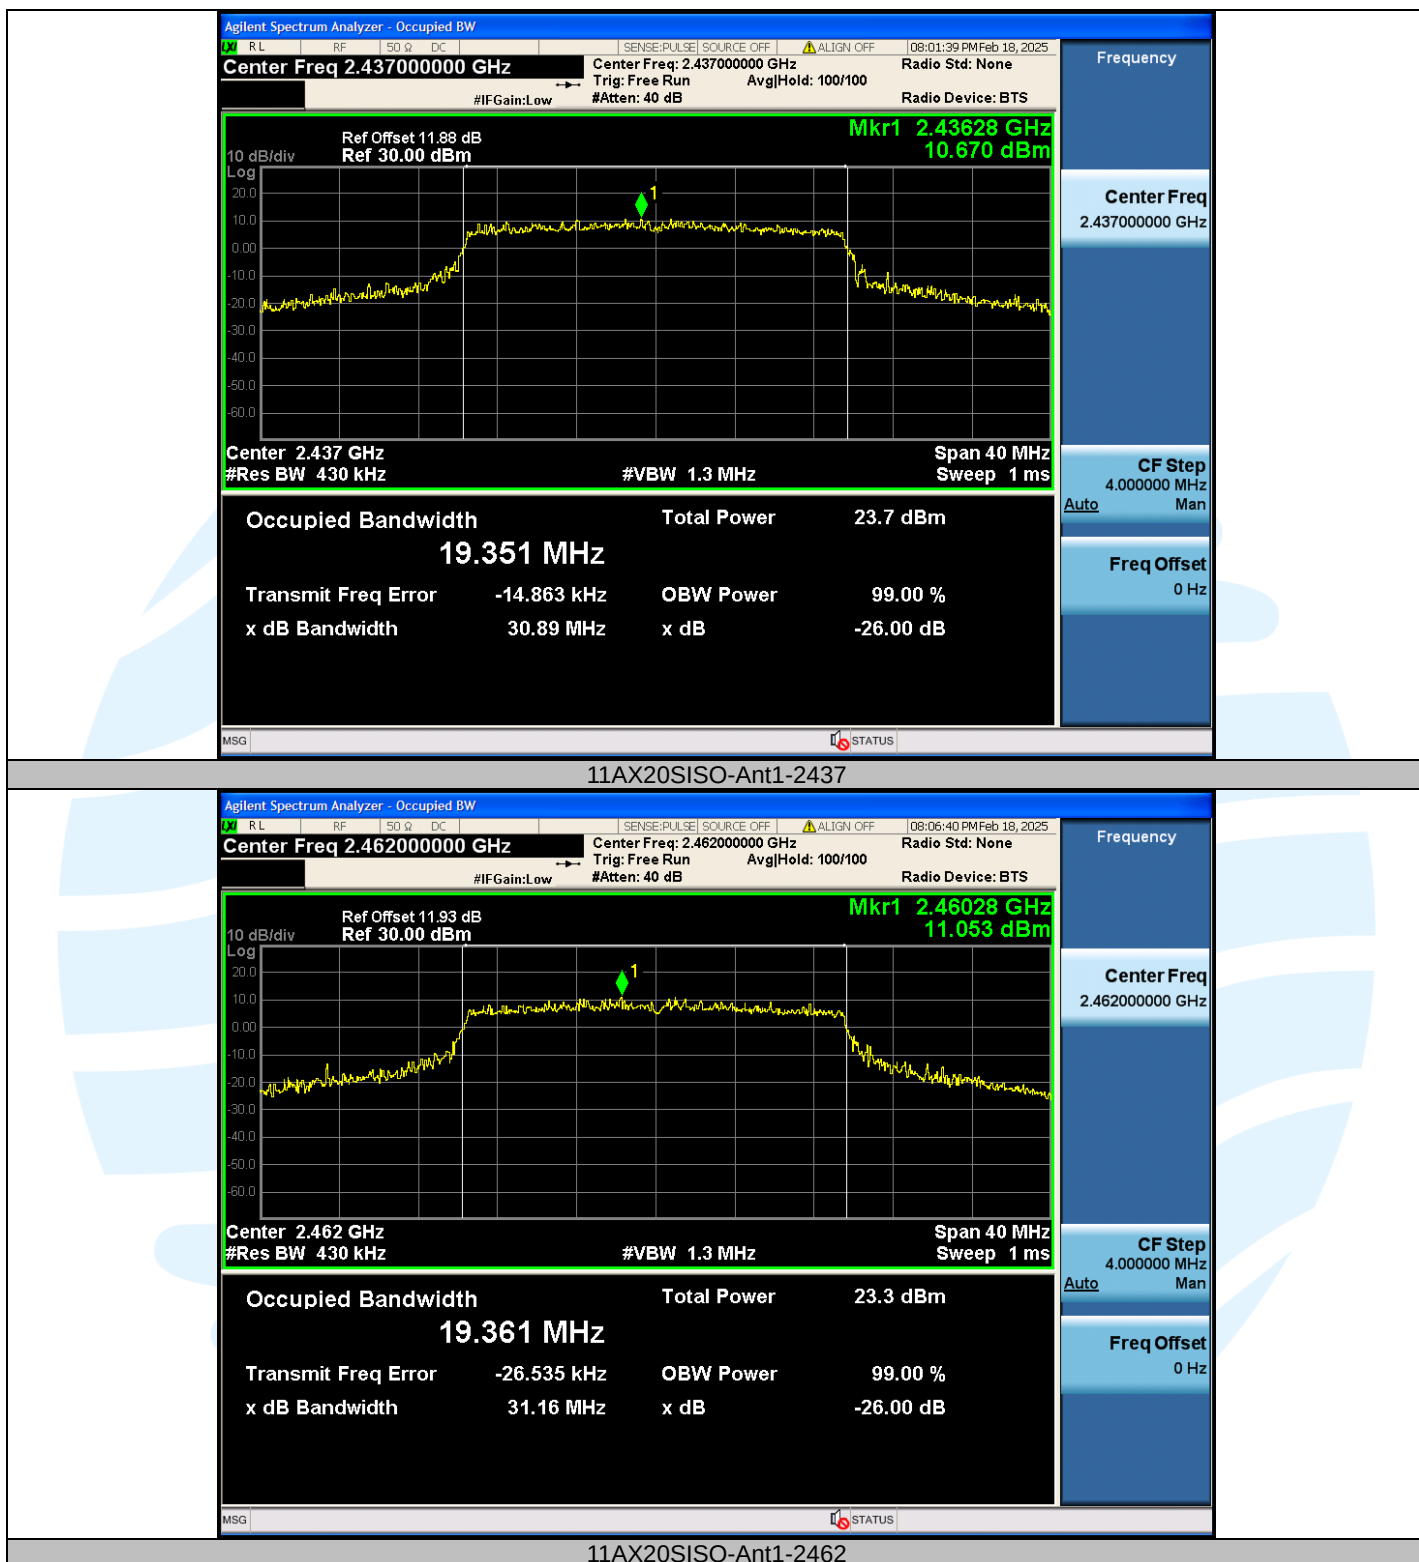**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

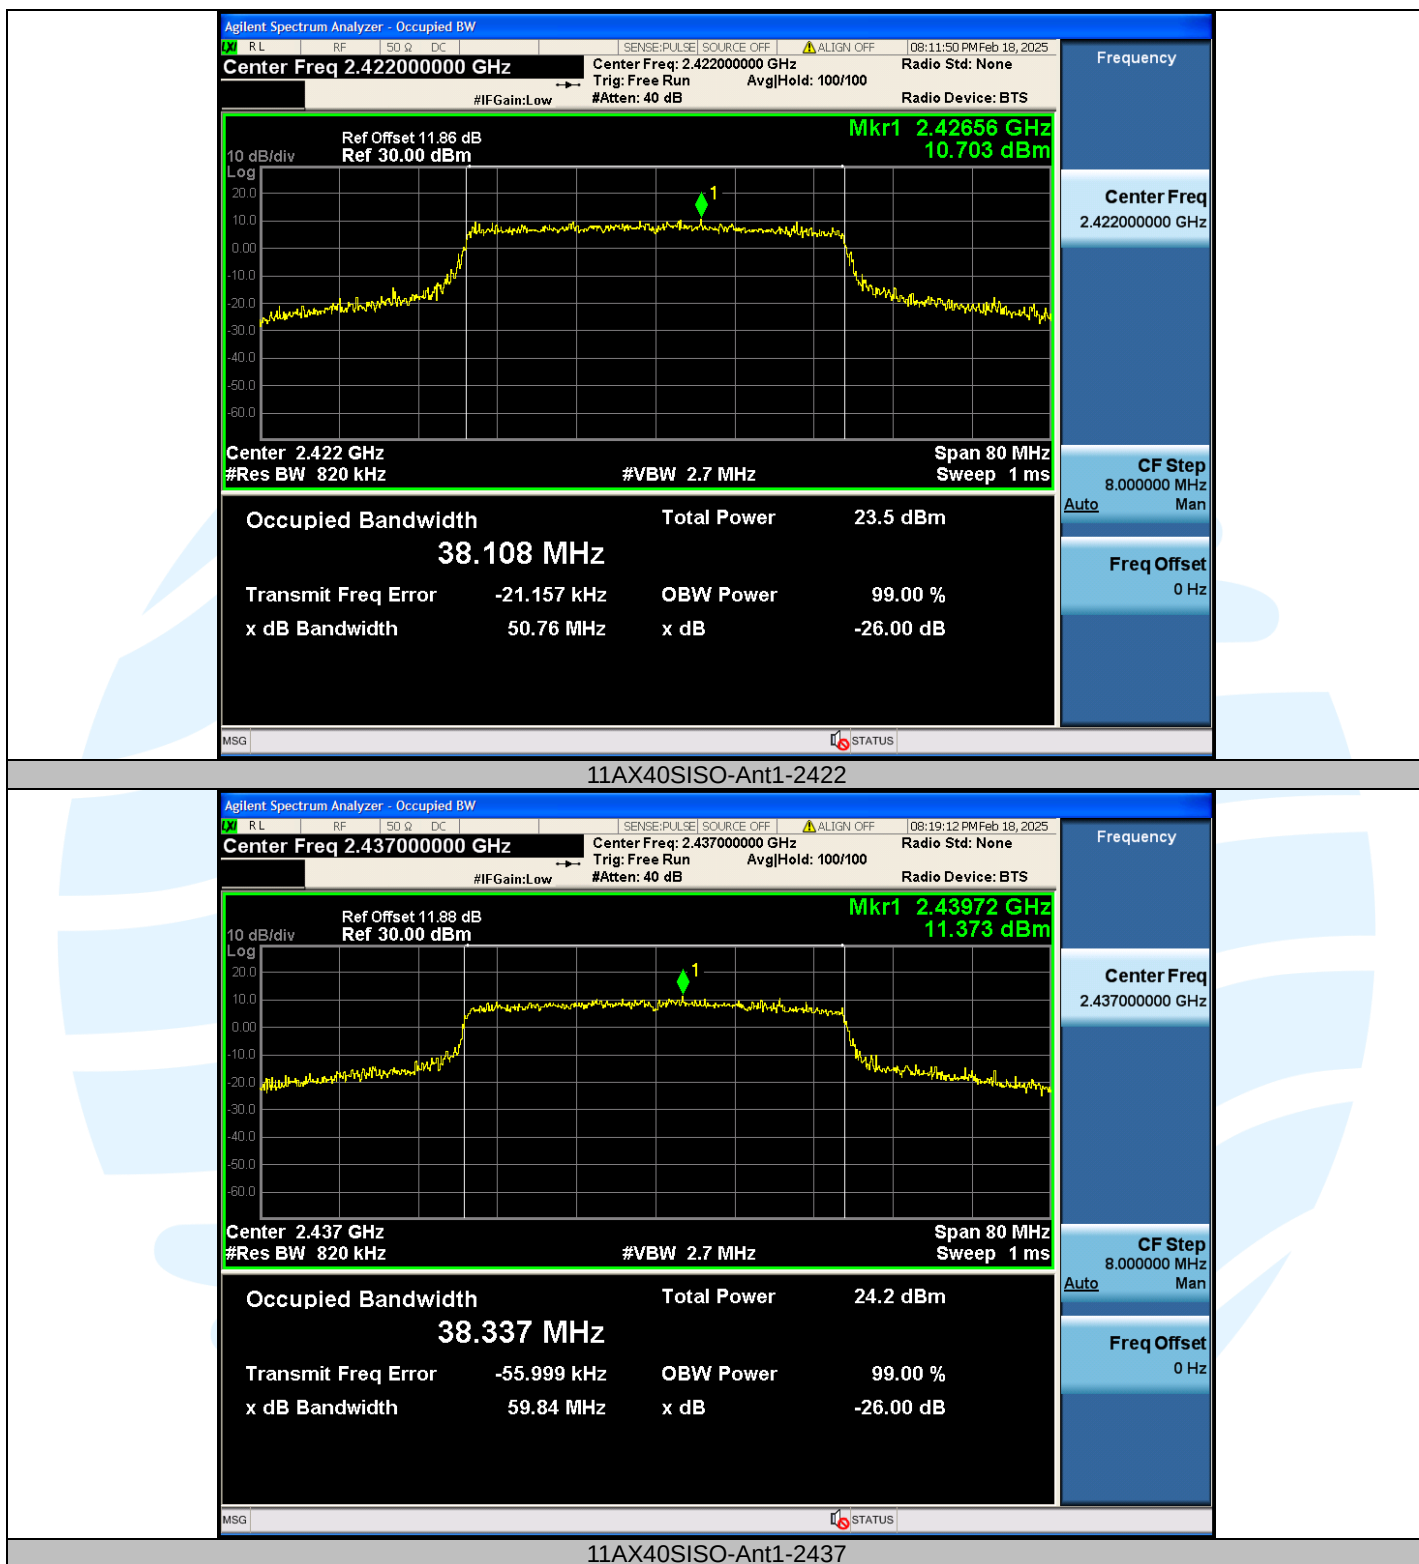

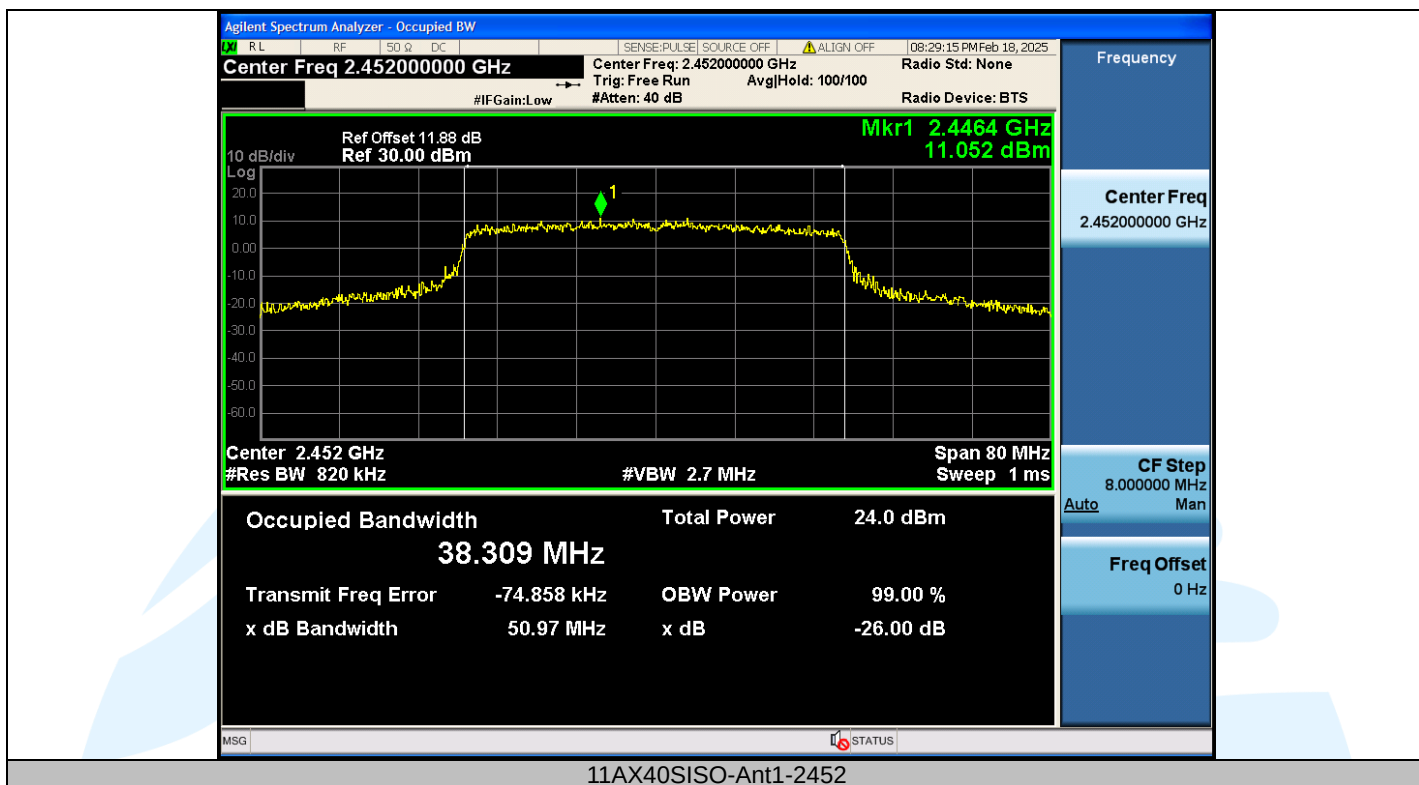

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

A.2 6DB BANDWIDTH

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.555	0.5	PASS
11B	Ant1	2437	8.602	0.5	PASS
11B	Ant1	2462	8.629	0.5	PASS
11G	Ant1	2412	16.35	0.5	PASS
11G	Ant1	2437	16.06	0.5	PASS
11G	Ant1	2462	15.44	0.5	PASS
11N20SISO	Ant1	2412	16.60	0.5	PASS
11N20SISO	Ant1	2437	17.68	0.5	PASS
11N20SISO	Ant1	2462	17.33	0.5	PASS
11N40SISO	Ant1	2422	36.36	0.5	PASS
11N40SISO	Ant1	2437	36.08	0.5	PASS
11N40SISO	Ant1	2452	35.12	0.5	PASS
11AX20SISO	Ant1	2412	18.26	0.5	PASS
11AX20SISO	Ant1	2437	18.31	0.5	PASS
11AX20SISO	Ant1	2462	18.29	0.5	PASS
11AX40SISO	Ant1	2422	37.24	0.5	PASS
11AX40SISO	Ant1	2437	37.47	0.5	PASS
11AX40SISO	Ant1	2452	37.38	0.5	PASS

Test Graphs

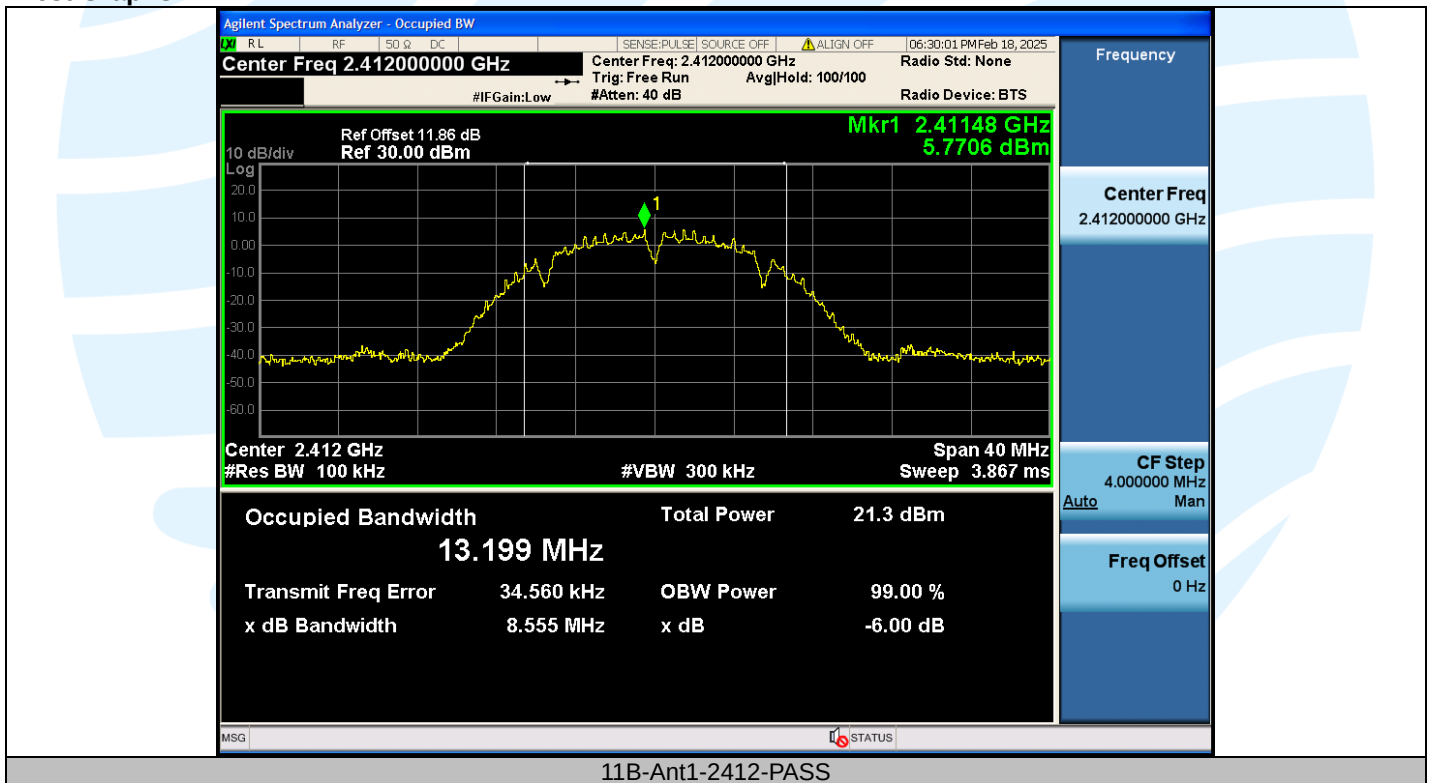

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

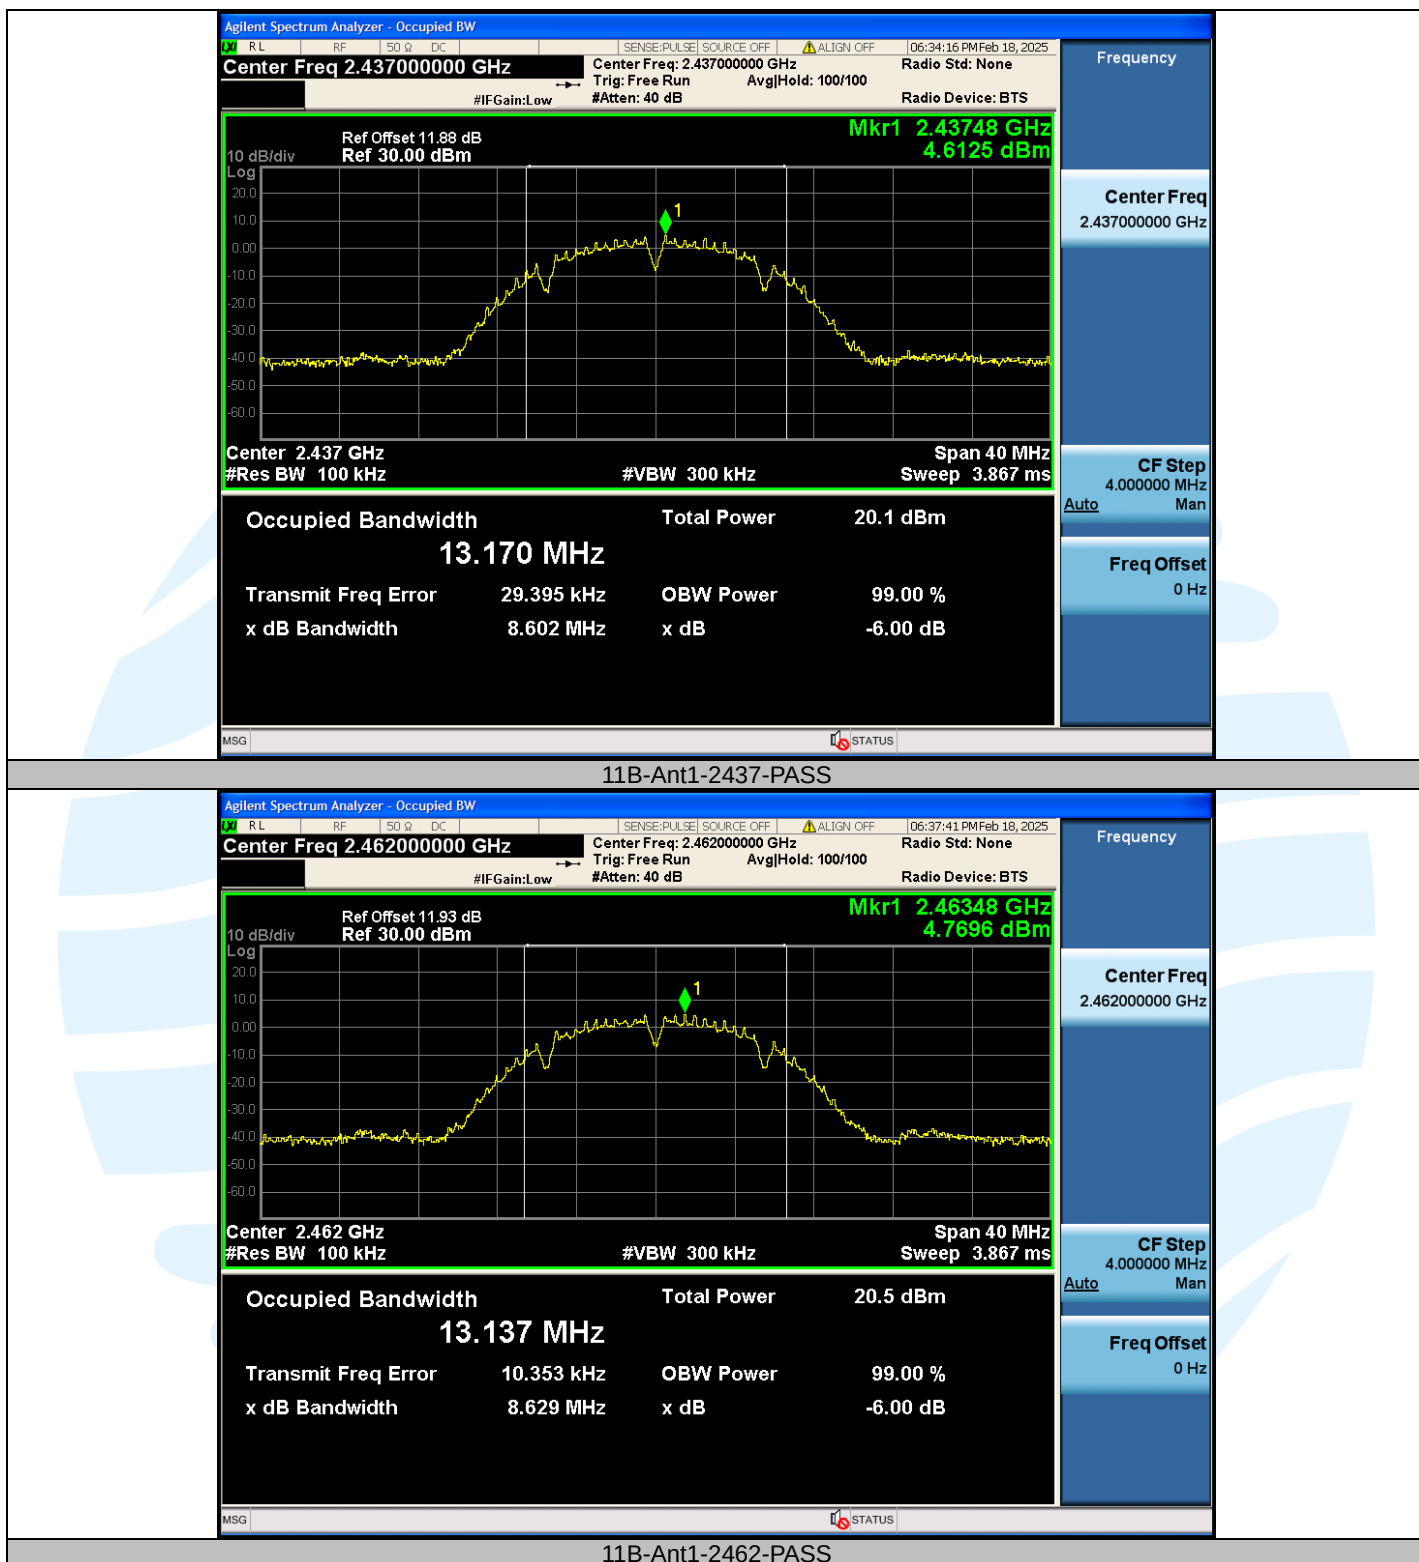


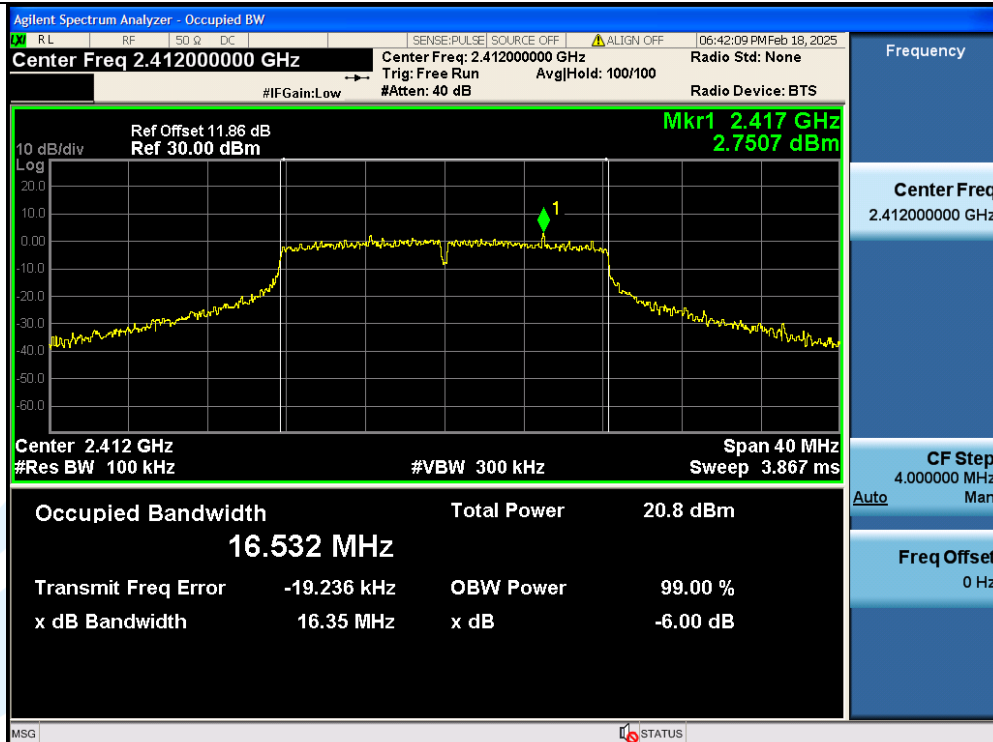


11G-Ant1-2412-PASS

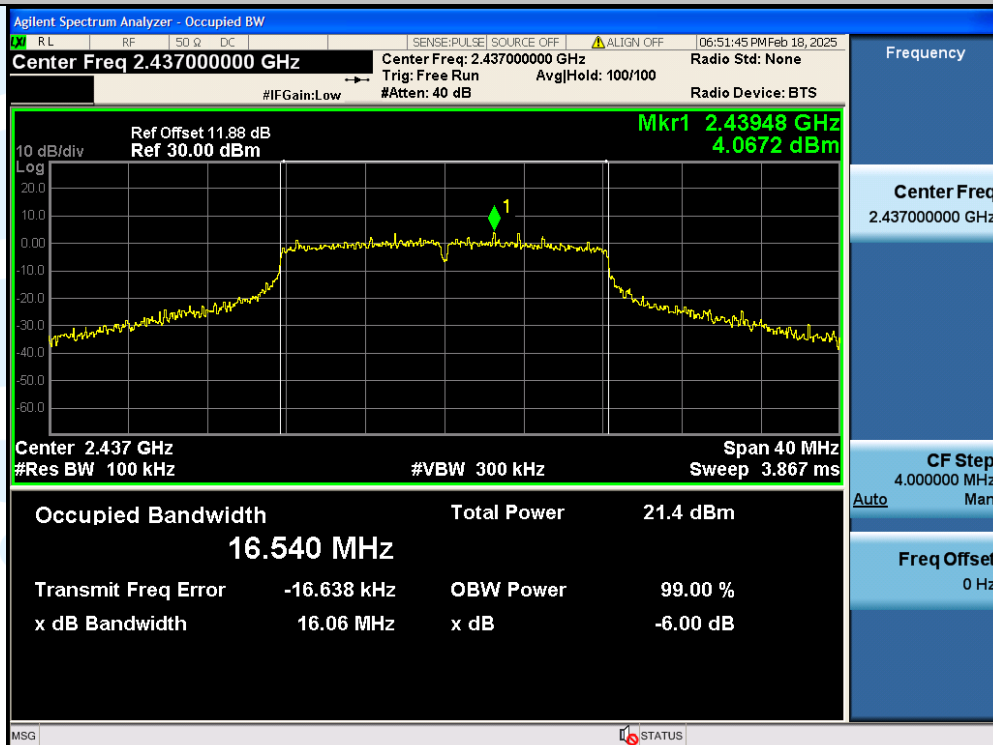

11G-Ant1-2437-PASS

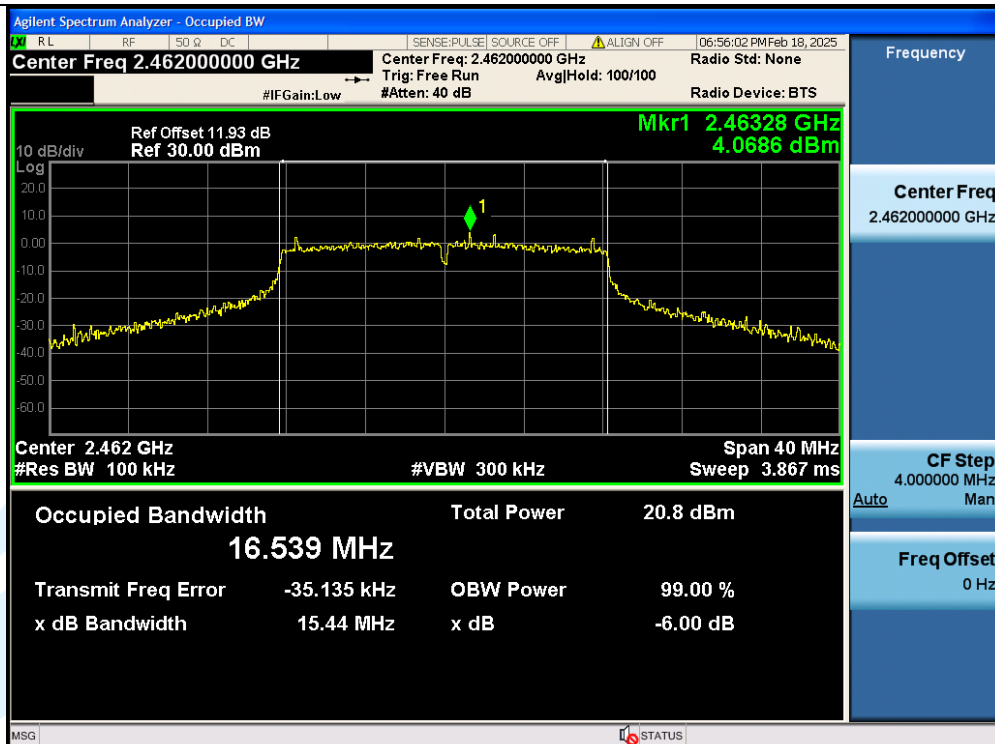

11G-Ant1-2462-PASS

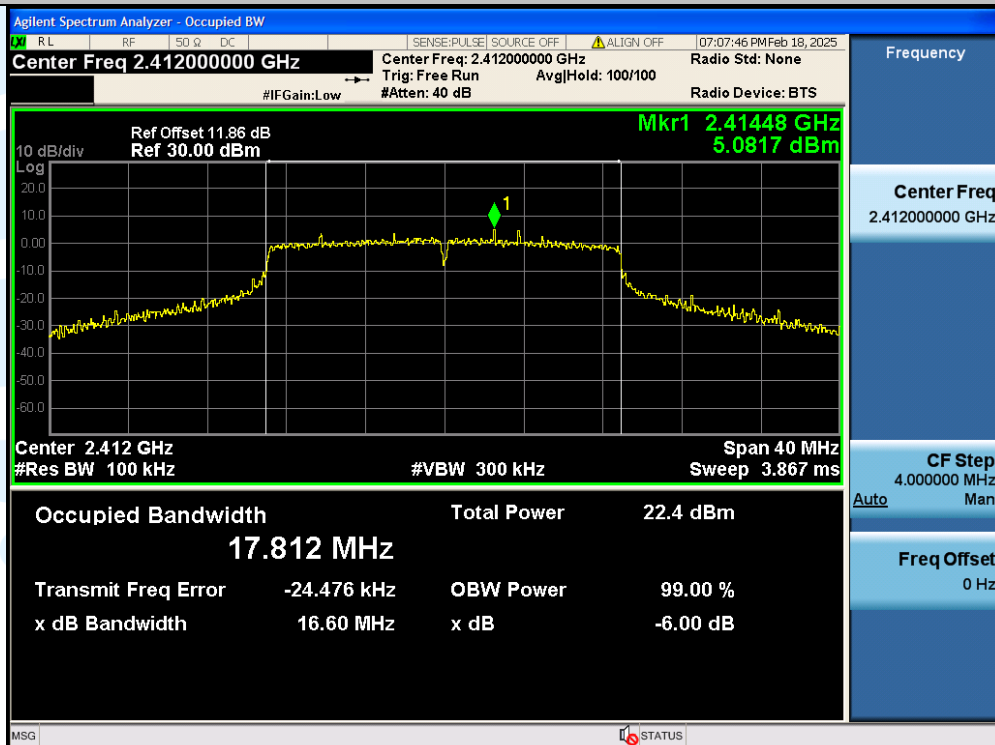

11N20SISO-Ant1-2412-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-RSS247-V1.1

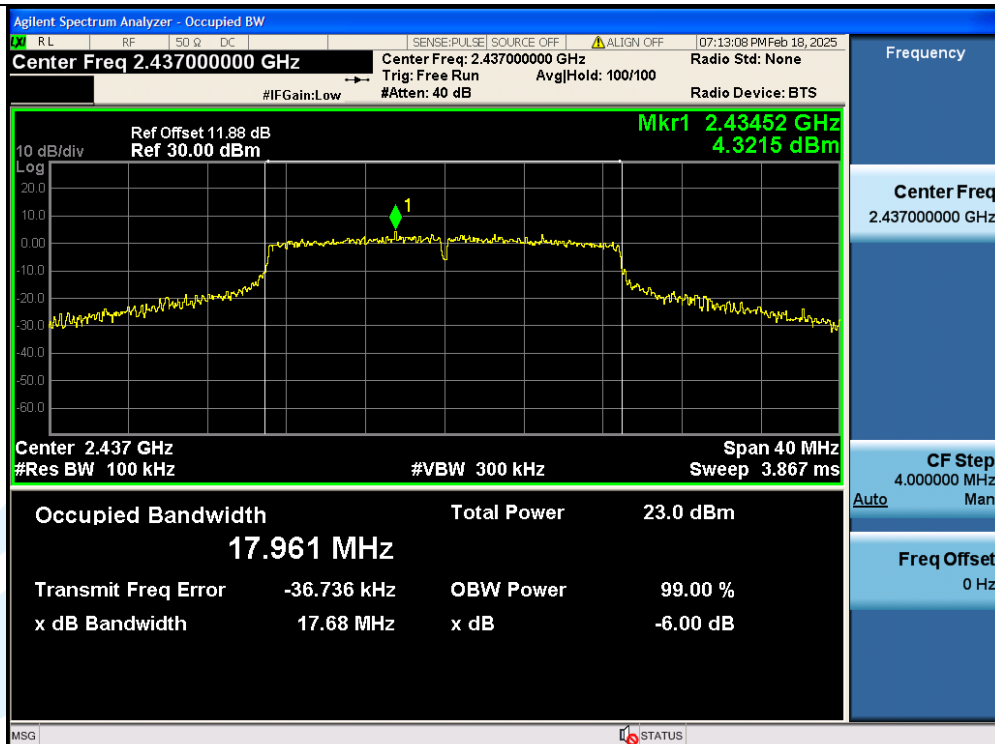


11N20SISO-Ant1-2437-PASS

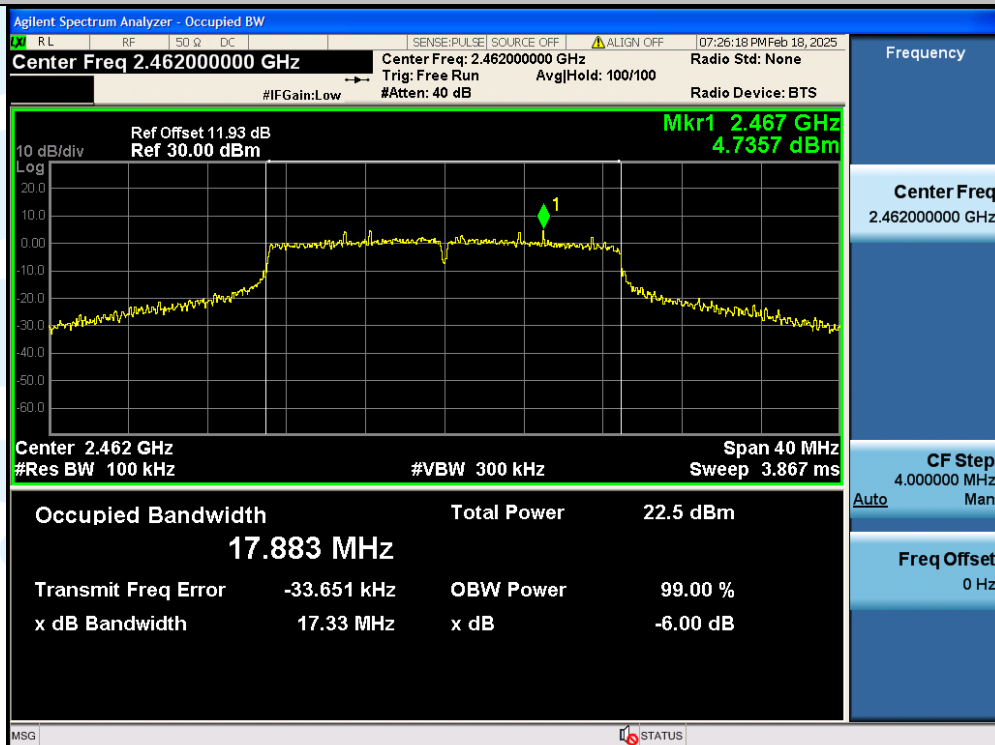


11N20SISO-Ant1-2462-PASS

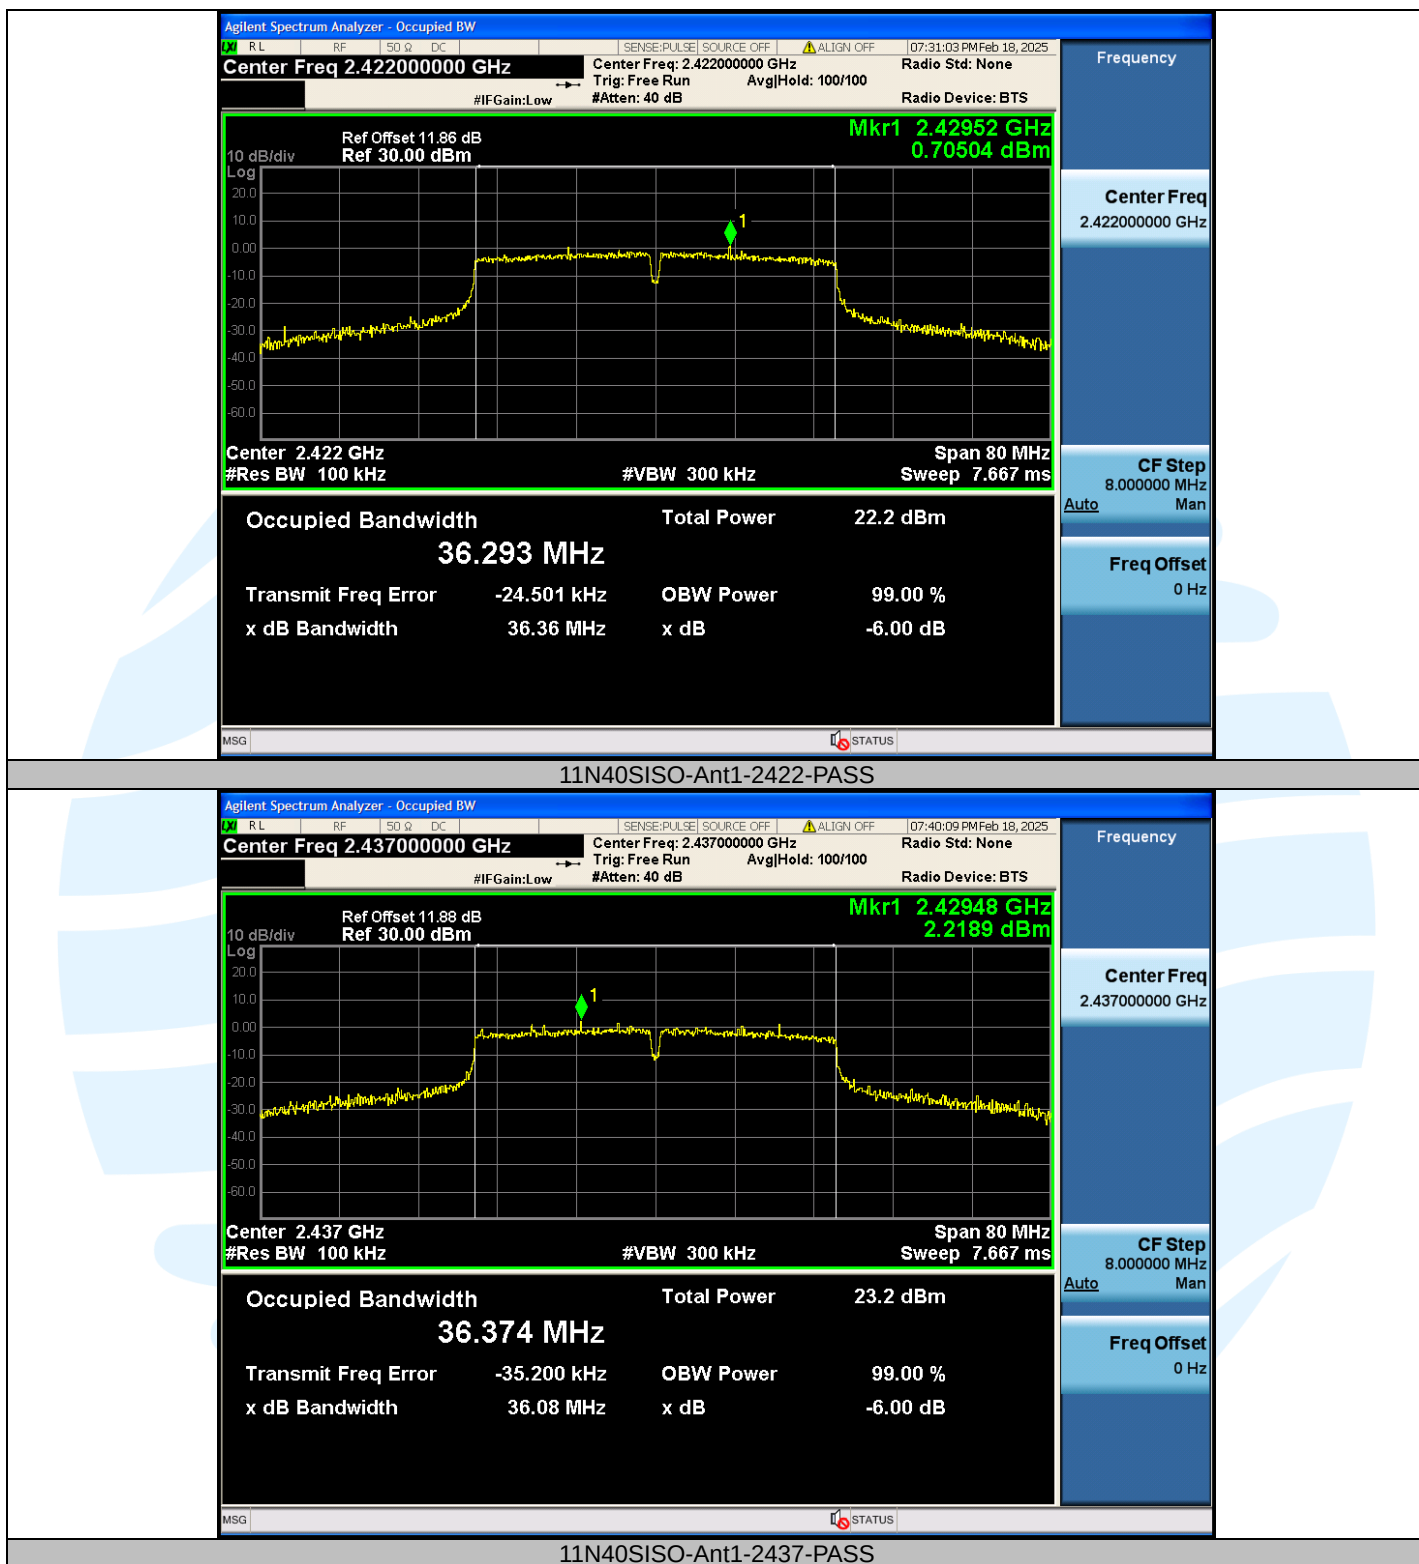

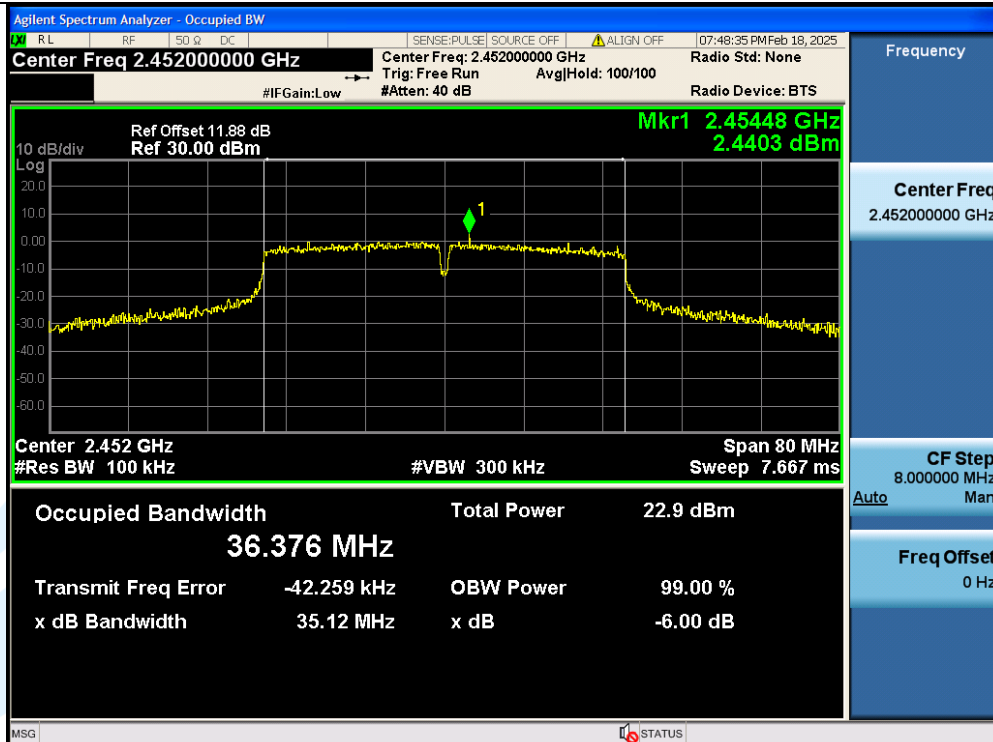

11N40SISO-Ant1-2452-PASS

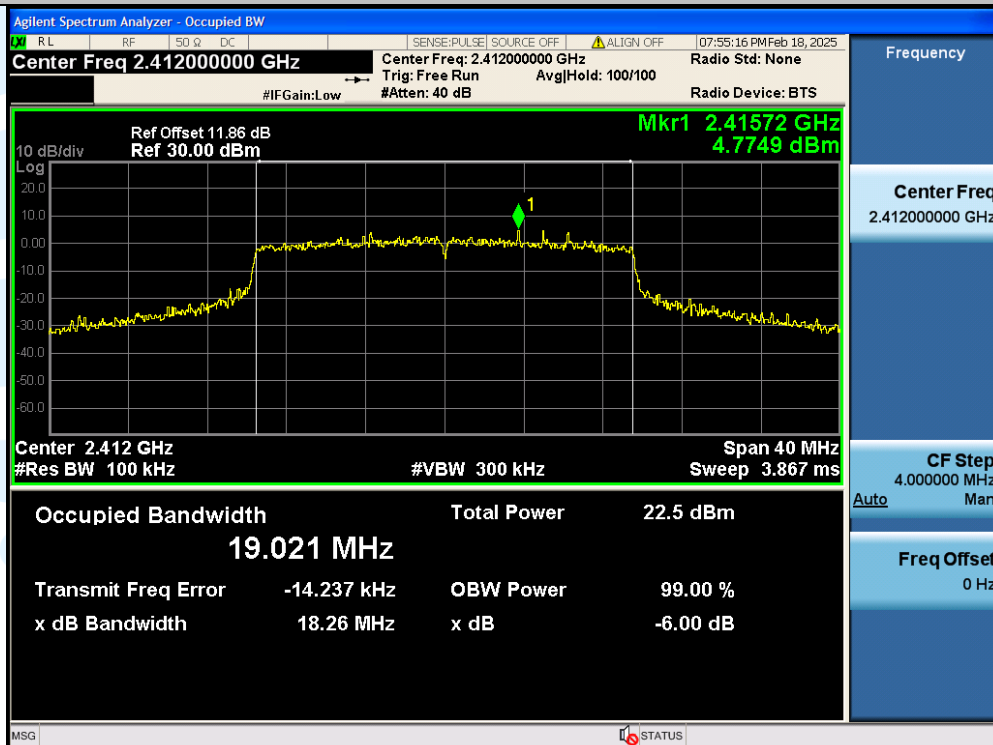

11AX20SISO-Ant1-2412-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

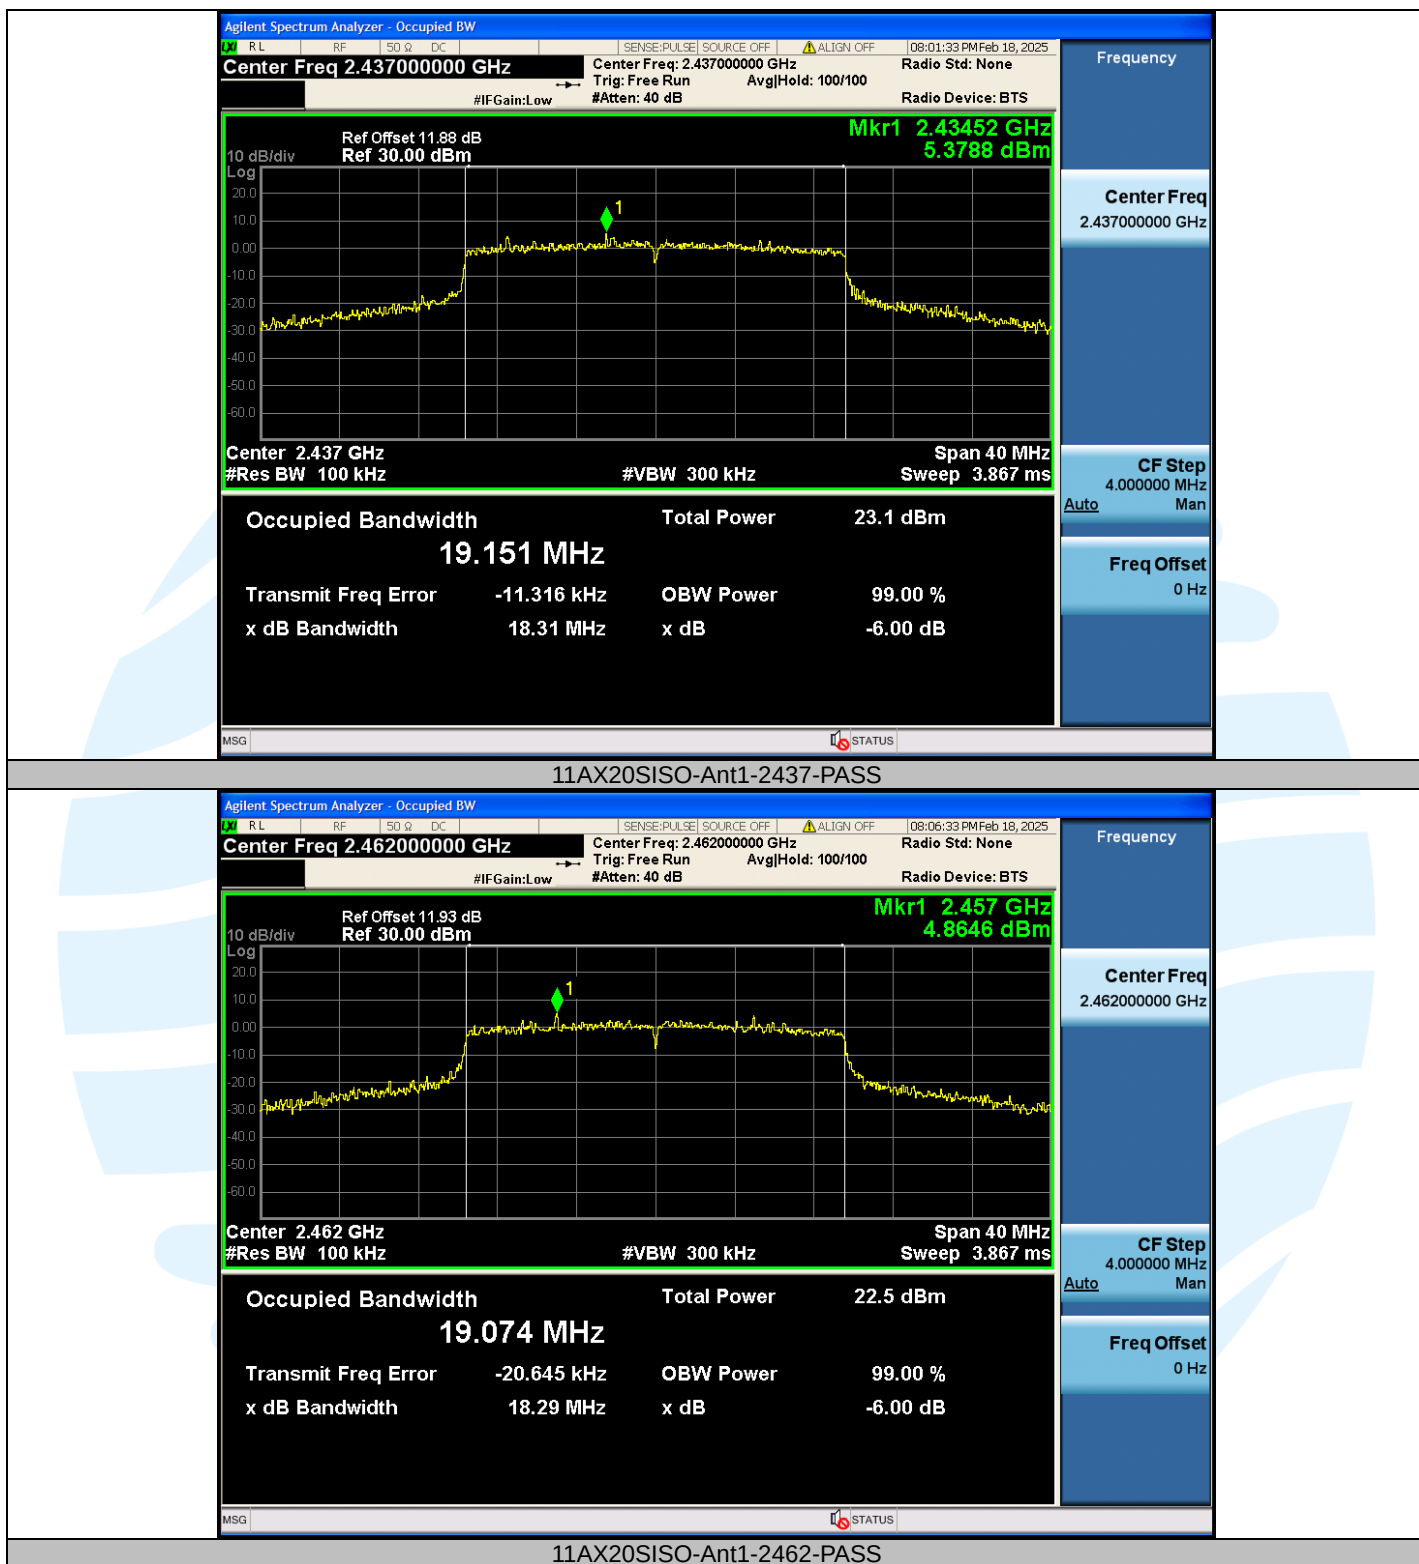

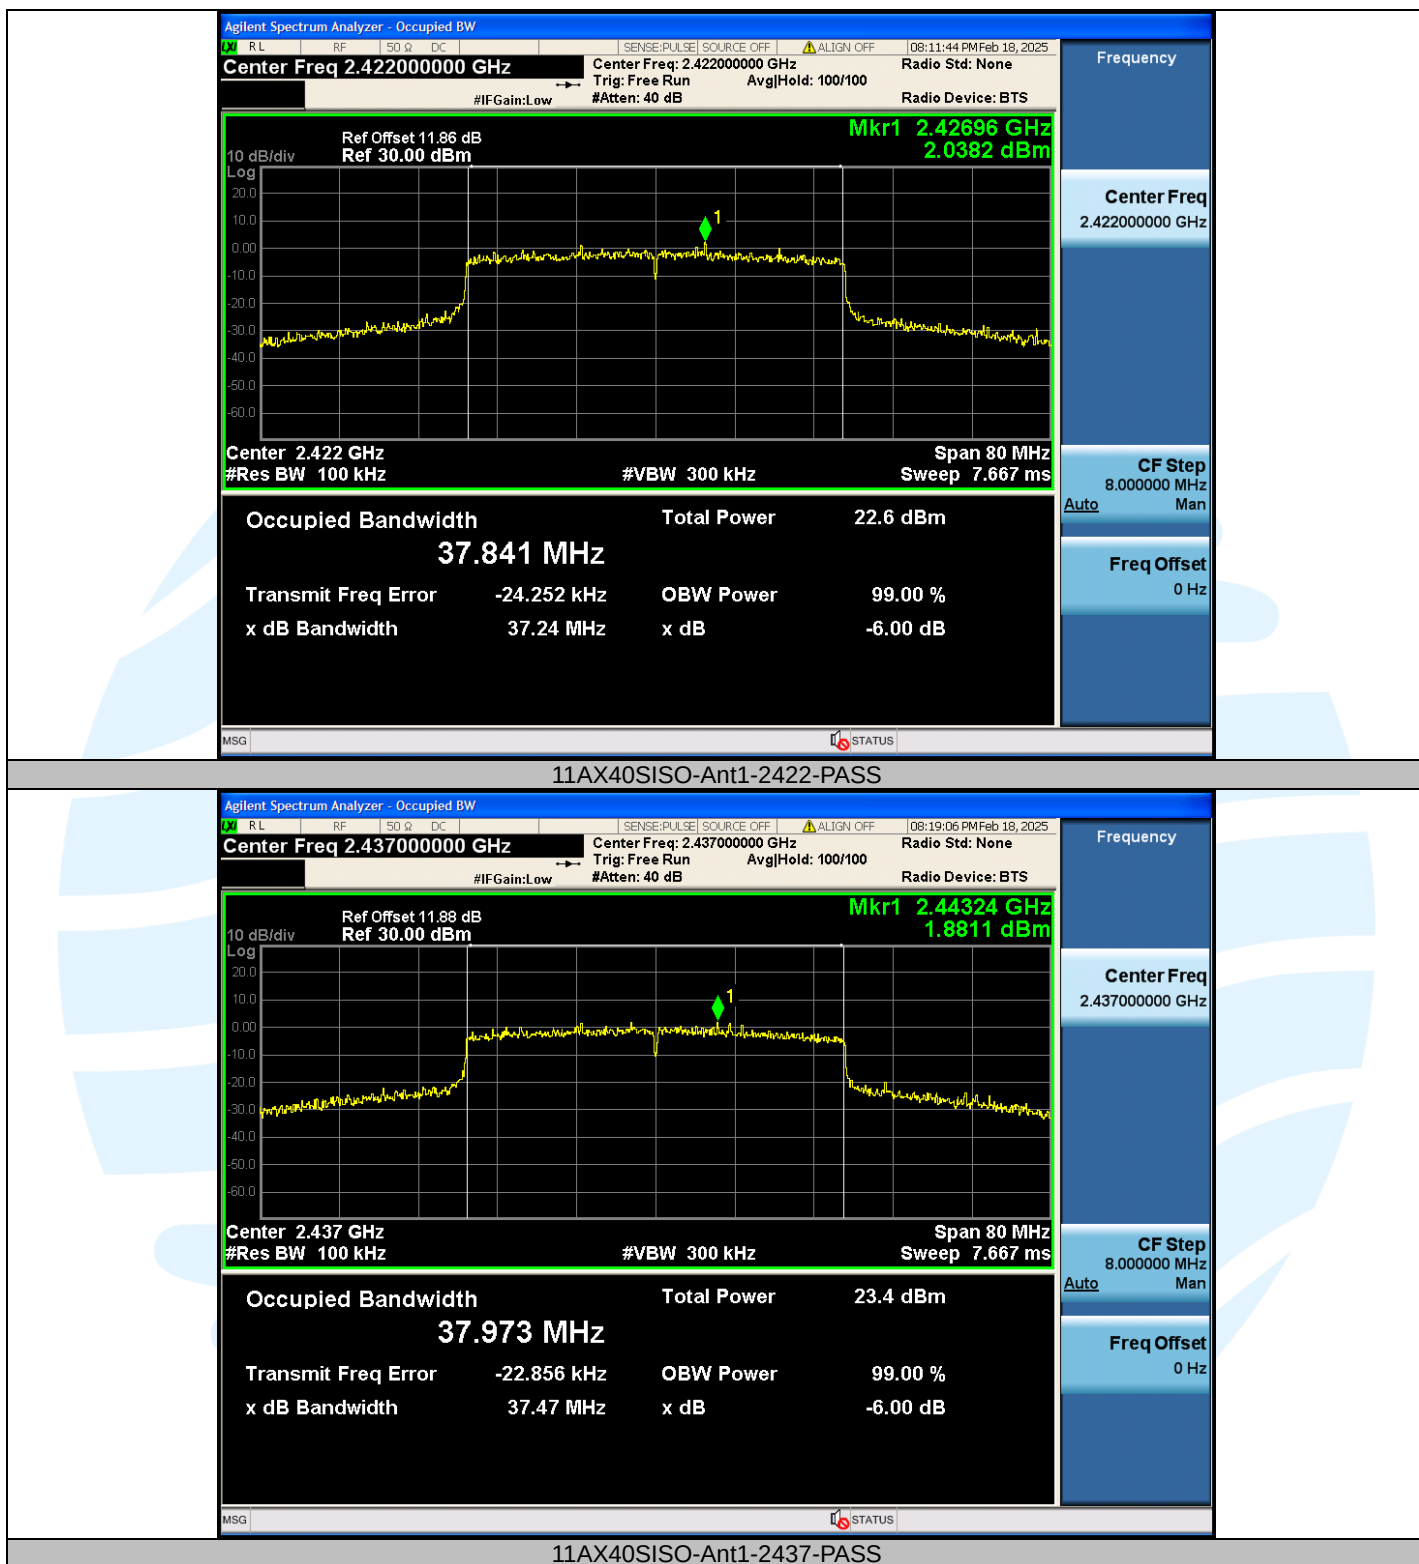

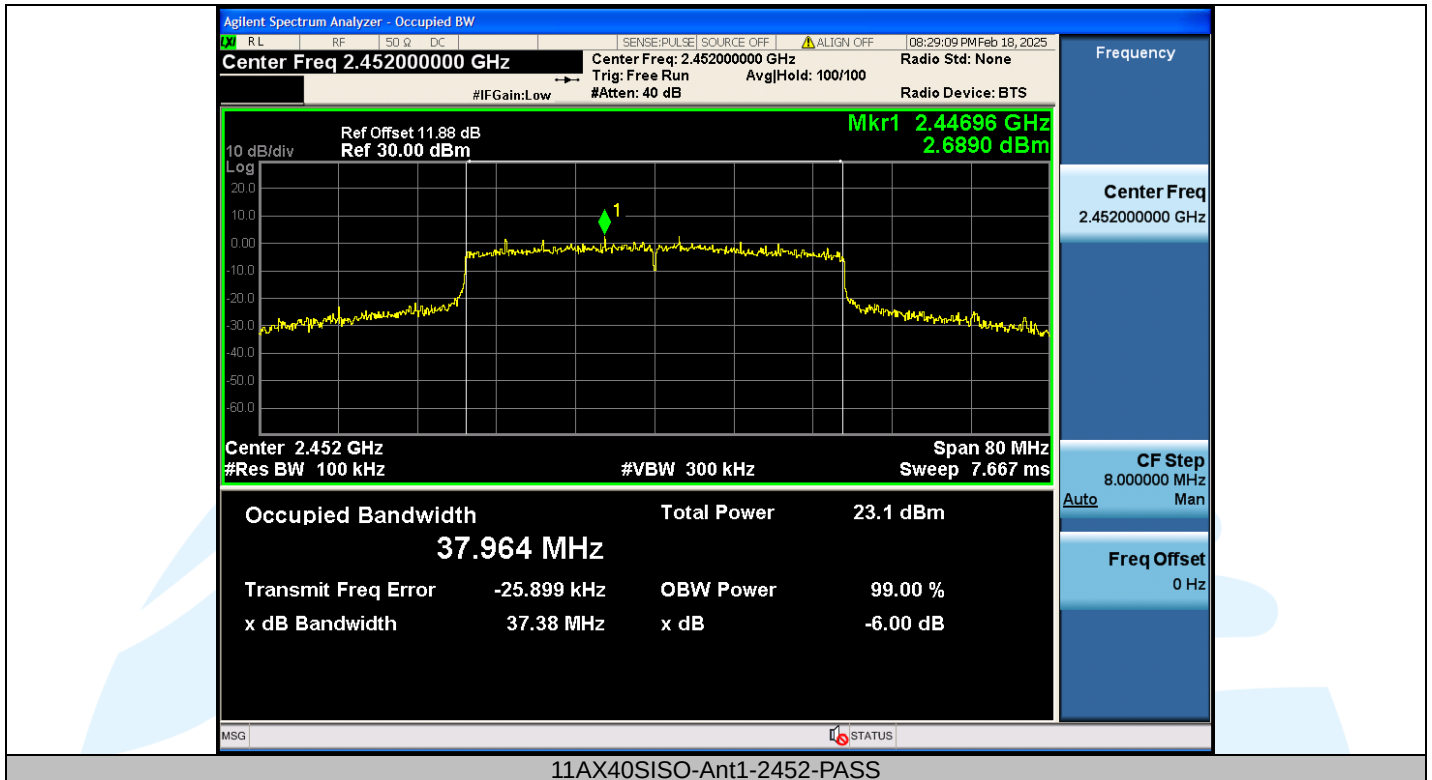

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

A.3 CONDUCTED OUT OF BAND EMISSION

TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	0~Reference	4.11	4.11	---	PASS
11B	Ant1	2412	30~1000	4.11	-58.74	≤-15.89	PASS
11B	Ant1	2412	1000~26500	4.11	-41.44	≤-15.89	PASS
11B	Ant1	2437	0~Reference	3.47	3.47	---	PASS
11B	Ant1	2437	30~1000	3.47	-58.85	≤-16.53	PASS
11B	Ant1	2437	1000~26500	3.47	-43.43	≤-16.53	PASS
11B	Ant1	2462	0~Reference	3.71	3.71	---	PASS
11B	Ant1	2462	30~1000	3.71	-58.84	≤-16.29	PASS
11B	Ant1	2462	1000~26500	3.71	-42.88	≤-16.29	PASS
11G	Ant1	2412	0~Reference	0.46	0.46	---	PASS
11G	Ant1	2412	30~1000	0.46	-59.33	≤-19.54	PASS
11G	Ant1	2412	1000~26500	0.46	-43.4	≤-19.54	PASS
11G	Ant1	2437	0~Reference	4.75	4.75	---	PASS
11G	Ant1	2437	30~1000	4.75	-58.79	≤-15.25	PASS
11G	Ant1	2437	1000~26500	4.75	-41.85	≤-15.25	PASS
11G	Ant1	2462	0~Reference	1.35	1.35	---	PASS
11G	Ant1	2462	30~1000	1.35	-58.5	≤-18.65	PASS
11G	Ant1	2462	1000~26500	1.35	-43.11	≤-18.65	PASS
11N20SISO	Ant1	2412	0~Reference	1.86	1.86	---	PASS
11N20SISO	Ant1	2412	30~1000	1.86	-58.7	≤-18.14	PASS
11N20SISO	Ant1	2412	1000~26500	1.86	-41.77	≤-18.14	PASS
11N20SISO	Ant1	2437	0~Reference	2.72	2.72	---	PASS
11N20SISO	Ant1	2437	30~1000	2.72	-58.43	≤-17.28	PASS
11N20SISO	Ant1	2437	1000~26500	2.72	-43.69	≤-17.28	PASS
11N20SISO	Ant1	2462	0~Reference	2.12	2.12	---	PASS
11N20SISO	Ant1	2462	30~1000	2.12	-58.22	≤-17.88	PASS
11N20SISO	Ant1	2462	1000~26500	2.12	-40.65	≤-17.88	PASS
11N40SISO	Ant1	2422	0~Reference	-1.43	-1.43	---	PASS
11N40SISO	Ant1	2422	30~1000	-1.43	-58.78	≤-21.43	PASS
11N40SISO	Ant1	2422	1000~26500	-1.43	-46.12	≤-21.43	PASS
11N40SISO	Ant1	2437	0~Reference	2.59	2.59	---	PASS
11N40SISO	Ant1	2437	30~1000	2.59	-58.77	≤-17.41	PASS
11N40SISO	Ant1	2437	1000~26500	2.59	-45.37	≤-17.41	PASS
11N40SISO	Ant1	2452	0~Reference	0.81	0.81	---	PASS
11N40SISO	Ant1	2452	30~1000	0.81	-58.34	≤-19.19	PASS
11N40SISO	Ant1	2452	1000~26500	0.81	-43.95	≤-19.19	PASS
11AX20SISO	Ant1	2412	0~Reference	1.96	1.96	---	PASS
11AX20SISO	Ant1	2412	30~1000	1.96	-58.54	≤-18.04	PASS
11AX20SISO	Ant1	2412	1000~26500	1.96	-43.09	≤-18.04	PASS
11AX20SISO	Ant1	2437	0~Reference	2.19	2.19	---	PASS
11AX20SISO	Ant1	2437	30~1000	2.19	-58.76	≤-17.81	PASS
11AX20SISO	Ant1	2437	1000~26500	2.19	-41.79	≤-17.81	PASS
11AX20SISO	Ant1	2462	0~Reference	1.84	1.84	---	PASS
11AX20SISO	Ant1	2462	30~1000	1.84	-57.97	≤-18.16	PASS
11AX20SISO	Ant1	2462	1000~26500	1.84	-41.63	≤-18.16	PASS
11AX40SISO	Ant1	2422	0~Reference	-0.66	-0.66	---	PASS
11AX40SISO	Ant1	2422	30~1000	-0.66	-59.01	≤-20.66	PASS
11AX40SISO	Ant1	2422	1000~26500	-0.66	-43.47	≤-20.66	PASS
11AX40SISO	Ant1	2437	0~Reference	1.63	1.63	---	PASS
11AX40SISO	Ant1	2437	30~1000	1.63	-58.67	≤-18.37	PASS
11AX40SISO	Ant1	2437	1000~26500	1.63	-46.07	≤-18.37	PASS
11AX40SISO	Ant1	2452	0~Reference	1.08	1.08	---	PASS
11AX40SISO	Ant1	2452	30~1000	1.08	-58.56	≤-18.92	PASS
11AX40SISO	Ant1	2452	1000~26500	1.08	-45.85	≤-18.92	PASS

Test Graphs

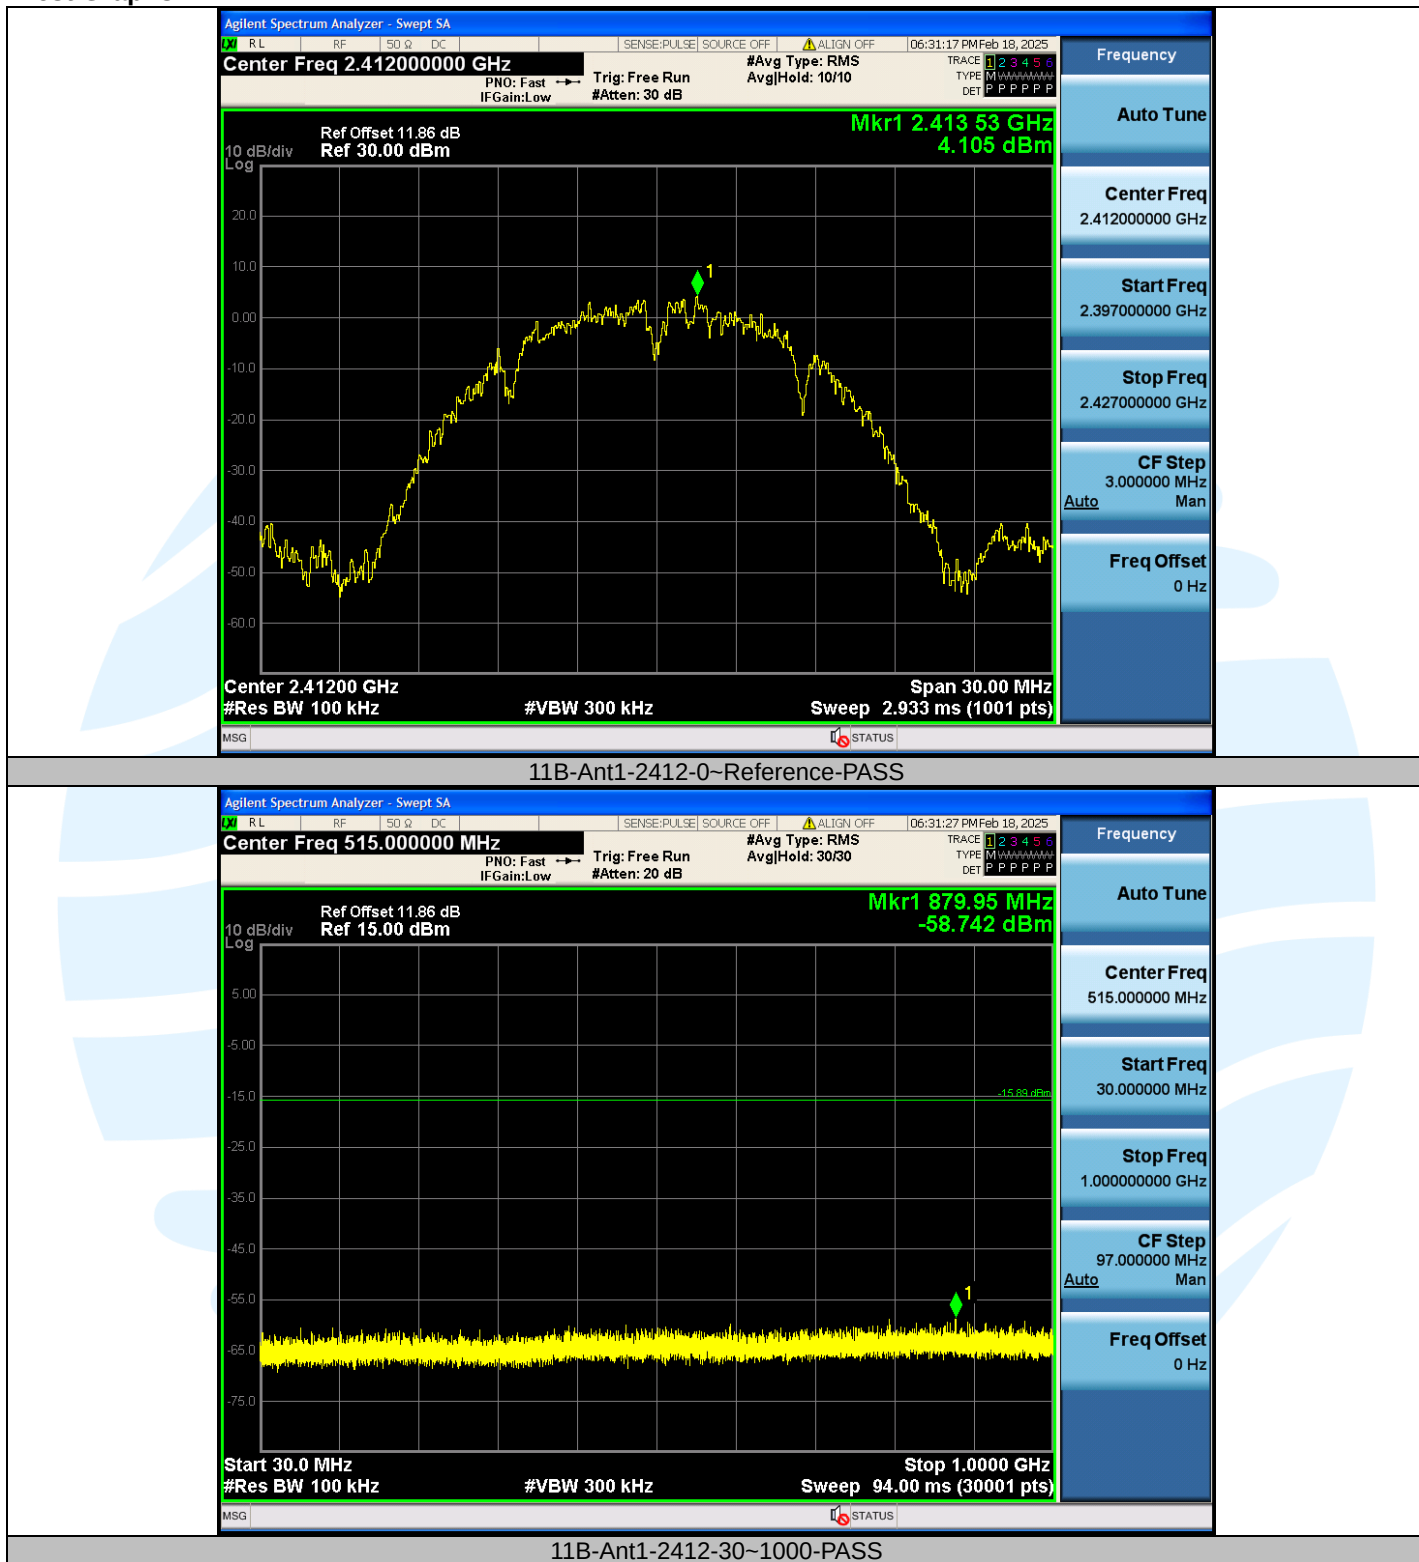

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

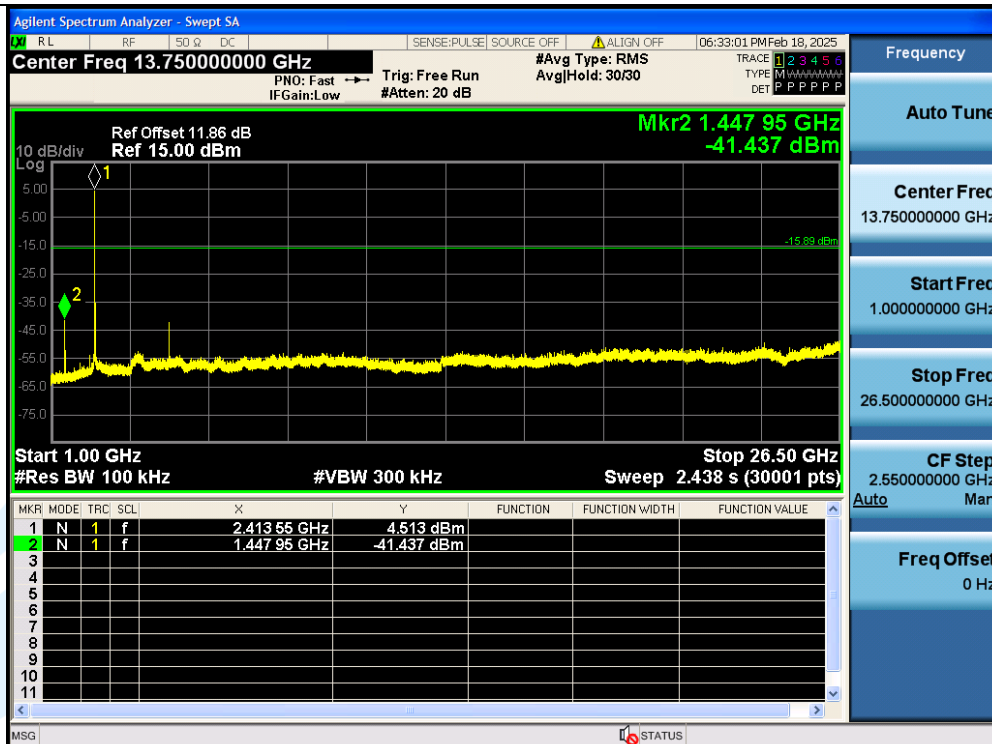

11B-Ant1-2412-1000-26500-PASS



11B-Ant1-2437-0~Reference-PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

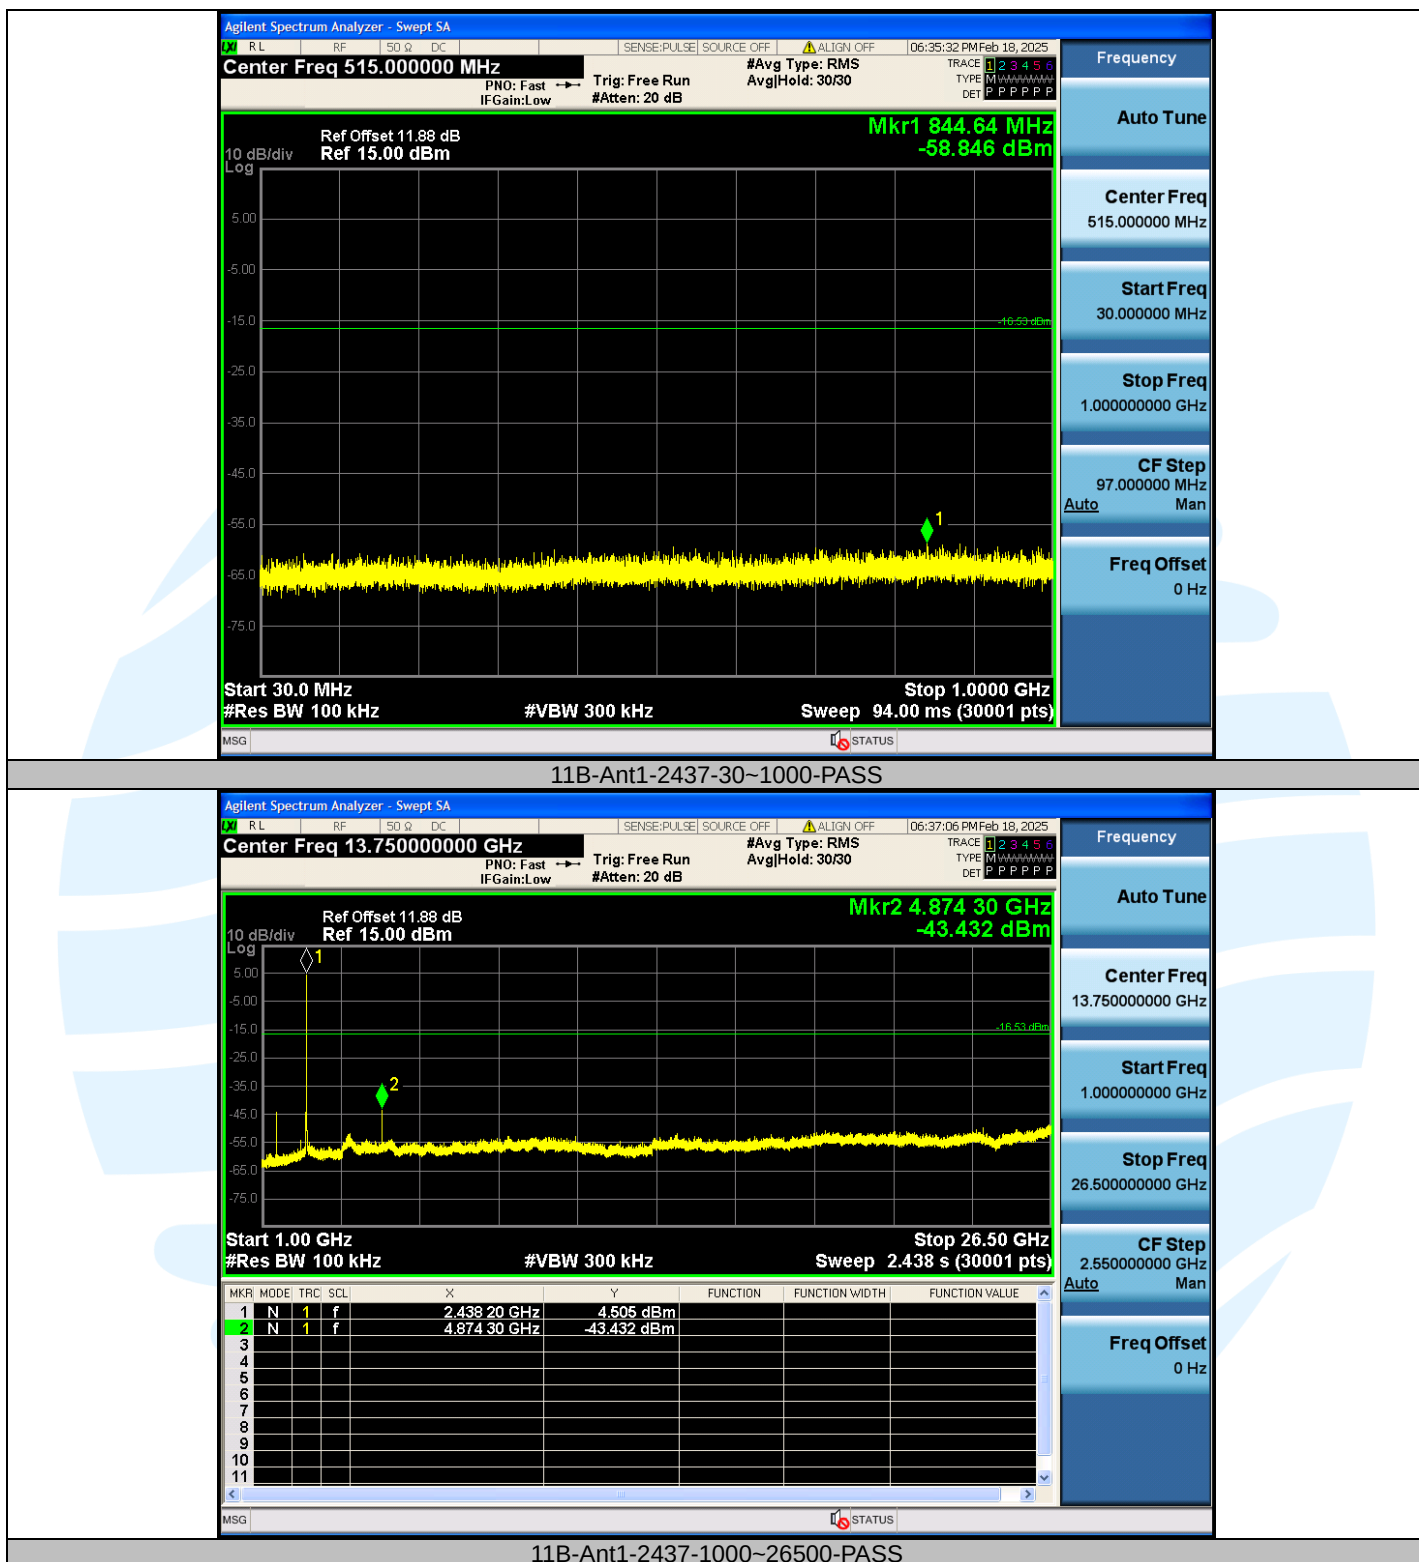

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1

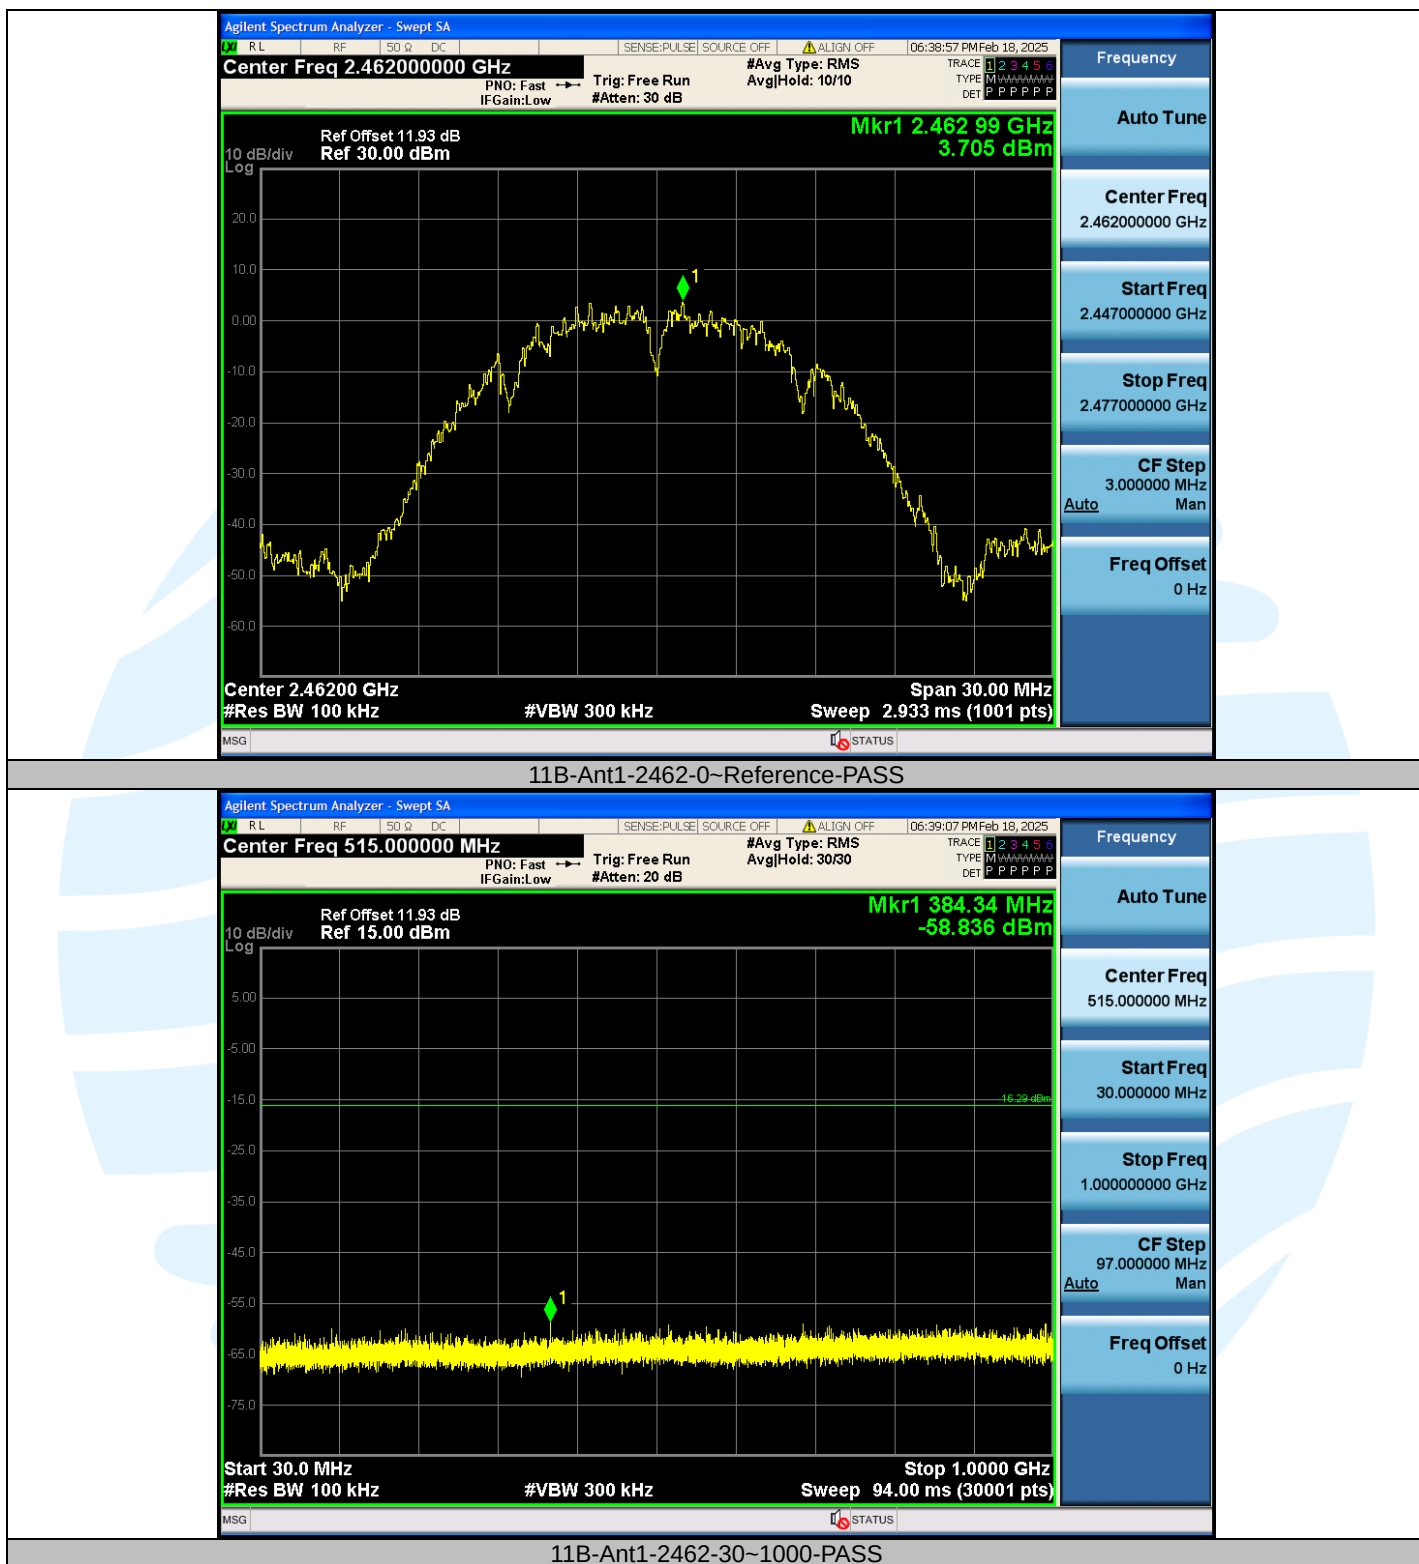

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-RSS247-V1.1

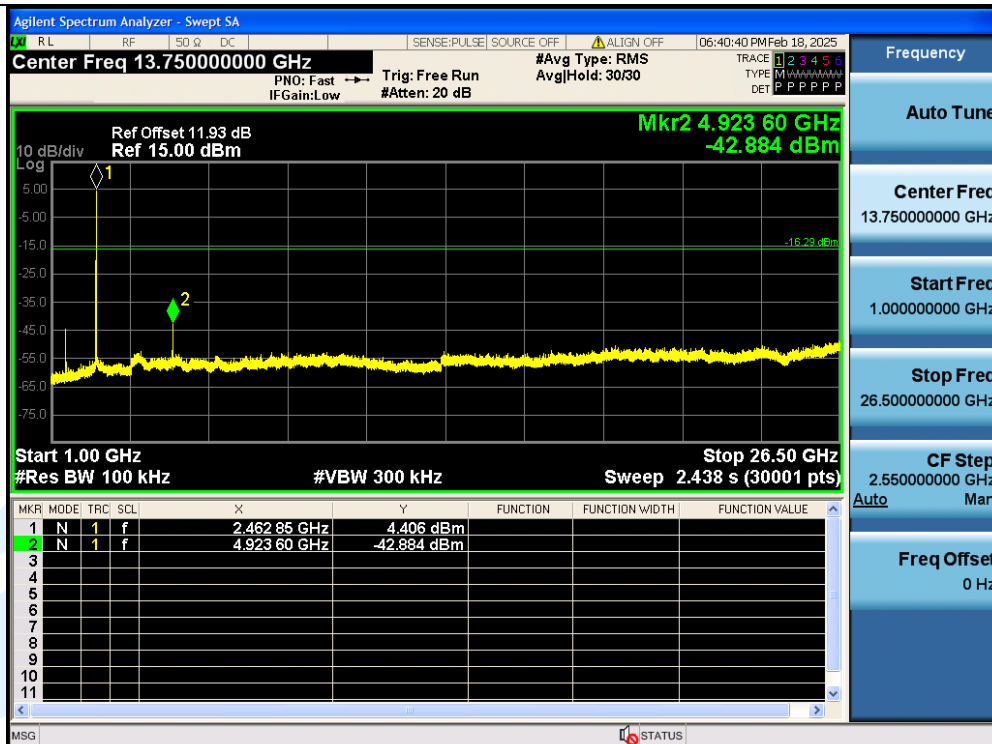

11B-Ant1-2462-1000-26500-PASS

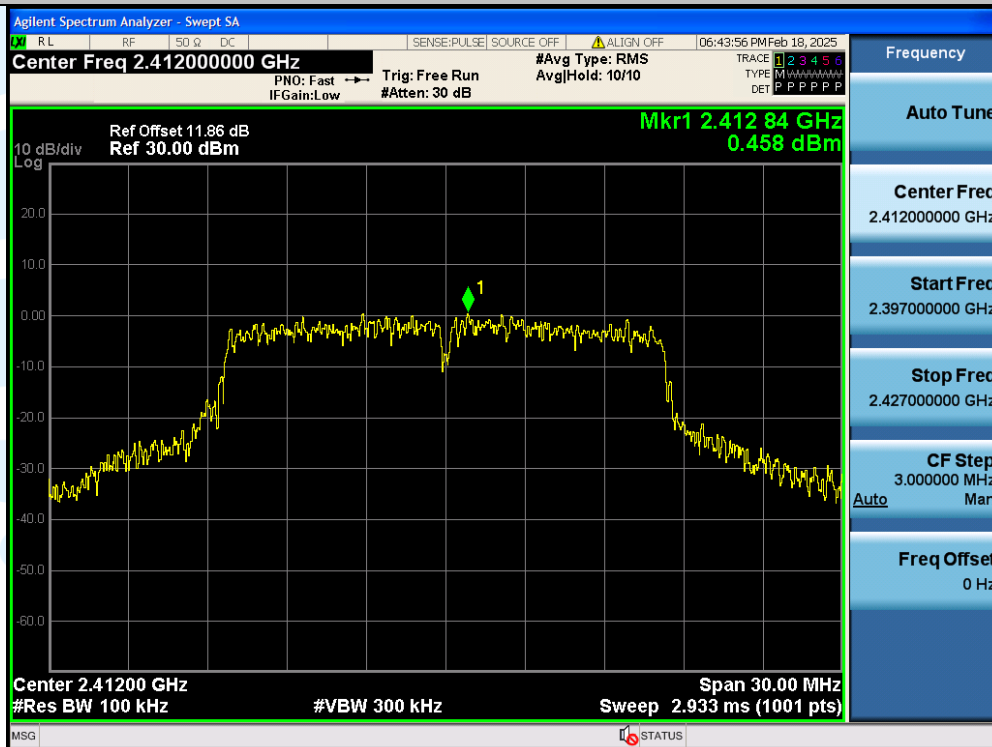

11G-Ant1-2412-0~Reference-PASS

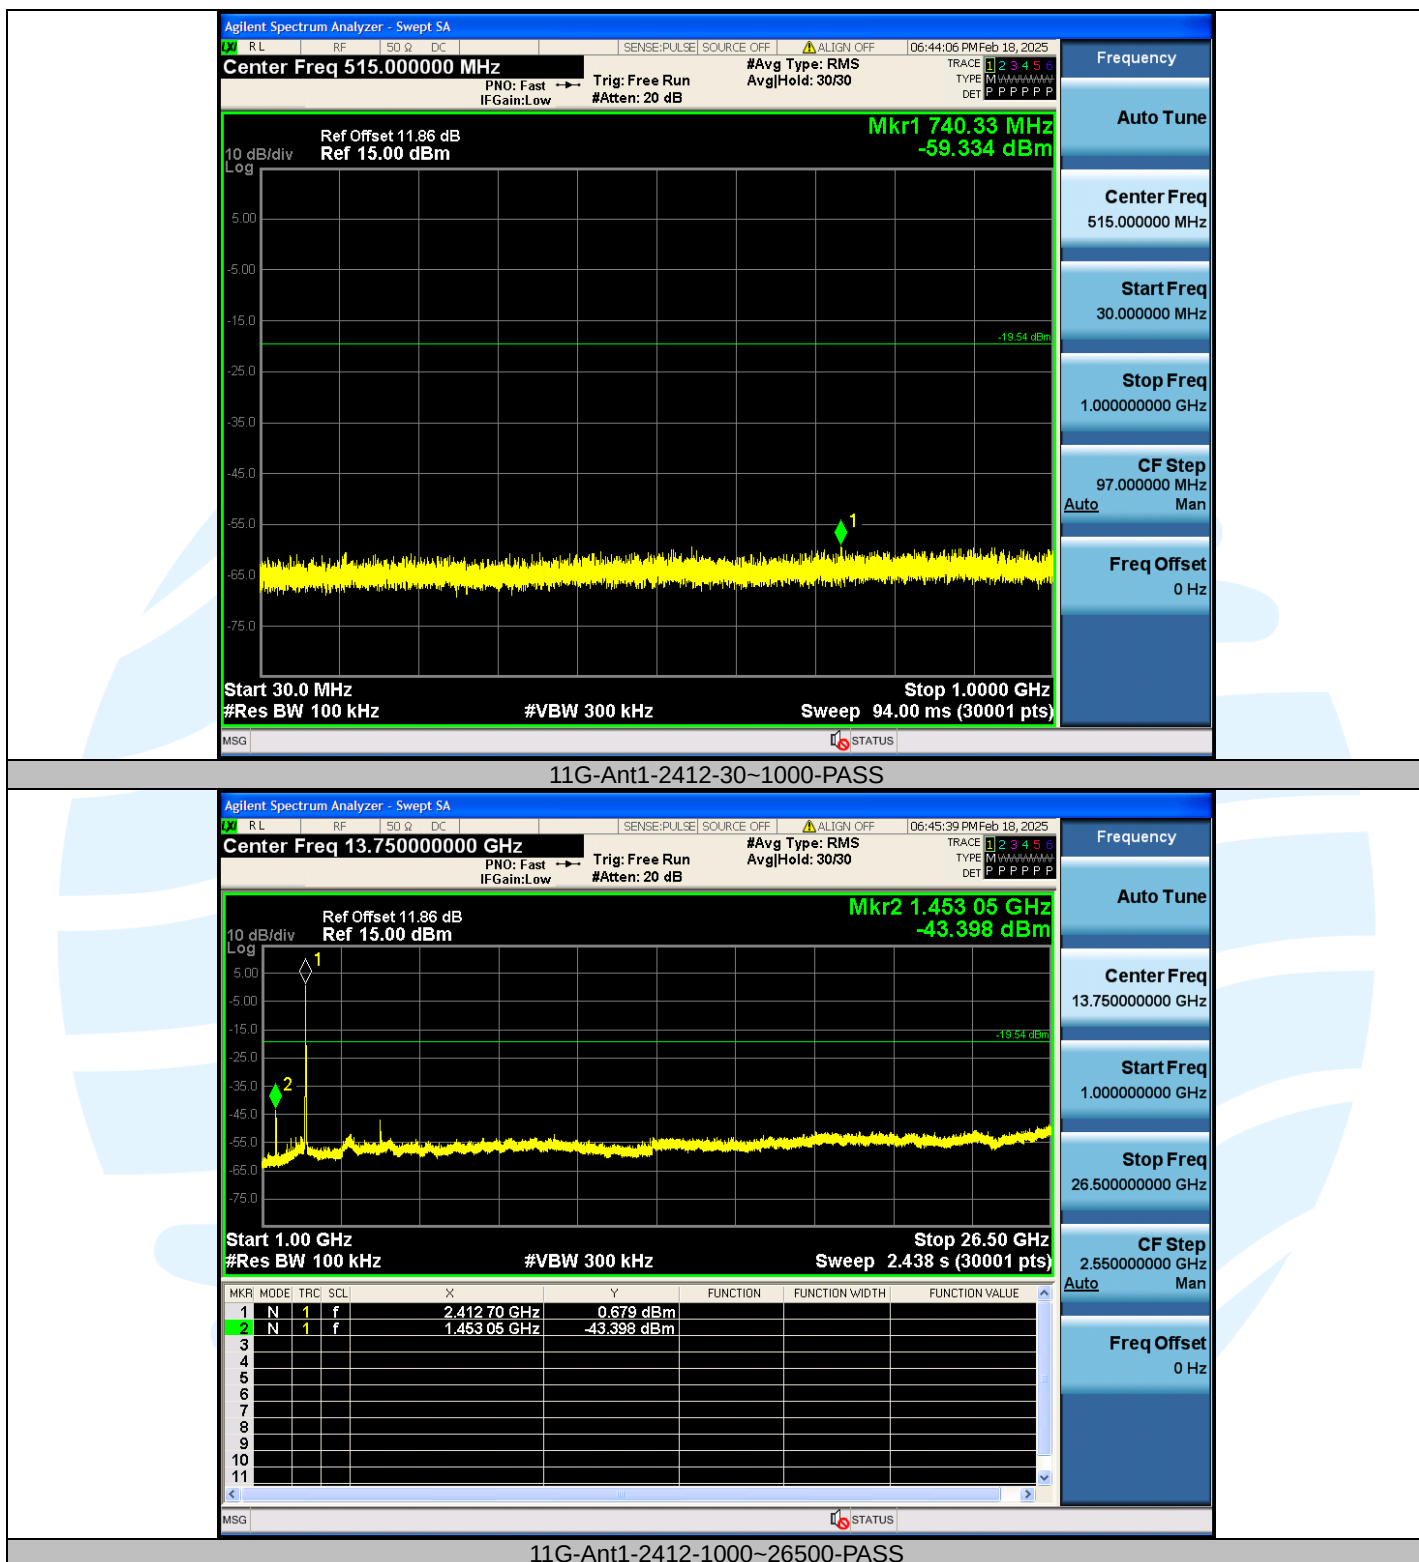

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-RSS247-V1.1