



Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI



Features:

- 2400-2500 / 4900-7125 MHz
- Size 42.6 X 8.6 X 0.15 mm
- Efficiency 60/70%
- VSWR < 2
- Nominal impedance 50 Ω
- Cable and connector can be customized

Applications:



- WiFi 6E, 802.11ax
- Bluetooth, BLE, ZigBee
- DSRC
- · ISM band radios
- IoT, M2M

All dimensions are in mm / inches

Issue: 2523

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:

Pulse Worldwide Headquarters 12220 World Trade Drive San Diego, CA 92128 USA Tel:1-858-674-8100 Pulse/Larsen Antennas 18110 SE 34th St Bldg 2 Suite 250 Vancouver, WA 98683 USA Tel: 1-360-944-7551 Europe Headquarters Pulse GmbH & Do, KG Zeppelinstrasse 15 Herrenberg, Germany Tel: 49 7032 7806 0 Pulse (Suzhou) Wireless Products Co, Inc. 99 Huo Ju Road(#29 Bldg,4th Phase Suzhou New District Jiangsu Province, Suzhou 215009 PR China Tel: 86 512 6807 9998

TECHNICAL DATA SHEET



Series: Internal Antenna

Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

ELECTRICAL SPECIFICATIONS

Antenna Type Dipole

Frequency 2400-2500MHz

4900-7125MHz

Nominal Impedance 50 Ω

Return Loss 2400-2500MHz<-6db

4900-7125MHz<-10db

Radiation Pattern Omni

Gain 2+/-1dBi@2400-2500MHz

3+/-1dBi@4900-7125MHz

Efficiency 40%@2400-2500MHz

50%@4900-7125MHz

Polarization Linear

Power Withstanding 5W

TECHNICAL DATA SHEET



Series: Internal Antenna

Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

MECHANICAL SPECIFICATIONS

Radiator material FPC

Color Black

Adhesive 3M467

Thickness(with adhesive, no liner) 0.15 mm

Weight 0.32 g

FPC size(L X W X T) 42.6 X 8.6 X 0.15 mm

ENVIRONMENTAL SPECIFICATIONS

Operating temperature -40/+85 ° C







Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

This document covers all product variants of the following product family:

W3917B0100TI 100mm 1.13mm OD cable

U.FL compatible connector









Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

MECHANICAL DRAWING

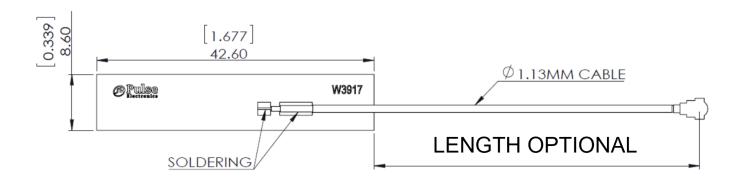

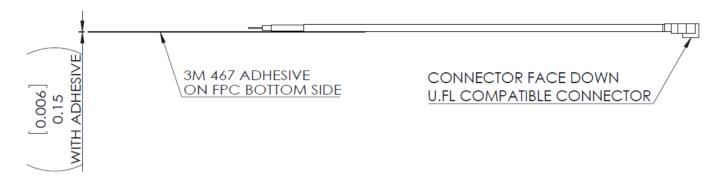






Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

CHARTS

(*) All RF parameters measured on 2mm thick PC plate Test Setup









Description: 2.4/4.9-7.125GHz FPC antenna


PART NUMBER: W3917B0100TI

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Return Loss

Return Loss vs Frequency

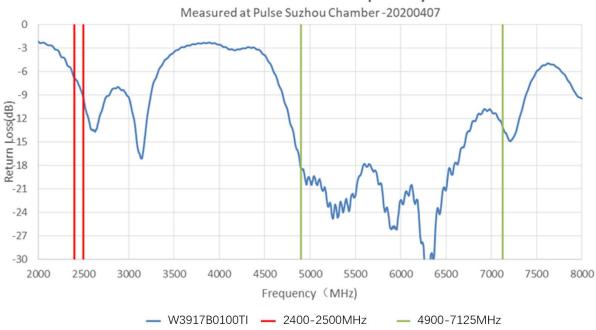






Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Efficiency

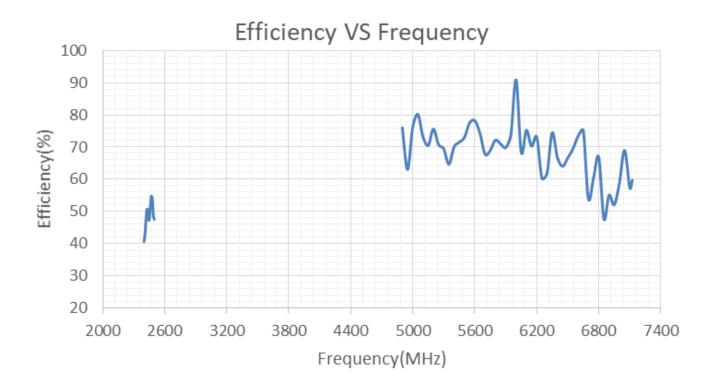






Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

CHARTS

(*) All RF parameters measured on 2mm thick PC plate

Peak Gain

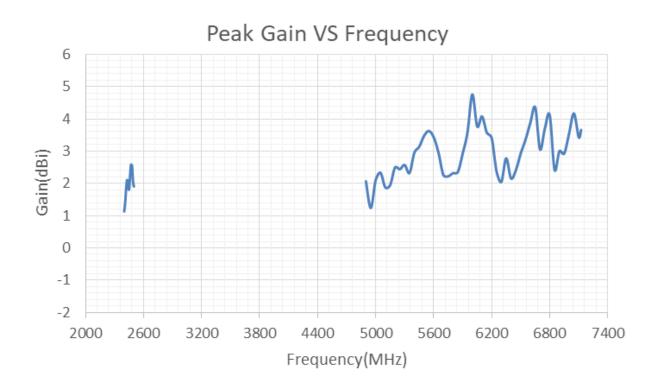









Description: 2.4/4.9-7.125GHz FPC antenna


PART NUMBER: W3917B0100TI


CHARTS

Radiation Patterns 2400-2500MHz

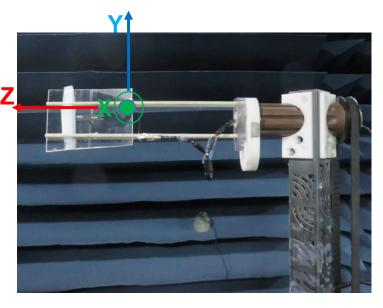

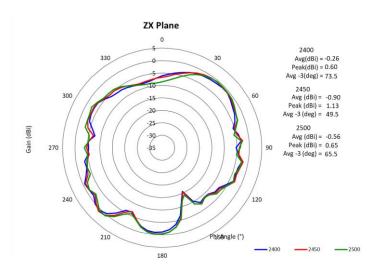

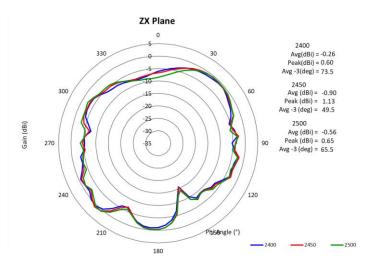

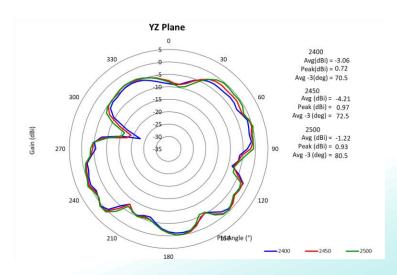

Issue: 2523







Description: 2.4/4.9-7.125GHz FPC antenna


PART NUMBER: W3917B0100TI


CHARTS

Radiation Patterns 4900-5900MHz

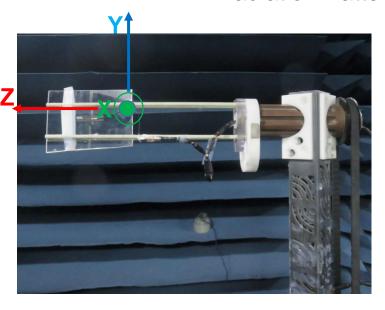

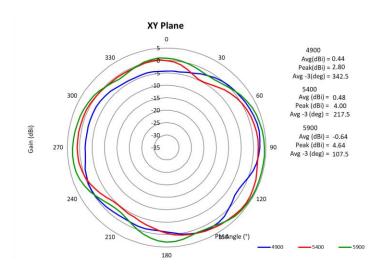

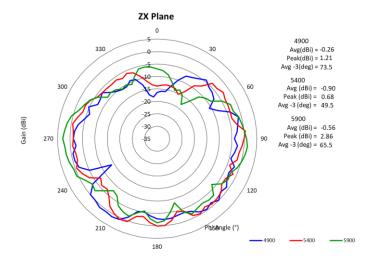

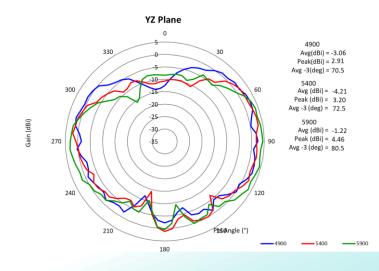

Issue: 2523







Description: 2.4/4.9-7.125GHz FPC antenna


PART NUMBER: W3917B0100TI


CHARTS

Radiation Patterns 6000-7125MHz

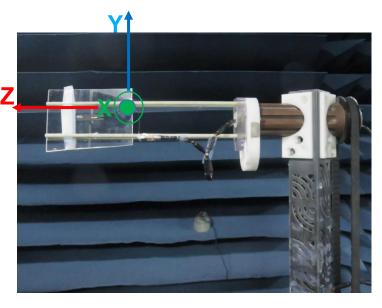

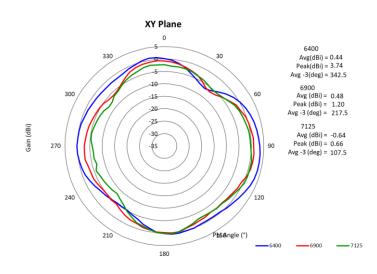

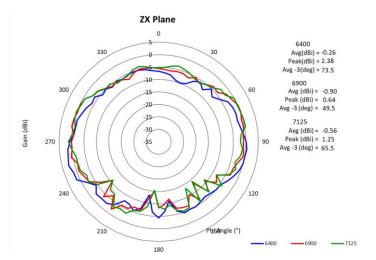

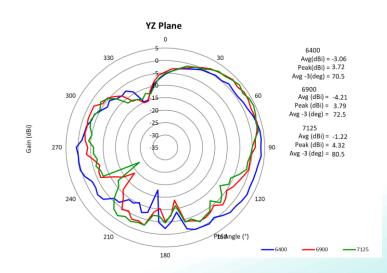

Issue: 2523





Description: 2.4/4.9-7.125GHz FPC antenna

PART NUMBER: W3917B0100TI

PACKAGING

10PCS/PE bag 10 PE bag/foam bag 50 foam bag/ carton box

Total 5000PCS/Carton box



