



HCT CO., LTD.

CERTIFICATION DIVISION

74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA
TEL: +82 31 645 6300 FAX: +82 31 645 6401

EMI CERTIFICATION REPORT

Applicant:

LG Electronics MobileComm U.S.A., Inc.

1000 Sylvan Avenue, Englewood Cliffs NJ 07632

Date of Issue: January 20, 2014

Test Report No.: HCTE1312FE31-1

Test Site: HCT CO., LTD.

HCT FRN: 0005-8664-21

FCC ID:

ZNFVK810

Rule Part(s) / Standard(s) : FCC PART 15 Subpart B Class B
Equipment Type : LTE tablet with Bluetooth and WLAN
Model Name : LG-VK810
Additional Model Name : VK810, LGVK810
Port / Connector(s) : USB / Earphone Port
Date of Test : December 23, 2013 - December 24, 2013

The device bearing the trade name and model specified above, has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.4/2003. (See Test Report if any modifications were made for compliance)

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

HCT certifies that no party to application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C 862

Report prepared by
: Gu-Cheol Yoon
Test Engineer of EMC Team

Approved by
: Sang-Jun Lee
Manager of EMC Team

This report only responds to the tested sample and may not be reproduced, except in full, without written approval of the HCT Co., Ltd.

DOCUMENT HISTORY

The revision history for this document is shown in table.

Version	Date	Description
HCTE1312FE31	December 26, 2013	Initial Release
HCTE1312FE31-1	January 20, 2014	Explanation for test configuration (Claus1.3)

TABLE OF CONTENTS

	PAGE
1. GENERAL INFORMATION	4
1.1 Product Description	4
1.2 Related Submittal(s) / Grant(s)	4
1.3 Tested System Details	5
1.4 Cable Description	6
1.5 Noise Suppression Parts on Cable. (I/O cable)	6
1.6 Test Methodology	7
1.7 Test Facility	7
1.8 Frequency Range of Radiated Measurements	7
2. SYSTEM TEST CONFIGURATION	8
2.1 Configuration of Test System	8
3. PRELIMINARY TEST	9
3.1 Conducted Emission Test	9
3. 2 Radiated Emission Test	9
4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY	10
4.1 Conducted Emission Test	10
4.2 Radiated Emission Test	11
5. FIELD STRENGTH CALCULATION	17
6. TEST EQUIPMENT	18
7. CONCLUSION	19

ATTACHMENT: TEST SETUP PHOTOGRAPHS

1. GENERAL INFORMATION

1.1 Product Description

Equipment Under Test is manufactured by **LG Electronics MobileComm U.S.A., Inc.**
Its basic purpose is used for communications.

Model Name	LG-VK810
Additional Model	VK810, LGVK810
FCC ID	ZNFVK810
EUT Type	LTE tablet with Bluetooth and WLAN
TX Frequency	1 710 MHz to 1 755 MHz (LTE B4) 777 MHz to 787 MHz (LTE B13)
RX Frequency	2 110 MHz to 2 155 MHz (LTE B4) 746 MHz to 756 MHz (LTE B13)

1.2 Related Submittal(s) / Grant(s)

Original submittal only.

1.3 Tested System Details

All equipment descriptions used in the tested system (including inserted cards) are:

Device Type	Model Name	Manufacturer	FCC ID / DoC	Connected To
EUT	LG-VK810	LG	ZNFVK810	Notebook PC Ear-phone
USB cable	EAD62590001	KSD	-	E.U.T Notebook PC
USB cable [*]	EAD62589201	CRESYN	-	E.U.T Notebook PC
USB cable	EAD62590301	Ningbo Broad	-	E.U.T Notebook PC
Ear-phone	SGEY0003744	CRESYN	-	E.U.T
Notebook PC	ProBook6560b	H.P	DoC	EUT Notebook PC adaptor
Notebook PC adaptor	PPP009D	DELTA Electronics (JIANGSU)LTD	-	Notebook PC
Gateway	MV440	Axesstel	PH7MV440	Notebook PC, Adaptor
Serial Mouse	Serial 2 button mouse	Radio shack	FSUGMZE3	Notebook PC
Adaptor	DA-60M12	Yang Ming Industrial	-	Gateway
RJ45 cable	-	-	-	Notebook PC, Gateway
Micro SD card	8 GB	SanDisk	-	EUT

※Note:

- ^{*} The worst-case emissions are reported.
- This tablet device only has a single I/O port, therefore the minimum number of peripherals required by the test procedure for a pc could not be met, however, the EUT was tested with a notebook pc connected to its port, which is considered to be a typical usage configuration. All other as ports of C63.4 testing requirements were maintained.

1.4 Cable Description

Product Name	Port	Power Cord Shielded (Y/N)	I/O Cable Shielded (Y/N)	Length (m)
EUT	Micro USB	Y	Y	(P,D)1.2
	Ear-phone	N/A	Y	(D)1.2
Notebook PC	RJ 45	N/A	N	(D)1.5
	Serial (Mouse)	N/A	Y	(D)1.8
	DC in	N	N/A	(P)1.8
Gateway	DC in	N	N/A	(P)1.8

* The marked "(D)" means the data cable and "(P)" means the power cable.

1.5 Noise Suppression Parts on Cable. (I/O cable)

Product Name	Port	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
EUT	Micro USB	N	N/A	Y	Both End
	Ear-phone	N	N/A	Y	EUT End
Notebook PC	RJ 45	N	N/A	N	N/A
	Serial (Mouse)	N	N/A	Y	Notebook PC End

1.6 Test Methodology

Both Conducted and Radiated testing was performed according to the procedures in ANSI C63.4/2003. Radiated testing was performed at an antenna to EUT distance of 3 m.

1.7 Test Facility

Chamber used to collect the test data is located at the 74, SEOICHEON-RO, 578BEON-GIL, MAJANG-MYEON, ICHEON-SI, GYEONGGI-DO, KOREA. Those measurement facilities are constructed in conformance with the requirements of C63.4/2003.

Measurement Facilities	Reg. No.
Radiated Field strength measurement facility (3m)	90661 (June 21, 2011)
Radiated Field strength measurement facility (10m)	90661 (June 21, 2011)

1.8 Frequency Range of Radiated Measurements

An unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a Radiated Emission limit is specified, up to the frequency shown in the following table

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30
1.705 to 108	1 000
108 to 500	2 000
500 to 1 000	5 000
Above 1 000	5 th harmonic of the highest frequency or 40 GHz, whichever is lower

2. SYSTEM TEST CONFIGURATION

2.1 Configuration of Test System


2.1.1 Conducted Emission Test

EUT was connected to LISN via Notebook PC adaptor and Base Station. Preliminary Power Line Conducted Emission tests were performed by using the procedure in ANSI C63.4/2003 7.2.3 to determine the worst operating conditions.

2.1.2 Radiated Emission Test

Preliminary Radiated Emission tests were performed by using the procedure in ANSI C63.4/2003 8.3.1.1 to determine the worst operating condition. Final Radiated Emission tests were performed at 3 m semi-anechoic chamber.

[Configuration of Tested System]

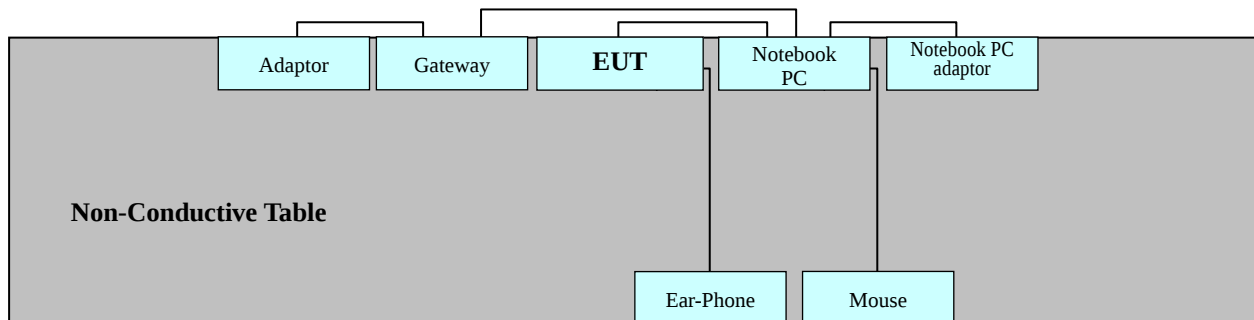

Power Line: 120 VAC

3. PRELIMINARY TEST

3.1 Conducted Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

3. 2 Radiated Emission Test

- It was tested Data Communication mode, after connecting all peripheral devices.

Operation Mode: ☒ Data Communication mode

4. CONDUCTED AND RADIATED EMISSION TEST SUMMARY

4.1 Conducted Emission Test

The following table shows the highest levels of conducted emissions on both polarization of hot and neutral line.

Limit Apply to	: FCC PART 15 Subpart B Class B
Detector	: Quasi-Peak, Average (6 dB Bandwidth: 9 kHz)
Operation Mode	: Data Communication mode
USB Type	: CRESYN
Temperature	: 19.0°C
Humidity Level	: 30.6 %
Test Date	: December 24, 2013

Frequency (MHz)	Transd (dB)	Conductor	Quasi-Peak			Average		
			Limit (dBuV)	Measurement Level (dBuV)	Result Level (dBuV)	Limit (dBuV)	Measurement Level (dBuV)	Result Level (dBuV)
0.194	9.8	H	64	44.7	54.5	54	26.0	35.8
0.194	10.0	N	64	47.1	57.1	54	-	-
0.270	9.8	H	61	36.2	46.0	51	18.1	27.9
0.278	10.0	N	61	37.2	47.2	51	-	-
4.608	10.2	H	56	32.5	42.7	46	23.9	34.1
4.688	10.4	N	56	-	-	46	23.8	34.2

※ **NOTE:** Refer to page 11 to page 14 for details.

1. Conductor H = Hot, Conductor N = Neutral
2. Transd = LISN factor + Cable Loss factor


HCT

EMC

EUT: LG-VK810
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: GC YOON
 Test Specification: FCC PART15B
 Comment: H (CRESYN CABLE)
 Start of Test: 2013-12-24 / 10:13:46오전

SCAN TABLE: "FCC CLASS B(H)"

Short Description:			FCC CLASS B(H)				Transducer
Start	Stop	Step	Detector	Meas. Time	IF Bandw.		
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

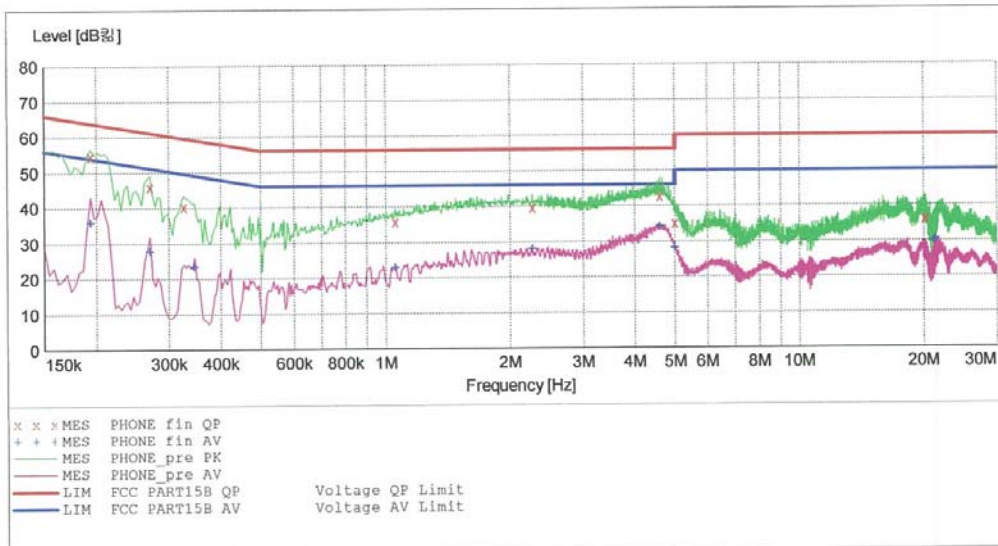

MEASUREMENT RESULT: "PHONE_fin QP"

Frequency	Level	Transd	Limit	Margin	Line	PE
MHz	dBμV	dB	dBμV	dB		
0.194000	54.50	9.8	64	9.3	---	---
0.270000	46.00	9.8	61	15.2	---	---
0.326000	40.40	9.8	60	19.1	---	---
1.056000	35.80	9.8	56	20.2	---	---
2.268000	39.60	10.0	56	16.4	---	---
4.608000	42.70	10.2	56	13.3	---	---
5.000000	35.00	10.2	56	21.0	---	---
20.064000	36.10	10.9	60	23.9	---	---
20.200000	36.30	10.9	60	23.7	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-12-24 10:16 오전

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.194000	35.80	9.8	54	18.1	---	---
0.270000	27.90	9.8	51	23.2	---	---
0.346000	23.50	9.8	49	25.6	---	---
1.056000	23.00	9.8	46	23.0	---	---
2.268000	28.10	10.0	46	17.9	---	---
4.608000	34.10	10.2	46	11.9	---	---
5.000000	28.10	10.2	46	17.9	---	---
21.192000	29.80	11.0	50	20.2	---	---
21.328000	30.20	11.0	50	19.8	---	---


HCT

EMC

EUT: LG-VK810
 Manufacturer: LG
 Operating Condition: DATA MODE
 Test Site: SHIELD ROOM
 Operator: GC YOON
 Test Specification: FCC PART15B
 Comment: N (CRESYN CABLE)
 Start of Test: 2013-12-24 / 10:10:11오전

SCAN TABLE: "FCC CLASS B(N)"

Short Description:				FCC CLASS B(N)			
Start	Stop	Step	Detector	Meas. Time	IF Bandw.	Transducer	
Frequency	Frequency	Width					
150.0 kHz	500.0 kHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
500.0 kHz	5.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				
5.0 MHz	30.0 MHz	4.0 kHz	MaxPeak	10.0 ms	9 kHz	None	
			Average				

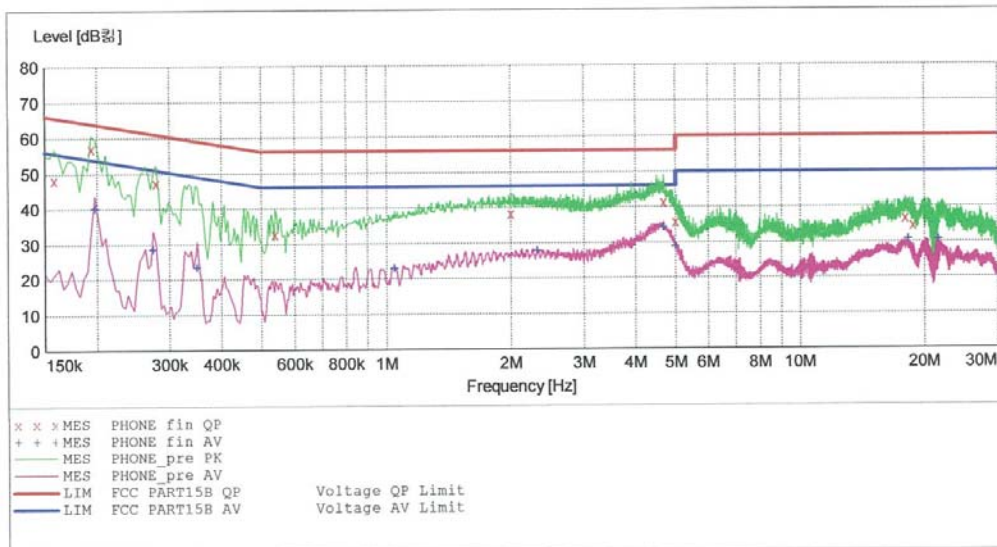

MEASUREMENT RESULT: "PHONE_fin QP"

2013-12-24 10:12오전

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Line	PE
0.158000	48.20	10.0	66	17.4	---	---
0.194000	57.10	10.0	64	6.7	---	---
0.278000	47.20	10.0	61	13.7	---	---
0.540000	32.70	10.0	56	23.3	---	---
2.004000	38.30	10.1	56	17.7	---	---
4.684000	41.30	10.4	56	14.7	---	---
5.000000	35.80	10.4	56	20.2	---	---
17.940000	36.70	11.2	60	23.3	---	---
18.764000	34.60	11.2	60	25.4	---	---

MEASUREMENT RESULT: "PHONE_fin AV"

2013-12-24 10:12오전							
Frequency MHz	Level dB _{μV}	Transd dB	Limit dB _{μV}	Margin dB	Line	PE	
0.198000	40.00	10.0	54	13.7	---	---	
0.274000	28.50	10.0	51	22.5	---	---	
0.350000	23.40	10.0	49	25.6	---	---	
1.048000	23.00	10.1	46	23.0	---	---	
2.320000	27.70	10.2	46	18.3	---	---	
4.688000	34.20	10.4	46	11.8	---	---	
5.000000	28.80	10.4	46	17.2	---	---	
18.244000	30.70	11.2	50	19.3	---	---	
21.664000	30.60	11.3	50	19.4	---	---	

4.2 Radiated Emission Test

The following table shows the highest levels of Radiated Emissions on both polarization of horizontal and vertical.

-For measurement below 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Quasi-Peak (6 dB Bandwidth: 120 kHz)

Operation Mode : Data Communication mode

USB Type : CRESYN

Temperature : 20.1°C

Humidity Level : 29.4 %

Test Date : December 24, 2013

Frequency (MHz)	Reading (dB μ V)	Polarity (H/V)	Antenna Height (m)	Correction Factor		Limit (dB μ V/m)	Level (dB μ V/m)	Margin (dB)
				Antenna (dB/m)	Cable (dB)			
32.8	14.35	V	1.0	11.42	3.34	40.0	29.11	10.89
60.1	19.87	V	1.0	11.79	3.54	40.0	35.20	4.80
108.0	16.20	H	1.0	10.24	3.80	43.5	30.24	13.26
265.2	17.24	H	1.0	12.27	4.41	46.0	33.92	12.08
408.0	12.10	H	1.0	15.79	4.89	46.0	32.78	13.22
625.0	14.41	V	1.0	19.97	5.39	46.0	39.77	6.23

※ **NOTE:** Polarity H = Horizontal, Polarity V = Vertical

-For measurement above 1 GHz

Limit Apply to : FCC PART 15 Subpart B Class B

Detector : Peak mode: Peak (RBW: 1 MHz, VBW: 1 MHz)
: Average mode: Peak (RBW: 1 MHz, VBW: 10 Hz)

Operation Mode : Data Communication mode

USB Type : CRESYN

Temperature : 20.4°C

Humidity Level : 30.3 %

Test Date : December 23, 2013

Frequency (GHz)	Peak			POL	Average		
	Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)		Total (dBμV/m)	Limit (dBμV/m)	Margin (dB)
1.3305	49.4	74	24.6	V	28.2	54	25.8
2.0177	53.7	74	20.3	V	30.6	54	23.4
2.0773	52.70	74	21.3	V	29.80	54	24.2
2.6566	52.10	74	21.9	V	31.50	54	22.5

※ NOTE:

1. Polarity H = Horizontal, Polarity V = Vertical
2. Measurement above 1 GHz was performed from 1 GHz to the 5th harmonic of highest fundamental frequency. Test was measured by 12 GHz.

5. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the antenna factor and cable factor.
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 21.5 dB μ V is obtained. The antenna factor of 7.4 dB/m and a cable factor of 1.1 dB are added. The 30 dB μ V/m value is mathematically converted to its corresponding level in μ V/m.

$$FS = 21.5 + 7.4 + 1.1 = 30 \text{ dB}\mu\text{V/m}$$

[Radiated Emission Limits]

Frequency of Emission (MHz)	Field Strength	
	μ V/m	dB μ V/m
30 to 88	100	40.0
88 to 216	150	43.5
216 to 960	200	46.0
Above 960	500	54.0

6. TEST EQUIPMENT

<u>Type</u>	<u>Manufacturer</u>	<u>Model Name</u>	<u>Serial Number</u>	<u>Calibration Cycle</u>	<u>Next CAL Date</u>
<u>Conducted Emission</u>					
☒ EMI Test Receiver	Rohde & Schwarz	ESCI	100584	1 year	2014.04.25
☒ LISN	EMCO	3816/2SH	9706-1070	1 year	2014.04.26
☒ LISN	Rohde & Schwarz	ENV216	100073	1 year	2014.02.06
☐ EMI Test Receiver	Rohde & Schwarz	ESCI	100033	1 year	2014.06.23
☐ LISN	Rohde & Schwarz	ESH3-Z5	100282	1 year	2014.07.03
☐ Attenuator	Rohde & Schwarz	ESH3-Z2	357.8810.352	1 year	2014.07.03

Radiated Emission (30 Mhz to 1 GHz)

☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
☒ Trilog Antenna	Schwarzbeck	VULB9160	3301	2 year	2014.12.17
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Turn Table	HD GmbH	2090	9702/1224	N/A	-
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
☐ Trilog Antenna	Schwarzbeck	VULB9168	185	2 year	2015.04.16
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-

Radiated Emission (1 GHz to 12 GHz)

☒ EMI Test Receiver	Rohde & Schwarz	ESI40	831564103	1 year	2014.04.16
☒ Antenna master	HD GmbH	MA240	240/520	N/A	-
☒ Turn Table	HD GmbH	2090	9702/1224	N/A	-
☒ Power Amplifier	CERNEX	CBLU1183540	21690	1 year	2014.07.12
☒ Horn Antenna	Schwarzbeck	BBHA 9120D	296	2 year	2014.12.13
☐ EMI Test Receiver	Rohde & Schwarz	ESU 26	100241	1 year	2014.07.01
☐ Antenna master	INNCO Systems	MA4000-EP	MA4000/283	N/A	-
☐ Turn Table	INNCO Systems	DT3000-3T	DT3000/69	N/A	-

7. CONCLUSION

The data collected shows that the **EUT type: LTE tablet with Bluetooth and WLAN, FCC ID: ZNFVK810, Model: LG-VK810** complies with §15.107 and §15.109 of the FCC rules.