

# **FCC REPORT** (Mobile Phone)

**Applicant:** B mobile HK Limited

**Address of Applicant:** Ground floor, 144 Un Chau Street, Sham Shui Po, Hong Kong

**Equipment Under Test (EUT)**

Product Name: B mobile

Model No.: QS304

**FCC ID:** ZSW-QS304

FCC CFR Title 47 Part 2: 2011

**Applicable standards:** FCC CFR Title 47 Part22 Subpart H: 2011

FCC CFR Title 47 Part24 Subpart E: 2011

**Date of sample receipt:** 23 Apr., 2013

**Date of Test:** 24 Apr., to 26 Apr.,2013

**Date of report issued:** 27 Apr.,2013

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2. Version

| Version No. | Date         | Description |
|-------------|--------------|-------------|
| 00          | 27 Apr.,2013 | Original    |
|             |              |             |
|             |              |             |
|             |              |             |
|             |              |             |

**Prepared by:**



**Date:**

27 Apr.,2013

**Report Clerk**

**Reviewed by:**



**Date:**

27 Apr.,2013

**Project Engineer**

## 3. Contents

|                                                             | Page |
|-------------------------------------------------------------|------|
| 1. COVER PAGE .....                                         | 1    |
| 2. VERSION.....                                             | 2    |
| 3. CONTENTS.....                                            | 3    |
| 4. TEST SUMMARY.....                                        | 4    |
| 5. GENERAL INFORMATION .....                                | 5    |
| 5.1 CLIENT INFORMATION.....                                 | 5    |
| 5.2 GENERAL DESCRIPTION OF E.U.T.....                       | 5    |
| 5.3 TEST MODE .....                                         | 7    |
| 5.4 RELATED SUBMITTAL(S) / GRANT (S).....                   | 7    |
| 5.5 TEST METHODOLOGY.....                                   | 7    |
| 5.6 LABORATORY FACILITY.....                                | 7    |
| 5.7 LABORATORY LOCATION .....                               | 7    |
| 5.8 TEST INSTRUMENTS LIST.....                              | 8    |
| 6. SYSTEM TEST CONFIGURATION .....                          | 9    |
| 6.1 EUT CONFIGURATION .....                                 | 9    |
| 6.2 EUT EXERCISE.....                                       | 9    |
| 6.3 CONFIGURATION OF TESTED SYSTEM .....                    | 9    |
| 6.4 DESCRIPTION OF TEST MODES.....                          | 9    |
| 6.5 CONDUCTED PEAK OUTPUT POWER .....                       | 10   |
| 6.6 OCCUPY BANDWIDTH .....                                  | 12   |
| 6.7 MODULATION CHARACTERISTIC.....                          | 17   |
| 6.8 OUT OF BAND EMISSION AT ANTENNA TERMINALS .....         | 17   |
| 6.9 ERP, EIRP MEASUREMENT .....                             | 23   |
| 6.10 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT.....  | 26   |
| 6.11 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT ..... | 31   |
| 6.12 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT .....     | 33   |
| 7 TEST SETUP PHOTO.....                                     | 34   |
| 8 EUT CONSTRUCTIONAL DETAILS .....                          | 35   |

## 4. Test Summary

| Test Item                              | Section in CFR 47                                    | Result                                  |
|----------------------------------------|------------------------------------------------------|-----------------------------------------|
| RF Exposure (SAR)                      | Part 1.1307<br>Part 2.1093                           | Passed*<br>(Please refer to SAR Report) |
| RF Output Power                        | Part 2.1046<br>Part 22.913 (a)(2)<br>Part 24.232 (c) | Pass                                    |
| Modulation Characteristics             | Part 2.1047                                          | Pass                                    |
| 99% & -26 dB Occupied Bandwidth        | Part 2.1049<br>Part 22.917<br>Part 24.238            | Pass                                    |
| Spurious Emissions at Antenna Terminal | Part 2.1051<br>Part 22.917 (a)<br>Part 24.238 (a)    | Pass                                    |
| Field Strength of Spurious Radiation   | Part 2.1053<br>Part 22.917 (a)<br>Part 24.238 (a)    | Pass                                    |
| Out of band emission, Band Edge        | Part 22.917 (a)<br>Part 24.238 (a)                   | Pass                                    |
| Frequency stability vs. temperature    | Part 2.1055(a)(1)(b)                                 | Pass                                    |
| Frequency stability vs. voltage        | Part 2.1055(d)(1)(2)                                 | Pass                                    |

*Pass: The EUT complies with the essential requirements in the standard.*

## 5. General Information

### 5.1 Client Information

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | B mobile HK Limited                                                                                                         |
| Address of Applicant:    | Ground floor, 144 Un Chau Street, Sham Shui Po, Hong Kong                                                                   |
| Manufacturer:            | FORTUNE SHIP TECHNOLOGY (HK) LIMITED                                                                                        |
| Address of Manufacturer: | ROOM A 11/F, HO LEE COMMERCIAL BUILDING, 38-44 D'AGUILAR STREET, CENTRAL, HONG KONG                                         |
| Factory:                 | SHENZHEN EASIECOM ELECTRONIC CO.,LTD                                                                                        |
| Address of Factory:      | Floor3,Building A,Sailian Industrial Park,Fourth Industrial Zone,Shuiti an Community,Shiyan Street,Baoan District,Shenzhen. |

### 5.2 General Description of E.U.T.

|                            |                                                                |
|----------------------------|----------------------------------------------------------------|
| Product Name:              | B mobile                                                       |
| Model No.:                 | QS304                                                          |
| Operation Frequency range: | GSM 850: 824.20MHz-848.80MHz<br>PCS1900: 1850.20MHz-1909.80MHz |
| GPRS Class:                | 12                                                             |
| Type of Emission:          | 244KGXW                                                        |
| IMEI:                      | IMEI :1234567890123X                                           |
| Software Version:          | /                                                              |
| Hardware Version:          | X321-MB-V2.1                                                   |
| Antenna type:              | PIFA Antenna                                                   |
| Antenna gain:              | GSM 850: -1dBi<br>PCS1900:-0.5dBi                              |
| AC adapter:                | Input:110-240V AC,50/60Hz 0.2A<br>Output:5.0V DC MAX 500mA     |
| Power supply:              | Rechargeable Li-ion Battery DC3.7V/800mAh                      |

Operation Frequency List:

| GSM 850  |                 | PCS1900  |                 |
|----------|-----------------|----------|-----------------|
| Channel: | Frequency (MHz) | Channel: | Frequency (MHz) |
| 128      | 824.20          | 512      | 1850.20         |
| 129      | 824.40          | 513      | 1850.40         |
| ....     | ....            | ....     | ....            |
| 189      | 836.40          | 660      | 1879.80         |
| 190      | 836.60          | 661      | 1880.00         |
| 191      | 836.80          | 662      | 1880.20         |
| ...      | ...             | ...      | ...             |
| 250      | 848.60          | 809      | 1909.60         |
| 251      | 848.80          | 810      | 1909.80         |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| GSM850          |         |                | PCS1900         |         |                |
|-----------------|---------|----------------|-----------------|---------|----------------|
|                 | Channel | Frequency(MHz) |                 | Channel | Frequency(MHz) |
| Lowest channel  | 128     | 824.20         | Lowest channel  | 512     | 1850.20        |
| Middle channel  | 190     | 836.60         | Middle channel  | 661     | 1880.00        |
| Highest channel | 251     | 848.80         | Highest channel | 810     | 1909.80        |

## 5.3 Test mode

|                            |                                                     |
|----------------------------|-----------------------------------------------------|
| Communicate mode (GSM850)  | Keep the EUT in communicating mode on GSM850 band.  |
| Communicate mode (PCS1900) | Keep the EUT in communicating mode on PCS1900 band. |

## 5.4 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is filing to comply with Section Part 22 subpart H and Part 24 subpart E of the FCC CFR 47 Rules.

## 5.5 Test Methodology

Both conducted and radiated testing were performed according to the procedures document on TIA/EIA 603 and FCC CFR 47.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

## 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

● **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

## 5.7 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China

Tel: 0755-23118282

Fax: 0755-23116366

## 5.8 Test Instruments list

| Radiated Emission: |                                      |                                   |                             |               |                     |                         |
|--------------------|--------------------------------------|-----------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                       | Manufacturer                      | Model No.                   | Inventory No. | Cal.Date (dd-mm-yy) | Cal.Due date (dd-mm-yy) |
| 1                  | 3m Semi- Anechoic Chamber            | SAEMC                             | 9(L)*6(W)* 6(H)             | CCIS0001      | June 09 2012        | June 08 2013            |
| 2                  | EMI Test Receiver                    | Rohde & Schwarz                   | ESPI                        | CCIS0022      | Apr 01 2013         | Mar. 31 2014            |
| 3                  | BiConiLog Antenna                    | SCHWARZBECK<br>MESS-ELEKTRONIK    | VULB9163                    | CCIS0005      | June 04 2012        | June 03 2013            |
| 4                  | Double -ridged waveguide horn        | SCHWARZBECK<br>MESS-ELEKTRONIK    | BBHA9120D                   | CCIS0006      | May 30 2012         | May 29 2013             |
| 5                  | EMI Test Software                    | AUDIX                             | E3                          | N/A           | N/A                 | N/A                     |
| 6                  | Coaxial Cable                        | CCIS                              | N/A                         | CCIS0016      | Apr. 01 2013        | Mar. 31 2014            |
| 7                  | Coaxial Cable                        | CCIS                              | N/A                         | CCIS0017      | Apr. 01 2013        | Mar. 31 2014            |
| 8                  | Coaxial cable                        | CCIS                              | N/A                         | CCIS0018      | Apr. 01 2013        | Mar. 31 2014            |
| 9                  | Coaxial Cable                        | CCIS                              | N/A                         | CCIS0019      | Apr. 01 2013        | Mar. 31 2014            |
| 10                 | Coaxial Cable                        | CCIS                              | N/A                         | CCIS0087      | Apr. 01 2013        | Mar. 31 2014            |
| 11                 | Amplifier(10kHz-1.3GHz)              | HP                                | 8447D                       | CCIS0003      | Apr. 01 2013        | Mar. 31 2014            |
| 12                 | Amplifier(1GHz-18GHz)                | Compliance Direction Systems Inc. | PAP-1G18                    | CCIS0011      | June 09 2012        | June 08 2013            |
| 13                 | Pre-amplifier (18-26GHz)             | Rohde & Schwarz                   | AFS33-18002<br>650-30-8P-44 | GTS218        | Apr. 01 2013        | Mar. 31 2014            |
| 14                 | Horn Antenna                         | ETS-LINDGREN                      | 3160                        | GTS217        | Mar. 30 2013        | Mar. 29 2014            |
| 15                 | Universal Radio communication Tester | Rohde & Schwarz                   | CMU200                      | CCIS0069      | May. 29 2012        | May. 28 2013            |
| 16                 | Signal Analyzer                      | Rohde & Schwarz                   | FSIQ3                       | CCIS0088      | May. 29 2012        | May. 28 2013            |



## 6. System test configuration


### 6.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 6.2 EUT Exercise

The EUT (Transmitter) was operated in the engineering mode to fix the Tx frequency which was for the purpose of the measurements.


### 6.3 Configuration of Tested System

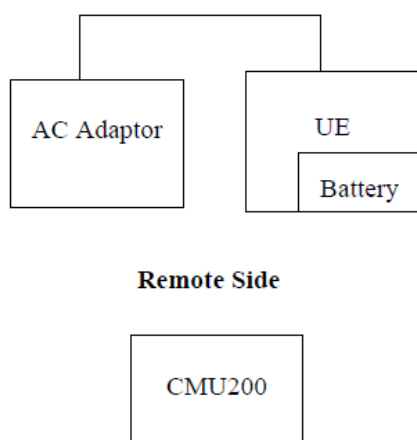

### 6.4 Description of Test Modes

The EUT has been tested under operating condition.  
EUT staying in continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing.  
The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for both GSM/PCS with power adaptor, earphone and Data cable. The worst-case H mode for GSM 850 band, PCS1900 band.


## 6.5 Conducted Peak Output Power
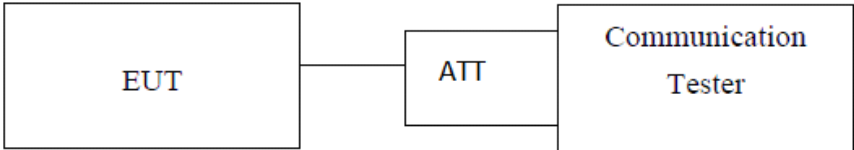
|                   |                                                                                                                                                                            |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a) and FCC part 24.232(b)                                                                                                                                  |
| Test Method:      | FCC part 2.1046                                                                                                                                                            |
| Limit:            | GSM 850 7W<br>PCS 1900 2W                                                                                                                                                  |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                  |
| Test Procedure:   | The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the communication tester. Transmitter output was read off in dBm. |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                           |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                           |
| Test results:     | Passed                                                                                                                                                                     |

### Measurement Data

| EUT Mode                      | Channel | Frequency (MHz) | Burst Average power (dBm) | Limit(dBm) | Result |
|-------------------------------|---------|-----------------|---------------------------|------------|--------|
| GSM 850                       | 128     | 824.20          | 31.55                     | 38.45      | Pass   |
|                               | 190     | 836.60          | 31.58                     |            |        |
|                               | 251     | 848.80          | 31.59                     |            |        |
| GPRS 850<br>(1 Uplink slot)   | 128     | 824.20          | 31.42                     |            |        |
|                               | 190     | 836.60          | 31.49                     |            |        |
|                               | 251     | 848.80          | 31.47                     |            |        |
| GPRS 850<br>(2 Uplink slots)  | 128     | 824.20          | 30.94                     |            |        |
|                               | 190     | 836.60          | 30.92                     |            |        |
|                               | 251     | 848.80          | 30.96                     |            |        |
| GPRS 850<br>(3 Uplink slots)  | 128     | 824.20          | 29.39                     |            |        |
|                               | 190     | 836.60          | 29.39                     |            |        |
|                               | 251     | 848.80          | 29.43                     |            |        |
| GPRS 850<br>(4 Uplink slots)  | 128     | 824.20          | 28.39                     |            |        |
|                               | 190     | 836.60          | 28.38                     |            |        |
|                               | 251     | 848.80          | 28.44                     |            |        |
| PCS 1900                      | 512     | 1850.20         | 29.40                     | 33.00      | Pass   |
|                               | 661     | 1880.00         | 28.82                     |            |        |
|                               | 810     | 1909.80         | 28.34                     |            |        |
| GPRS 1900<br>(1 Uplink slot)  | 512     | 1850.20         | 28.89                     |            |        |
|                               | 661     | 1880.00         | 28.36                     |            |        |
|                               | 810     | 1909.80         | 27.87                     |            |        |
| GPRS 1900<br>(2 Uplink slots) | 512     | 1850.20         | 27.15                     |            |        |
|                               | 661     | 1880.00         | 26.61                     |            |        |
|                               | 810     | 1909.80         | 26.16                     |            |        |
| GPRS 1900<br>(3 Uplink slots) | 512     | 1850.20         | 27.08                     |            |        |
|                               | 661     | 1880.00         | 27.00                     |            |        |
|                               | 810     | 1909.80         | 26.59                     |            |        |
| GPRS 1900<br>(4 Uplink slots) | 512     | 1850.20         | 25.94                     |            |        |
|                               | 661     | 1880.00         | 25.44                     |            |        |
|                               | 810     | 1909.80         | 24.95                     |            |        |

## 6.6 Occupy Bandwidth

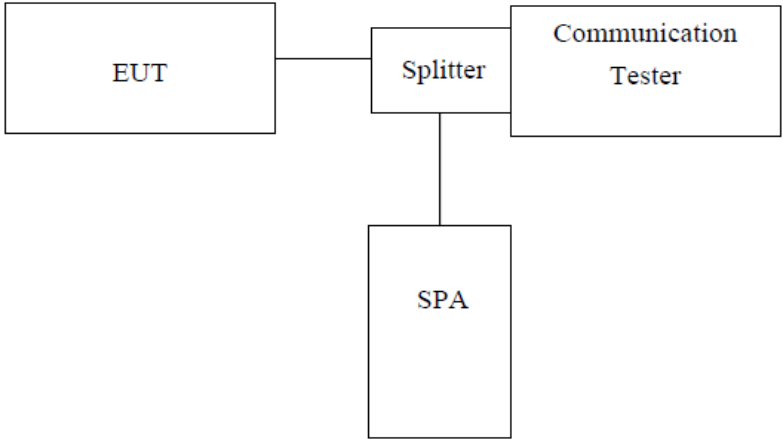
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a) and FCC part 24.232(b)                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | FCC part 2.1049                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                                                                                                                                                                                                                                                                |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer</li> <li>2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.</li> <li>3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                         |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                         |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                   |

### Measurement Data

| EUT Mode | Channel | Frequency (MHz) | 99% Occupy bandwidth (kHz) | -26dB bandwidth (kHz) |
|----------|---------|-----------------|----------------------------|-----------------------|
| GSM 850  | 128     | 824.20          | 248                        | 320                   |
|          | 190     | 836.60          | 248                        | 322                   |
|          | 251     | 848.80          | 250                        | 322                   |
| PCS 1900 | 512     | 1850.20         | 246                        | 318                   |
|          | 661     | 1880.00         | 244                        | 320                   |
|          | 810     | 1909.80         | 244                        | 316                   |


Test plot as follows:

|            |                      |            |         |
|------------|----------------------|------------|---------|
| Test Item: | 99% Occupy bandwidth | Test Mode: | GSM 850 |
|------------|----------------------|------------|---------|

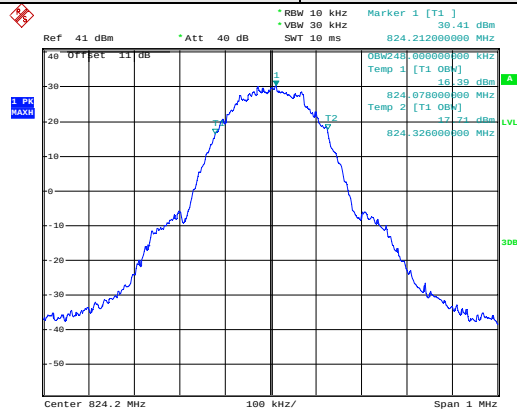


Date: 26.APR.2013 11:15:45

## Lowest channel

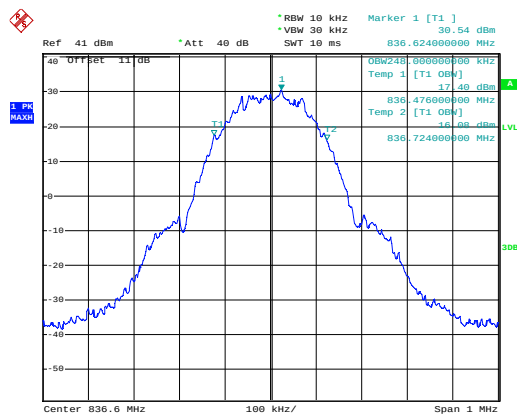

Date: 26.APR.2013 11:18:24


## Middle channel

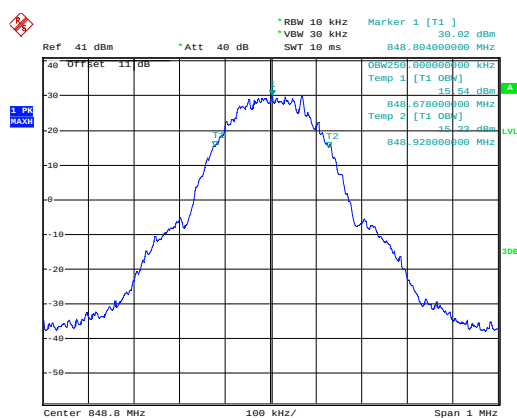

Date: 26.APR.2013 11:19:32


## Highest channel

|            |                 |            |         |
|------------|-----------------|------------|---------|
| Test Item: | -26dB bandwidth | Test Mode: | GSM 850 |
|------------|-----------------|------------|---------|

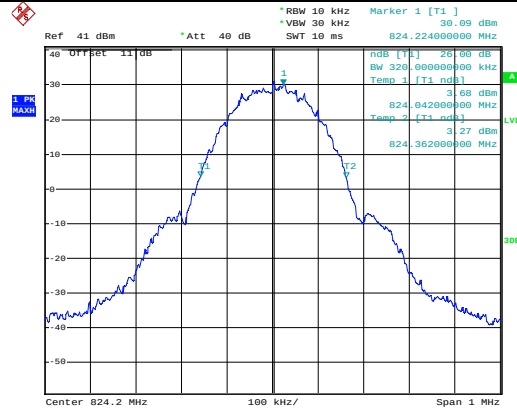


Date: 26.APR.2013 11:16:39

## Lowest channel

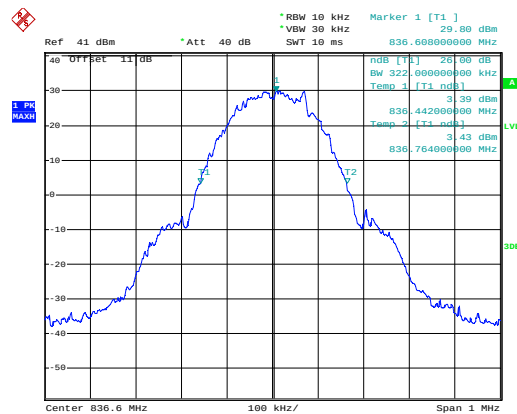

Date: 26.APR.2013 11:17:41


## Middle channel

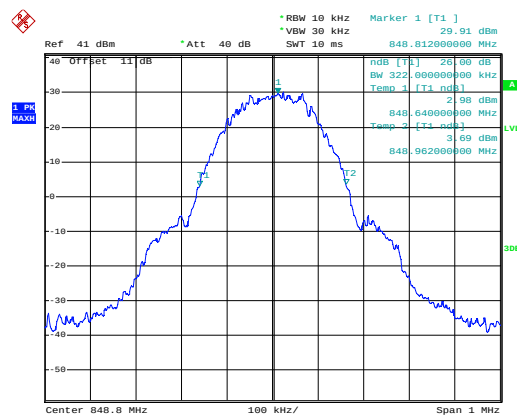

Date: 26.APR.2013 11:20:21


## Highest channel

|            |                      |            |          |
|------------|----------------------|------------|----------|
| Test Item: | 99% Occupy bandwidth | Test Mode: | PCS 1900 |
|------------|----------------------|------------|----------|

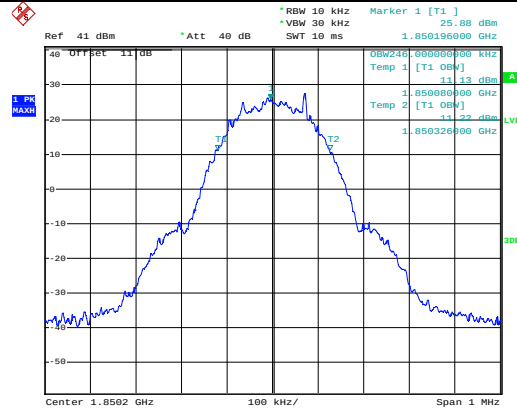


Date: 26.APR.2013 11:23:24

Lowest channel

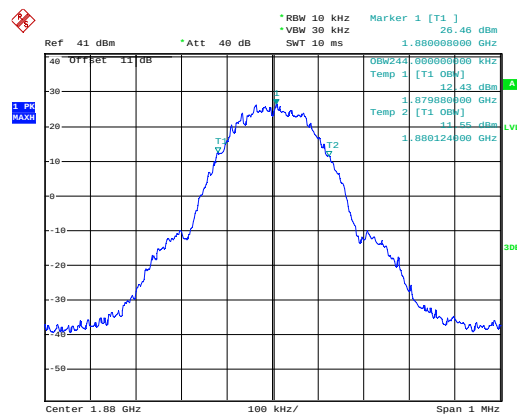

Date: 26.APR.2013 11:24:35


Middle channel

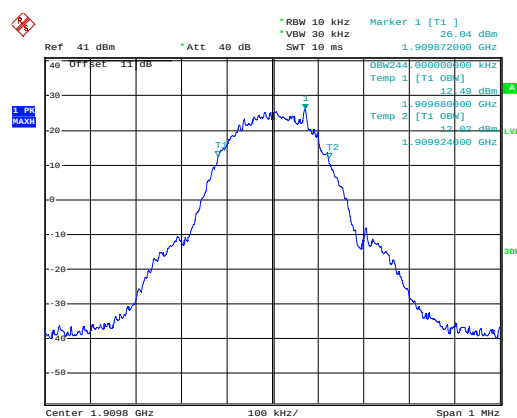

Date: 26.APR.2013 11:27:32


Highest channel

|            |                 |            |          |
|------------|-----------------|------------|----------|
| Test Item: | -26dB bandwidth | Test Mode: | PCS 1900 |
|------------|-----------------|------------|----------|

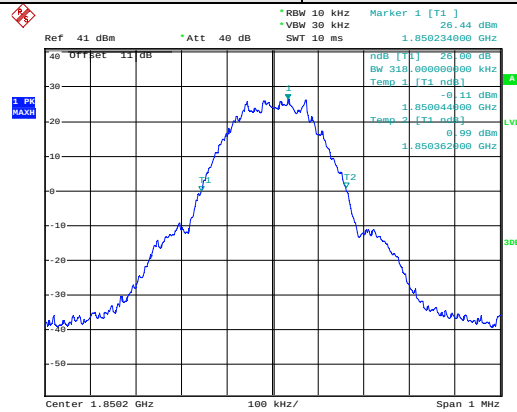


Date: 26.APR.2013 11:22:25

## Lowest channel

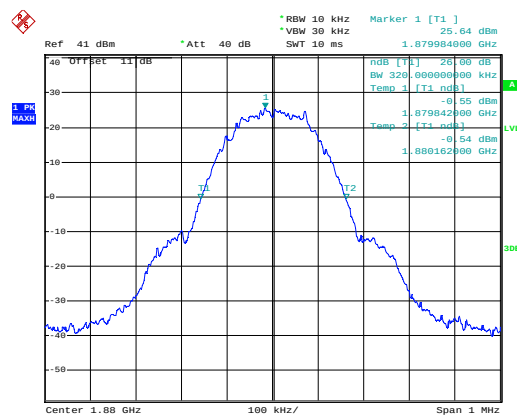

Date: 26.APR.2013 11:25:57

## Middle channel

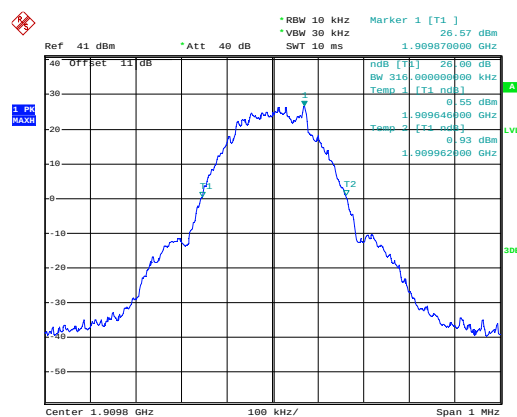

Date: 26.APR.2013 11:27:03


## Highest channel



## 6.7 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.


## 6.8 Out of band emission at antenna terminals
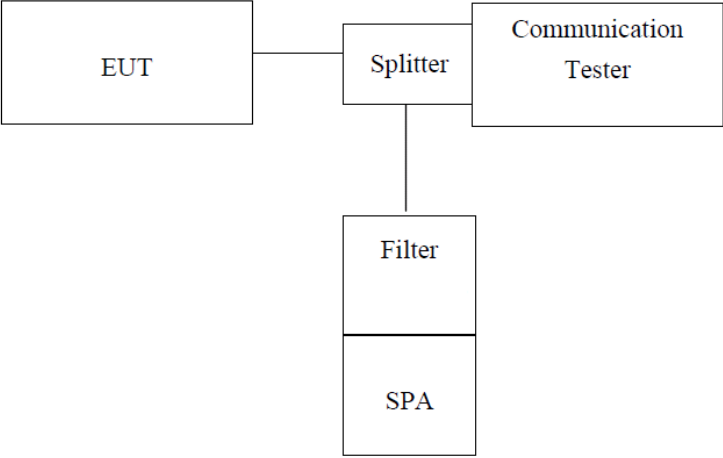
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a) and FCC part 24.238(a)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test Method:      | FCC part 2.1051                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test setup:       |  <p><i>Note: Measurement setup for testing on Antenna connector</i></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.</li> <li>2 The resolution bandwidth of the spectrum analyzer was set at 1MHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.</li> <li>3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic.</li> <li>4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

Test plot as follows:


## Spurious emission

|            |        |               |                |
|------------|--------|---------------|----------------|
| Test Mode: | GSM850 | Test Channel: | Lowest channel |
|------------|--------|---------------|----------------|

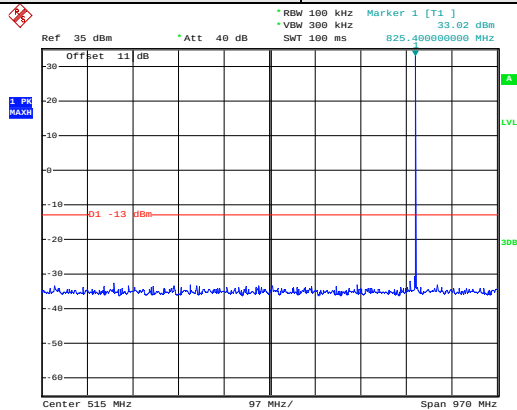

Date: 26.APR.2013 11:13:20


30MHz~1GHz

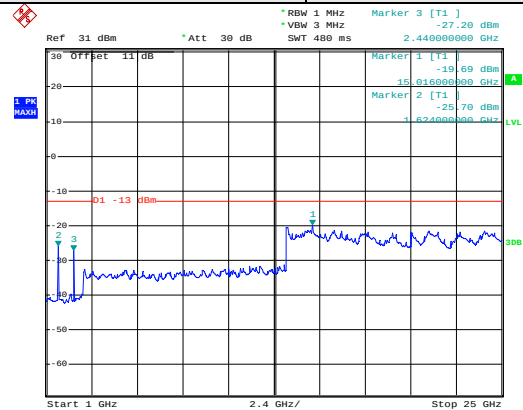

Date: 26.APR.2013 11:07:26


1GHz~25GHz

|            |        |               |                |
|------------|--------|---------------|----------------|
| Test Mode: | GSM850 | Test Channel: | Middle channel |
|------------|--------|---------------|----------------|

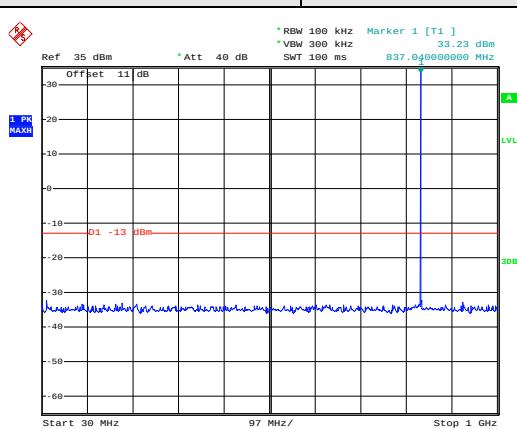

Date: 26.APR.2013 11:12:22


30MHz~1GHz

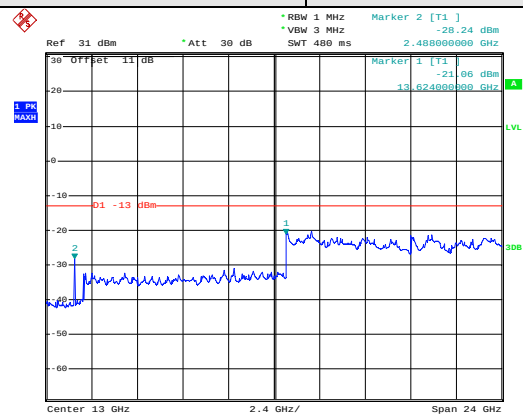

Date: 26.APR.2013 11:08:22


1GHz~25GHz

|            |        |               |                 |
|------------|--------|---------------|-----------------|
| Test Mode: | GSM850 | Test Channel: | Highest channel |
|------------|--------|---------------|-----------------|

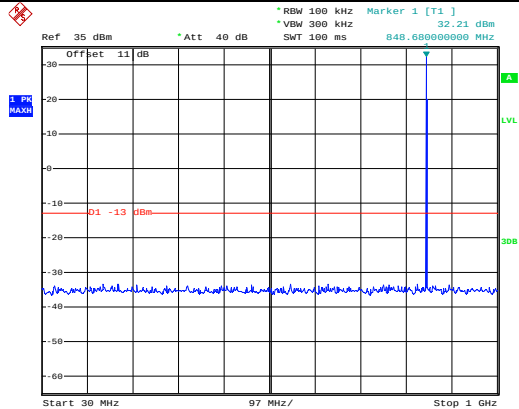

Date: 26.APR.2013 11:11:36


30MHz~1GHz

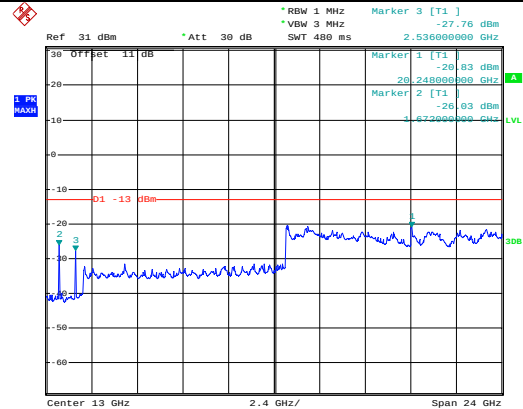

Date: 26.APR.2013 11:09:23


1GHz~25GHz

|            |         |               |                |
|------------|---------|---------------|----------------|
| Test Mode: | PCS1900 | Test Channel: | Lowest channel |
|------------|---------|---------------|----------------|

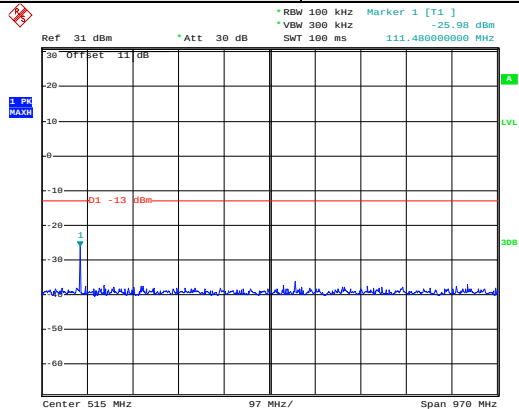

Date: 26.APR.2013 11:04:45


30MHz~1GHz

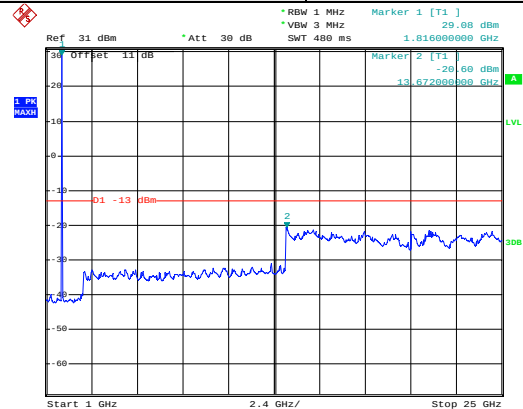

Date: 26.APR.2013 11:05:34


1GHz~25GHz

|            |         |               |                |
|------------|---------|---------------|----------------|
| Test Mode: | PCS1900 | Test Channel: | Middle channel |
|------------|---------|---------------|----------------|

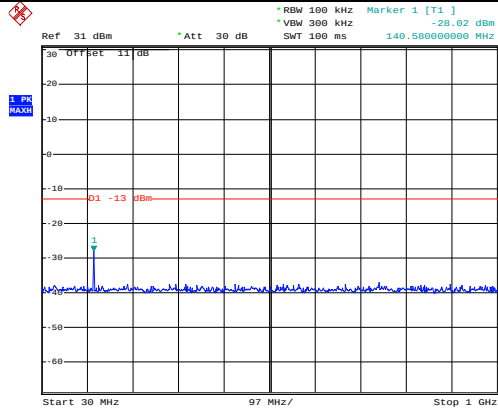

Date: 26.APR.2013 11:03:35


30MHz~1GHz

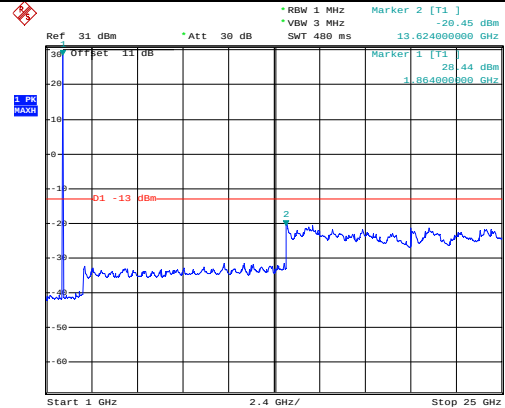

Date: 26.APR.2013 11:00:17


1GHz~25GHz

|            |         |               |                 |
|------------|---------|---------------|-----------------|
| Test Mode: | PCS1900 | Test Channel: | Highest channel |
|------------|---------|---------------|-----------------|

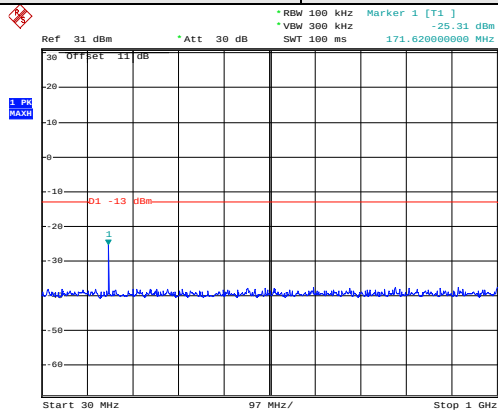

Date: 26.APR.2013 11:02:34

30MHz~1GHz

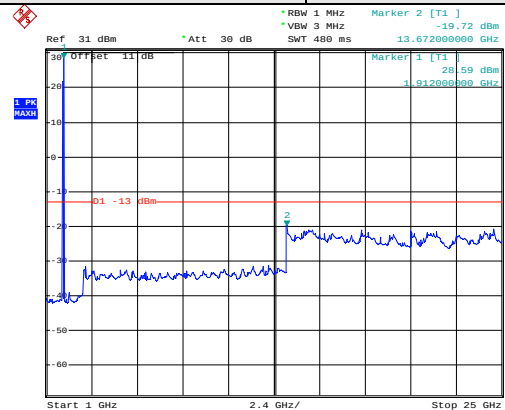


Date: 26.APR.2013 11:01:31

1GHz~25GHz


## Band edge emission:

|            |         |
|------------|---------|
| Test Mode: | GSM 850 |
|------------|---------|

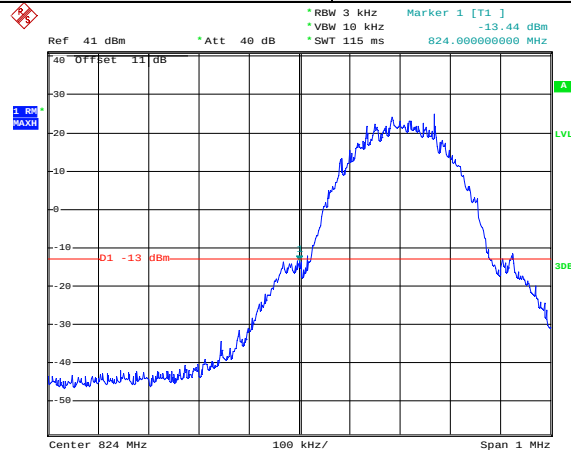

Date: 27.APR.2013 09:29:47


## Lowest channel

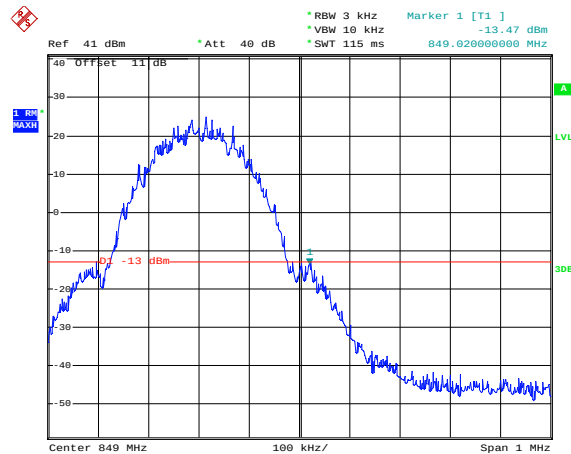

Date: 27.APR.2013 09:32:58


## Highest channel

|            |         |
|------------|---------|
| Test Mode: | PCS1900 |
|------------|---------|

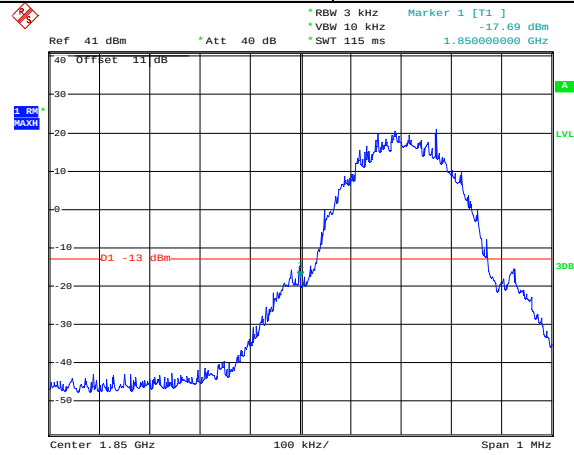

Date: 27.APR.2013 09:36:09




Lowest channel

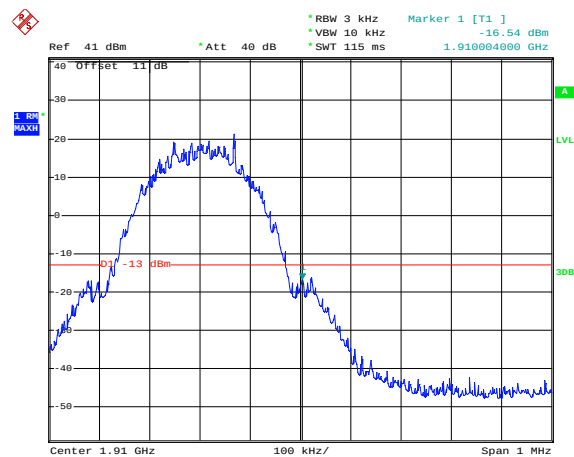

Date: 27.APR.2013 09:37:15

## Highest channel

## 6.9 ERP, EIRP Measurement
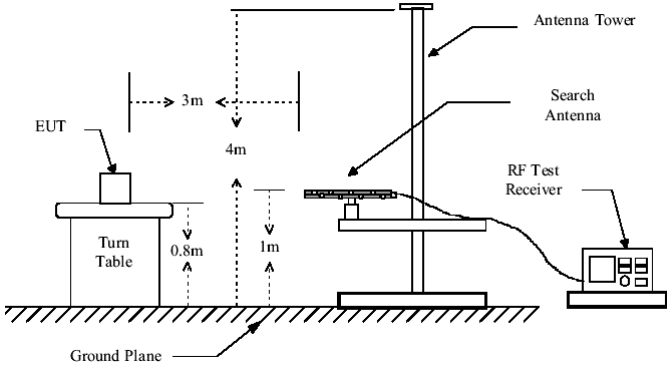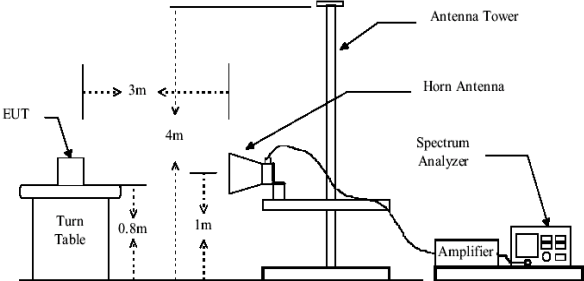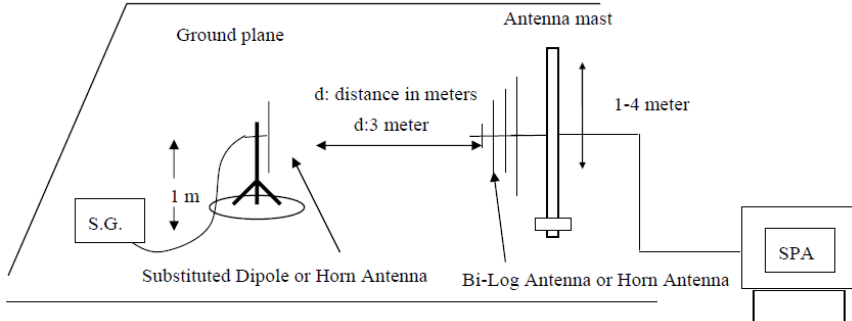
|                   |                                                                                                                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a) and FCC part 24.232(b)                                                                                                                                                                                                                                                                                    |
| Test Method:      | FCC part 2.1046                                                                                                                                                                                                                                                                                                              |
| Limit:            | GSM 850 7W ERP<br>PCS 1900 2W EIRP                                                                                                                                                                                                                                                                                           |
| Test setup:       | <p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p>  |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li> <li>2. During the measurement, the EUT was communication with the station. The highest emission was recorded with the rotation of the turntable and the lowering of the test antenna from 4m to 1m. The reading was recorded and the field strength (E in dBuV/m) was calculated.</li> <li>3. ERP in frequency band 824.2 –848.80.8MHz were measured using a substitution method. The EUT was replaced by dipole antenna connected, the S.G. output was recorded and ERP was calculated asfollows:<br/> <math display="block">\text{ERP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBd)} - \text{Cable Loss (dB)}</math> </li> <li>4. EIRP in frequency band 1850.2 –1909.8MHz were measured using a substitution method. The EUT was replaced by or horn antenna connected, the S.G. output was recorded and EIRP was calculated as follows:<br/> <math display="block">\text{EIRP} = \text{S.G. output (dBm)} + \text{Antenna Gain (dBi)} - \text{Cable Loss (dB)}</math> </li> <li>5. The worse case was relating to the conducted output power.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Remark:           | All three channels of GSM850 and PCS1900 are tested, but the test data of this report only shows the worst channel.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |




## Measurement Data (worst case)



| EUT mode | Channel | EUT Pol. | Antenna Pol. | ERP(dBm) | Limit (dBm) | Result |
|----------|---------|----------|--------------|----------|-------------|--------|
| GSM850   | 251     | H        | V            | 31.69    | 38.50       | Pass   |
|          |         |          | H            | 28.42    |             |        |
|          |         | E1       | V            | 31.20    |             |        |
|          |         |          | H            | 26.11    |             |        |
|          |         | E2       | V            | 31.05    |             |        |
|          |         |          | H            | 21.22    |             |        |

| EUT mode | Channel | EUT Pol. | Antenna Pol. | EIRP(dBm) | Limit (dBm) | Result |
|----------|---------|----------|--------------|-----------|-------------|--------|
| PCS1900  | 512     | H        | V            | 25.26     | 33.00       | Pass   |
|          |         |          | H            | 18.29     |             |        |
|          |         | E1       | V            | 24.72     |             |        |
|          |         |          | H            | 17.70     |             |        |
|          |         | E2       | V            | 24.72     |             |        |
|          |         |          | H            | 19.06     |             |        |

## 6.10 Field strength of spurious radiation measurement
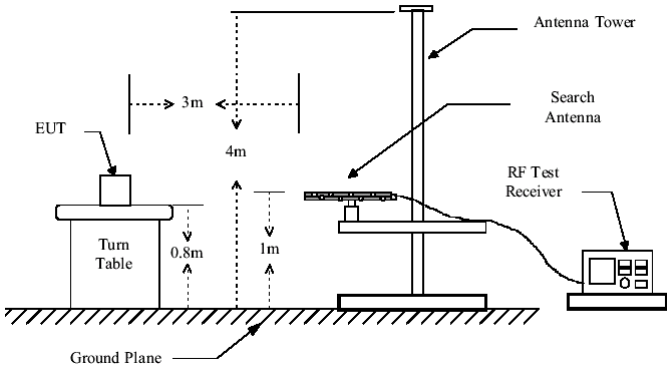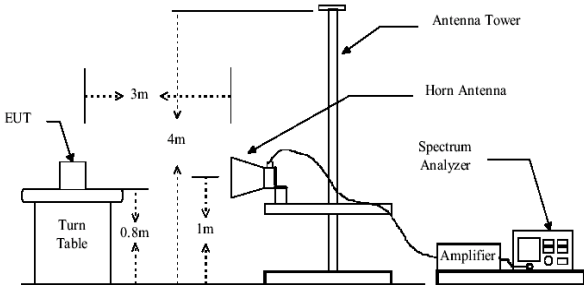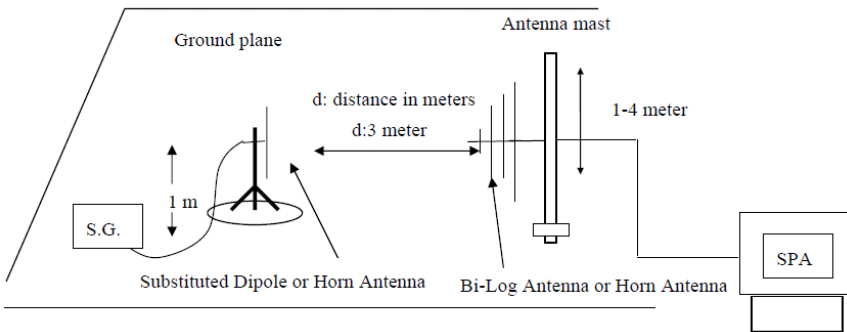
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a) and FCC part 24.238(a)                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test Method:      | FCC part 2.1053                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Test setup:       | <p>Below 1GHz</p>  <p>Above 1GHz</p>  <p>Substituted method:</p>                                                                                                                                         |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on a non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li> <li>2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT</li> </ol> |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | <p>positioned in each of its three orthogonal orientations.</p> <p>3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequencies (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.</p> <p>4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.</p> <p>ERP / EIRP = S.G. output (dBm) + Antenna Gain(dBd/dBi) – Cable Loss (dB)</p> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

Measurement Data

| Test mode:      | GSM850            |             | Test channel: | Lowest |
|-----------------|-------------------|-------------|---------------|--------|
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result |
|                 | Polarization      | Level (dBm) |               |        |
| 1648.40         | Vertical          | -42.68      | -13.00        | Pass   |
| 2472.60         | V                 | -43.87      |               |        |
| 3295.000        | V                 | -38. 28     |               |        |
| 4123.000        | V                 | -45. 95     |               |        |
| 5563.000        | V                 | -41. 28     |               |        |
| 5769.40         | V                 | -47.34      |               |        |
| 1648.40         | Horizontal        | -41.71      | -13.00        | Pass   |
| 2472.60         | H                 | -40.41      |               |        |
| 3295.000        | V                 | -37. 54     |               |        |
| 4123.000        | V                 | -43. 57     |               |        |
| 5770.000        | V                 | -33. 79     |               |        |
| 6598.000        | H                 | -37. 78     |               |        |
| Test mode:      | GSM850            |             | Test channel: | Middle |
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result |
|                 | Polarization      | Level (dBm) |               |        |
| 1673.20         | Vertical          | -42.77      | -13.00        | Pass   |
| 2509.80         | V                 | -44.61      |               |        |
| 3349.000        | V                 | -44.36      |               |        |
| 4186.000        | V                 | -44.63      |               |        |
| 5023.000        | V                 | -40. 27     |               |        |
| 5860.000        | V                 | -32. 24     |               |        |
| 1729.000        | Horizontal        | -47. 39     | -13.00        | Pass   |
| 2509.80         | H                 | -43.88      |               |        |
| 3349.000        | H                 | -43. 13     |               |        |
| 4186.000        | H                 | -46. 74     |               |        |
| 5212.000        | H                 | -41. 56     |               |        |
| 5856.20         | H                 | -42.71      |               |        |

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

| Test mode:      | GSM850            |             | Test channel: | Highest |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result  |
|                 | Polarization      | Level (dBm) |               |         |
| 1697.60         | Vertical          | -40.65      | -13.00        | Pass    |
| 2546.40         | V                 | -38.21      |               |         |
| 3394.00         | V                 | -38.13      |               |         |
| 4244.00         | V                 | -41.98      |               |         |
| 5095.00         | V                 | -40.23      |               |         |
| 5941.00         | V                 | -40.41      |               |         |
| 1697.60         | Horizontal        | -45.21      | -13.00        | Pass    |
| 2546.40         | H                 | -42.54      |               |         |
| 3394.00         | H                 | -43.09      |               |         |
| 4240.00         | H                 | -43.99      |               |         |
| 5095.00         | H                 | -41.02      |               |         |
| 5941.60         | H                 | -43.38      |               |         |
| Test mode:      | PCS1900           |             | Test channel: | Lowest  |
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result  |
|                 | Polarization      | Level (dBm) |               |         |
| 3700.00         | Vertical          | -39.02      | -13.00        | Pass    |
| 4654.00         | V                 | -45.58      |               |         |
| 5554.00         | V                 | -41.55      |               |         |
| 7399.00         | V                 | -37.01      |               |         |
| 11101.20        | V                 | -43.51      |               |         |
| 12951.40        | V                 | -42.32      |               |         |
| 3700.00         | Horizontal        | -42.27      | -13.00        | Pass    |
| 5680.00         | H                 | -41.72      |               |         |
| 7399.00         | H                 | -35.91      |               |         |
| 9251.00         | H                 | -41.84      |               |         |
| 11101.20        | H                 | -43.33      |               |         |
| 12951.40        | H                 | -44.46      |               |         |

Remark :


1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

| Test mode:      | PCS1900           |             | Test channel: | Middle  |
|-----------------|-------------------|-------------|---------------|---------|
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result  |
|                 | Polarization      | Level (dBm) |               |         |
| 3754.00         | Vertical          | -43.45      | -13.00        | Pass    |
| 5644.00         | V                 | -38.77      |               |         |
| 7102.00         | V                 | -38.26      |               |         |
| 9400.00         | V                 | -40.18      |               |         |
| 11280.00        | V                 | -42.62      |               |         |
| 13160.00        | V                 | -47.25      |               |         |
| 3763.00         | Horizontal        | -48.67      | -13.00        | Pass    |
| 4681.00         | H                 | -44.66      |               |         |
| 5365.00         | H                 | -41.61      |               |         |
| 9400.00         | H                 | -42.51      |               |         |
| 11280.00        | H                 | -44.22      |               |         |
| 13160.00        | H                 | -40.68      |               |         |
| Test mode:      | PCS1900           |             | Test channel: | Highest |
| Frequency (MHz) | Spurious Emission |             | Limit (dBm)   | Result  |
|                 | Polarization      | Level (dBm) |               |         |
| 3817.00         | Vertical          | -42.18      | -13.00        | Pass    |
| 5734.00         | V                 | -34.91      |               |         |
| 6886.00         | V                 | -38.82      |               |         |
| 9549.00         | V                 | -41.11      |               |         |
| 11458.80        | V                 | -43.27      |               |         |
| 13368.60        | V                 | -42.13      |               |         |
| 1729.00         | Horizontal        | -51.22      | -13.00        | Pass    |
| 3817.00         | H                 | -49.01      |               |         |
| 5545.00         | H                 | -42.00      |               |         |
| 7300.00         | H                 | -39.33      |               |         |
| 11458.80        | H                 | -43.95      |               |         |
| 13368.60        | H                 | -44.12      |               |         |

Remark :

1. The emission behavior belongs to narrowband spurious emission.
2. Remark"---" means that the emission level is too low to be measured
3. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

## 6.11 Frequency stability V.S. Temperature measurement

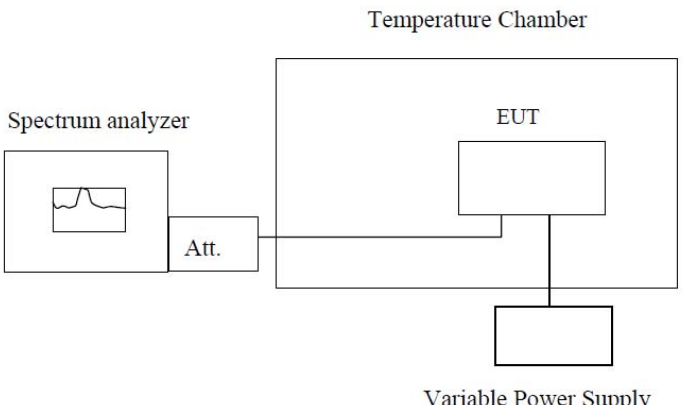
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 2.1055(a)(1)(b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test Method:      | FCC Part 2.1055(a)(1)(b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Limit:            | 2.5ppm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Test setup:       |  <p><b>Note :</b> Measurement setup for testing on Antenna connector</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. The equipment under test was connected to an external DC power supply and input rated voltage.</li> <li>2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.</li> <li>3. The EUT was placed inside the temperature chamber.</li> <li>4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.</li> <li>5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.</li> <li>6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Measurement Data**

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz |                 |                 |          |             |        |
|-----------------------------------------------------------------|-----------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc)                                            | Temperature (℃) | Frequency error |          | Limit (ppm) | Result |
|                                                                 |                 | Hz              | ppm      |             |        |
| 3.70                                                            | -30             | 47              | 0.056180 | 2.5         | Pass   |
|                                                                 | -20             | 54              | 0.064547 |             |        |
|                                                                 | -10             | 37              | 0.044227 |             |        |
|                                                                 | 0               | 46              | 0.054984 |             |        |
|                                                                 | 10              | 44              | 0.052594 |             |        |
|                                                                 | 20              | 53              | 0.063352 |             |        |
|                                                                 | 30              | 51              | 0.060961 |             |        |
|                                                                 | 40              | 49              | 0.058570 |             |        |
|                                                                 | 50              | 38              | 0.045422 |             |        |
| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz |                 |                 |          |             |        |
| Power supplied (Vdc)                                            | Temperature (℃) | Frequency error |          |             | Result |
|                                                                 |                 | Hz              | ppm      |             |        |
| 3.70                                                            | -30             | 47              | 0.025000 | 2.5         | Pass   |
|                                                                 | -20             | 44              | 0.023404 |             |        |
|                                                                 | -10             | 38              | 0.020213 |             |        |
|                                                                 | 0               | 46              | 0.024468 |             |        |
|                                                                 | 10              | 37              | 0.019681 |             |        |
|                                                                 | 20              | 36              | 0.019149 |             |        |
|                                                                 | 30              | 38              | 0.020213 |             |        |
|                                                                 | 40              | 51              | 0.027128 |             |        |
|                                                                 | 50              | 48              | 0.025532 |             |        |



## 6.12 Frequency stability V.S. Voltage measurement
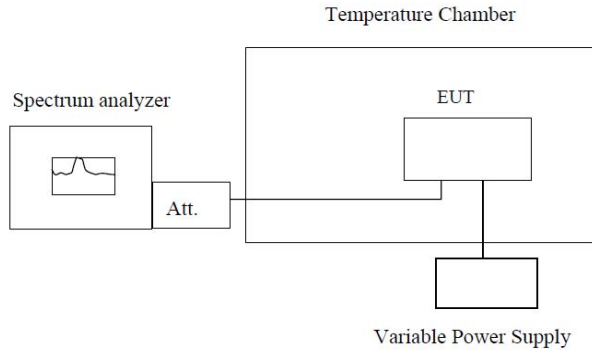
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 2.1055(d)(1)(2)                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Test Method:      | FCC Part 2.1055(d)(1)(2)                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Limit:            | 2.5 ppm                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test setup:       |  <p>Note : Measurement setup for testing on Antenna connector</p>                                                                                                                                                                                                                                                                                              |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.</li> <li>2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.</li> <li>3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### Measurement Data

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz

| Temperature (°C) | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|------------------|----------------------|-----------------|----------|-------------|--------|
|                  |                      | Hz              | ppm      |             |        |
| 25               | 4.25                 | 48              | 0.057375 | 2.5         | Pass   |
|                  | 3.70                 | 47              | 0.056180 |             |        |
|                  | 3.40                 | 45              | 0.053789 |             |        |

Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz

| Temperature (°C) | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|------------------|----------------------|-----------------|----------|-------------|--------|
|                  |                      | Hz              | ppm      |             |        |
| 25               | 4.25                 | 47              | 0.025000 | 2.5         | Pass   |
|                  | 3.70                 | 42              | 0.022340 |             |        |
|                  | 3.40                 | 43              | 0.022872 |             |        |